


Elver-1 EcoScope Service RT 500TVD


Format: ECO-SON-GVR_500TVD_RT


Vertical Scale: 1:500


Graphics File Created: 09-Jan-2009 08:06


	Shallow Button Resistivity, Real-Time (RES_BS_RT) 0.2 (OHMM) 2000			
	Deep Button Resistivity, Real-Time (RES_BD_RT) 0.2 (OHMM) 2000		Equivalent Circulating Density, Real-Time (ECD_ECO_RT) 0 (G/C3) 2	
Ultrasonic Caliper, Average Diameter, Real-Time, Recomputed at Surface (UCAV_ECO_RT) 8 (IN) 13	Ring Resistivity, Real-Time (RES_RING_RT) 0.2 (OHMM) 2000	Photoelectric Factor, Bottom, Real-Time, Computed Downhole (PEB_DH_ECO_RT) 0 (----) 10	Bulk Density Correction, Bottom, Real-Time Computed Downhole (DRHB_DH_ECO_RT) -0.25 (G/C3) 0.25	Delta-T Compressional, Real-Time (DTCO_RT) 40 (US/F) 140
Gamma Ray, Average, Real-Time (GRMA_ECO_RT) 0 (GAPI) 200	ARC Phase Shift Resistivity 40 inch at 2 MHz, Real-Time (P40H_ECO_RT) 0.2 (OHMM) 2000	Bulk Density, Bottom, Real-Time, Computed Downhole (ROBB_DH_ECO_RT) 1.95 (G/C3) 2.95		Coherence at Compressional Peak, Real-Time (CHCO_RT) -9 (----) 1
ROP*5 (ROP5) 200 (M/HR) 0	MWD Collar RPM (CRPM_RT) (RPM) 0 400	ARC Phase Shift Resistivity 16 inch at 2 MHz, Real-Time (P16H_ECO_RT) 0.2 (OHMM) 2000	Best Thermal Neutron Porosity, Average, Real-Time (BPHI_ECO_RT) 45 (PU) -15	Downhole Annulus Temperature, Real Time, Computed Downhole (DHAT_DH_ECO_RT) 0 (DEGC) 200

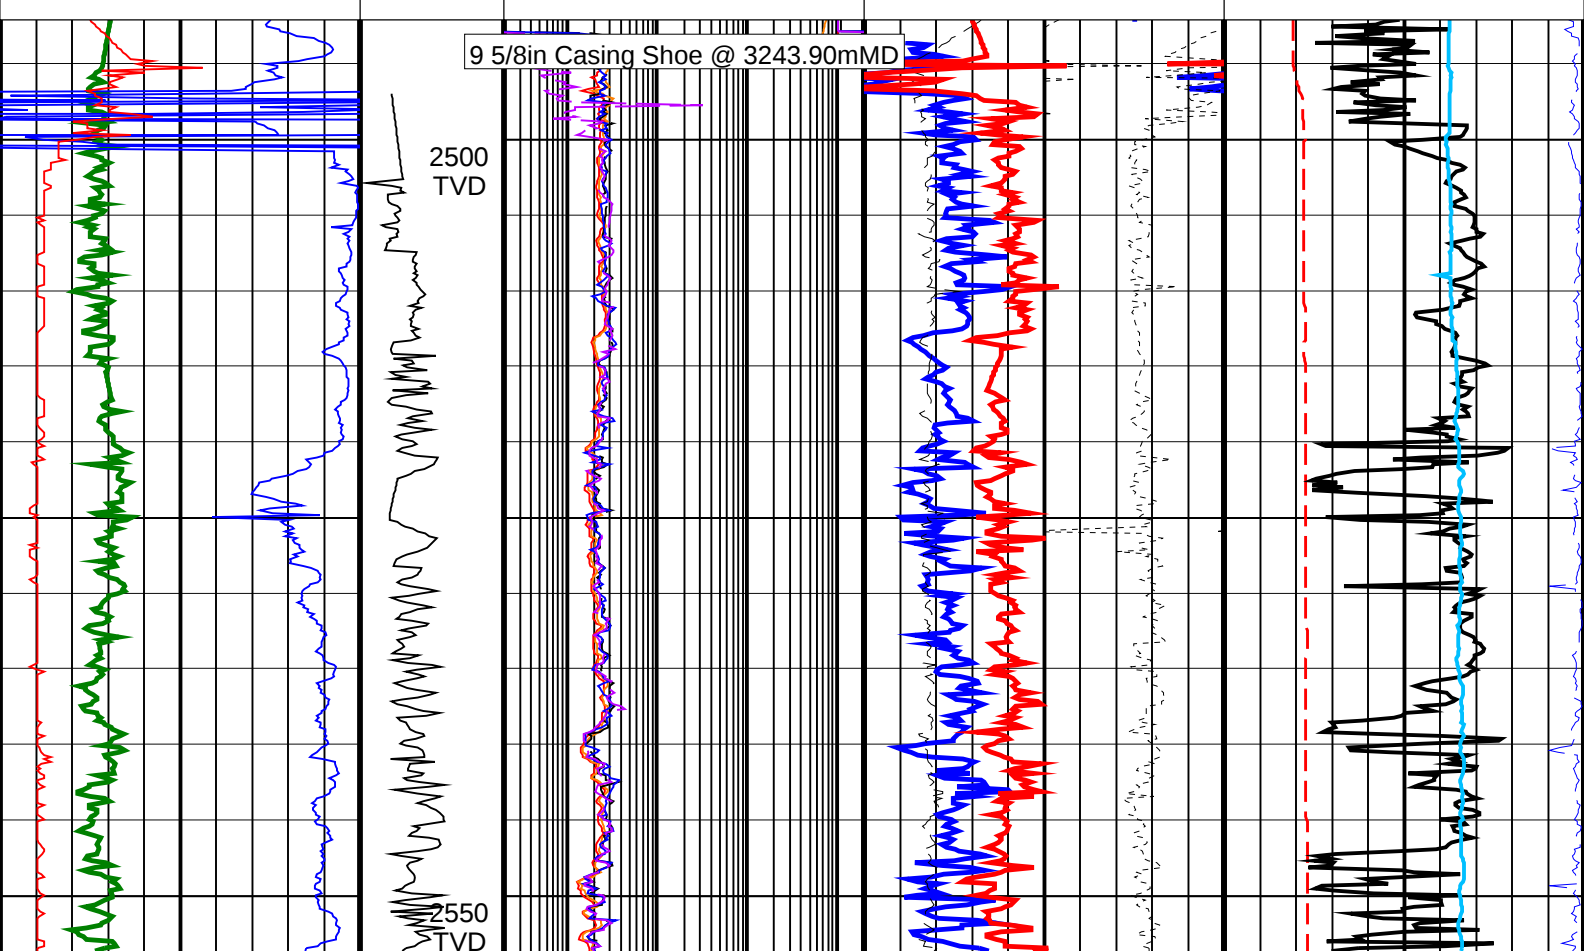


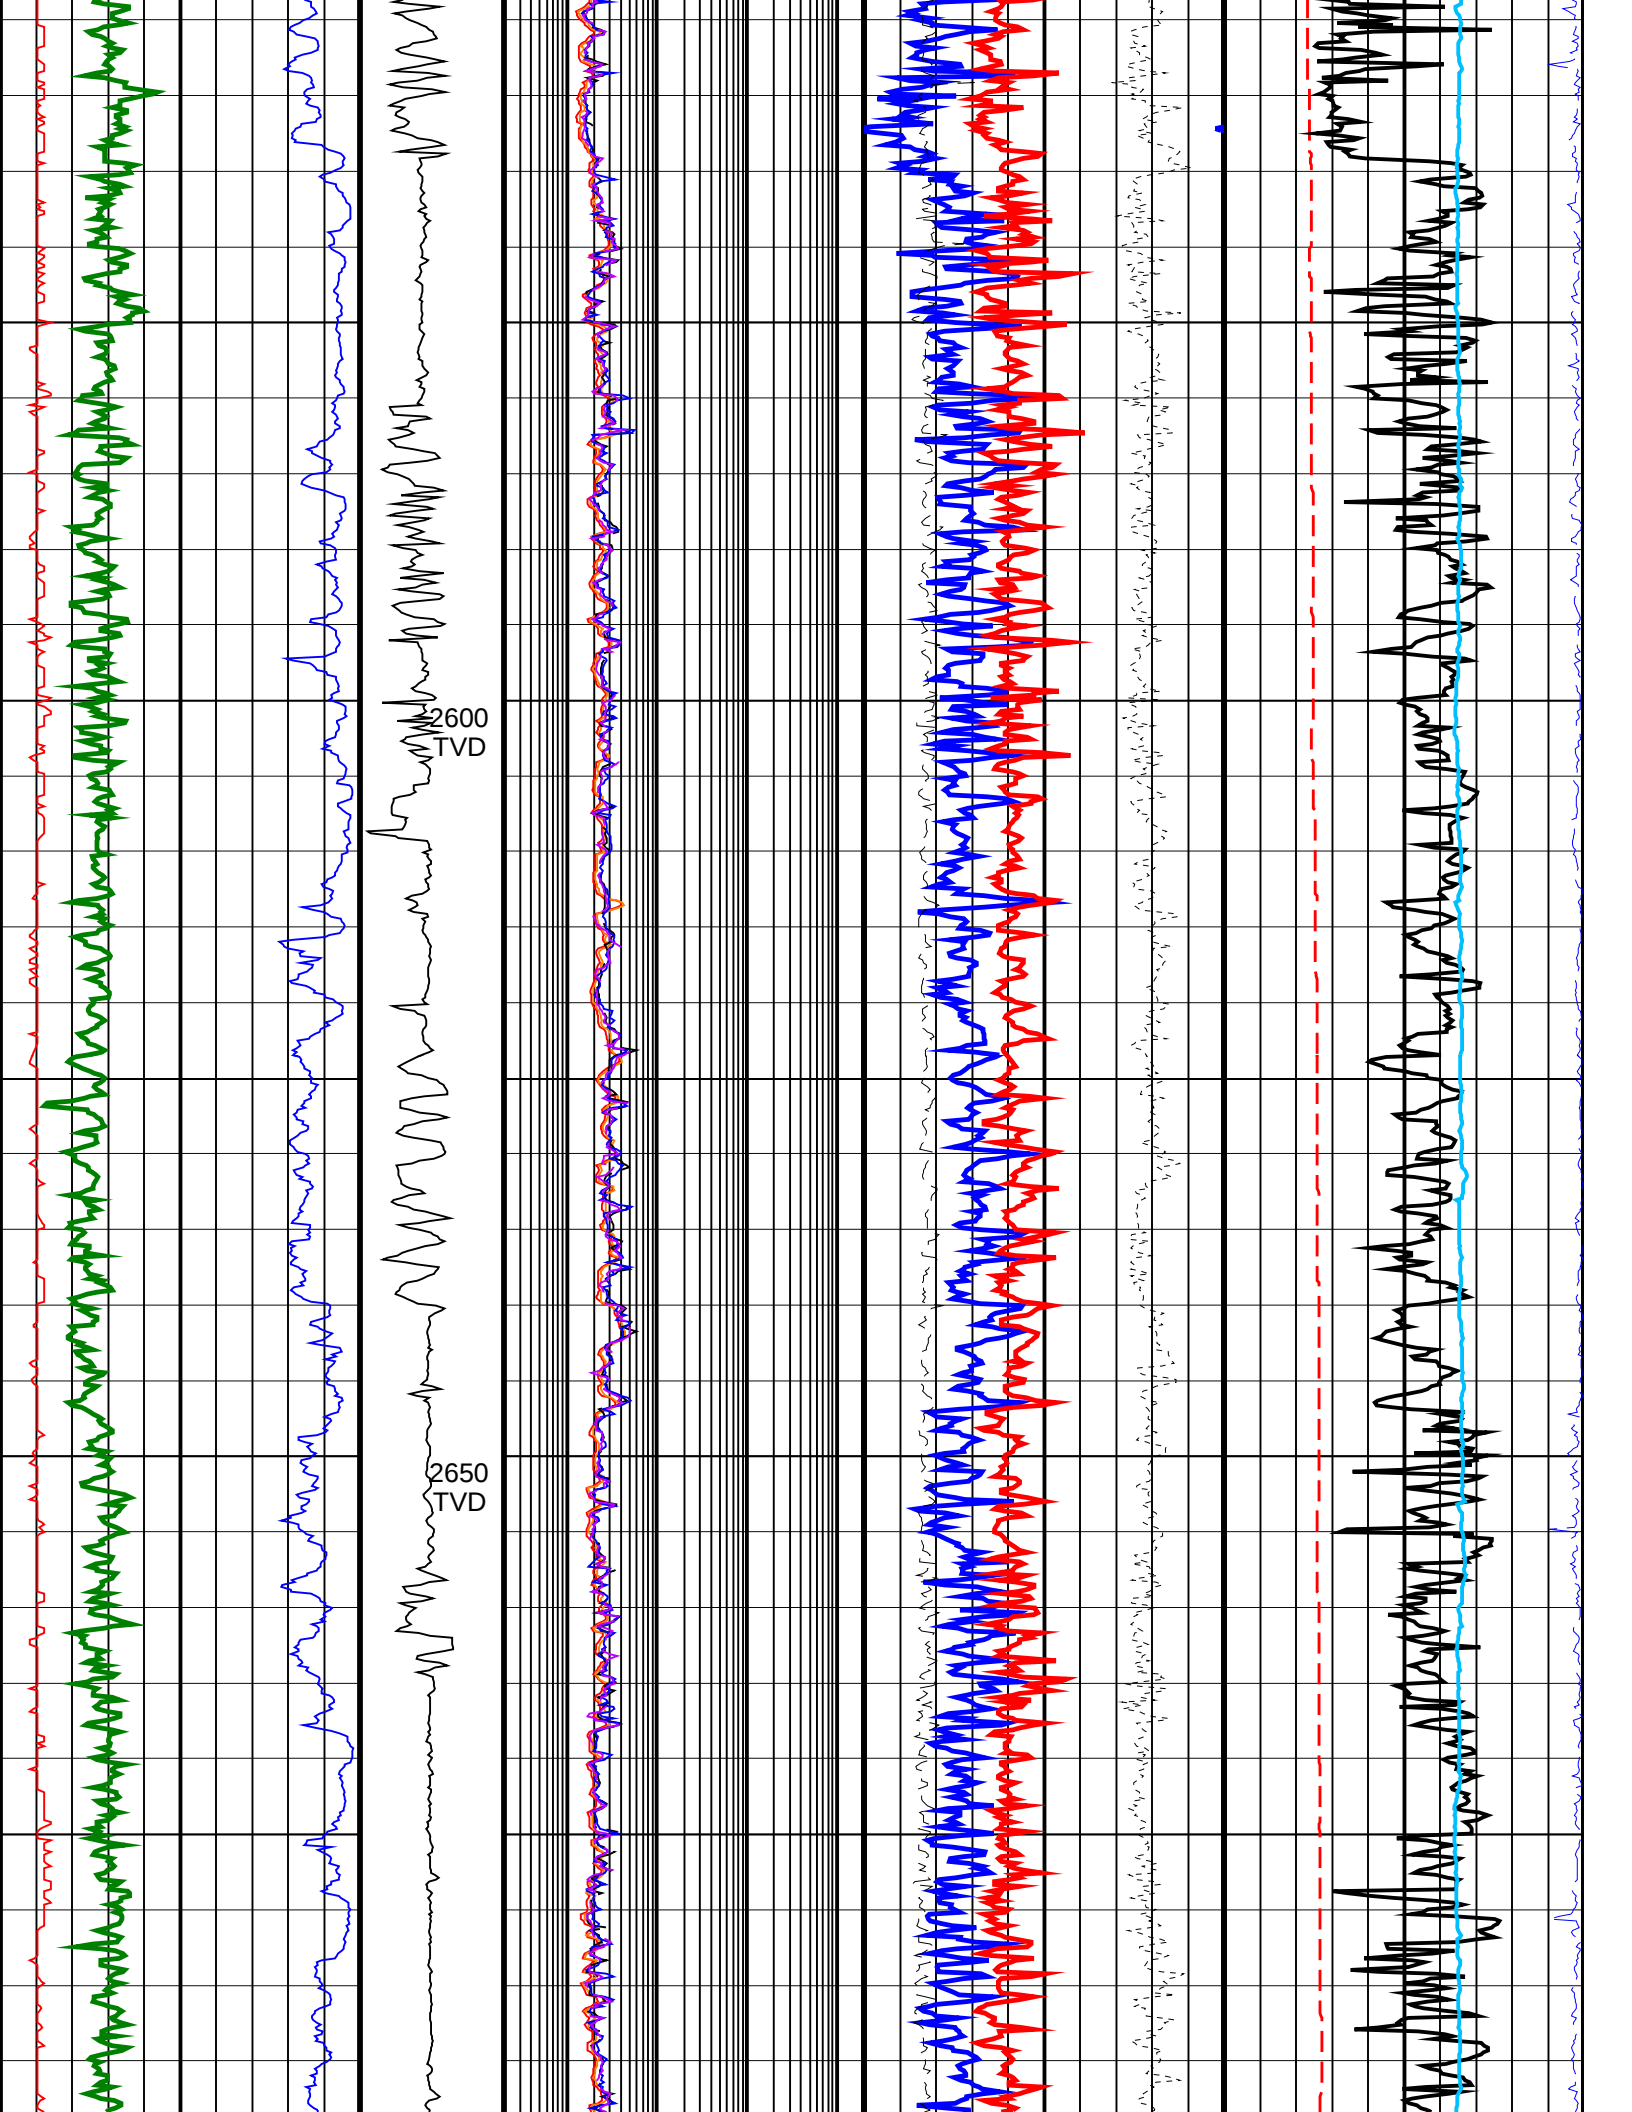


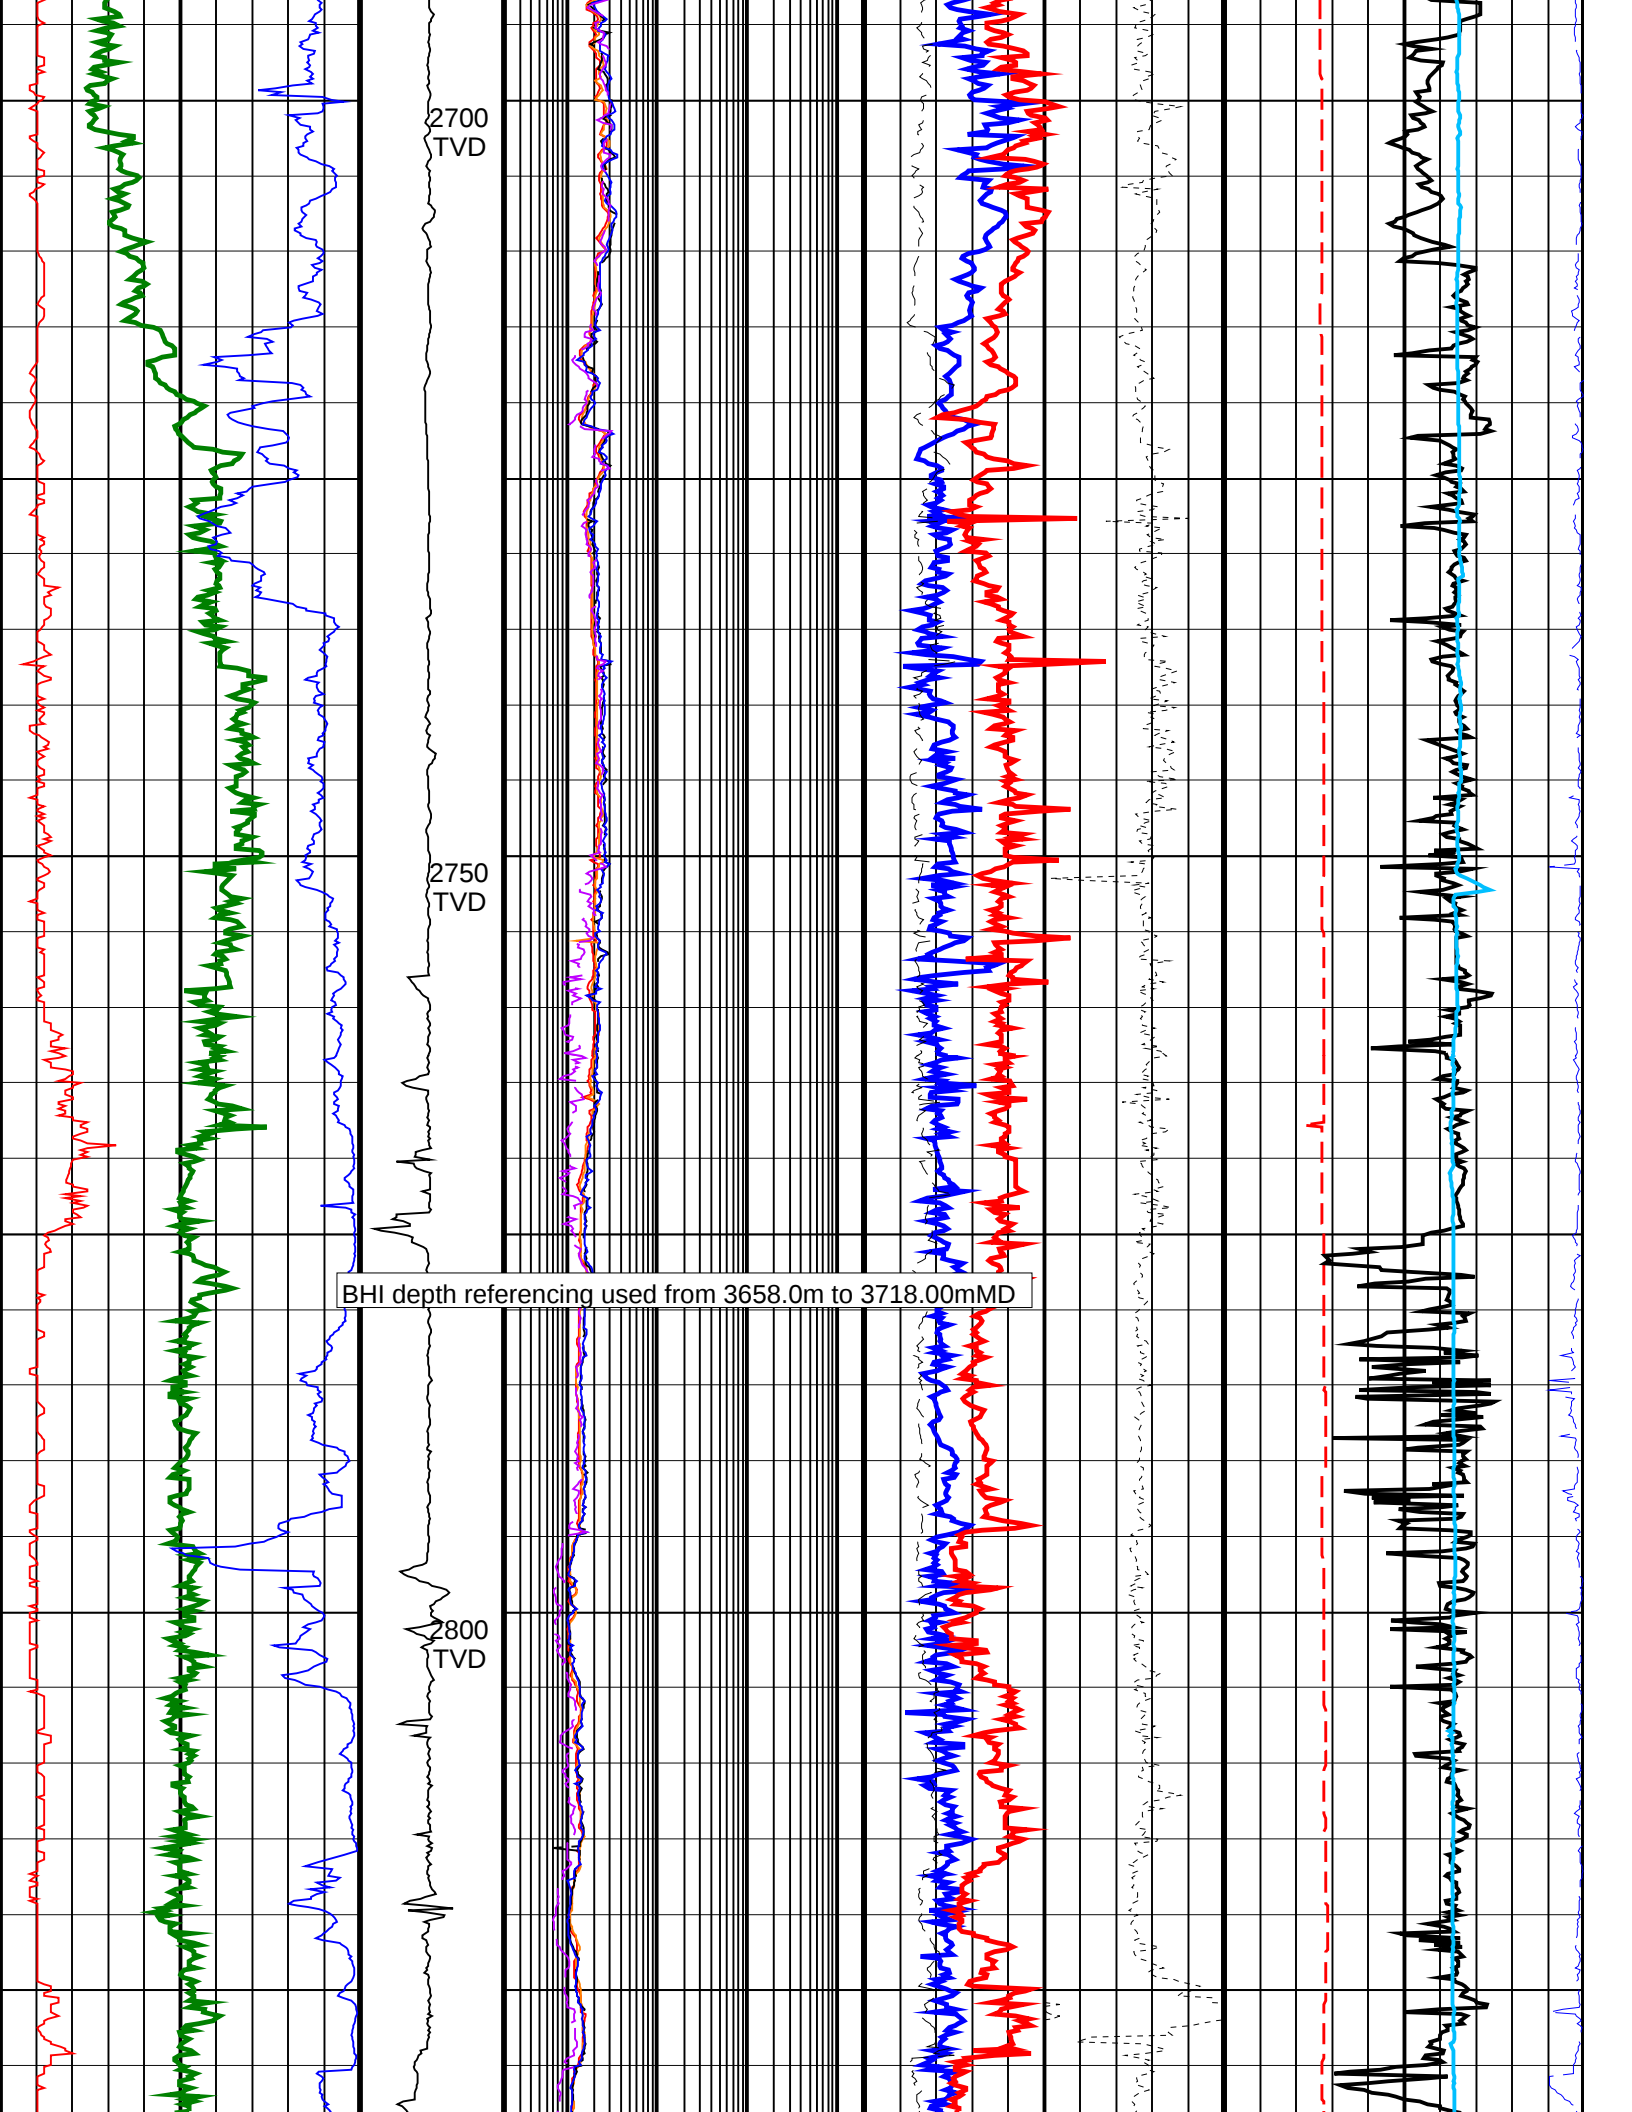


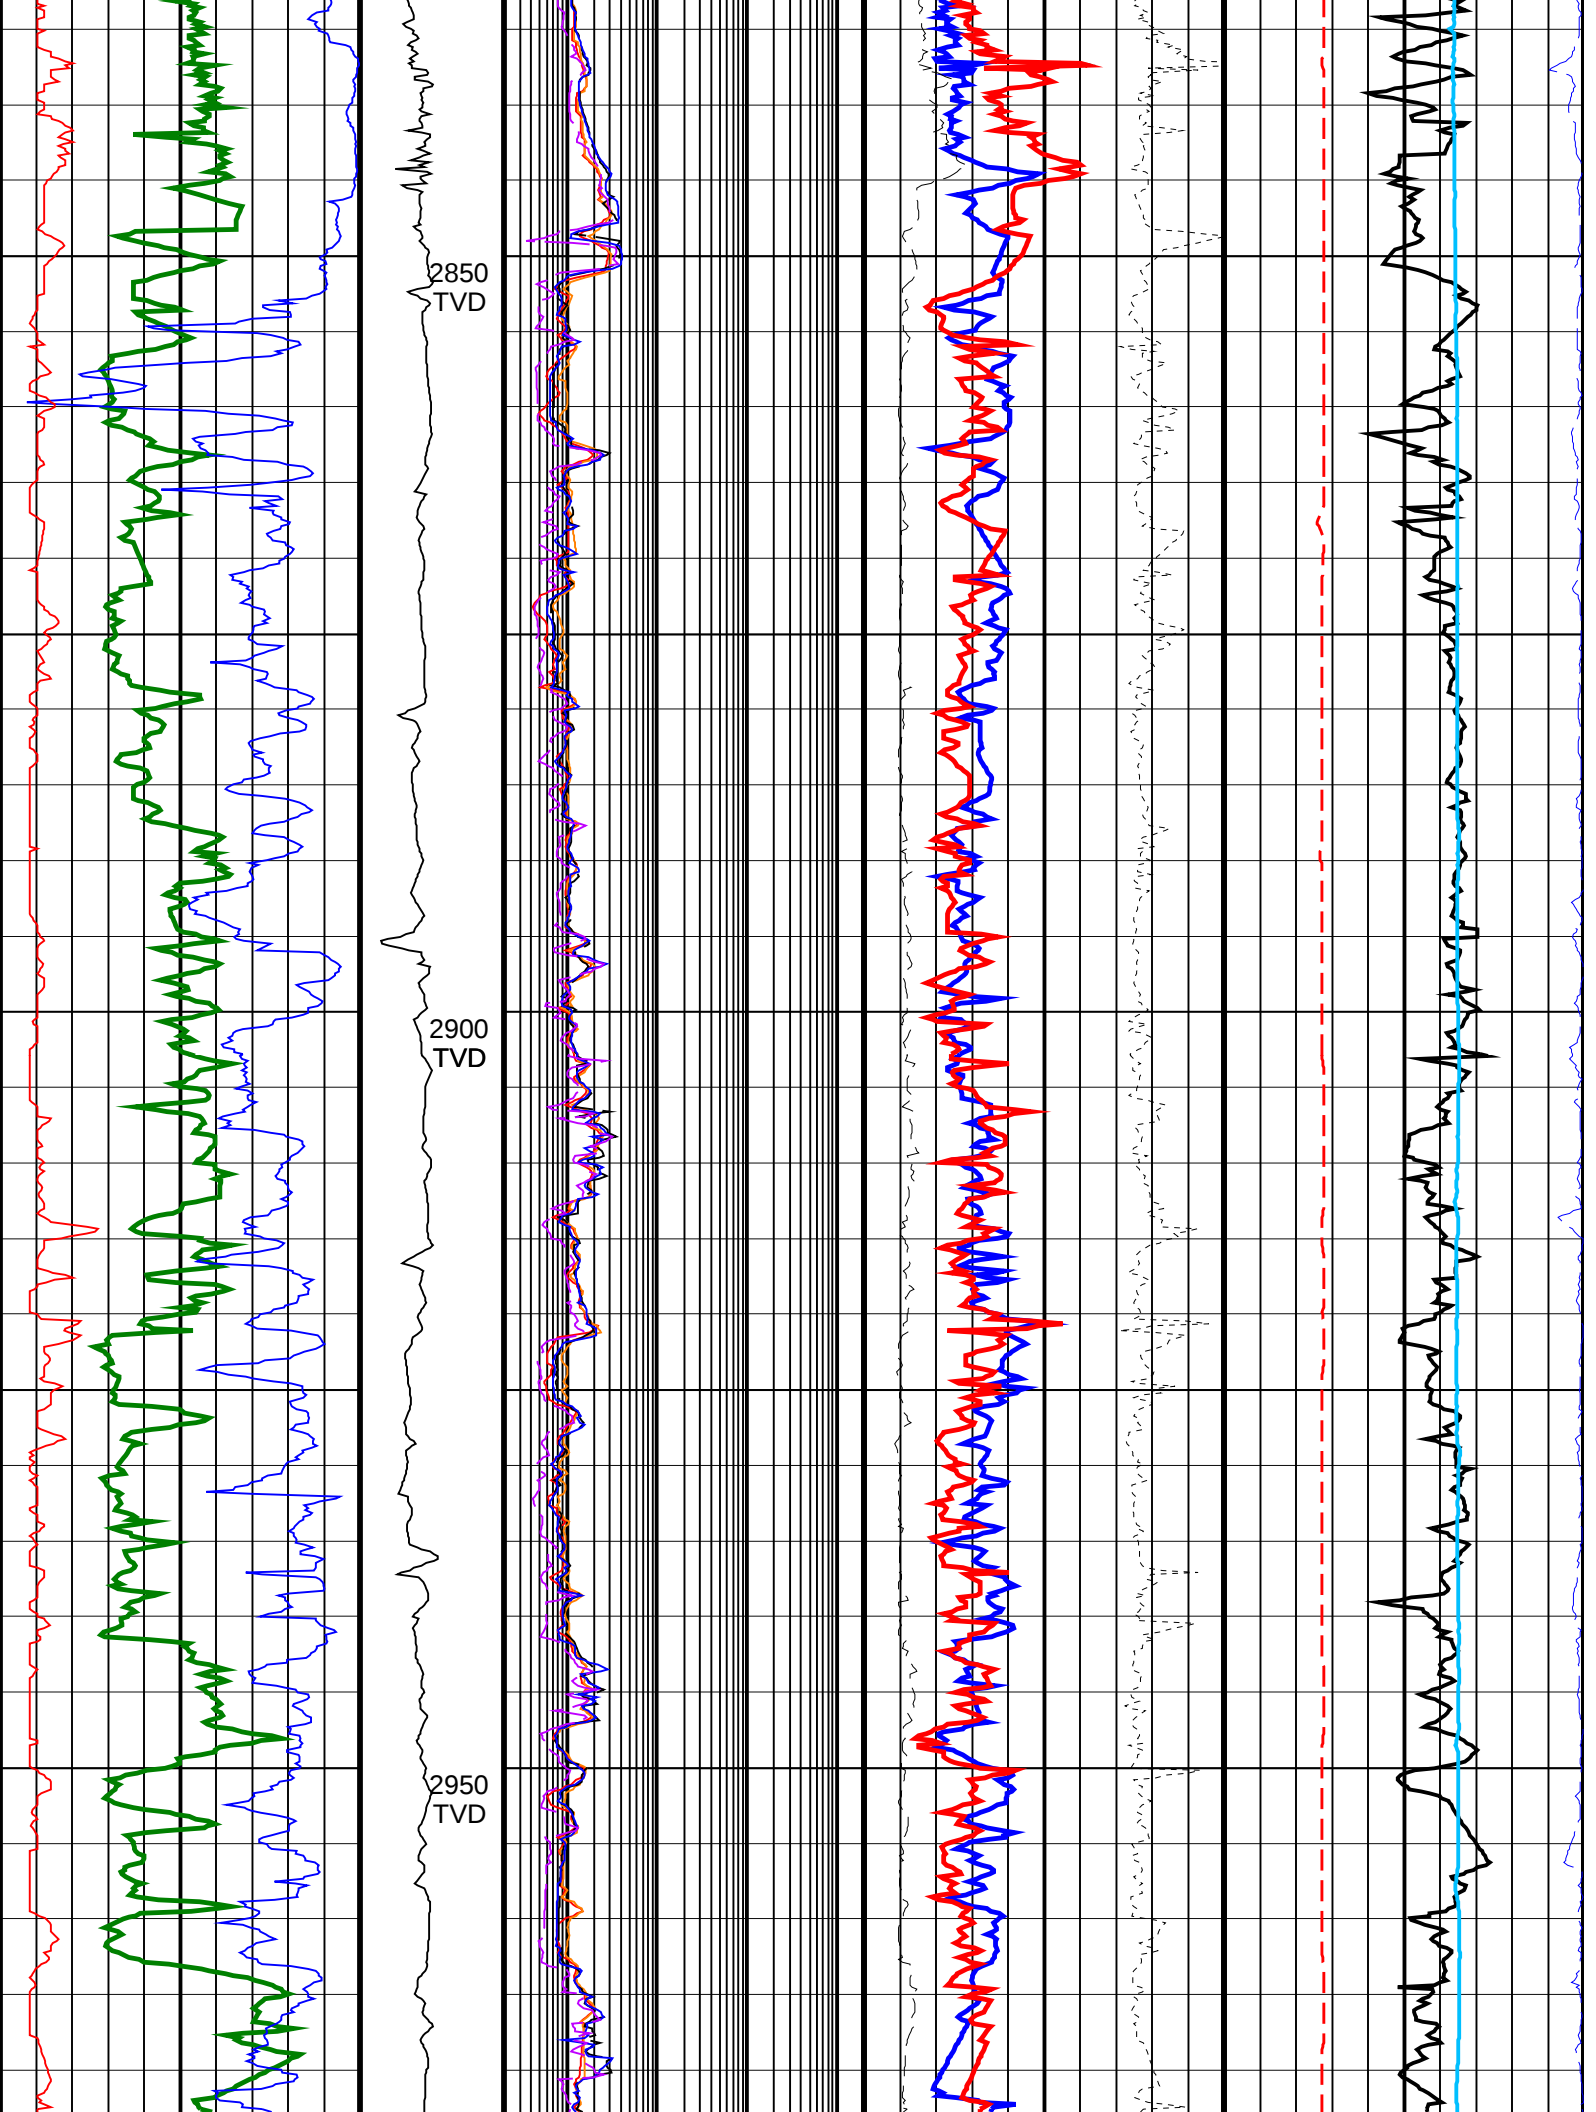

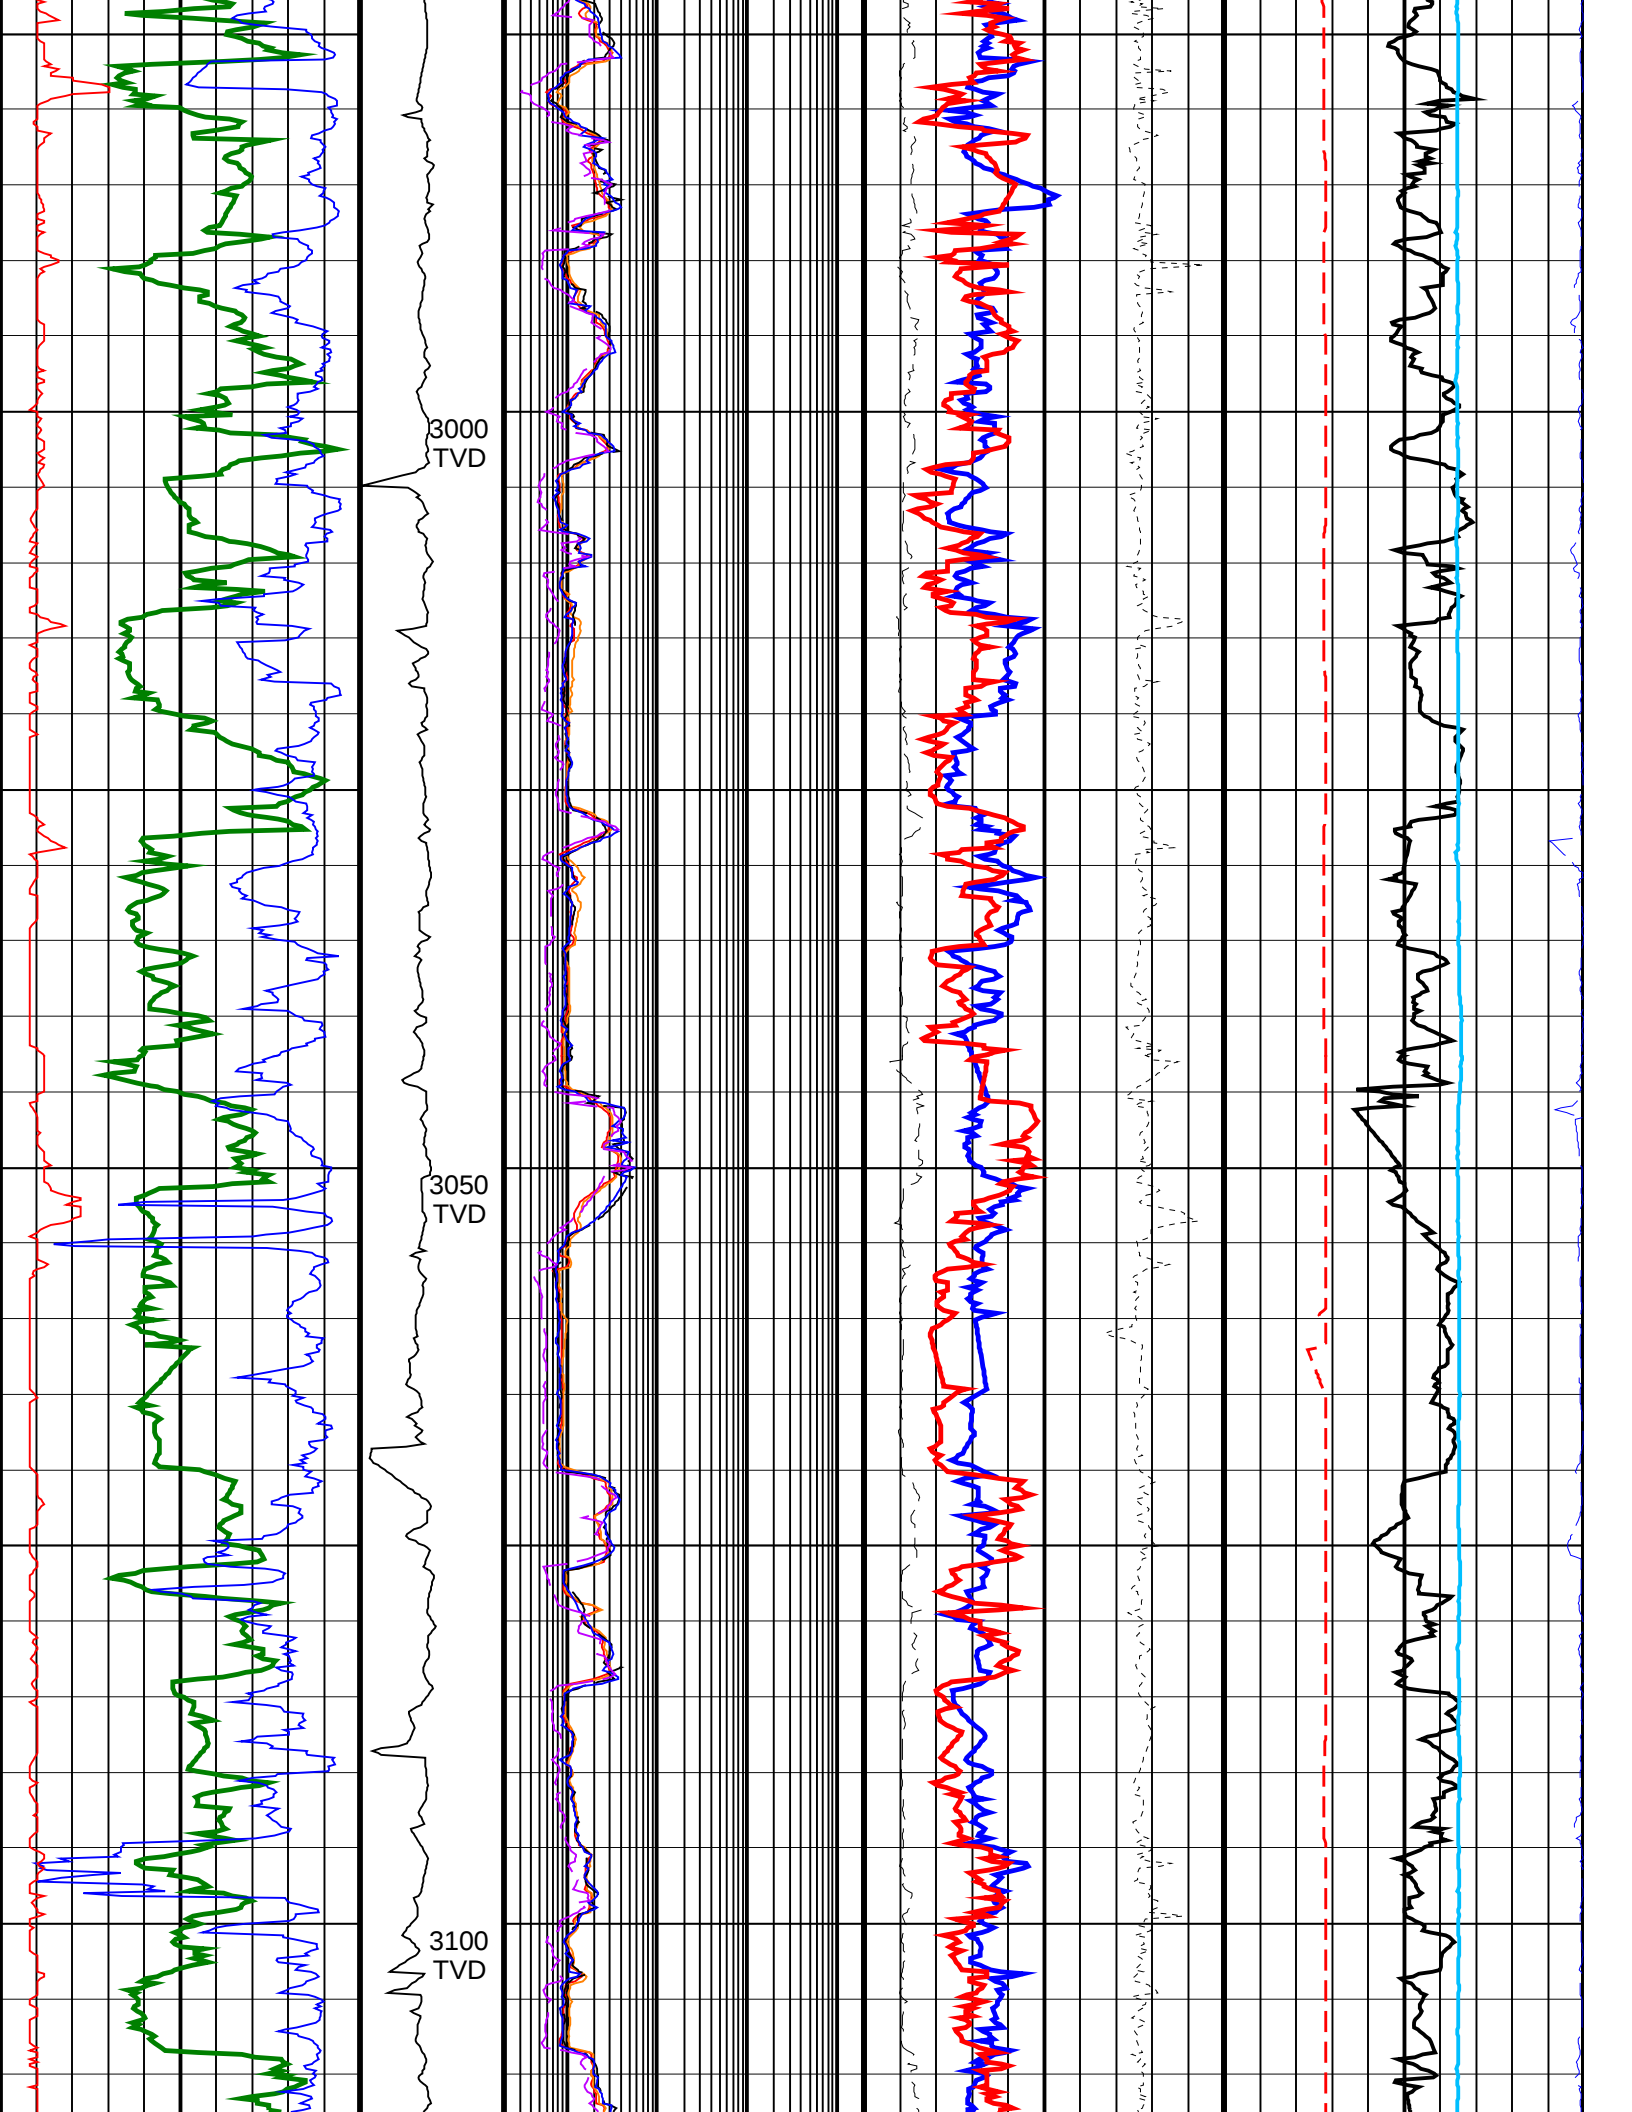

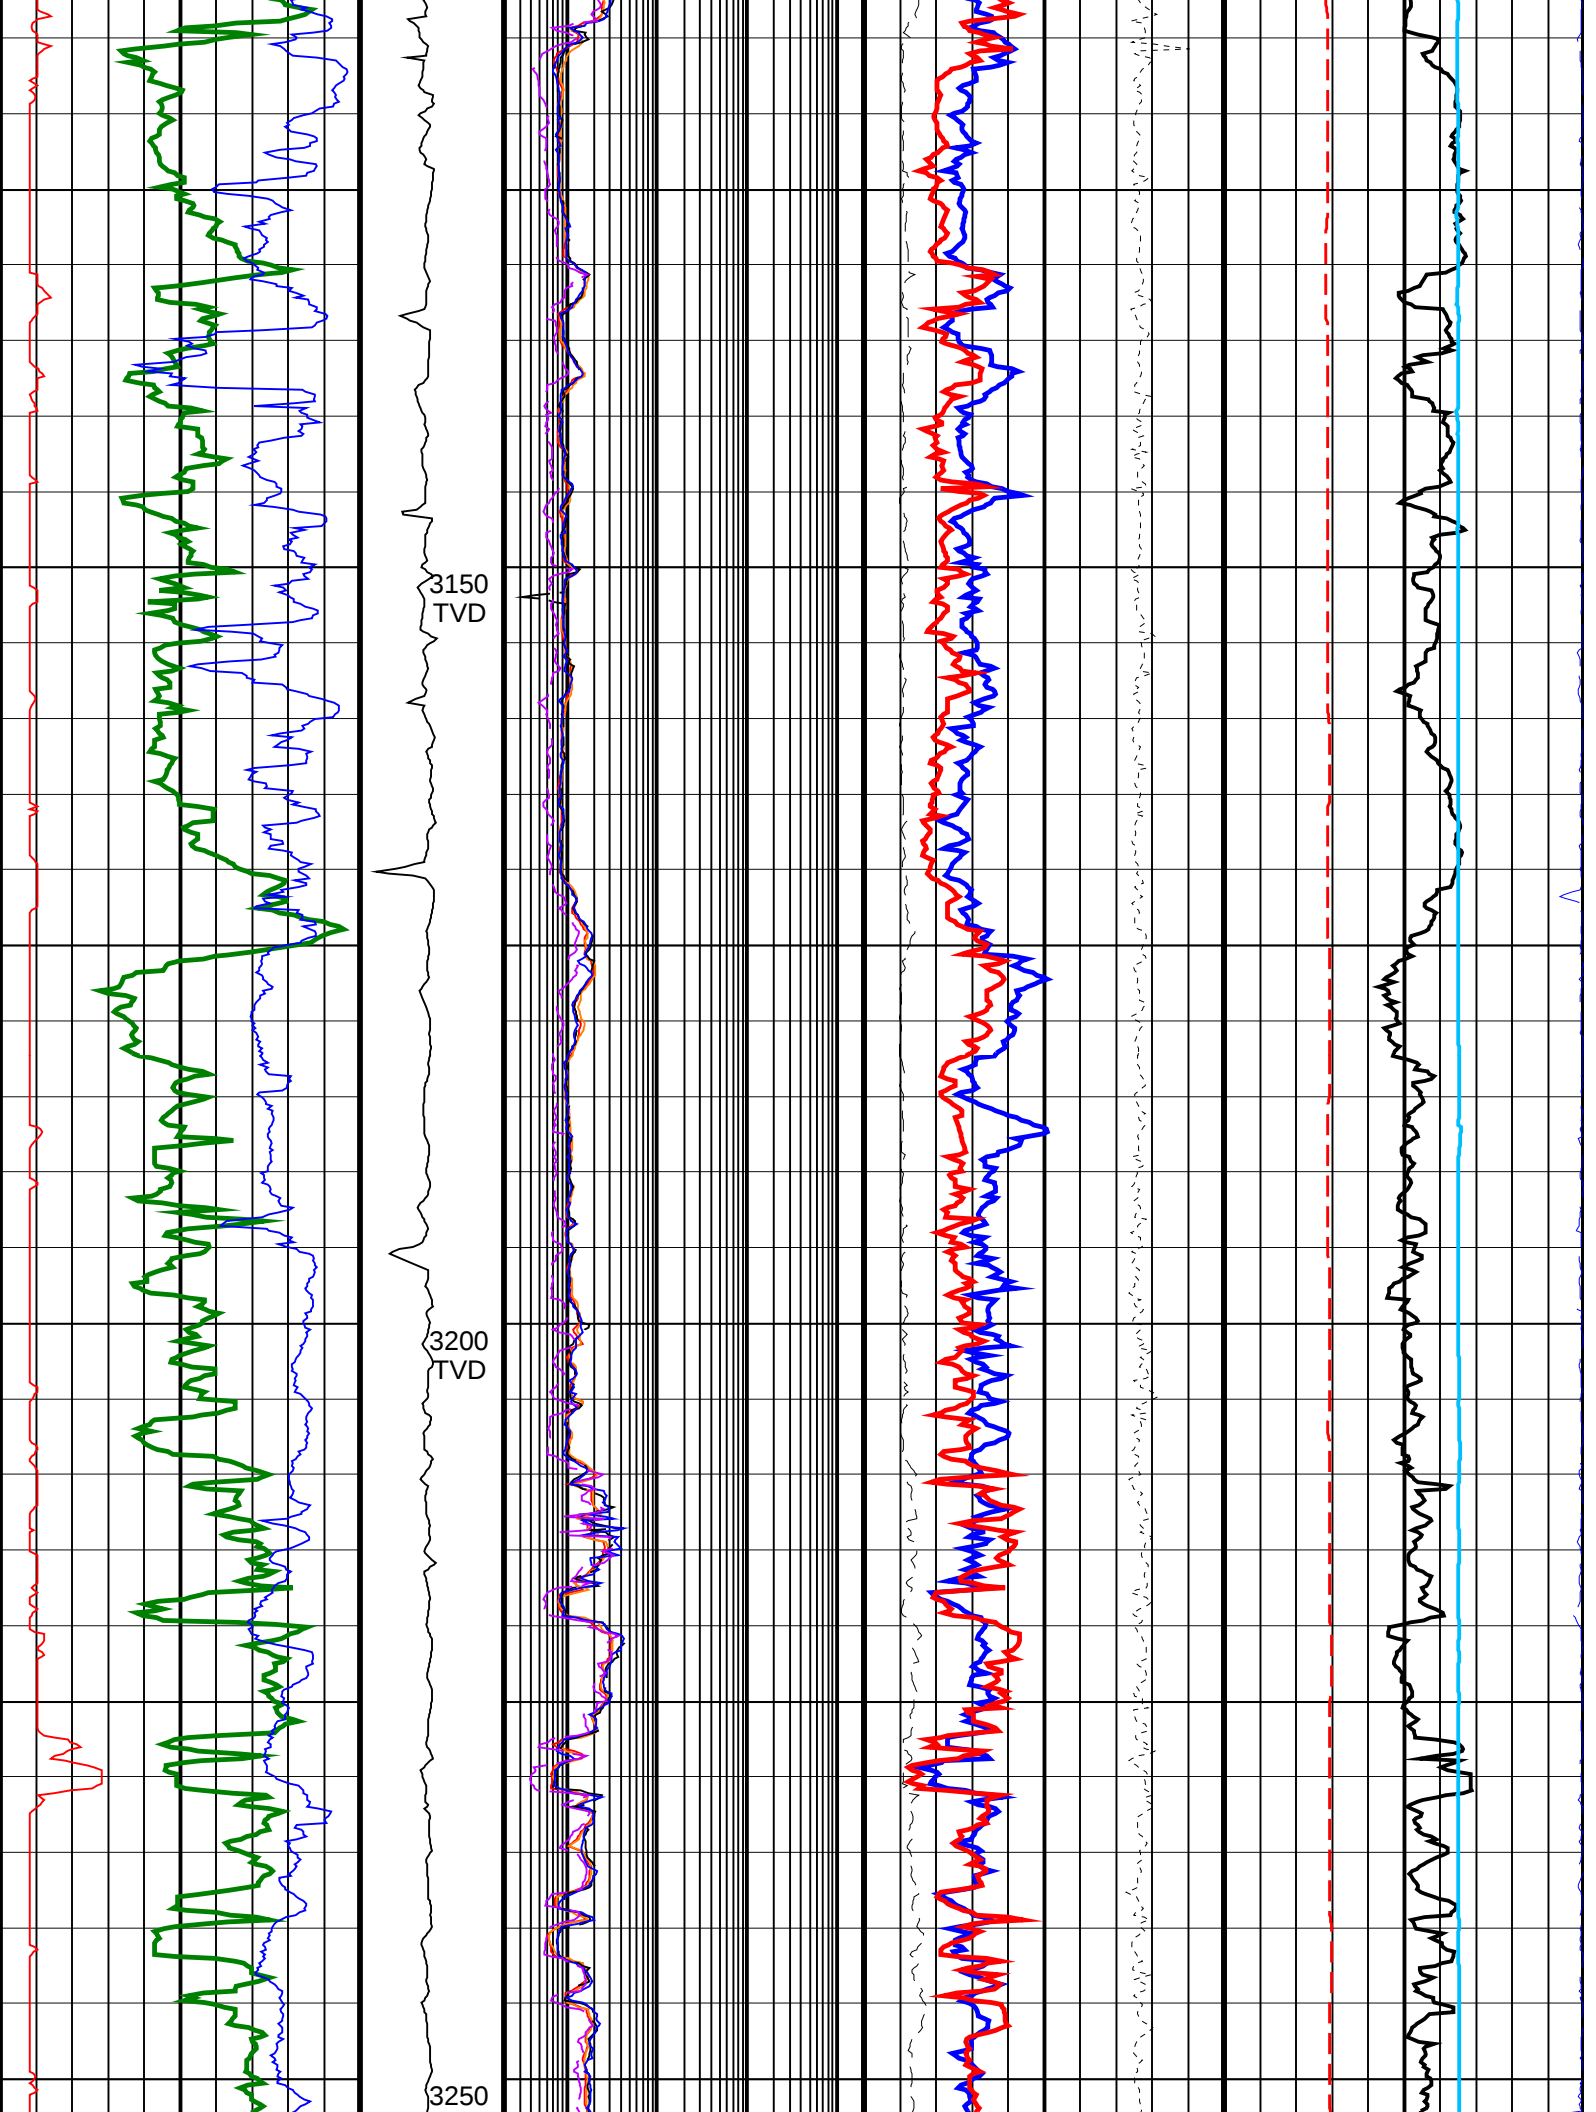

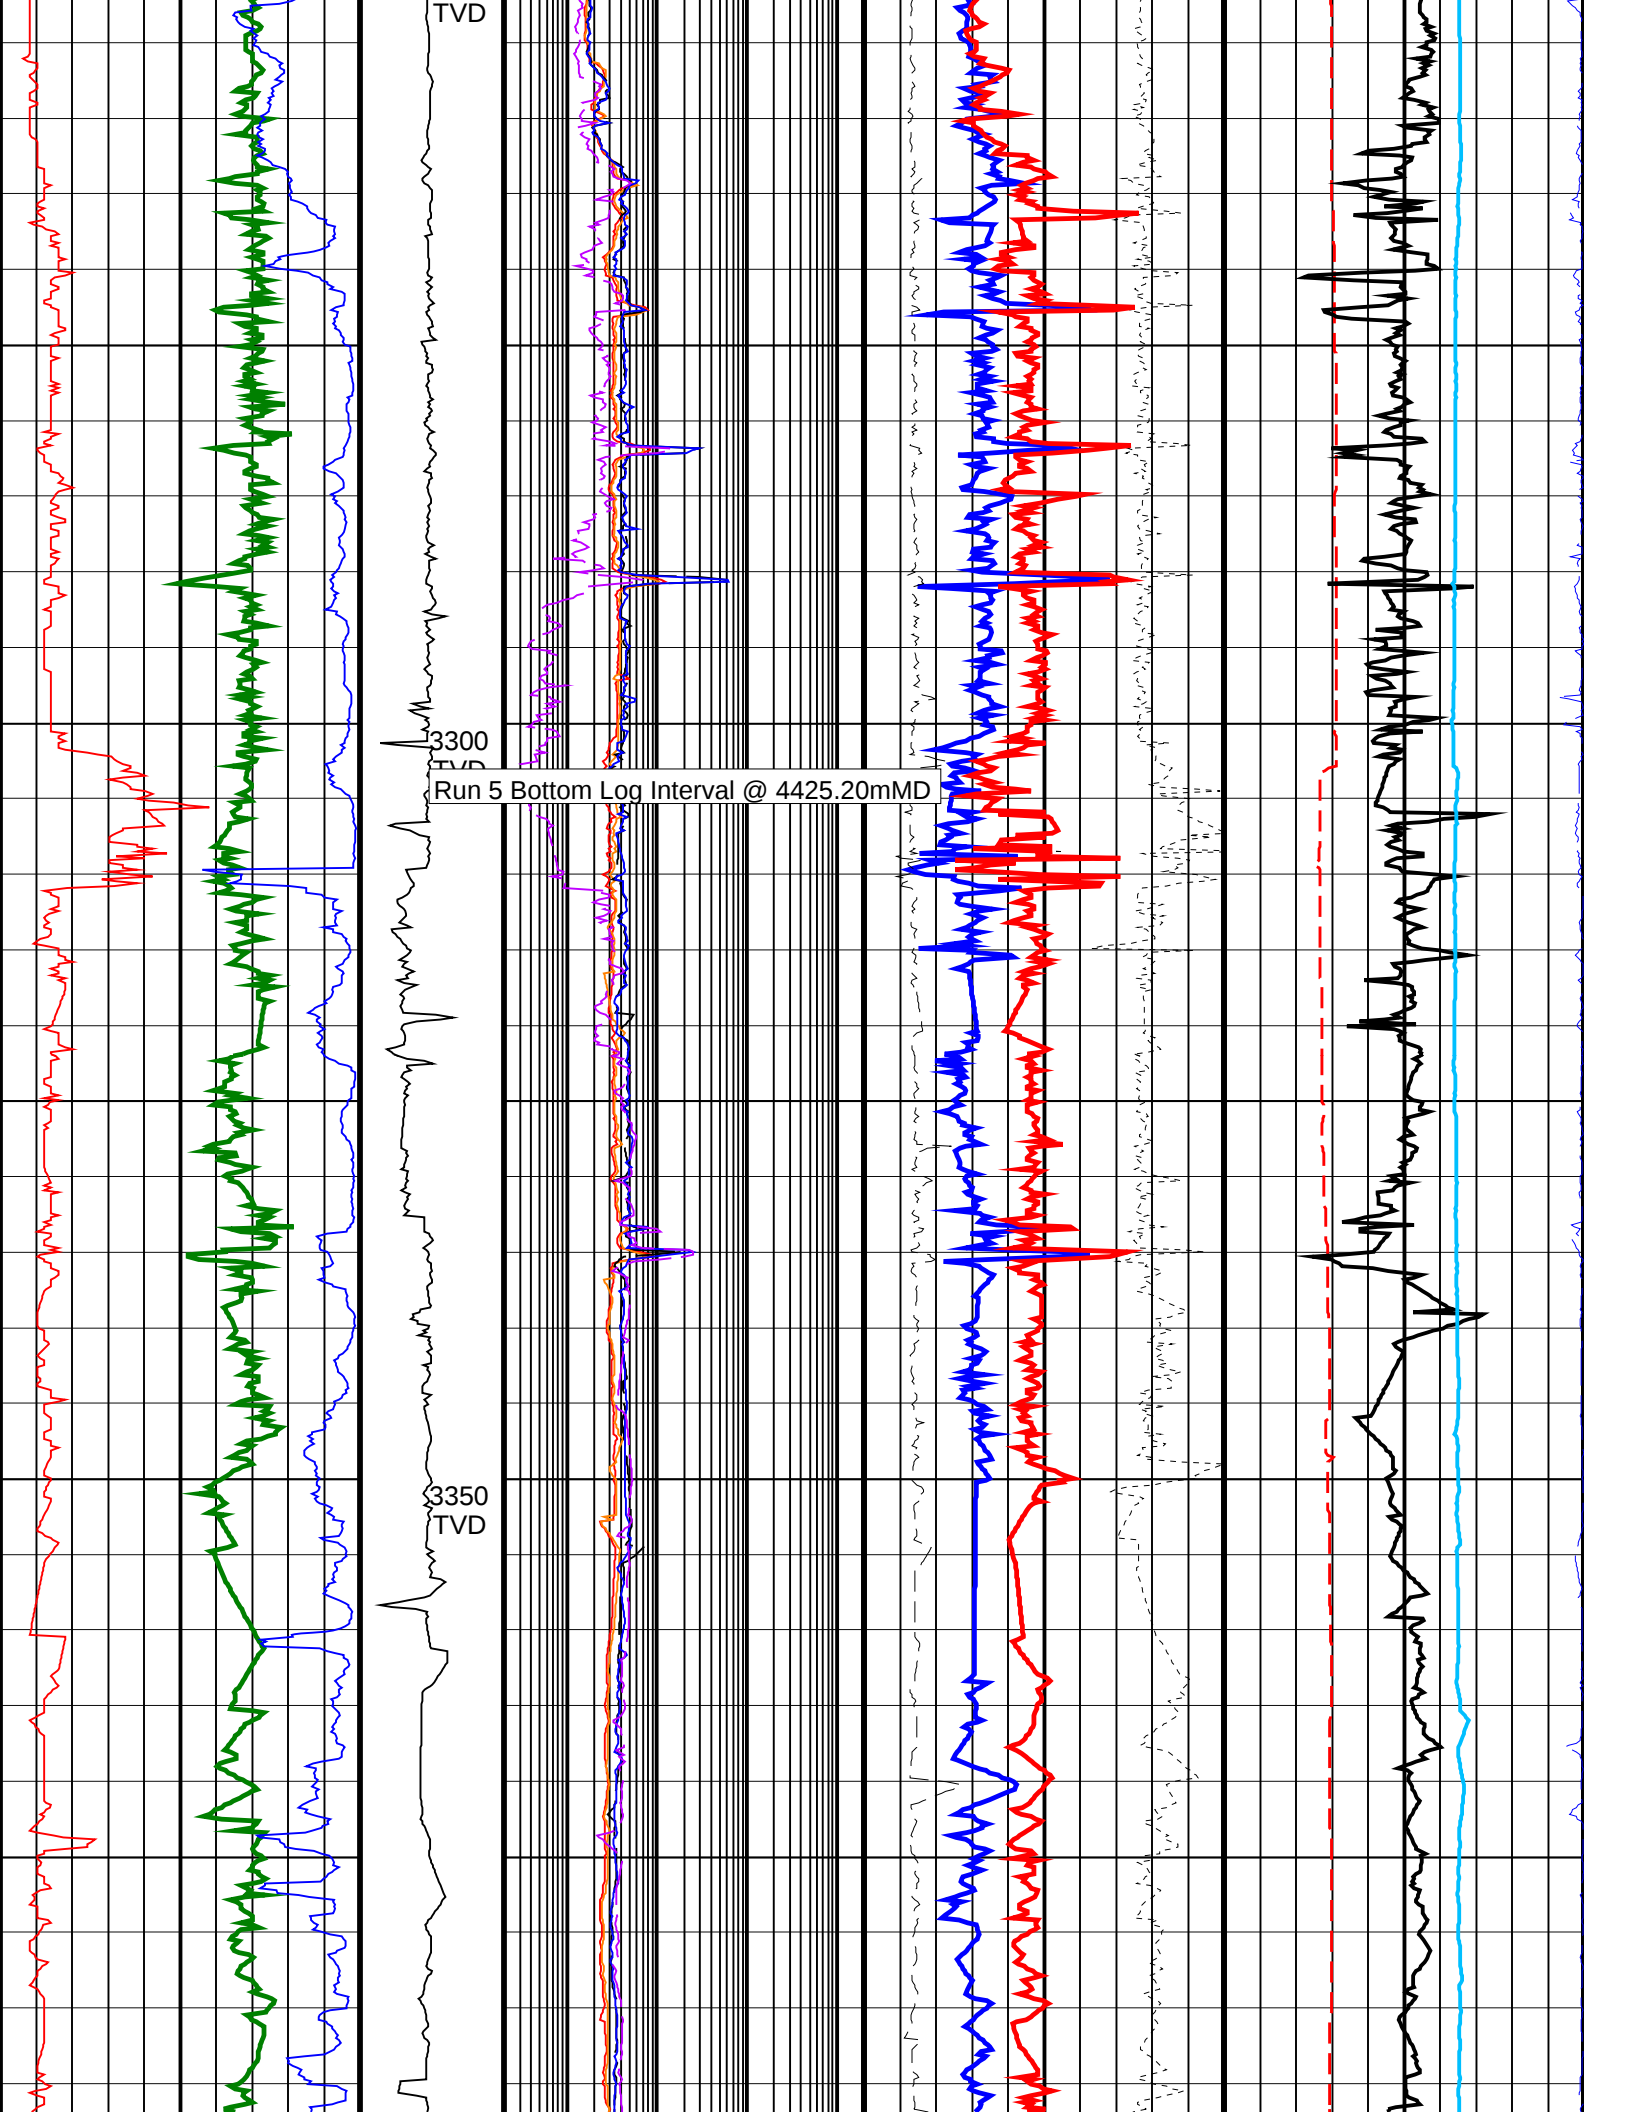

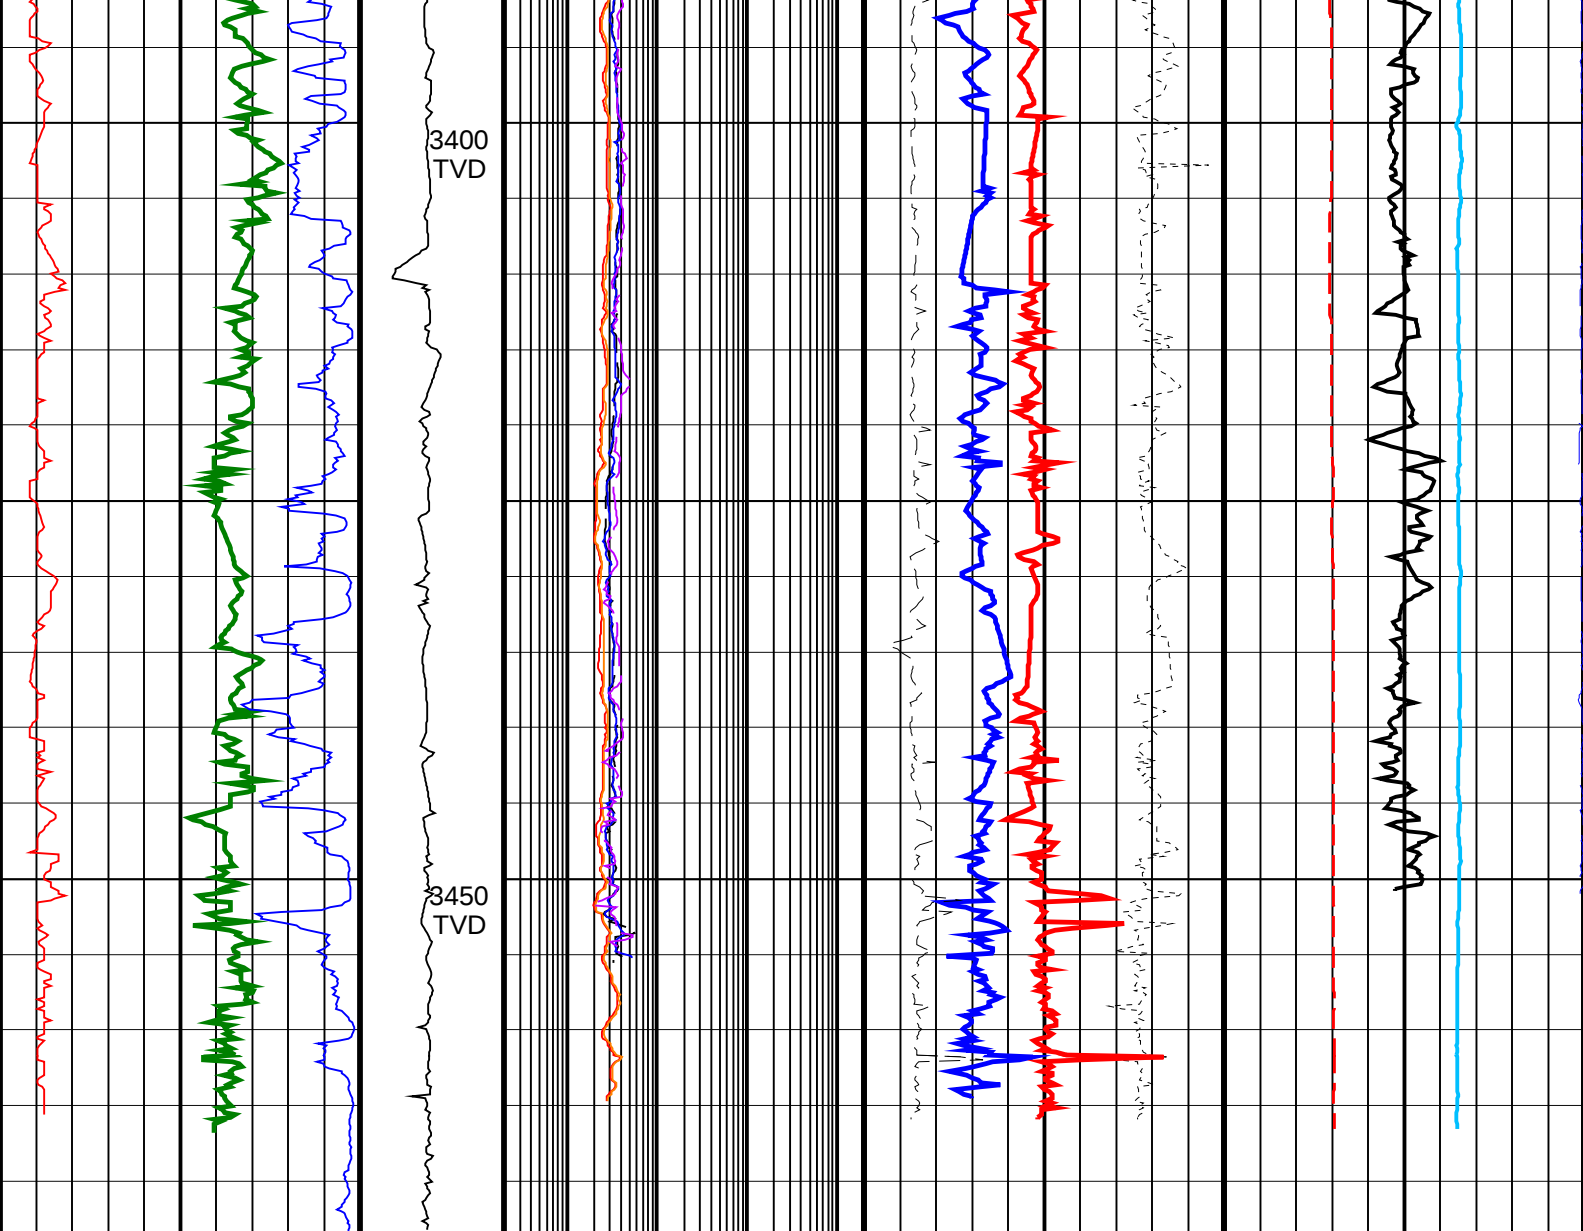

ROP*5 (ROP5) 200 (M/HR)	MWD Collar RPM (CRPM_RT) (RPM)	ARC Phase Shift Resistivity 16 inch at 2 MHz, Real-Time (P16H_ECO_RT)	Best Thermal Neutron Porosity, Average, Real-Time (BPHI_ECO_RT)	Downhole Annulus Temperature, Real Time, Computed Downhole (DHAT_ DH_ECO_RT) (DEGC)
0 400	0 400	0.2 (OHMM) 2000	45 (PU) -15	0 --- 200
Gamma Ray, Average, Real-Time (GRMA_ECO_RT) 0 (GAPI) 200		ARC Phase Shift Resistivity 40 inch at 2 MHz, Real-Time (P40H_ECO_RT)	Bulk Density, Bottom, Real-Time, Computed Downhole (ROBB_DH_ECO_RT)	Coherence at Compressional Peak, Real-Time (CHCO_RT) -9 (----) 1
		0.2 (OHMM) 2000	1.95 (G/C3) 2.95	
Ultrasonic Caliper, Average Diameter, Real-Time, Recomputed at Surface (UCAV_ECO_RT) 8 (IN) 13		Ring Resistivity, Real-Time (RES_RING_RT)	Photoelectric Factor, Bottom, Real-Time, Computed Downhole (PEB_DH_ECO_RT) (----) 10	Bulk Density Correction, Bottom, Real-Time Computed Downhole (DRHB_DH_ECO_RT) (G/C3)
		0.2 (OHMM) 2000	0 -0.25 0.25	Delta-T Compressional, Real-Time (DTCO_RT) 40 (US/F) 140
		Deep Button Resistivity, Real-Time (RES_BD_RT)		Equivalent Circulating Density, Real-Time (ECD_ECO_RT) (G/C3)
		0.2 (OHMM) 2000		0 2
		Shallow Button Resistivity, Real-Time (RES_BS_RT)		

IDEAL Version: ID13_0C_08

IDF