


Elver-1 EcoScope Service RT 200TVD


Format: ECO-SON-GVR_200TVD_RT


Vertical Scale: 1:200


Graphics File Created: 11-Jan-2009 07:02


		Shallow Button Resistivity, Real-Time (RES_BS_RT) 0.2 (OHMM) 2000				Equivalent Circulating Density, Real-Time (ECD_ECO_RT) 0.8 (G/C3) 1.6	
		Deep Button Resistivity, Real-Time (RES_BD_RT) 0.2 (OHMM) 2000					
Ultrasonic Caliper, Average Diameter, Real-Time, Recomputed at Surface (UCAV_ECO_RT) 6 (IN) 16		Ring Resistivity, Real-Time (RES_RING_RT) 0.2 (OHMM) 2000		Photoelectric Factor, Bottom, Real-Time, Computed Downhole (PEB_DH_ECO_RT) 0 (----) 10	Bulk Density Correction, Bottom, Real-Time Computed Downhole (DRHB_DH_ECO_RT) -0.25 0.25 (G/C3)	Delta-T Compressional, Real-Time (DTCO_RT) 40 (US/F) 140	
Gamma Ray, Average, Real-Time (GRMA_ECO_RT) 0 (GAPI) 200		ARC Phase Shift Resistivity 40 inch at 2 MHz, Real-Time (P40H_ECO_RT) 0.2 (OHMM) 2000		Bulk Density, Bottom, Real-Time, Computed Downhole (ROBB_DH_ECO_RT) 1.95 (G/C3) 2.95		Coherence at Compressional Peak, Real-Time (CHCO_RT) -4 (----) 1	
ROP*5 (ROP5) 200 (M/HR) 0		MWD Collar RPM (CRPM_RT) (RPM) 0 400	ARC Phase Shift Resistivity 16 inch at 2 MHz, Real-Time (P16H_ECO_RT) 0.2 (OHMM) 2000	Best Thermal Neutron Porosity, Average, Real-Time (BPHI_ECO_RT) 0.45 (V/V) -0.15		Downhole Annulus Temperature, Real Time, Computed Downhole (DHAT_DH_ECO_RT) 0 (DEGC) 200	

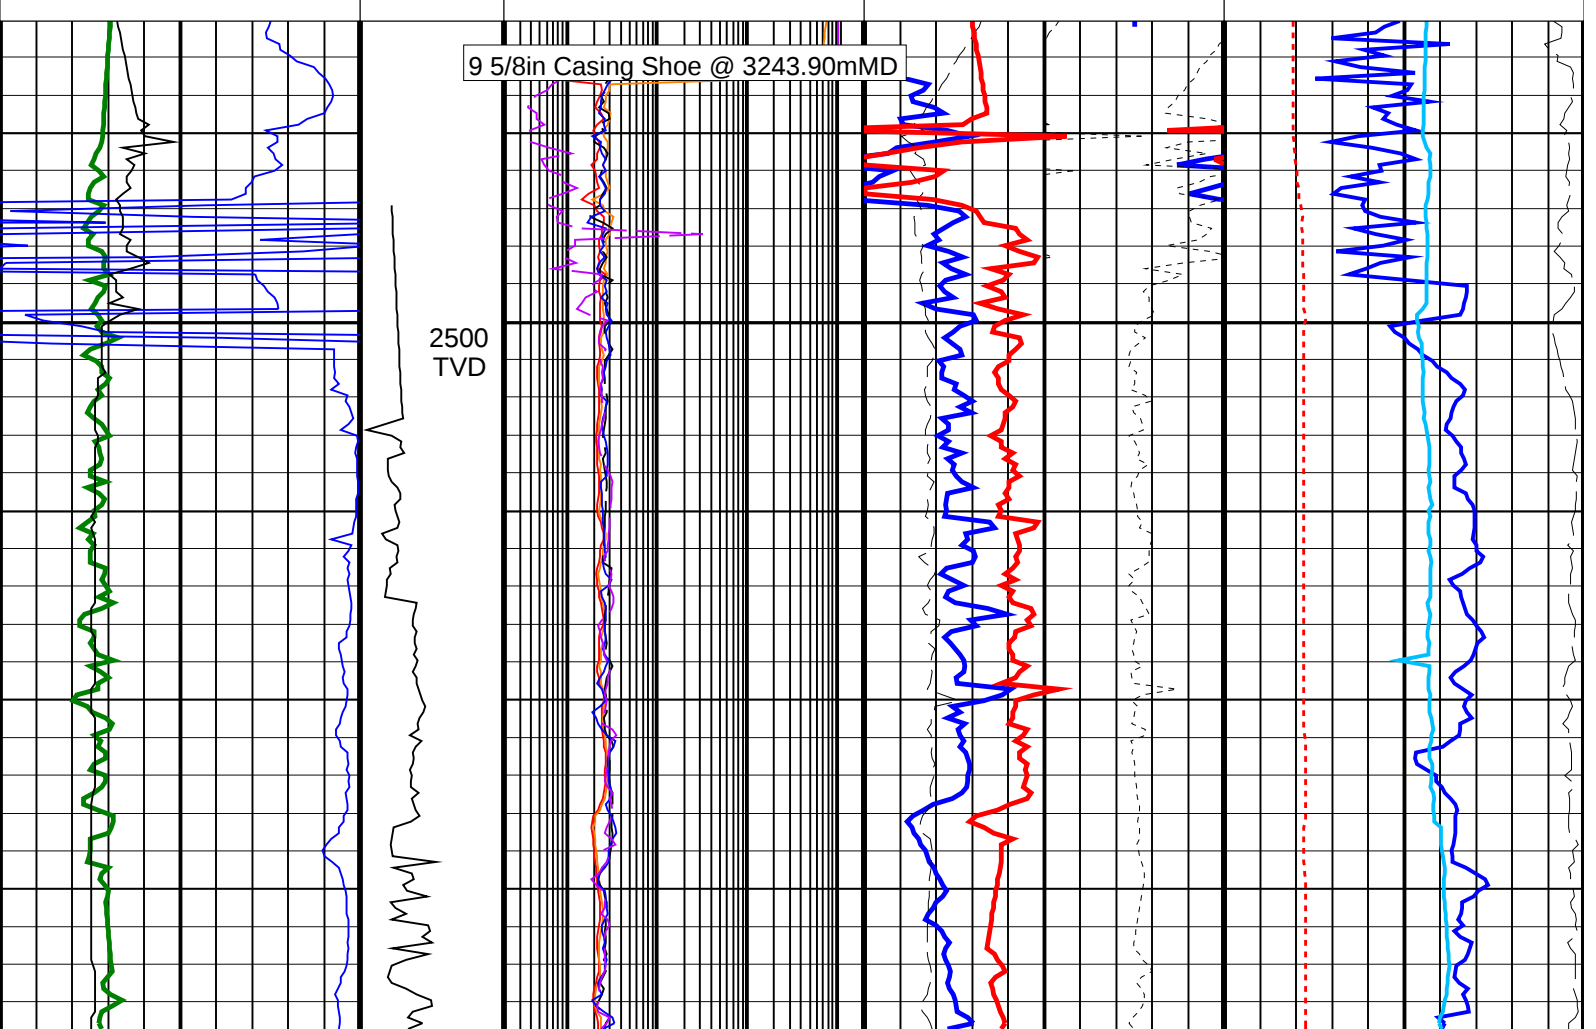

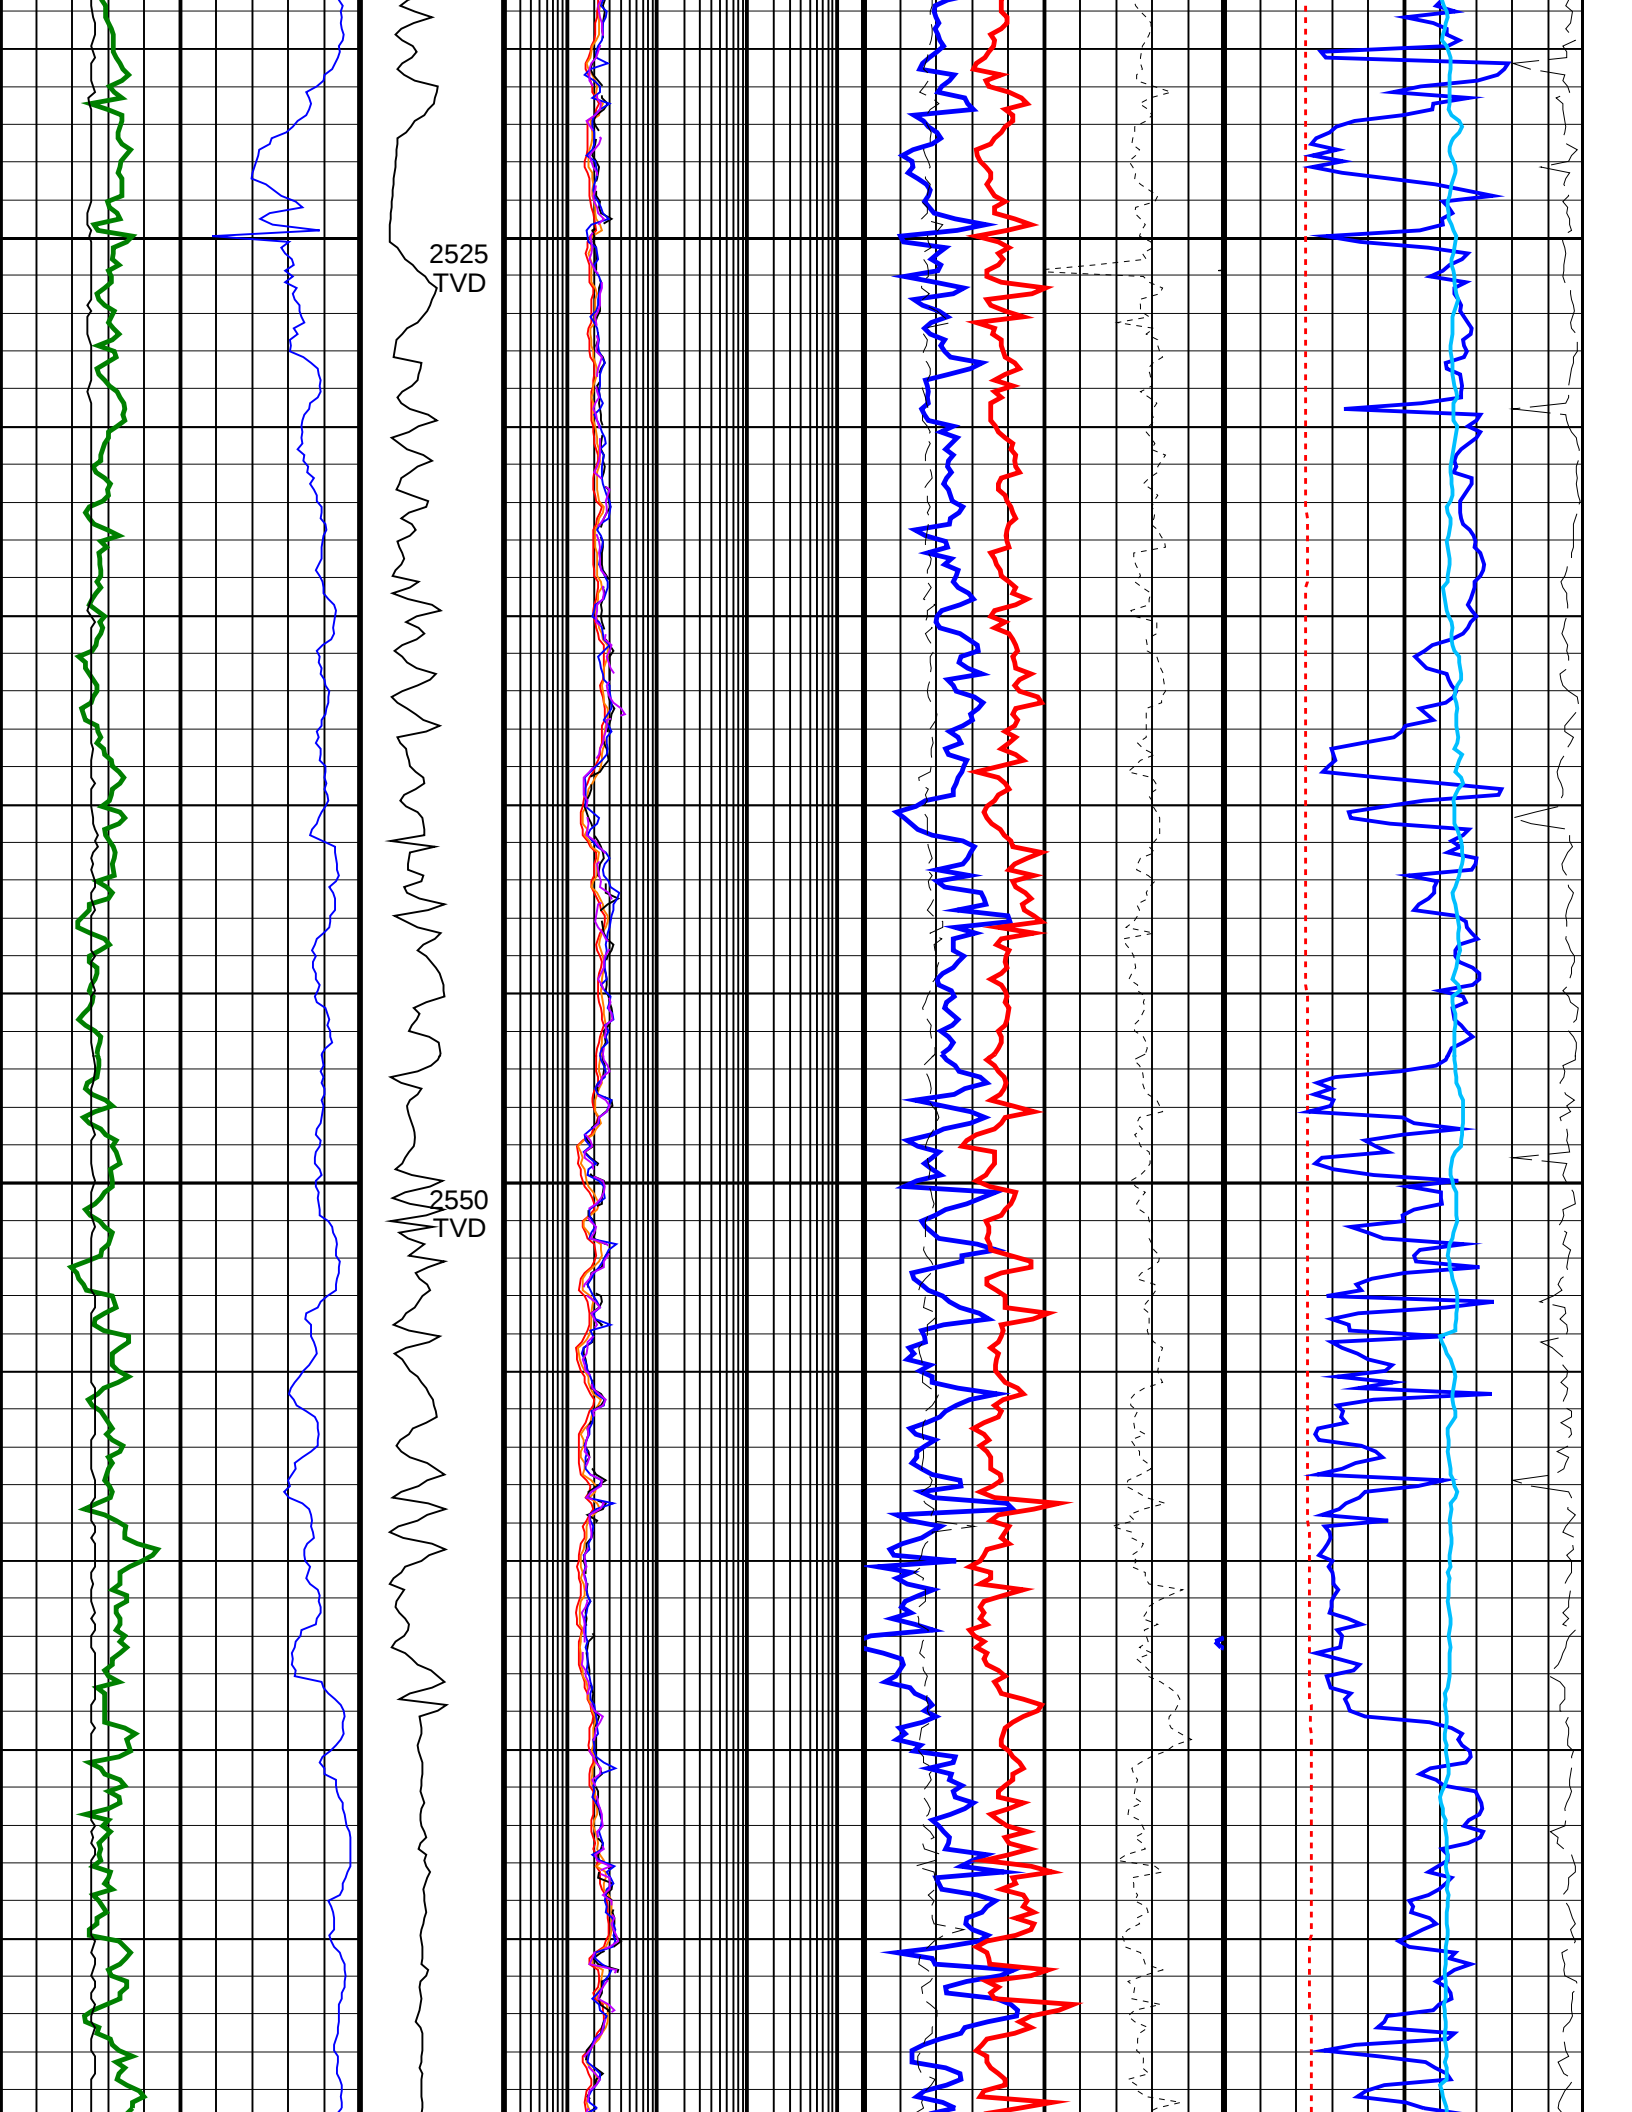

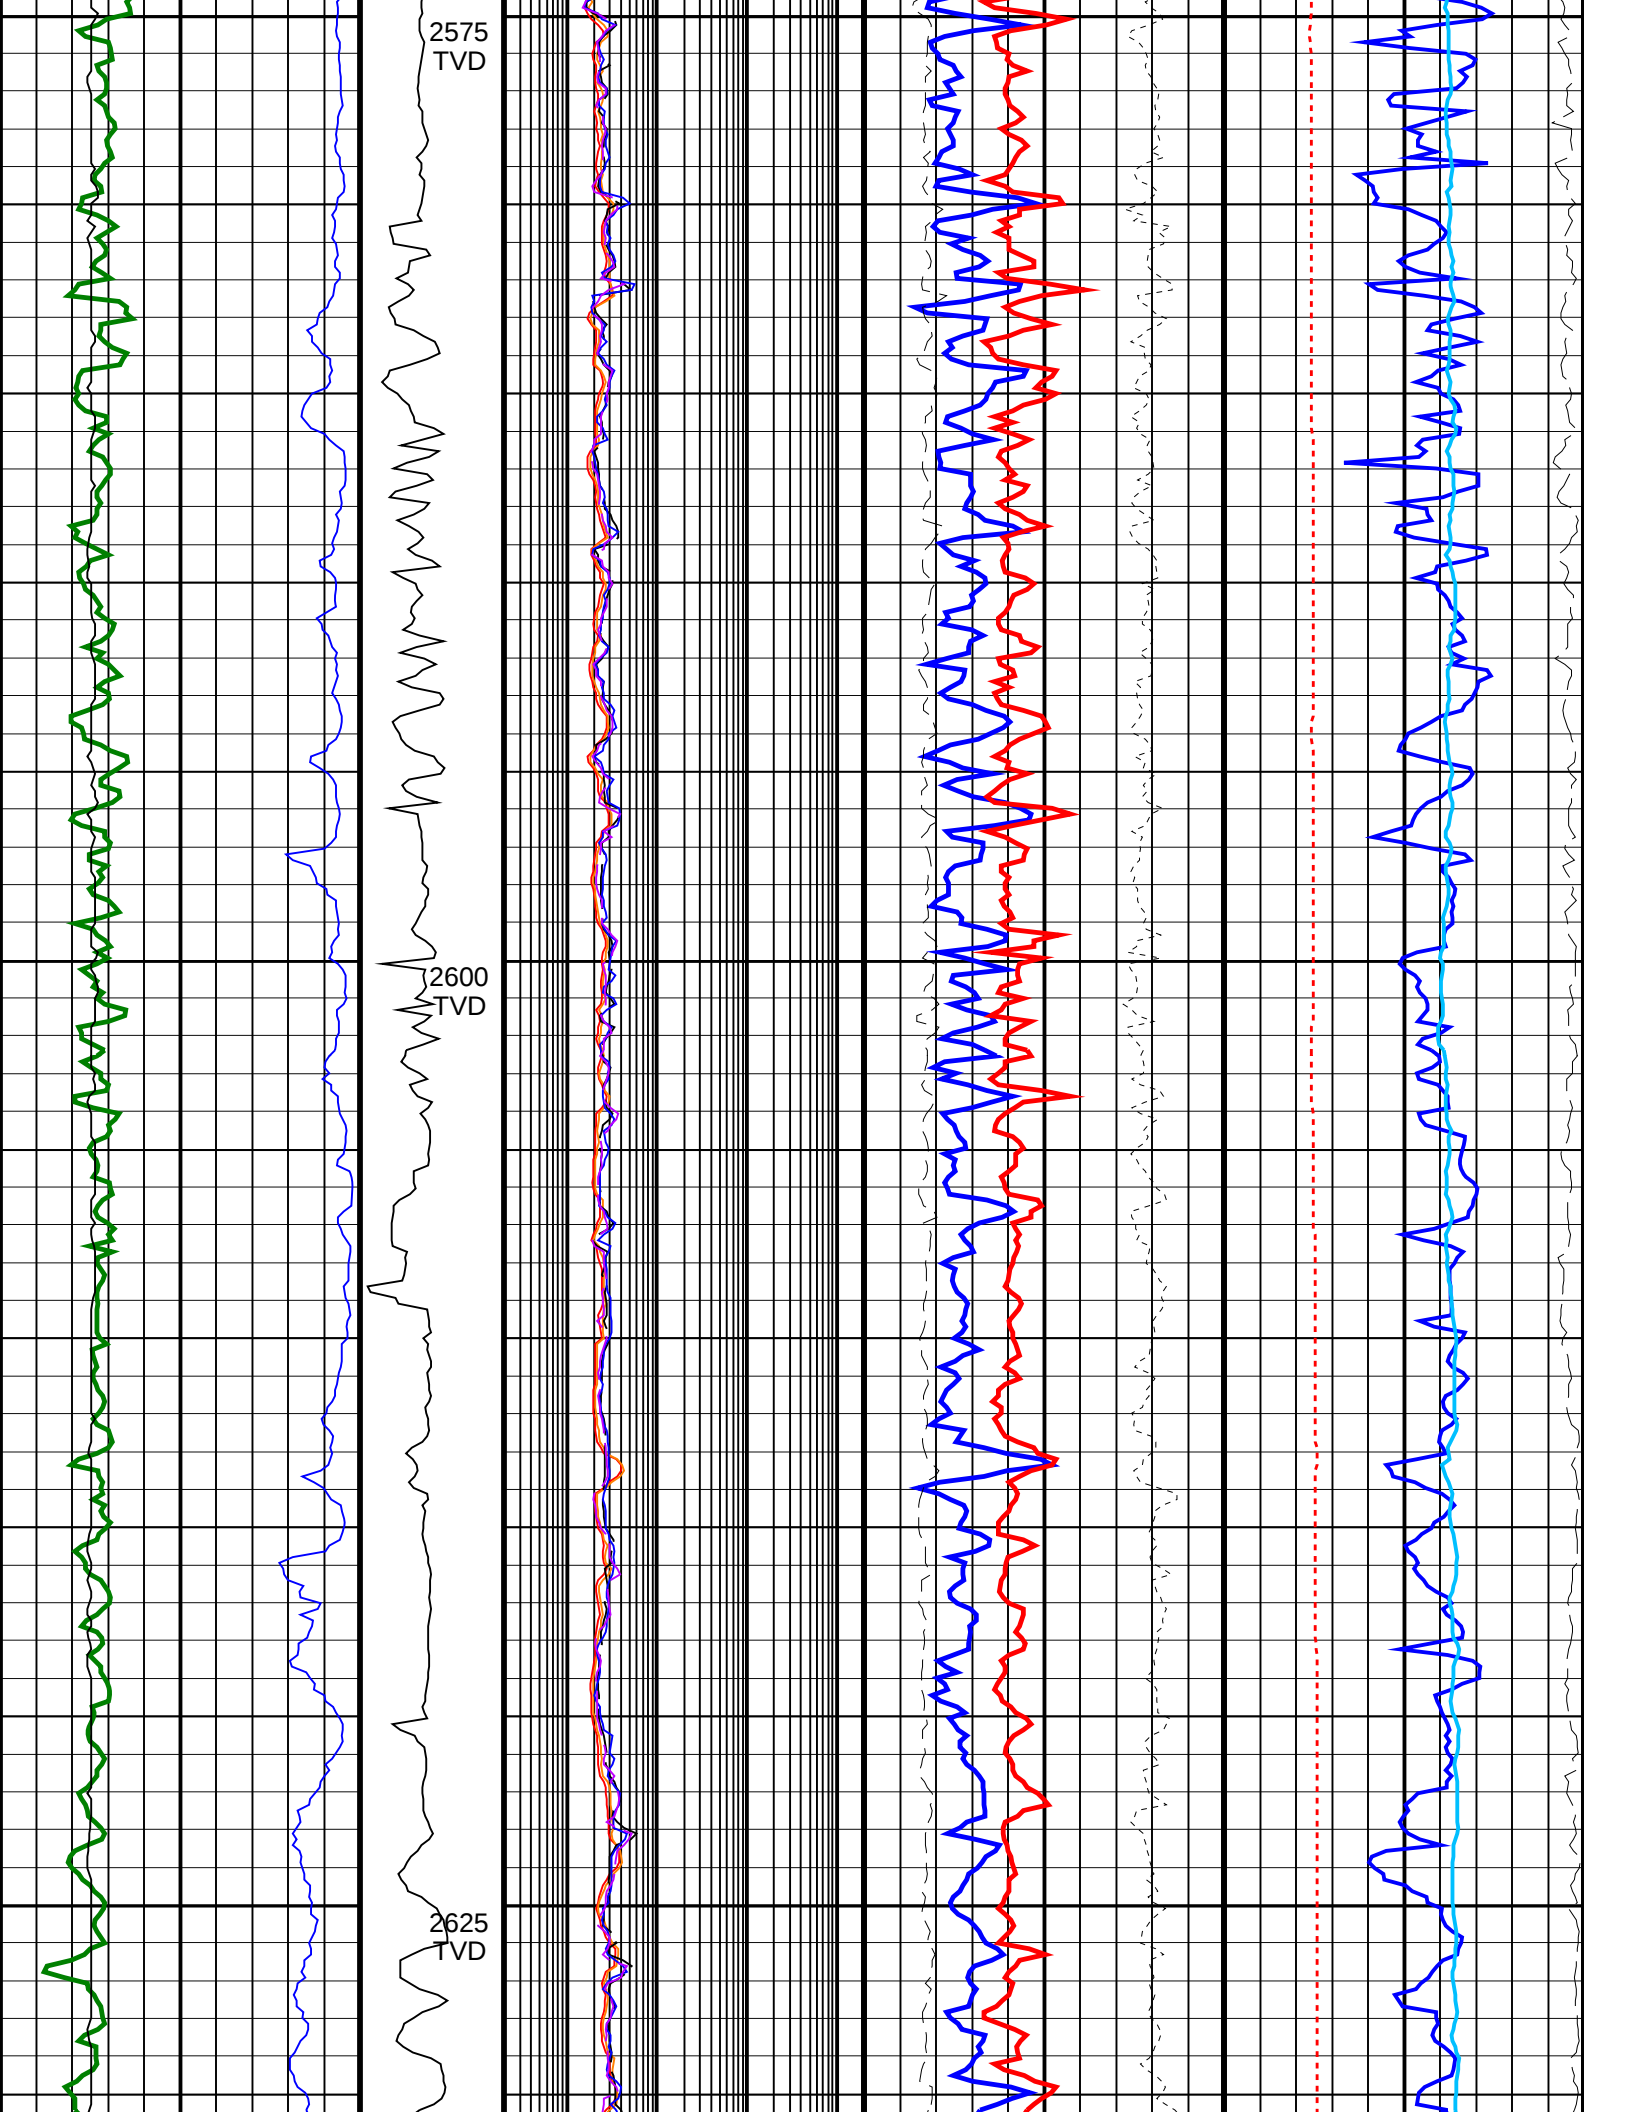


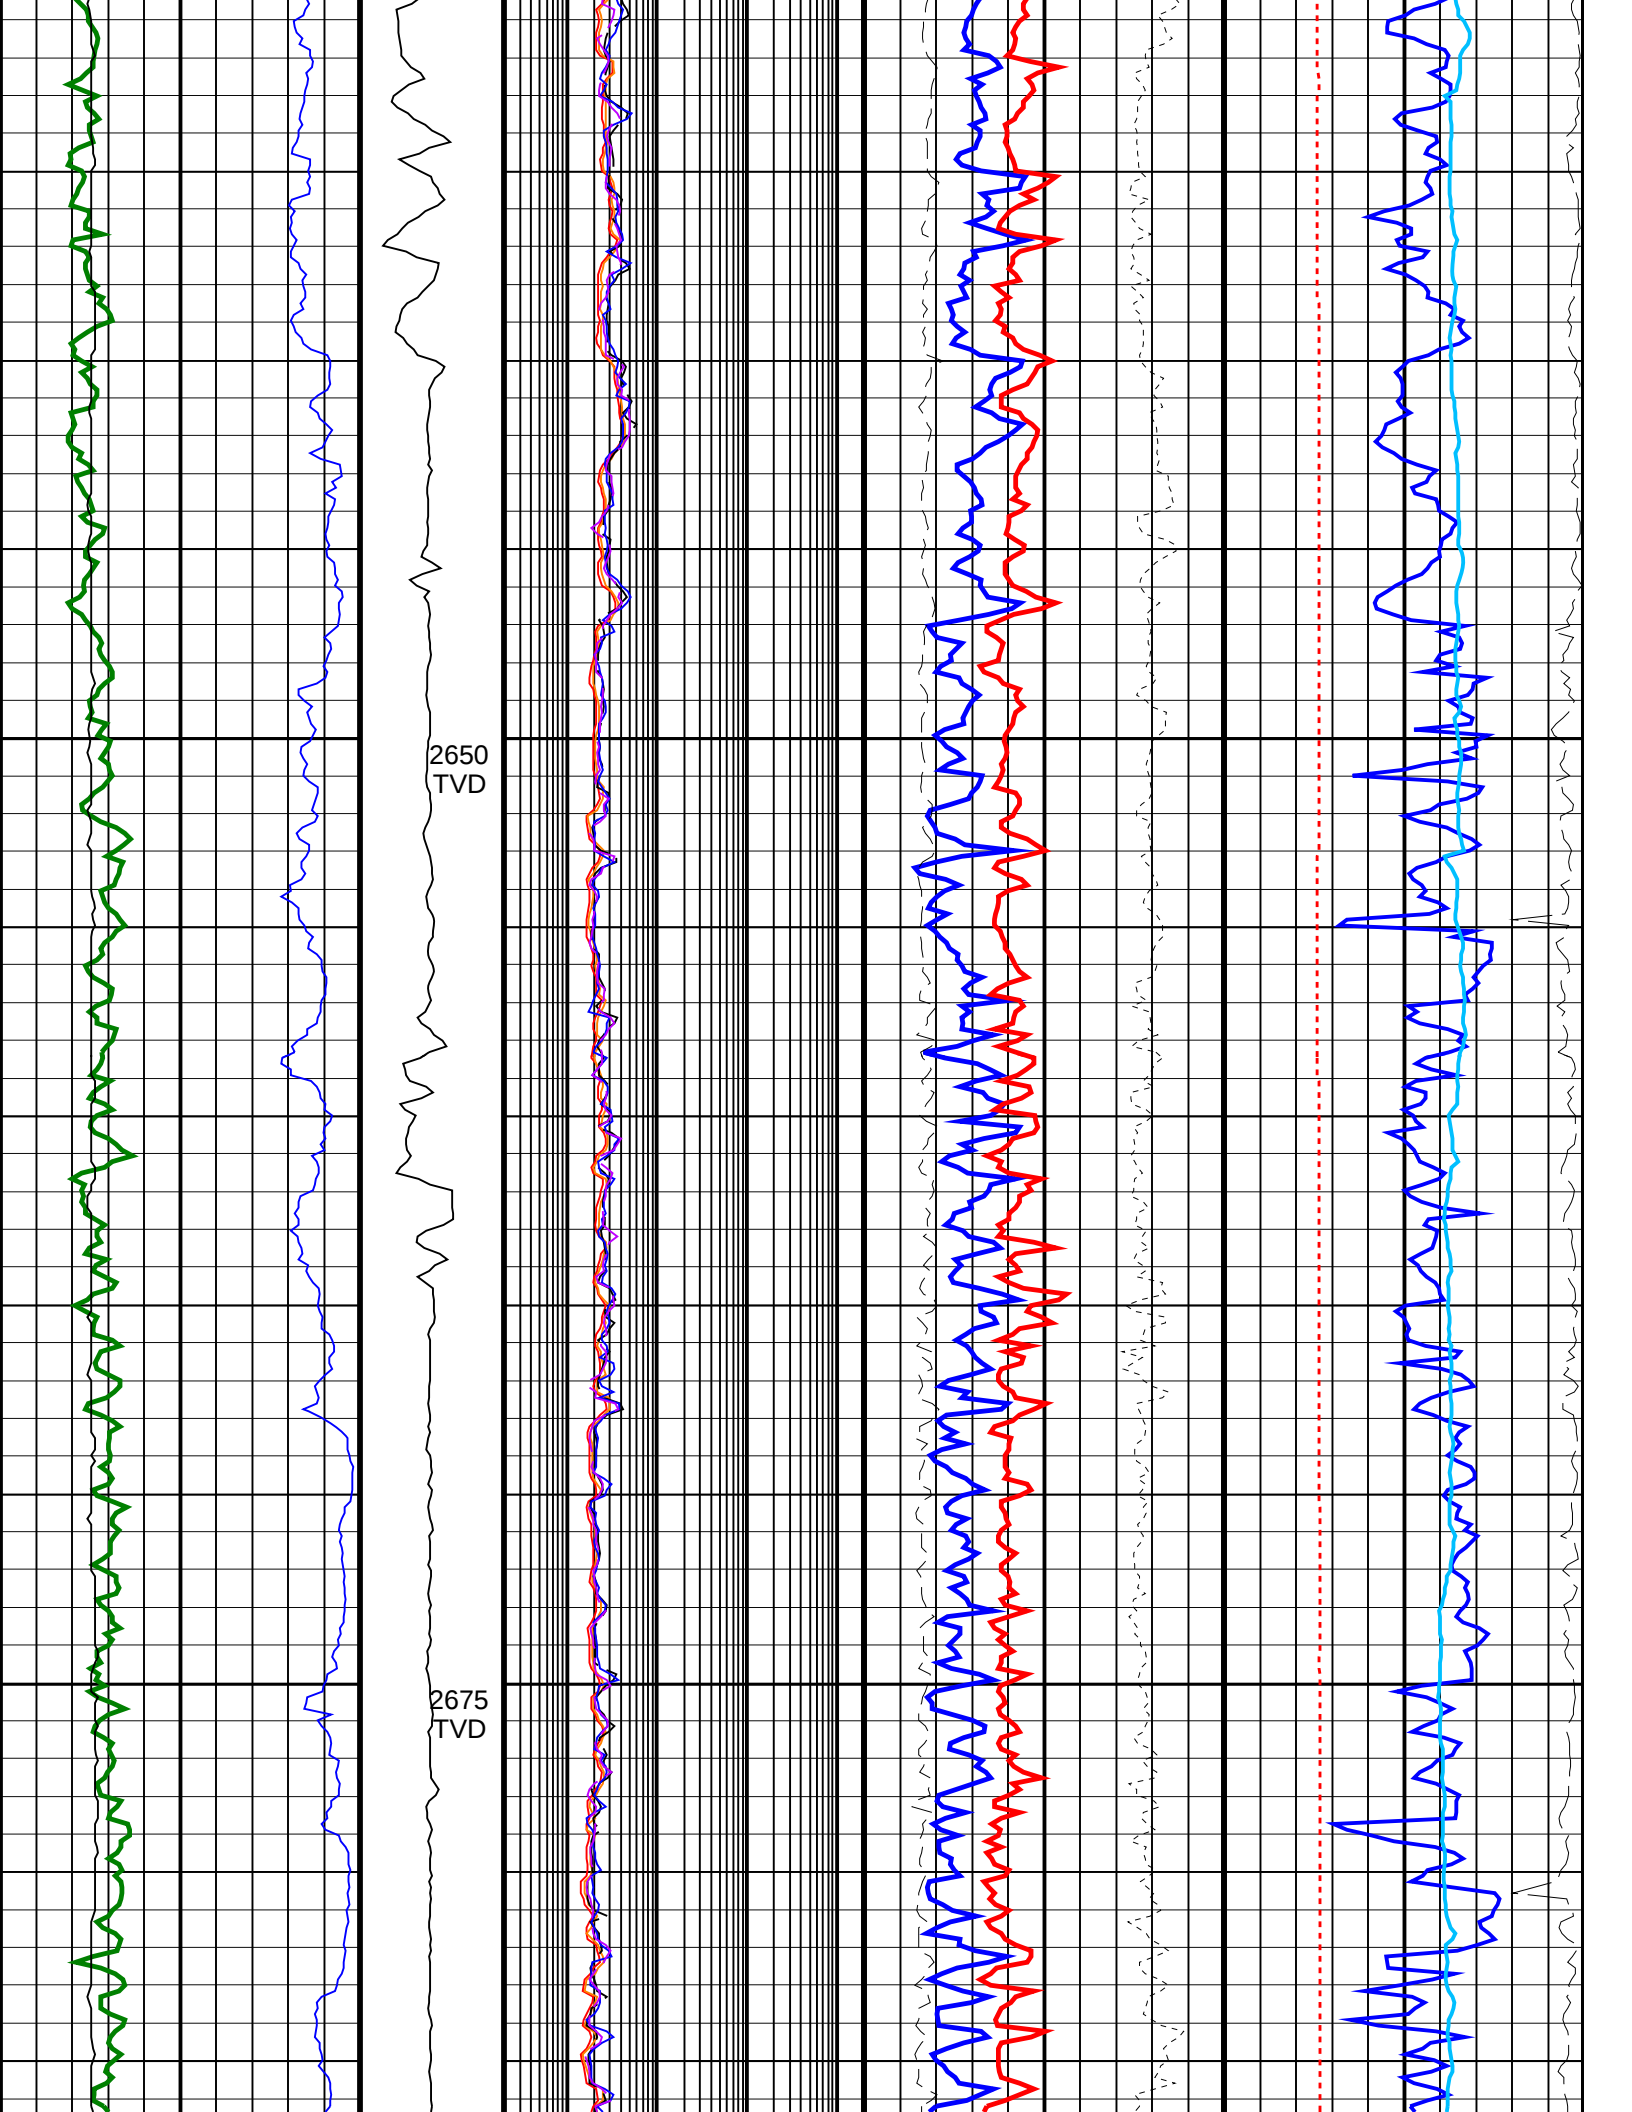


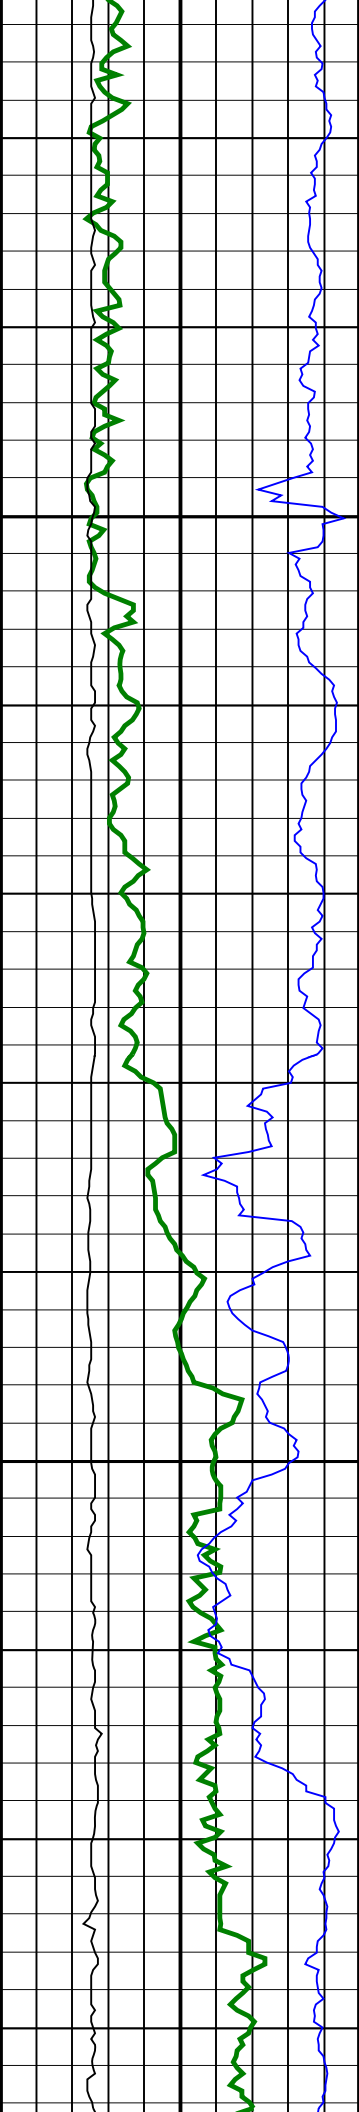

2700
TVD

2725
TVD

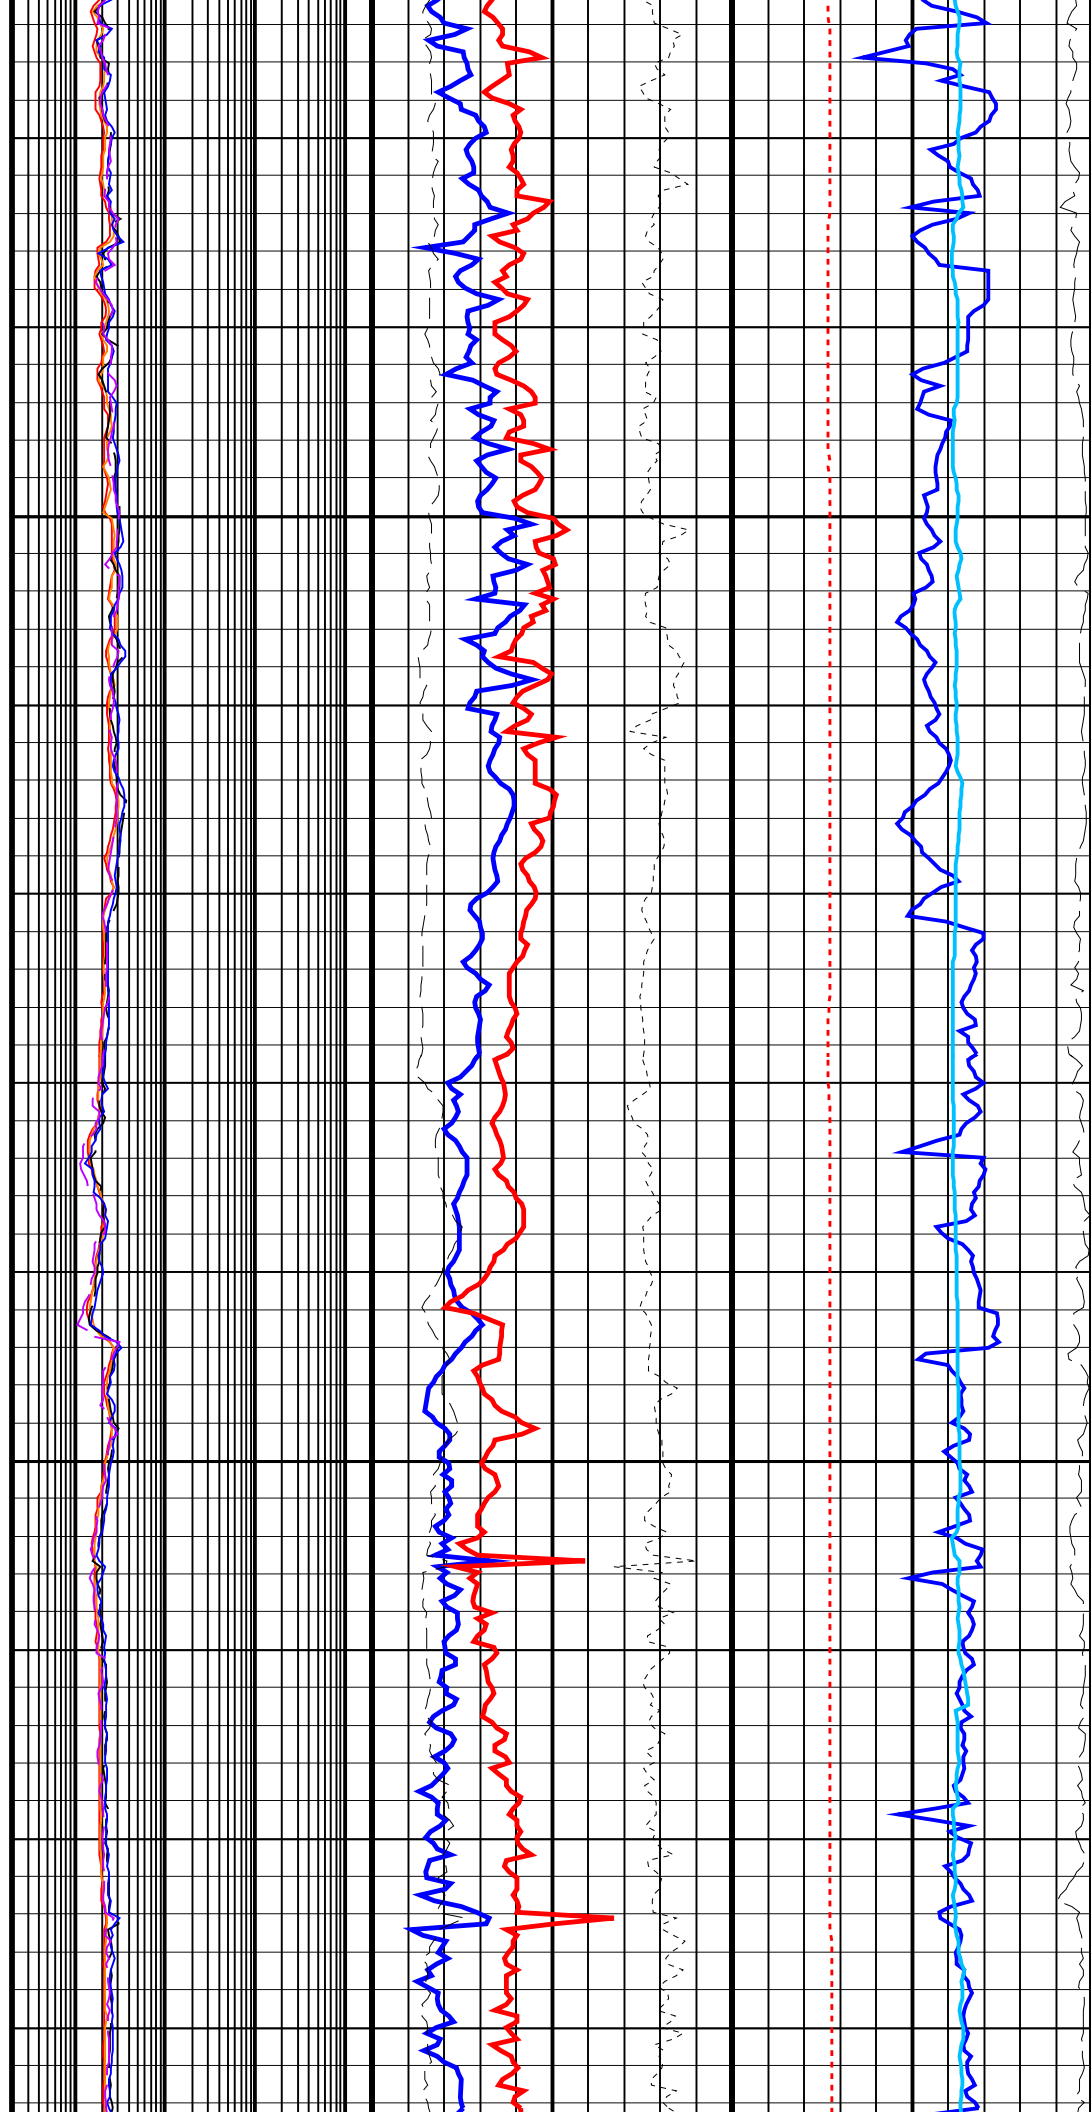


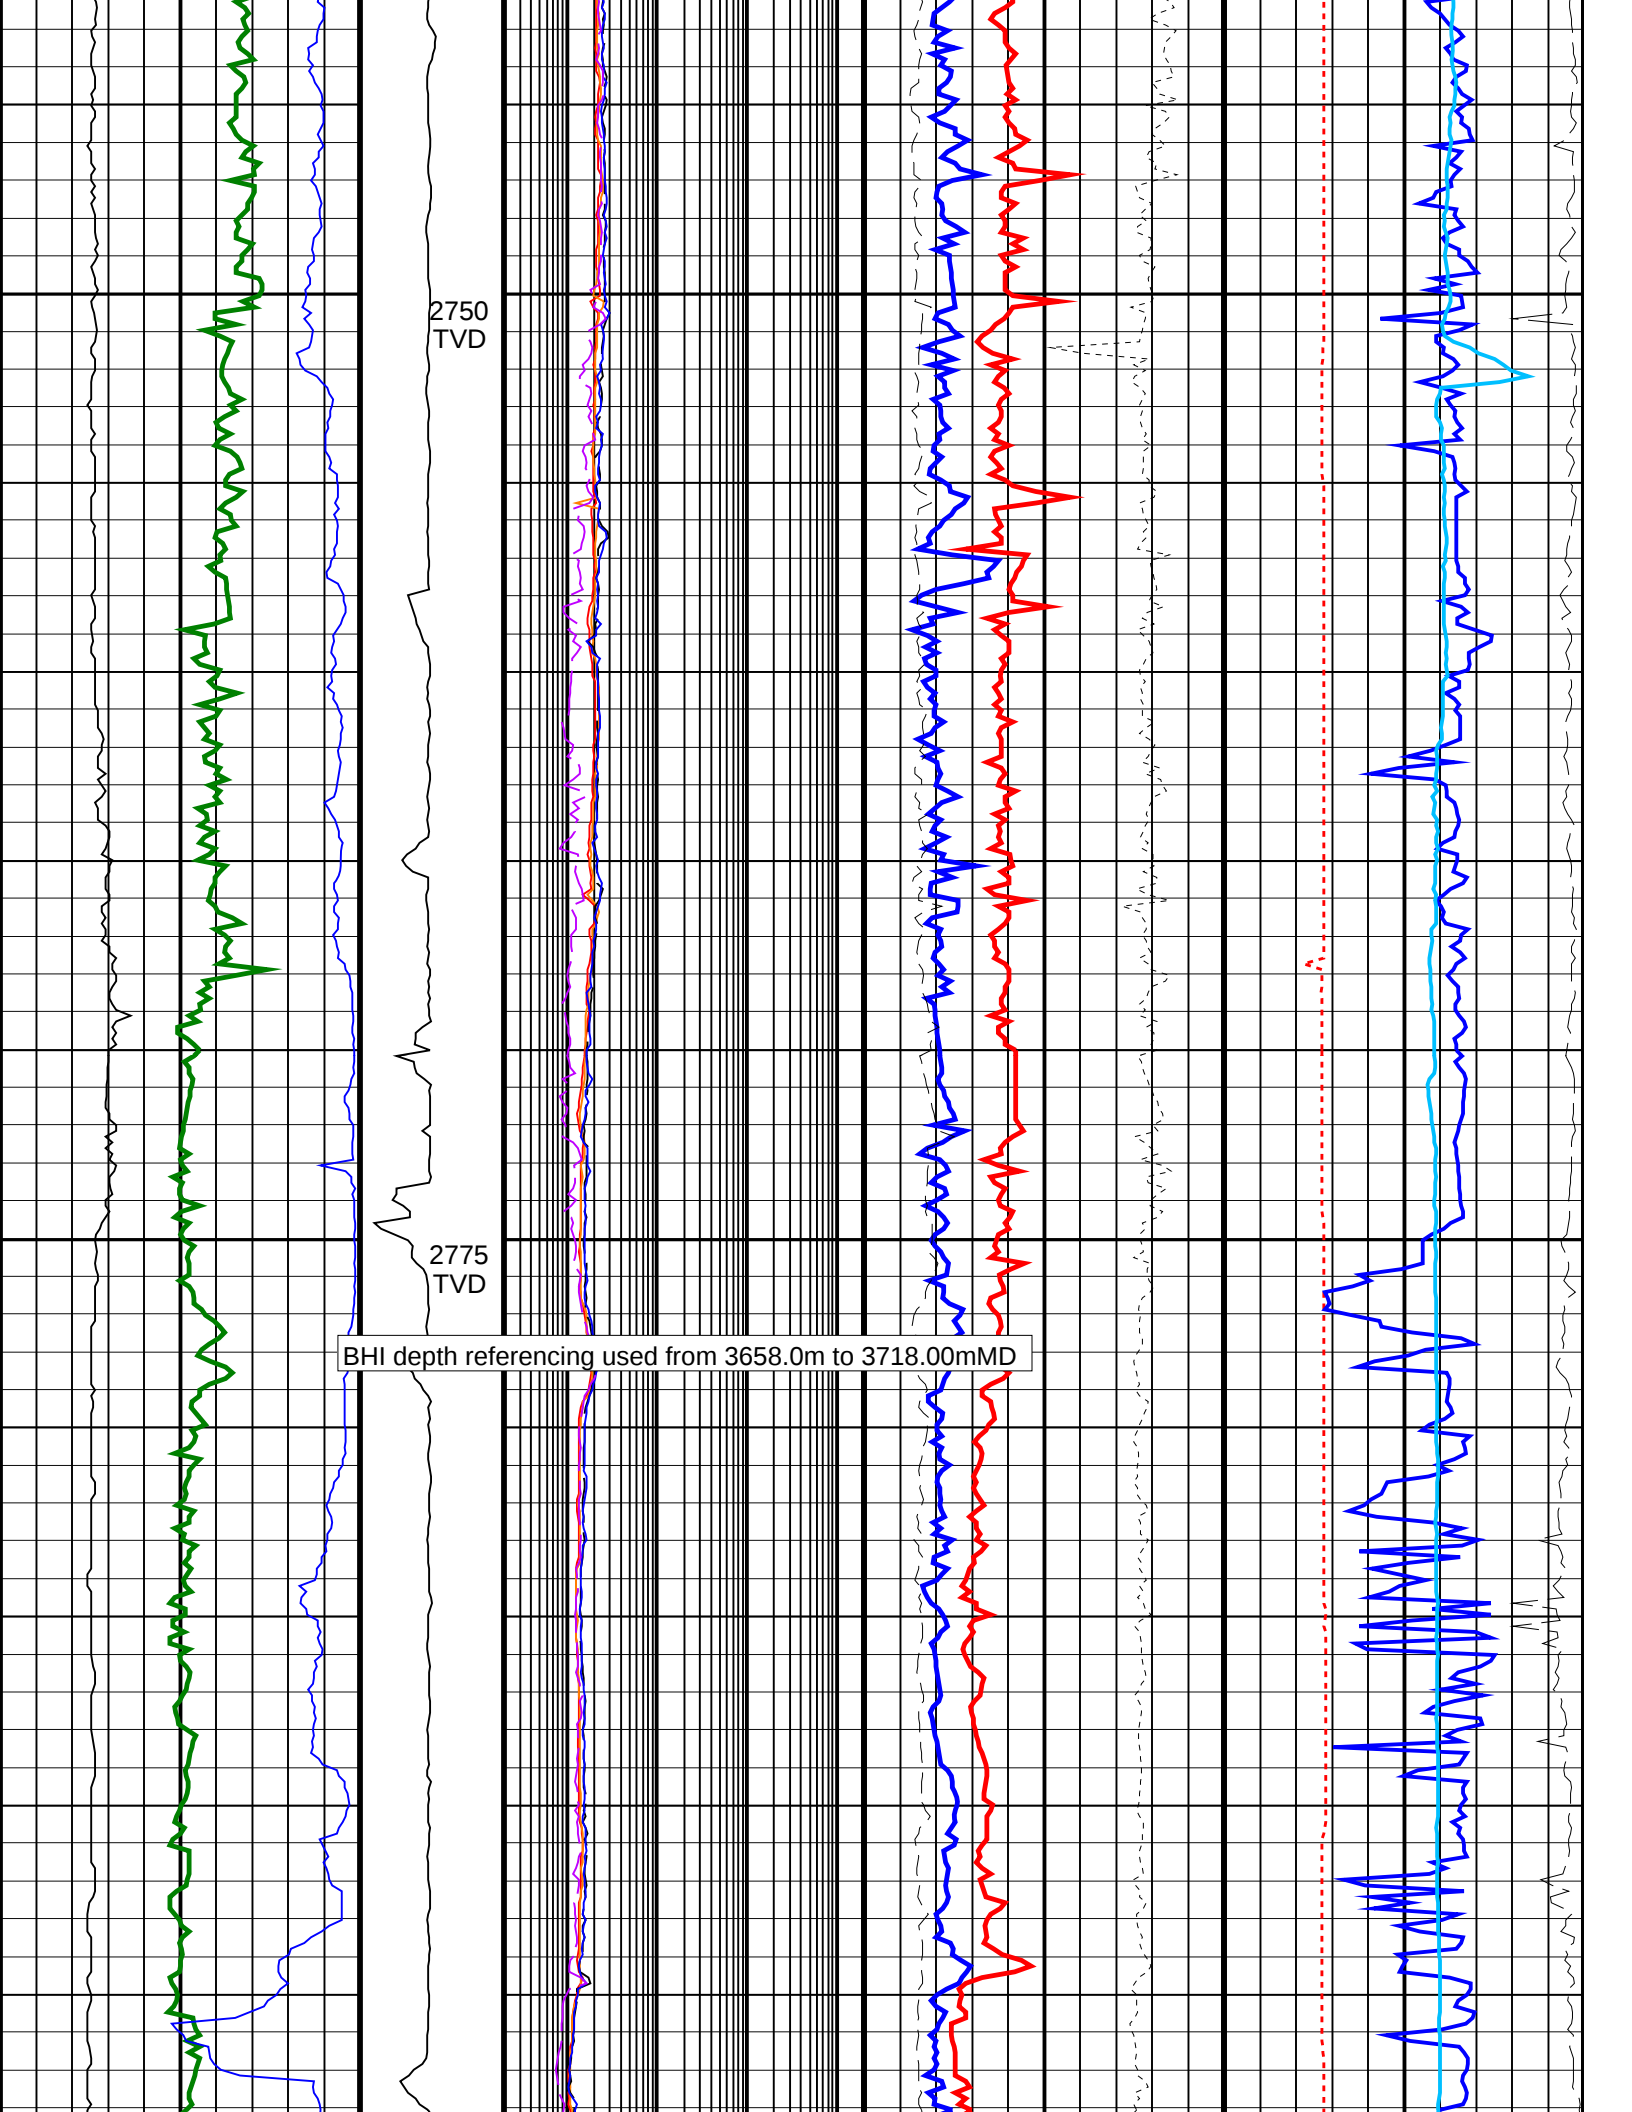



2750
TVD


2775
TVD


BHI depth referencing used from 3658.0m to 3718.00mMD

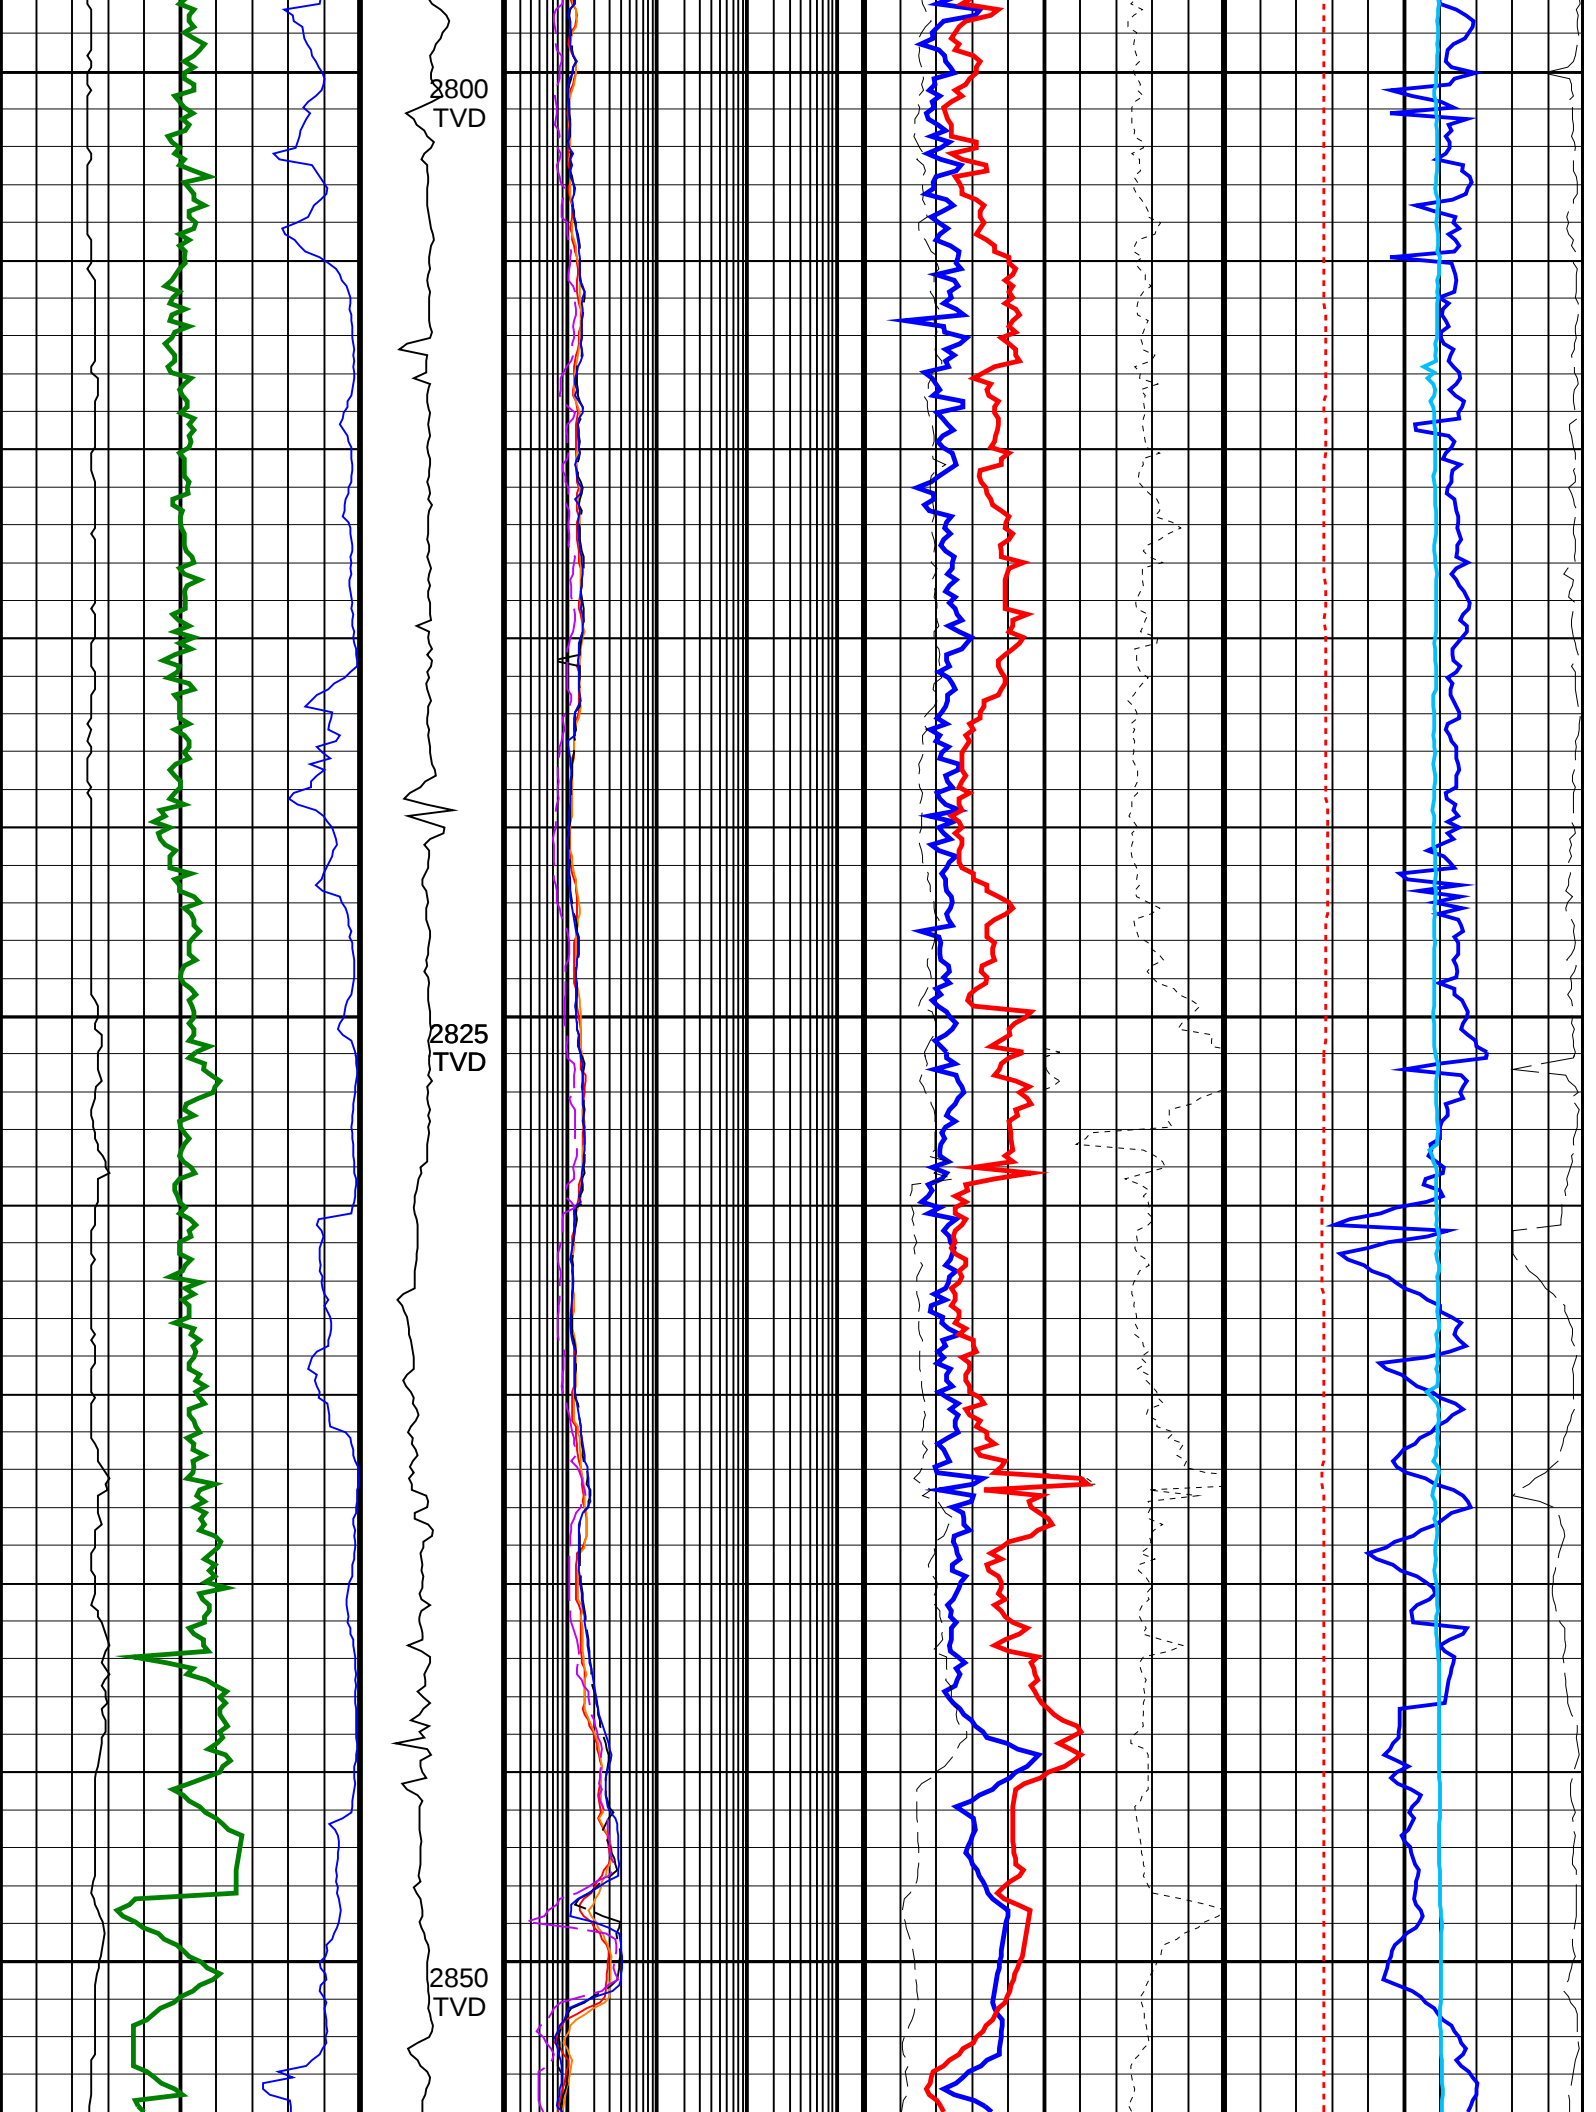


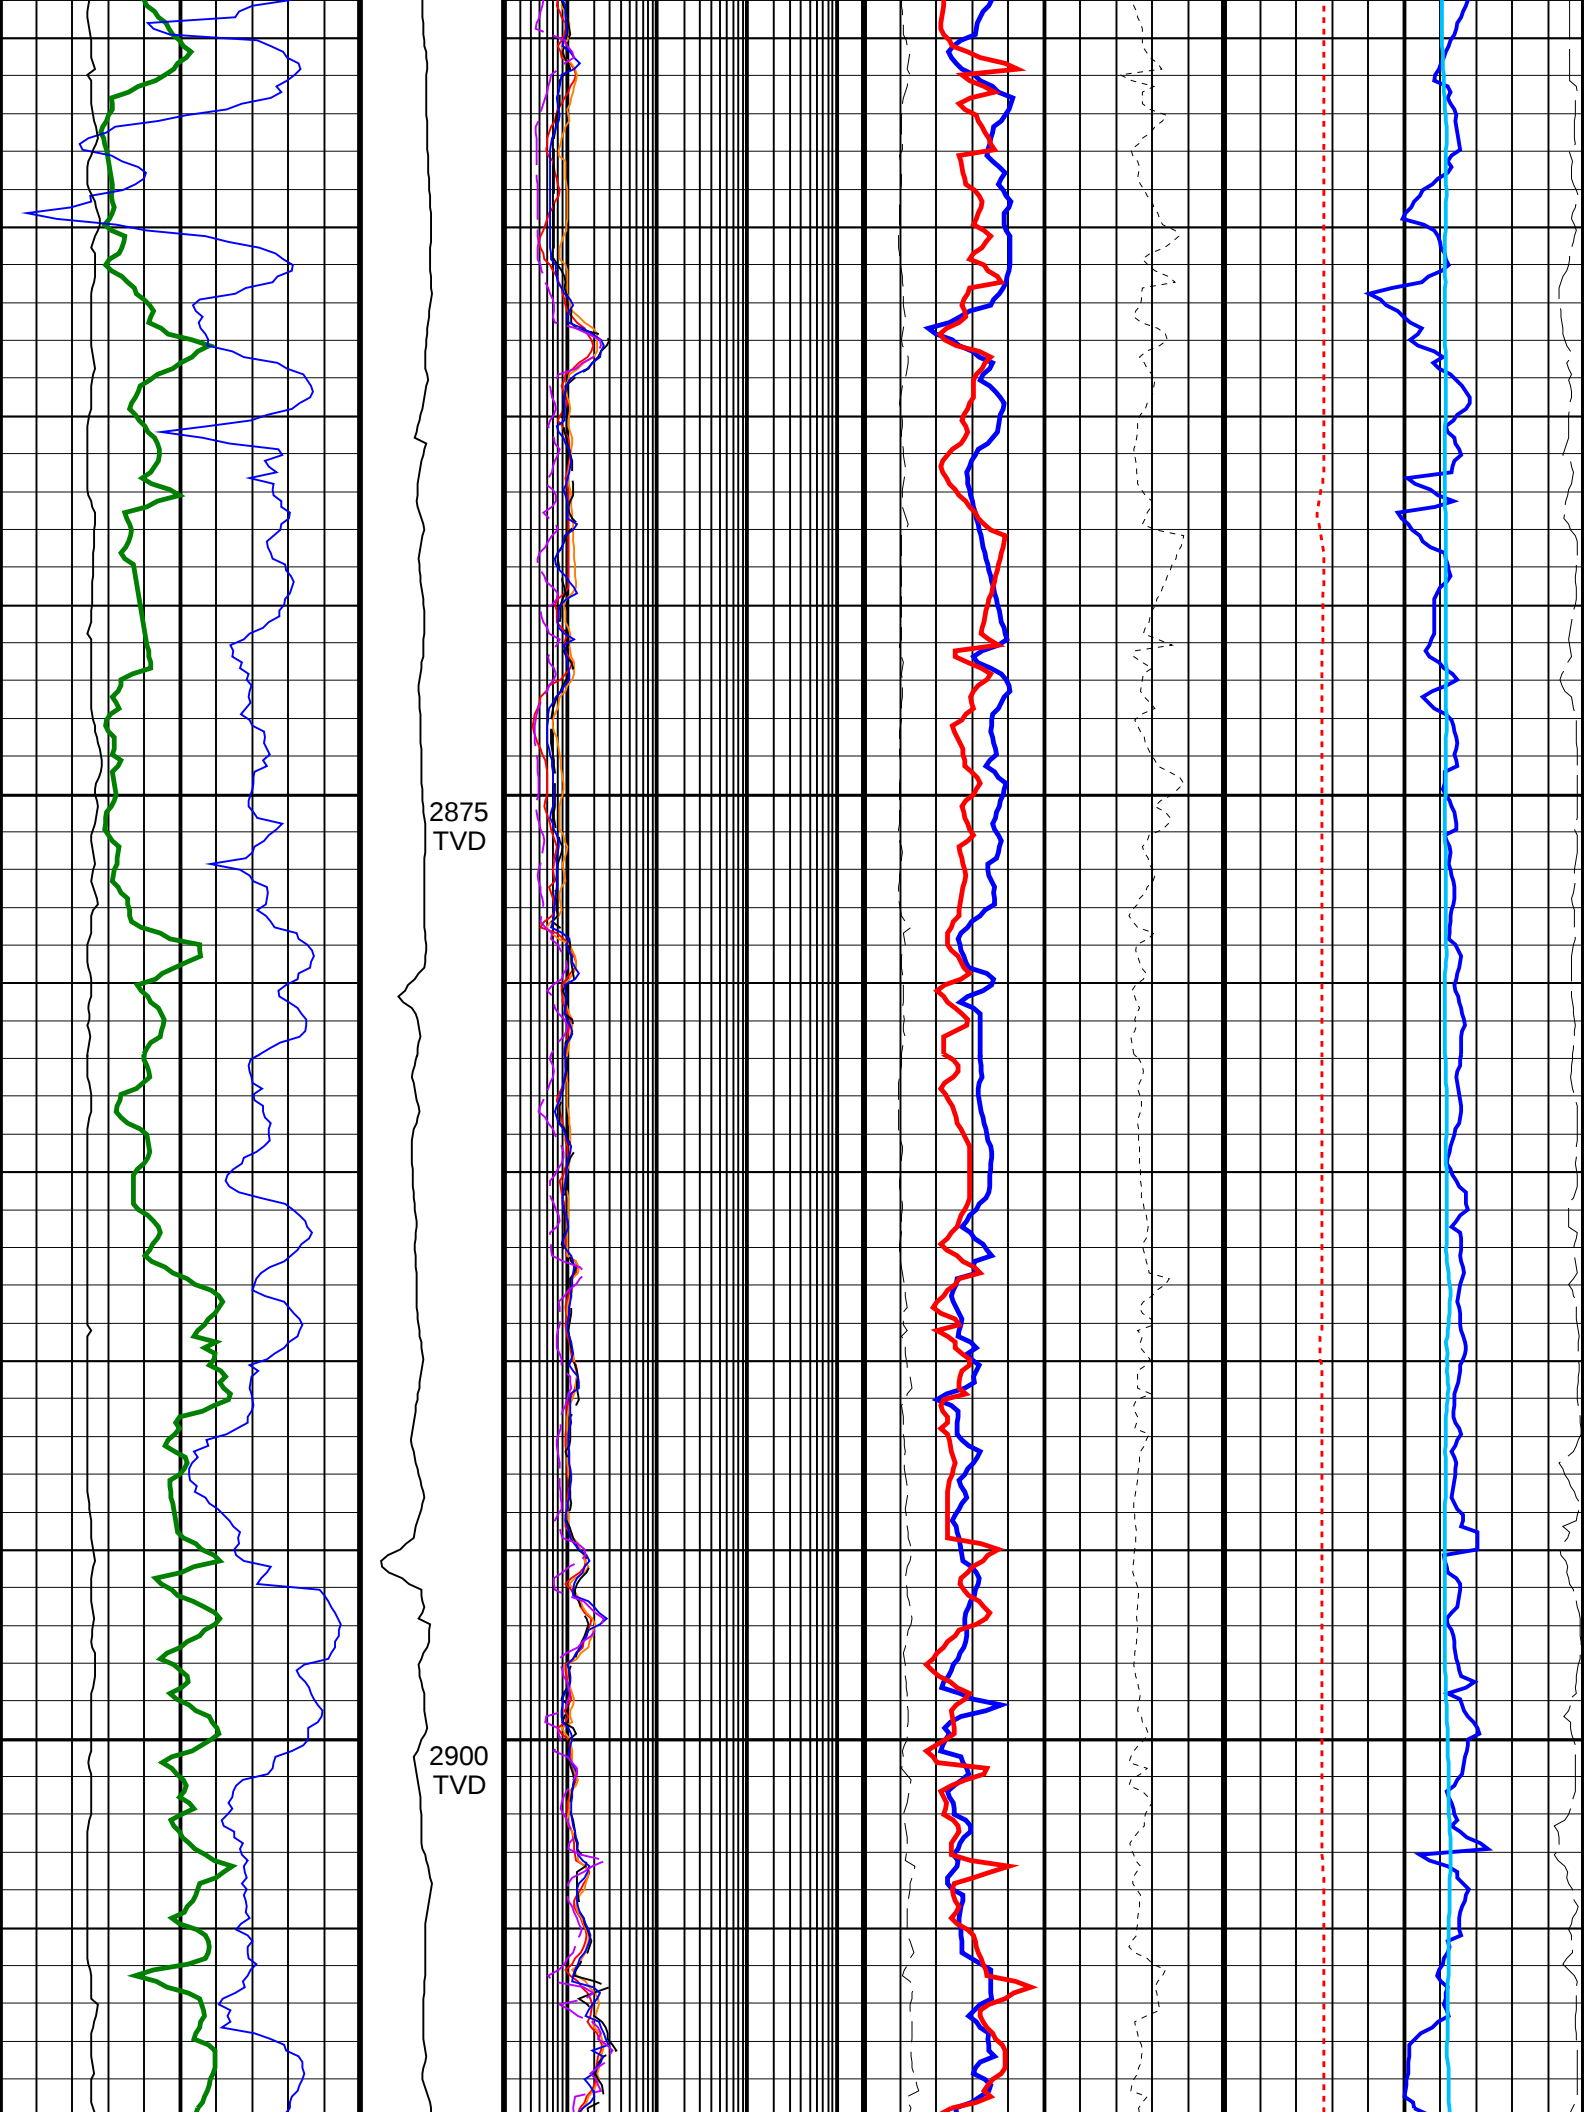


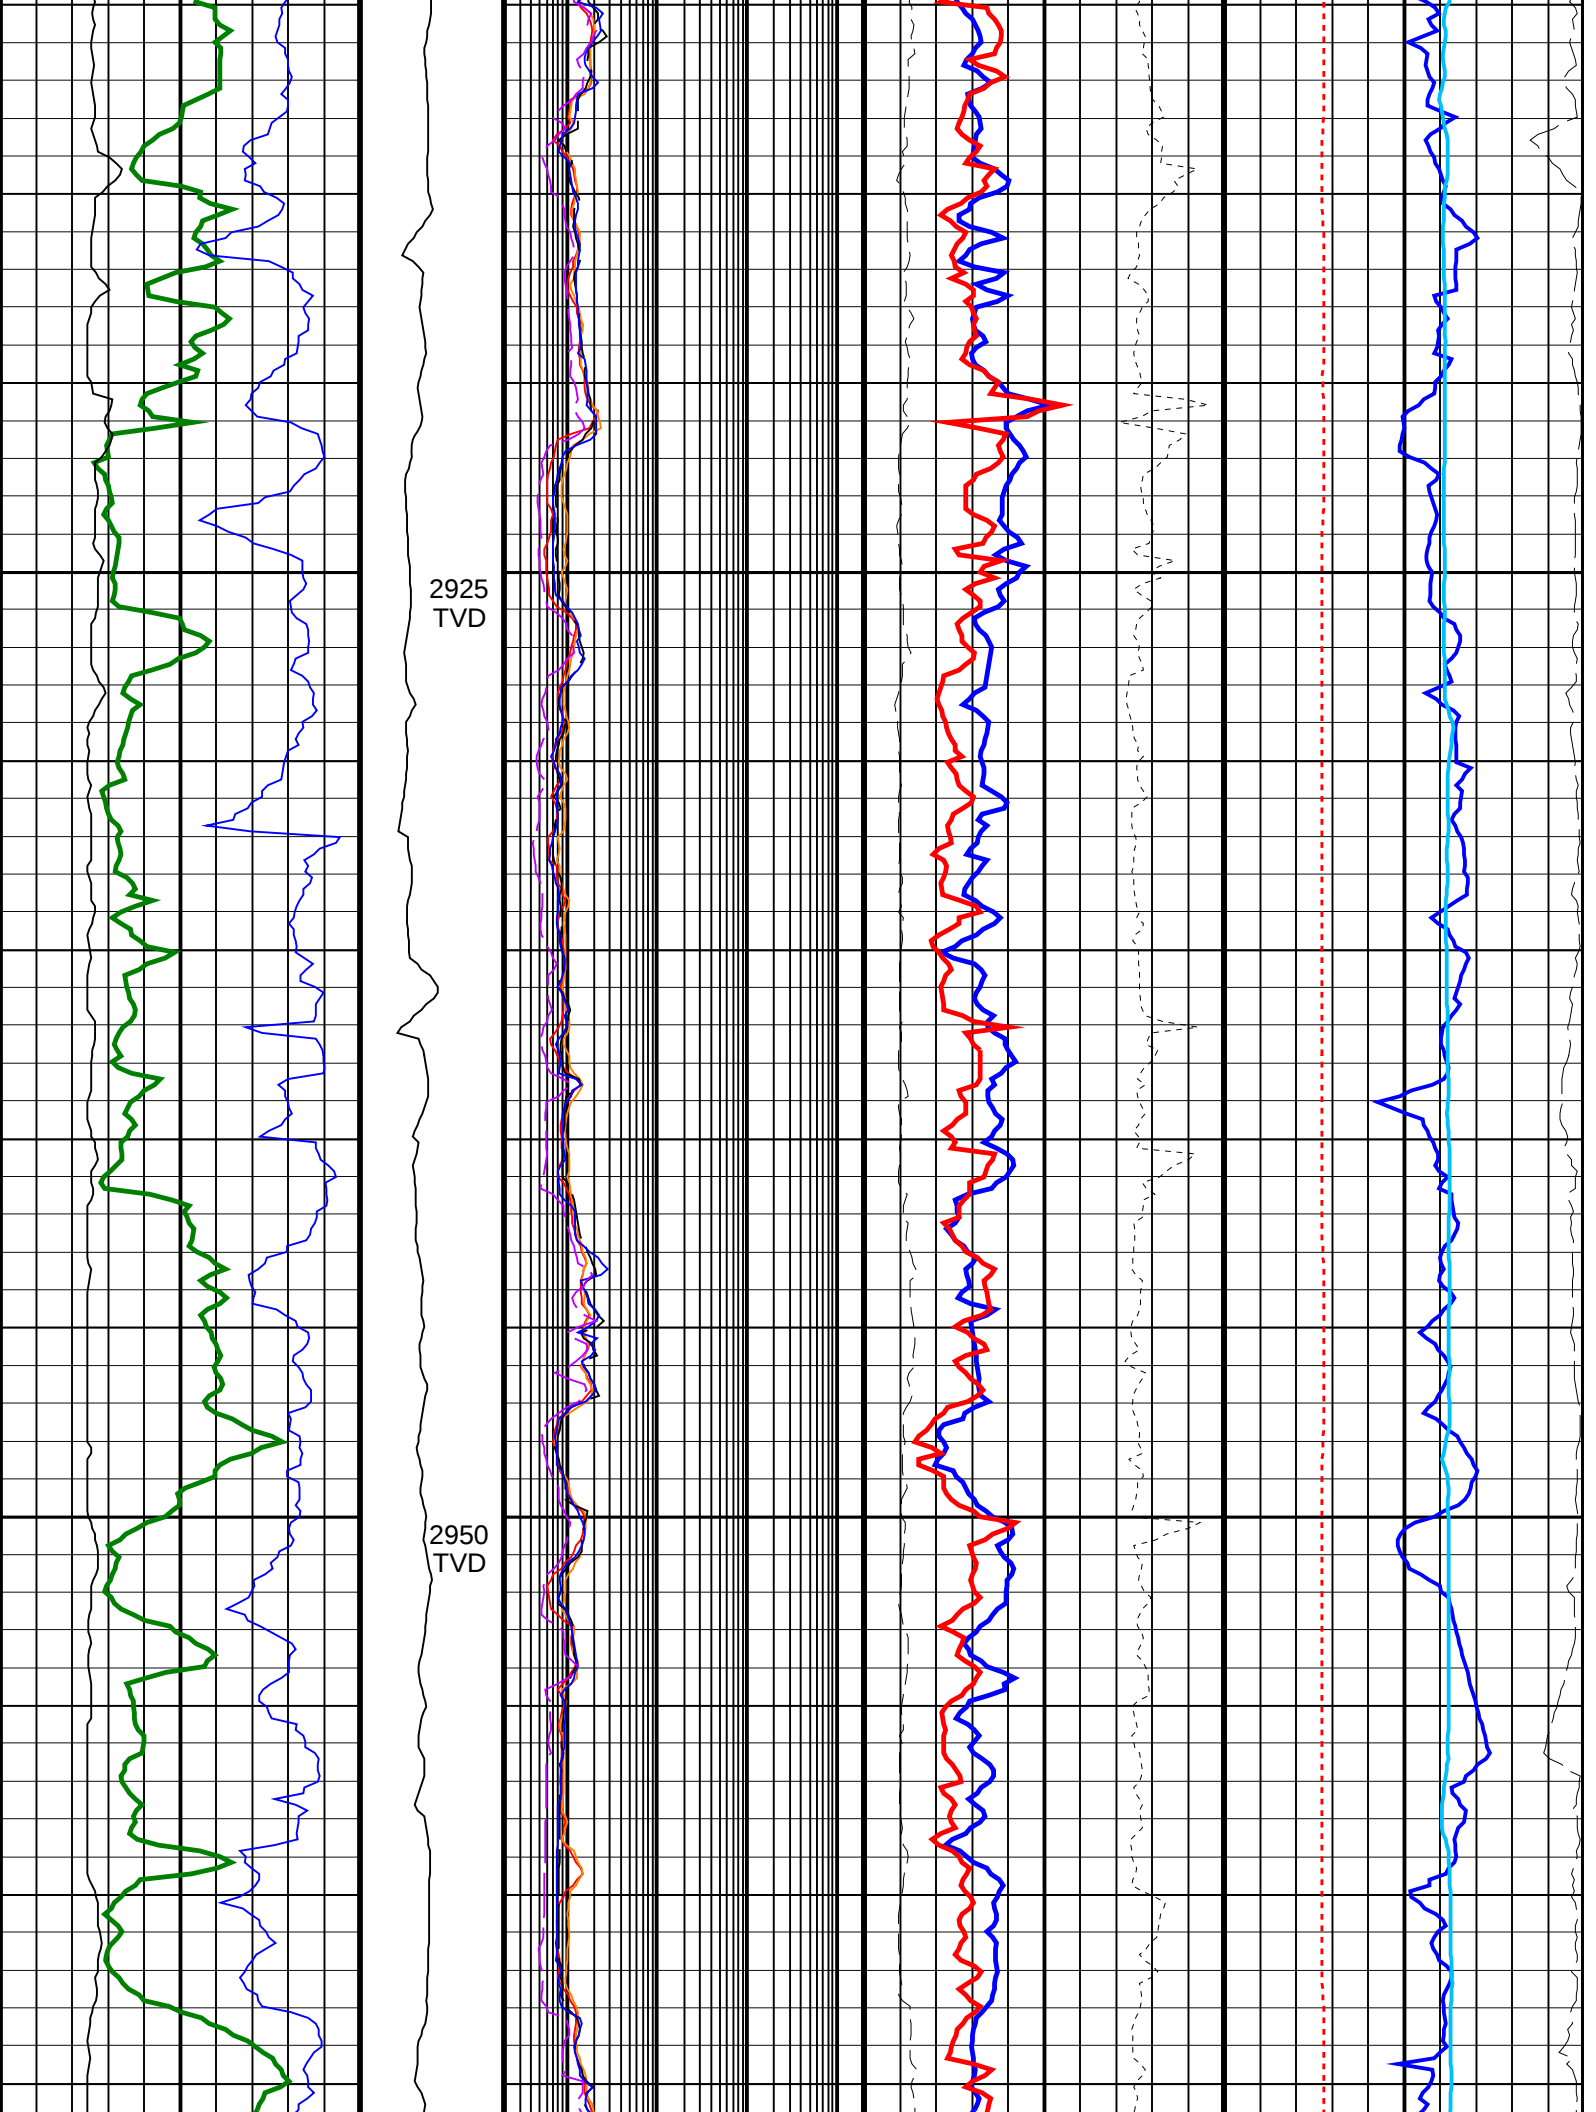


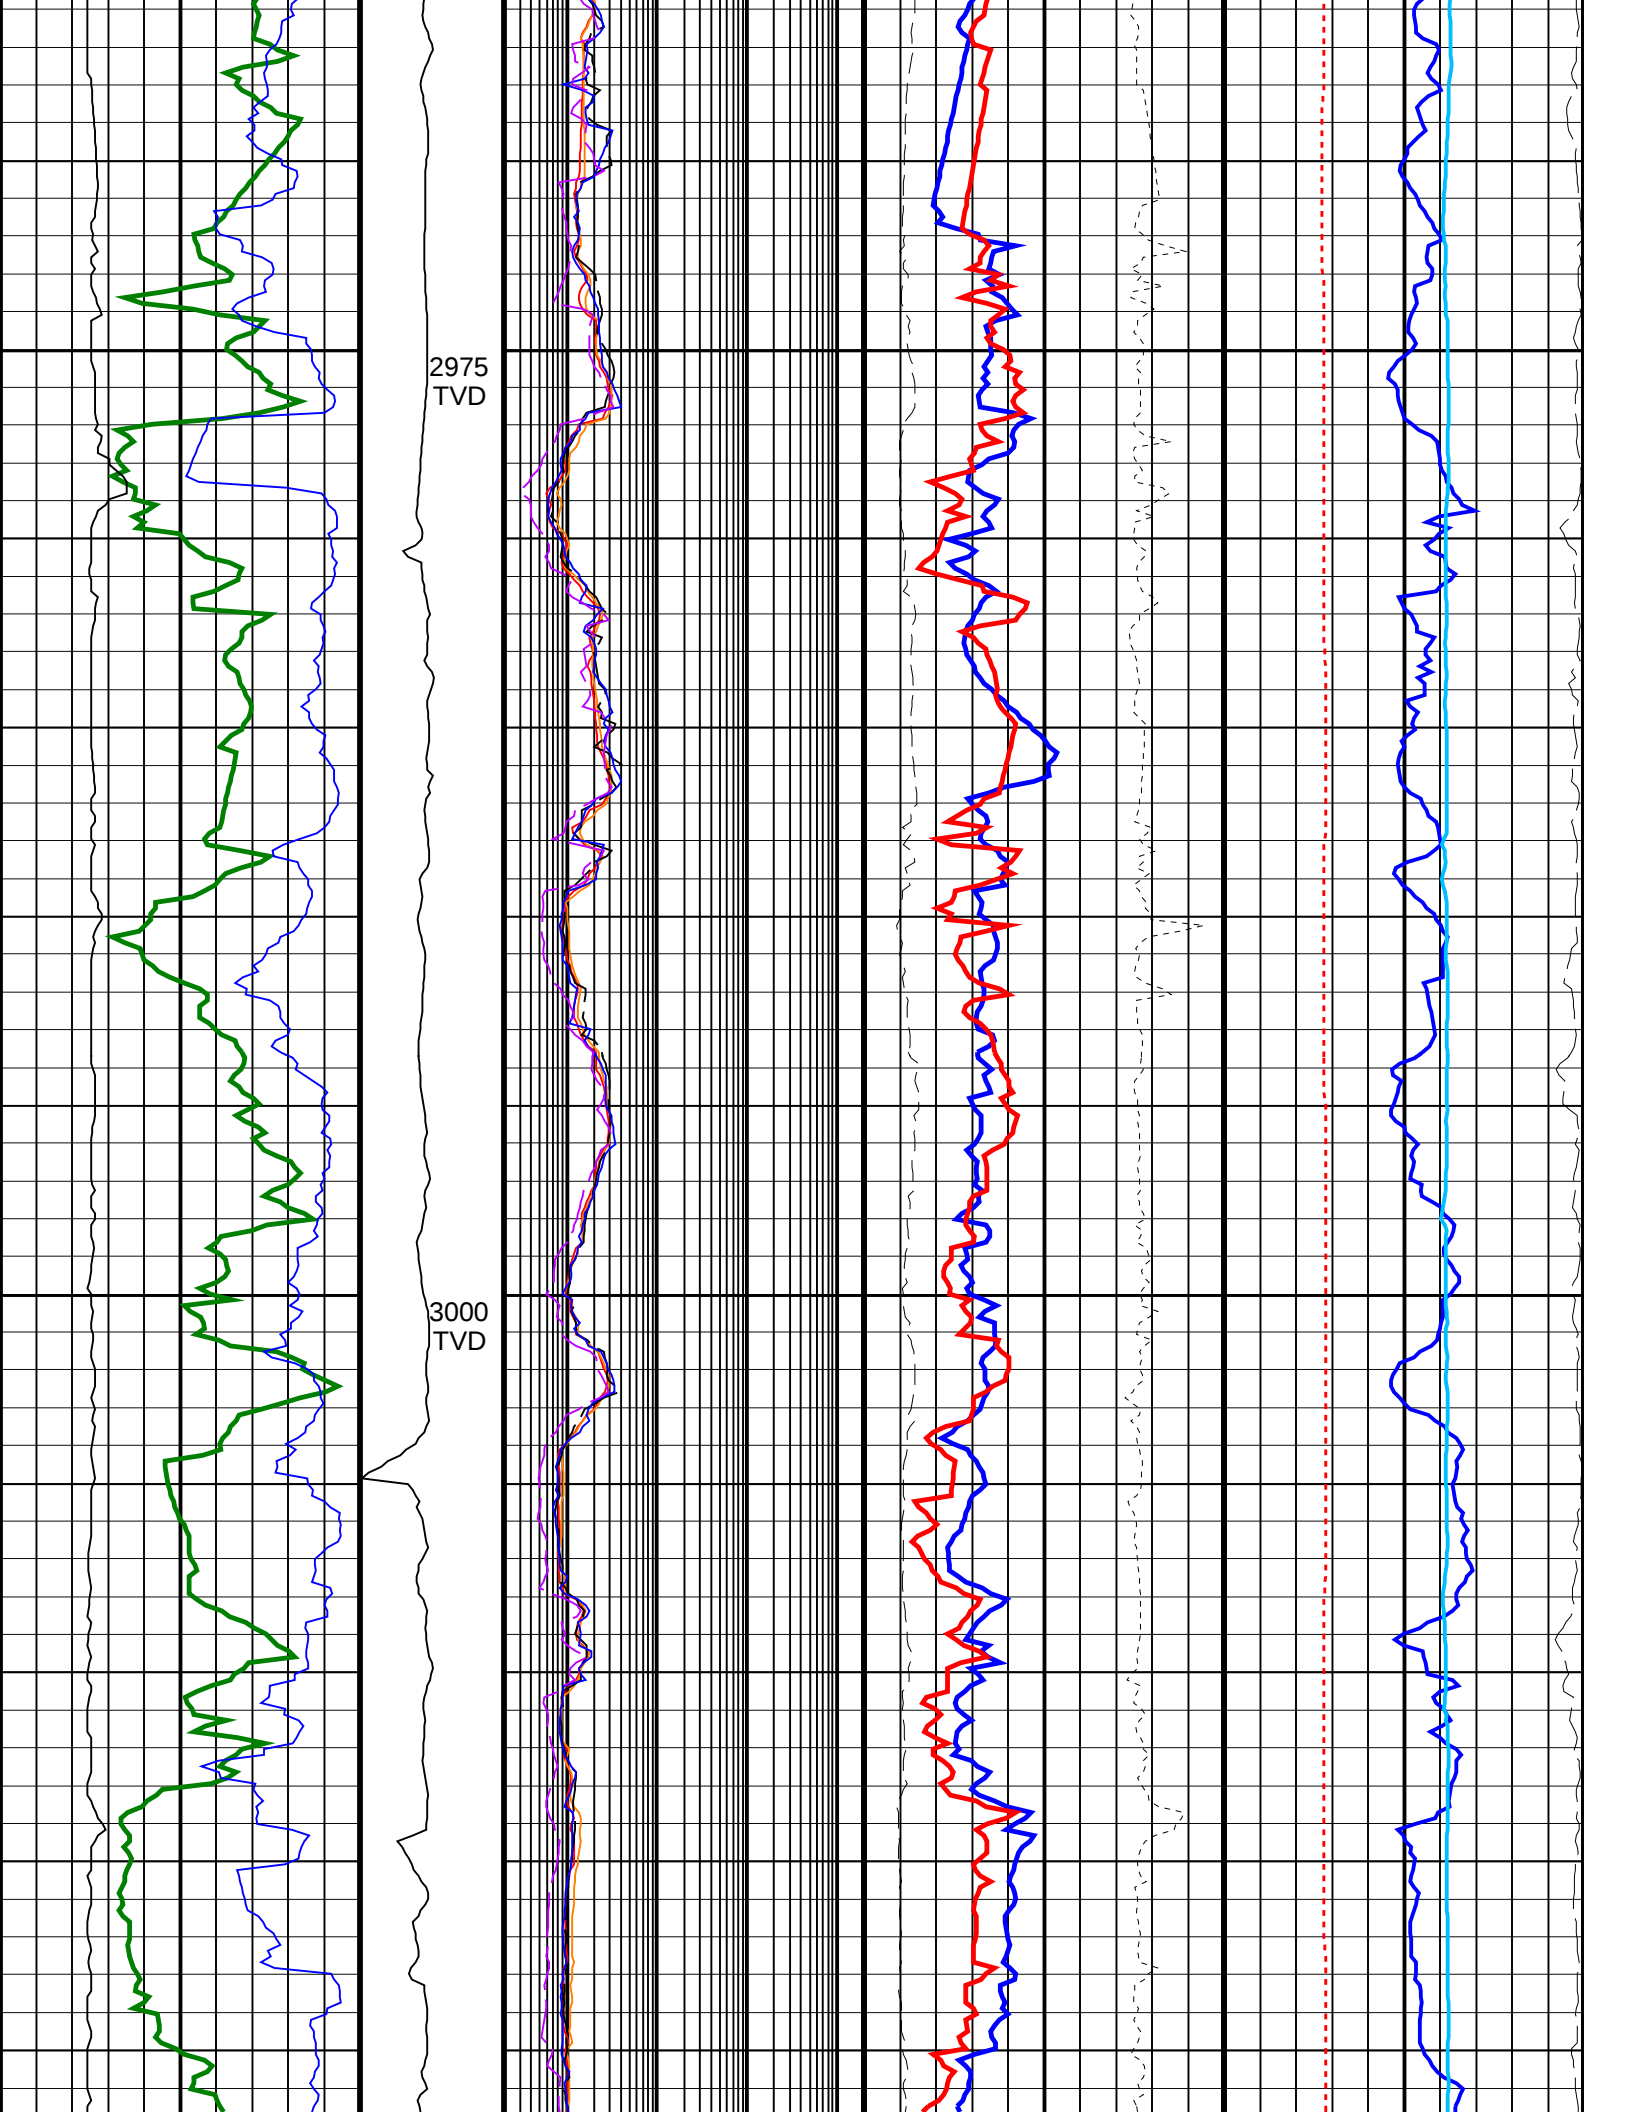

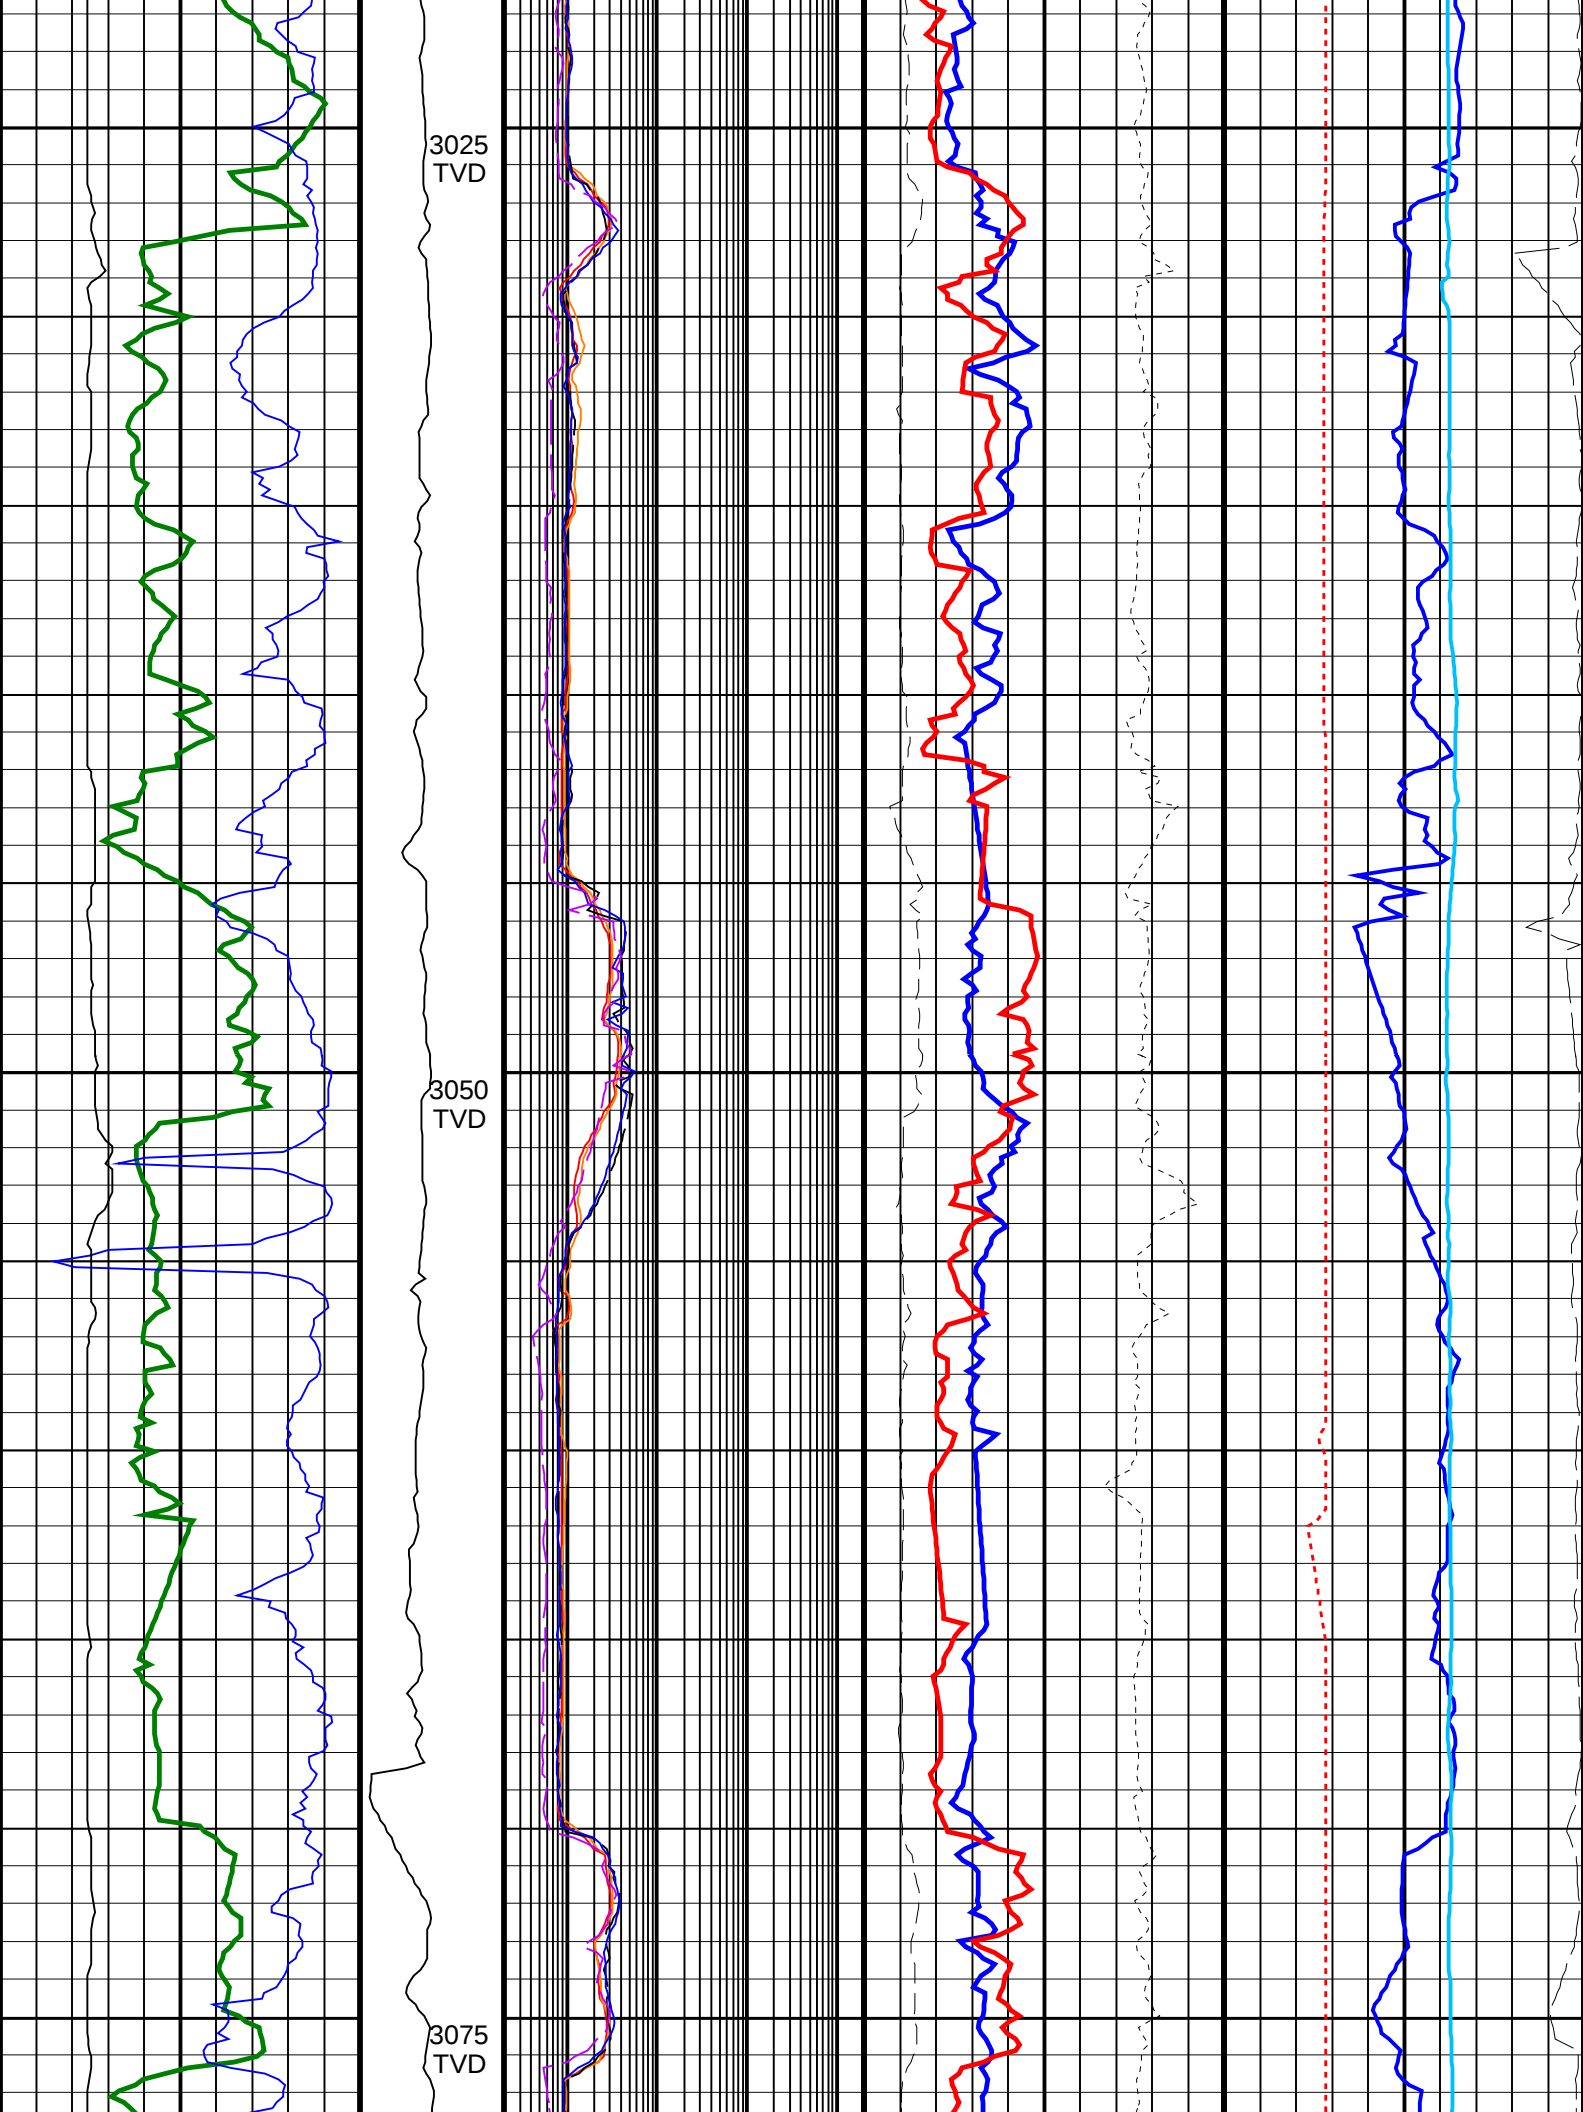






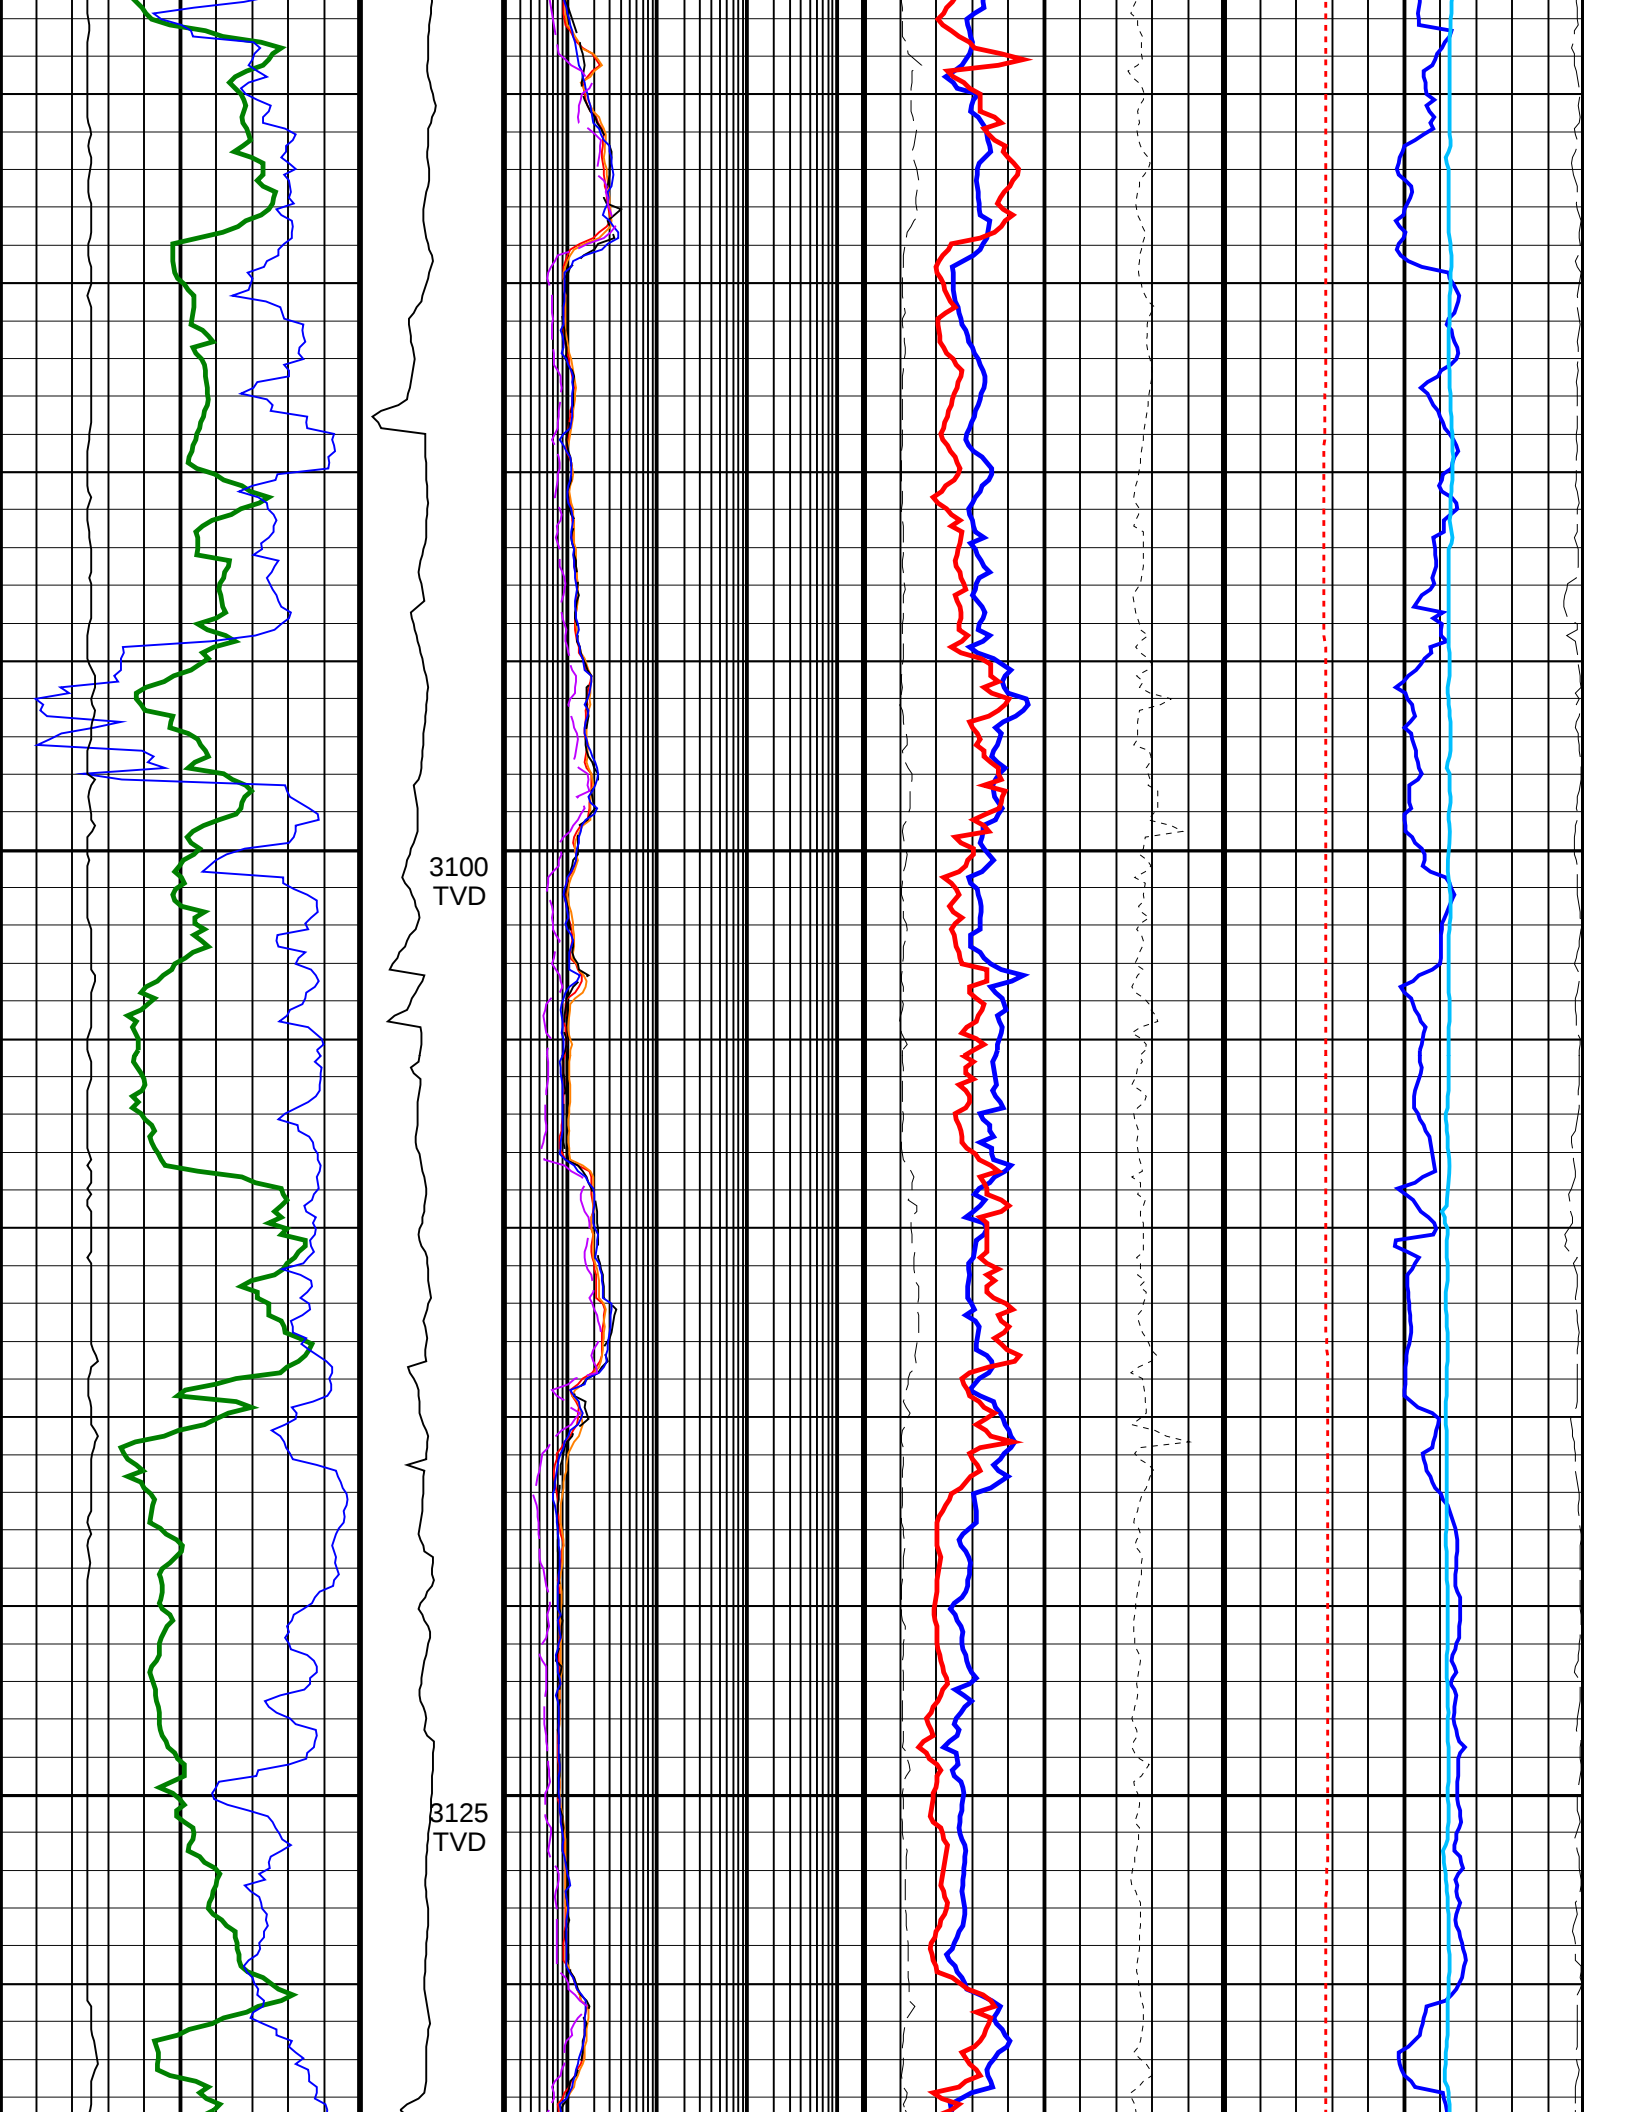





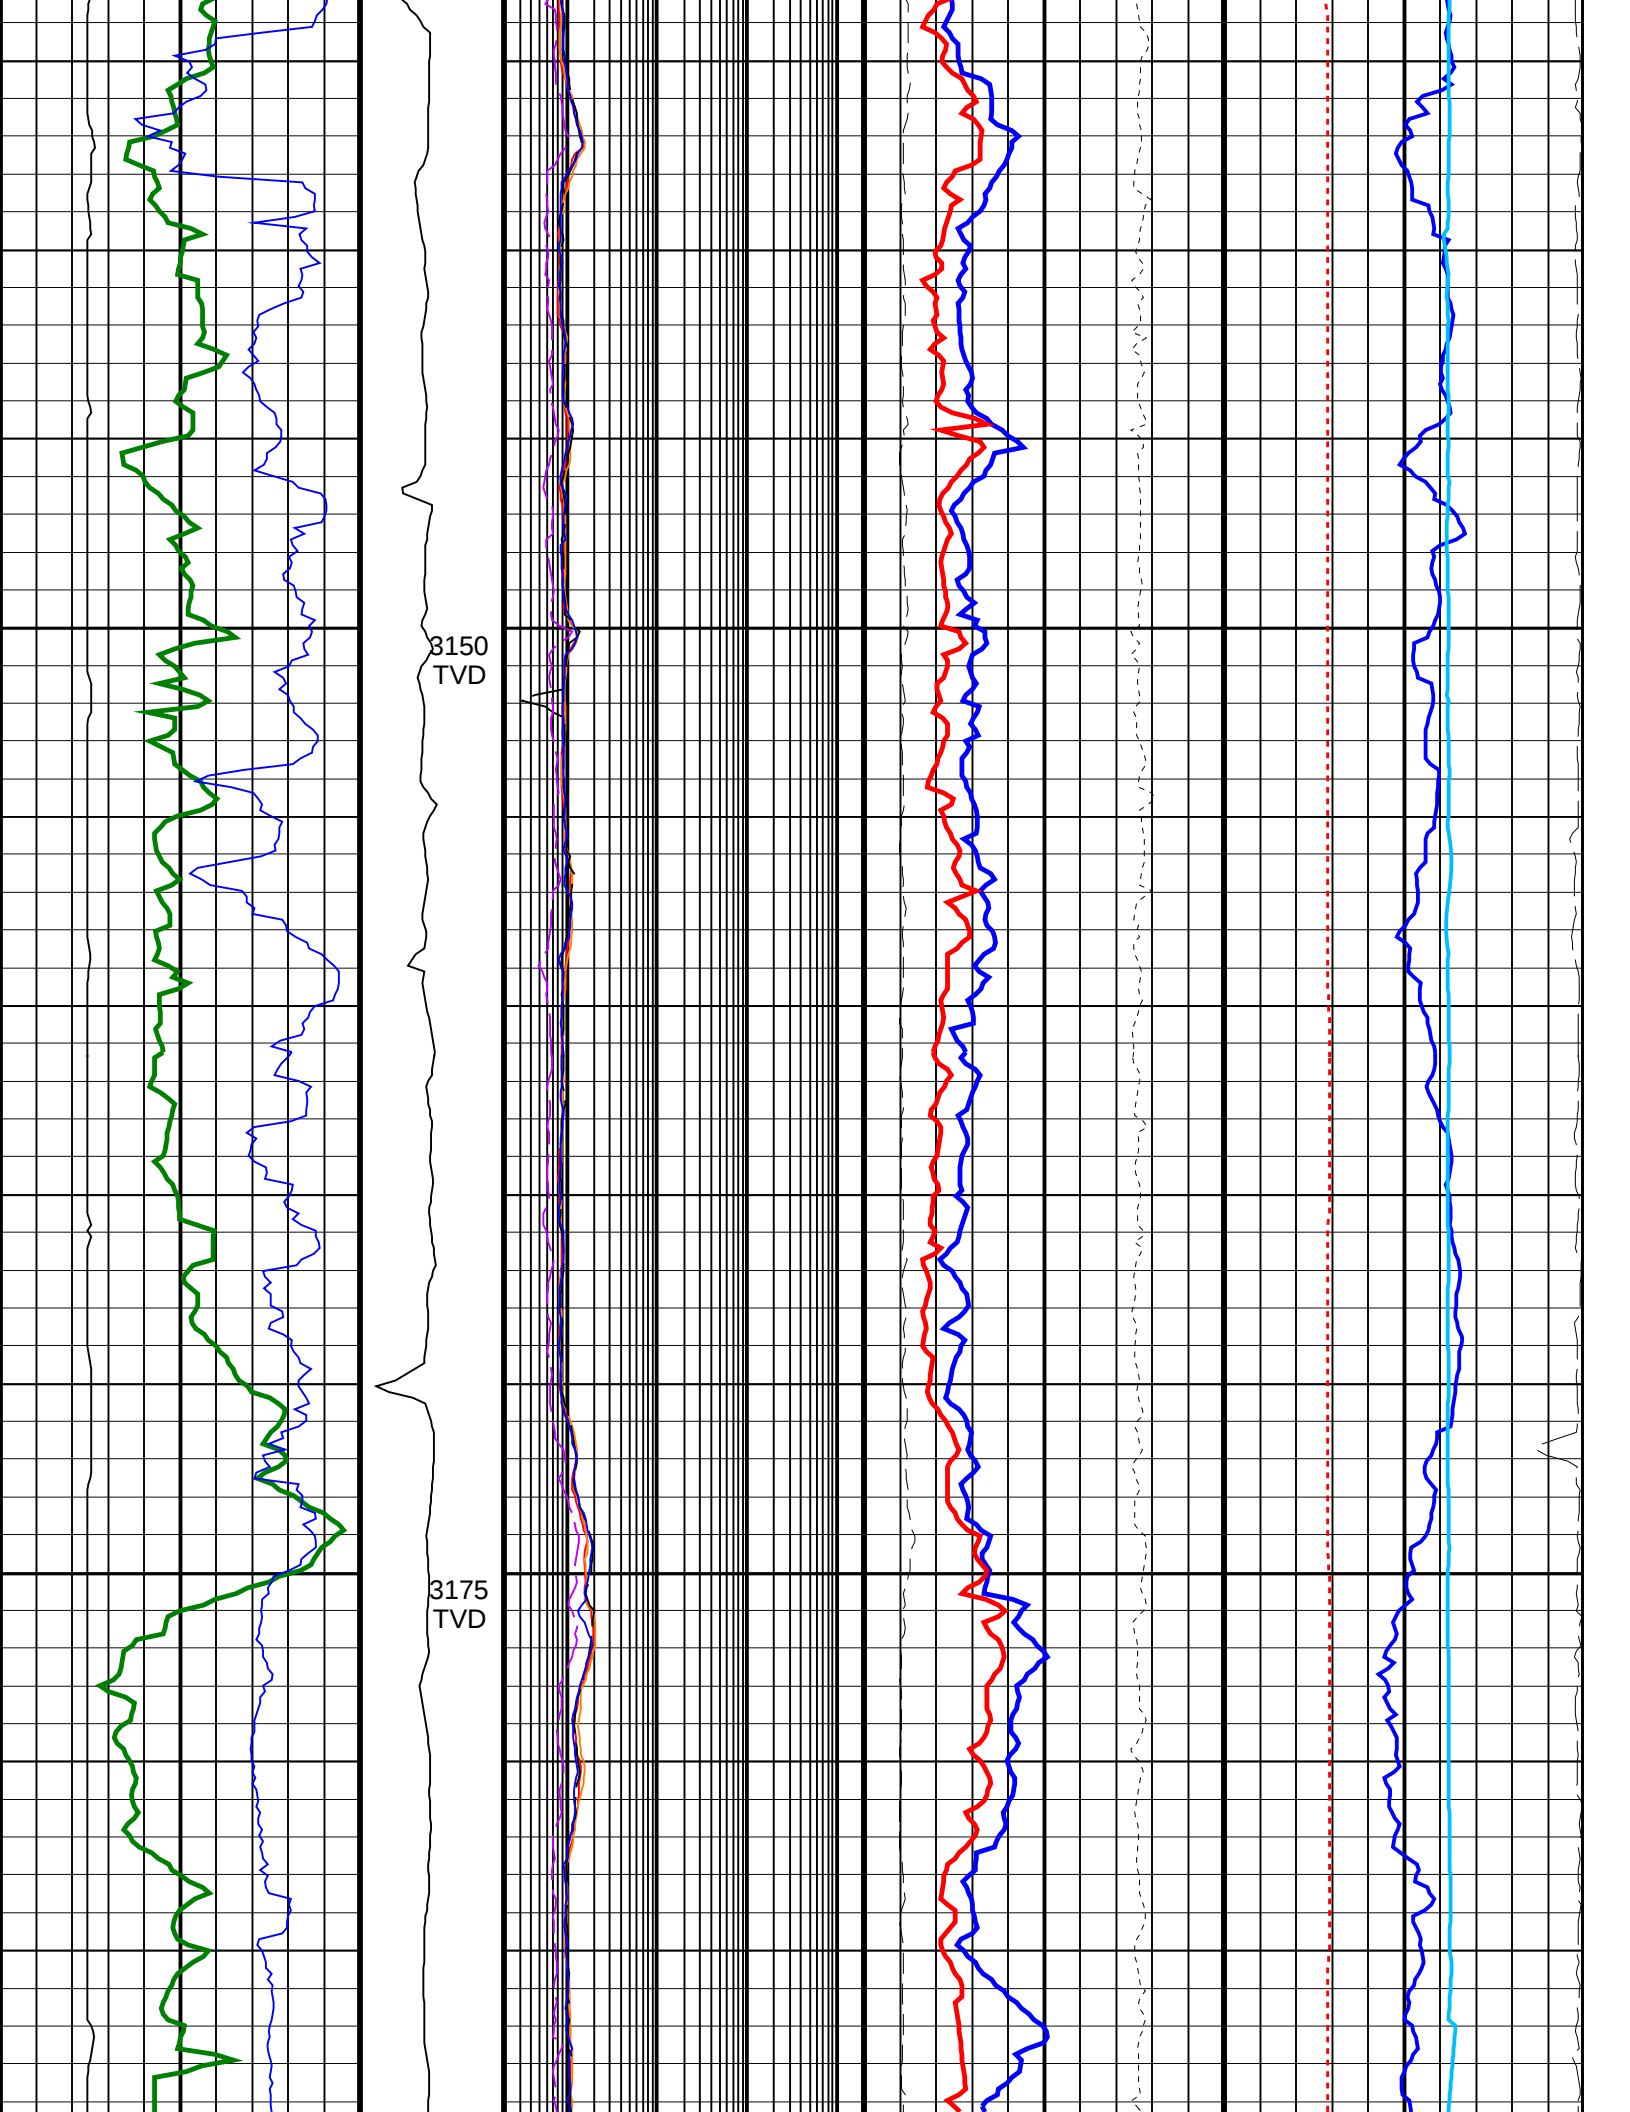


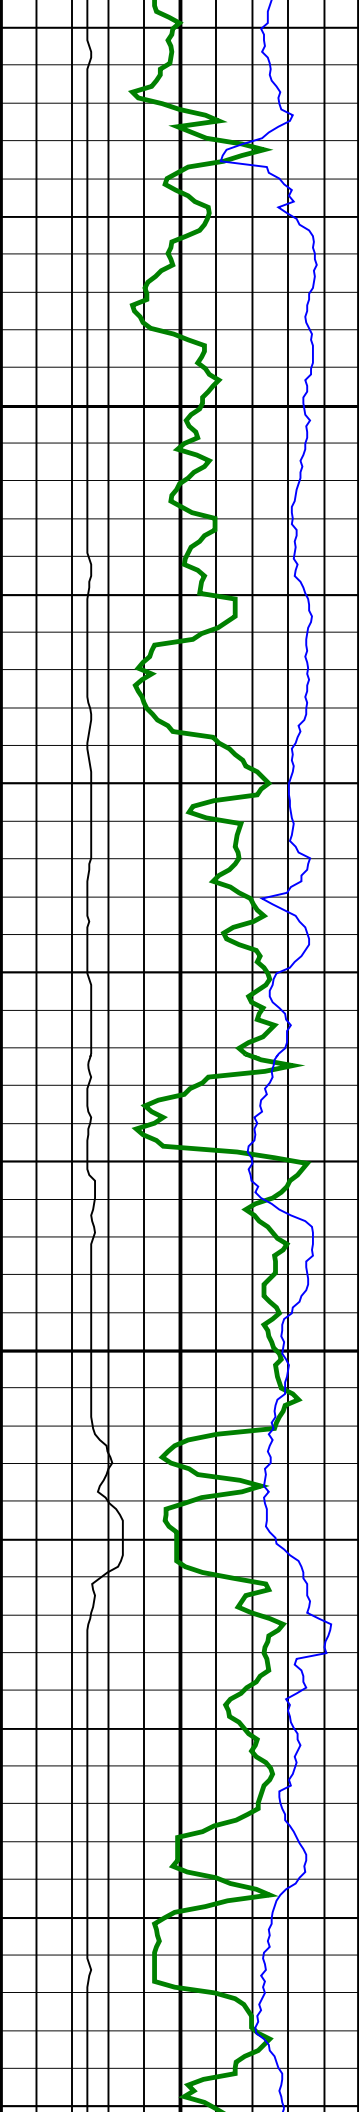


3200
TVD

3225
TVD

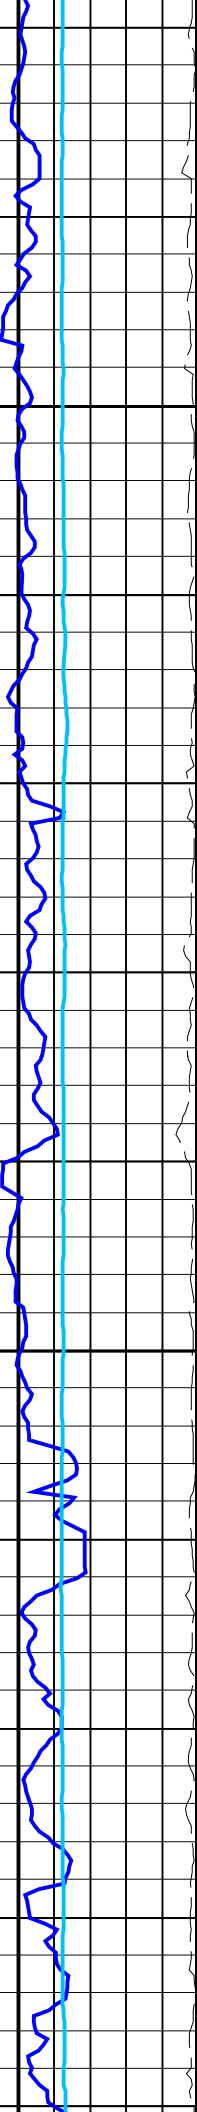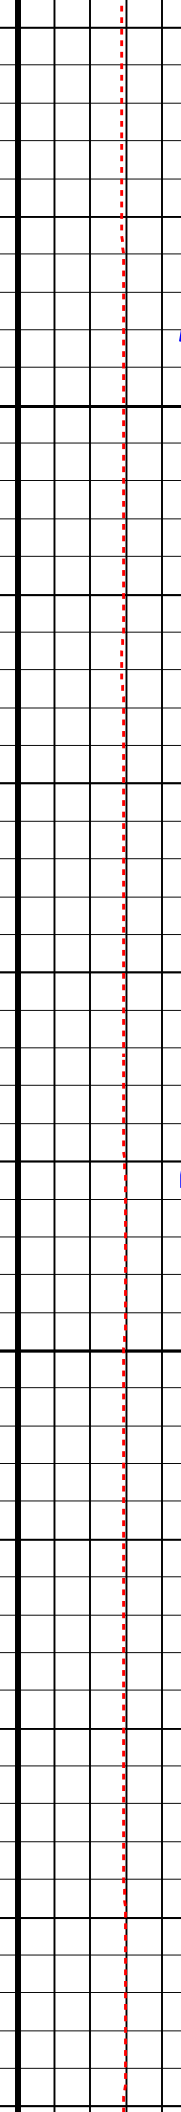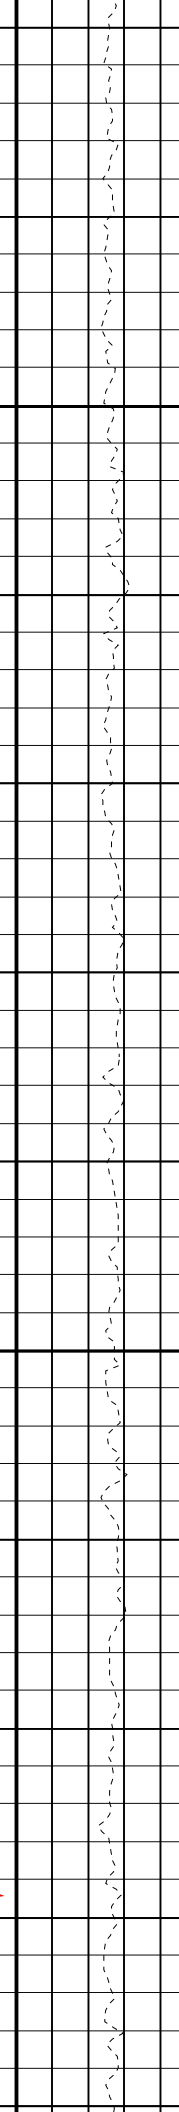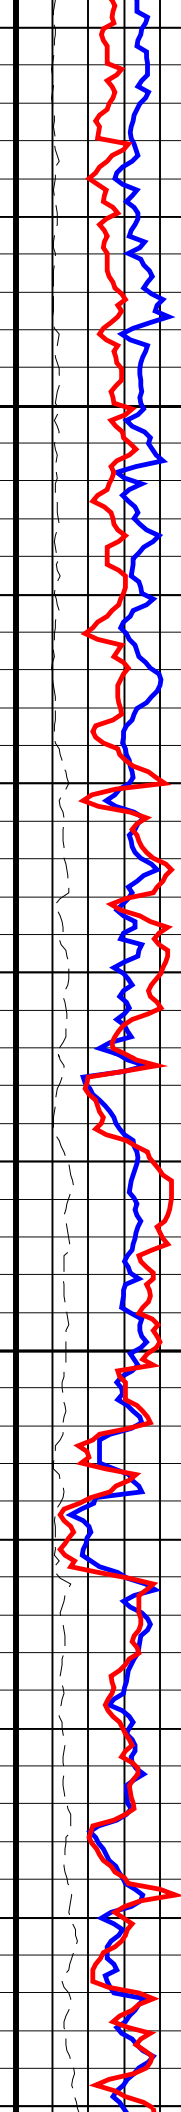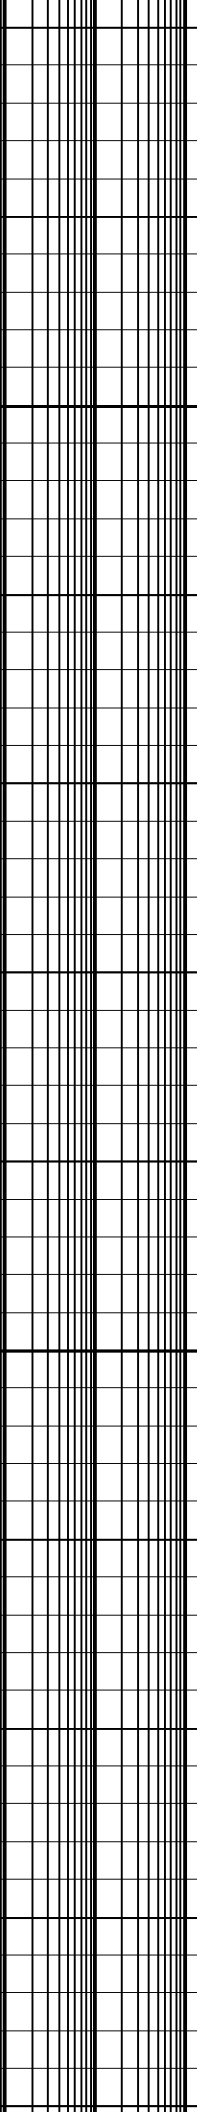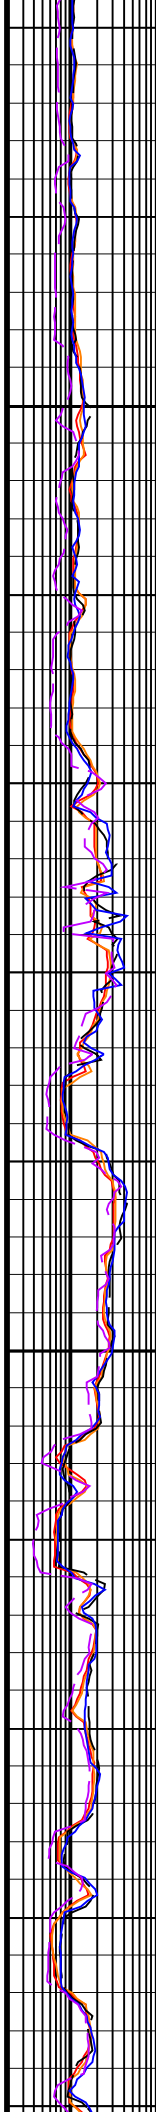

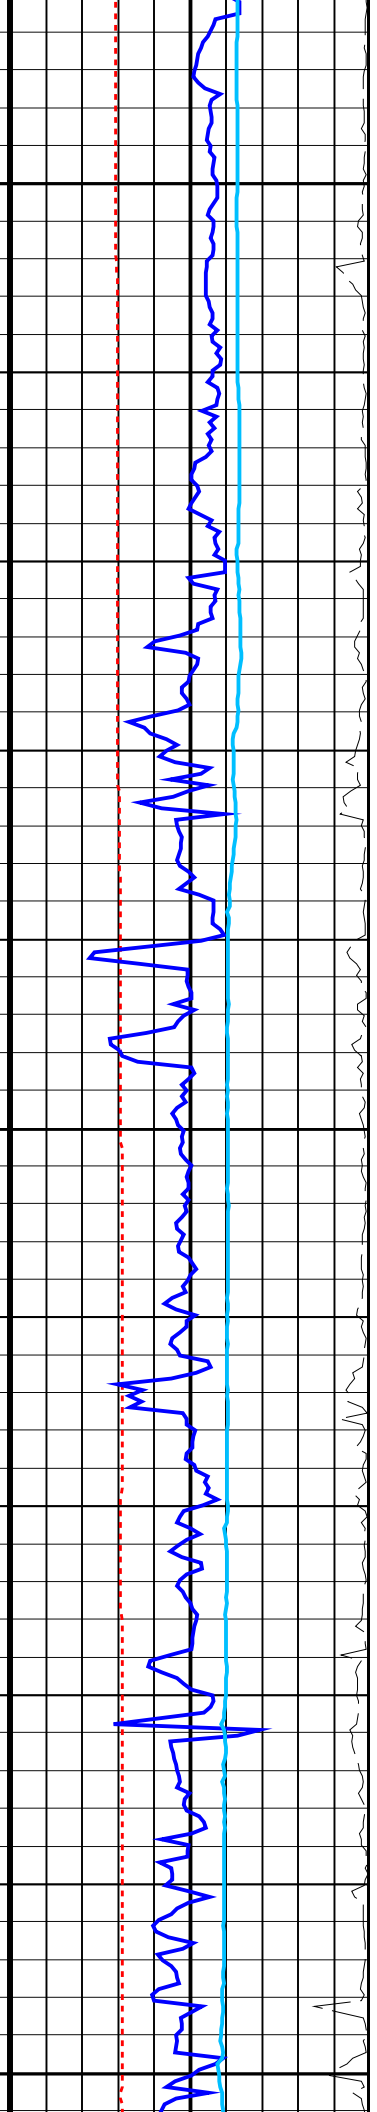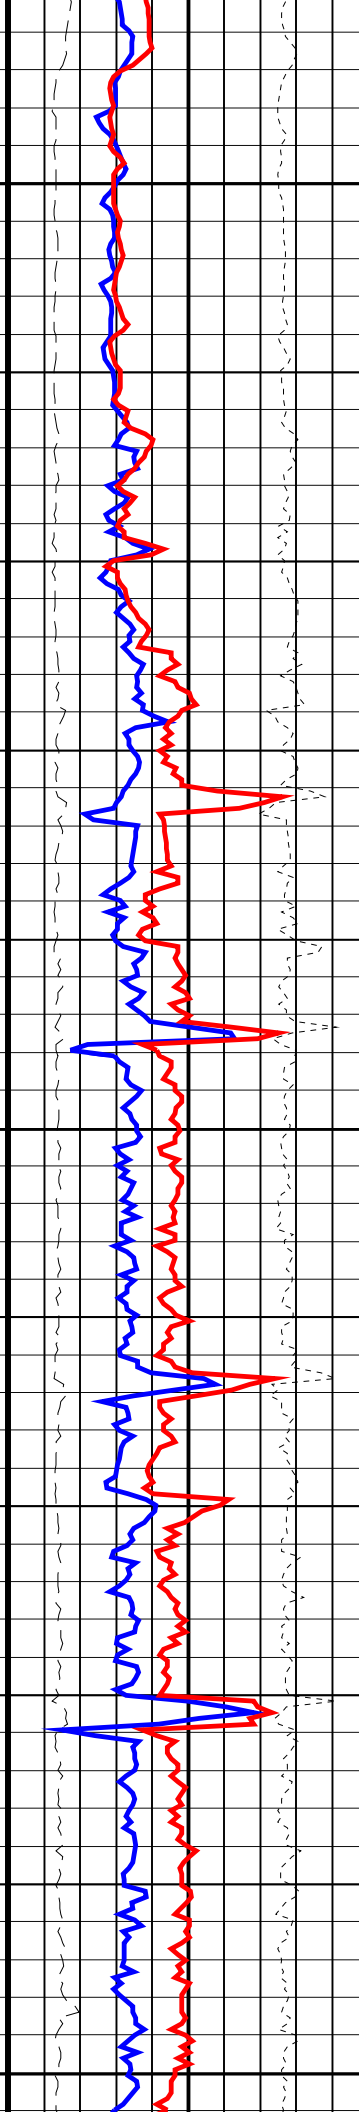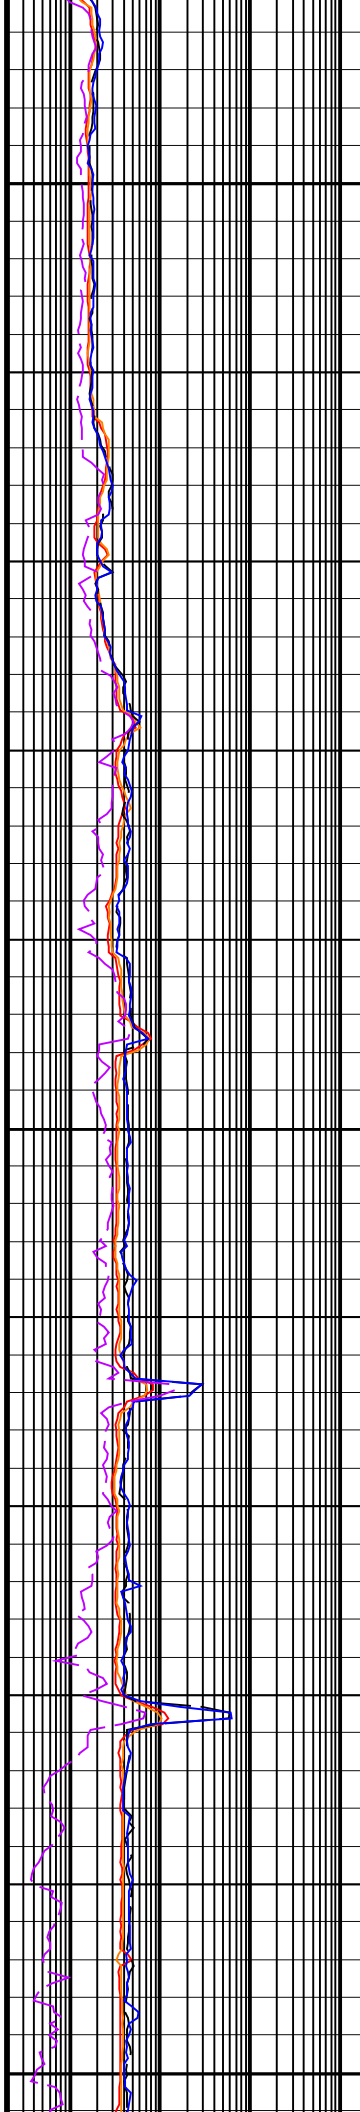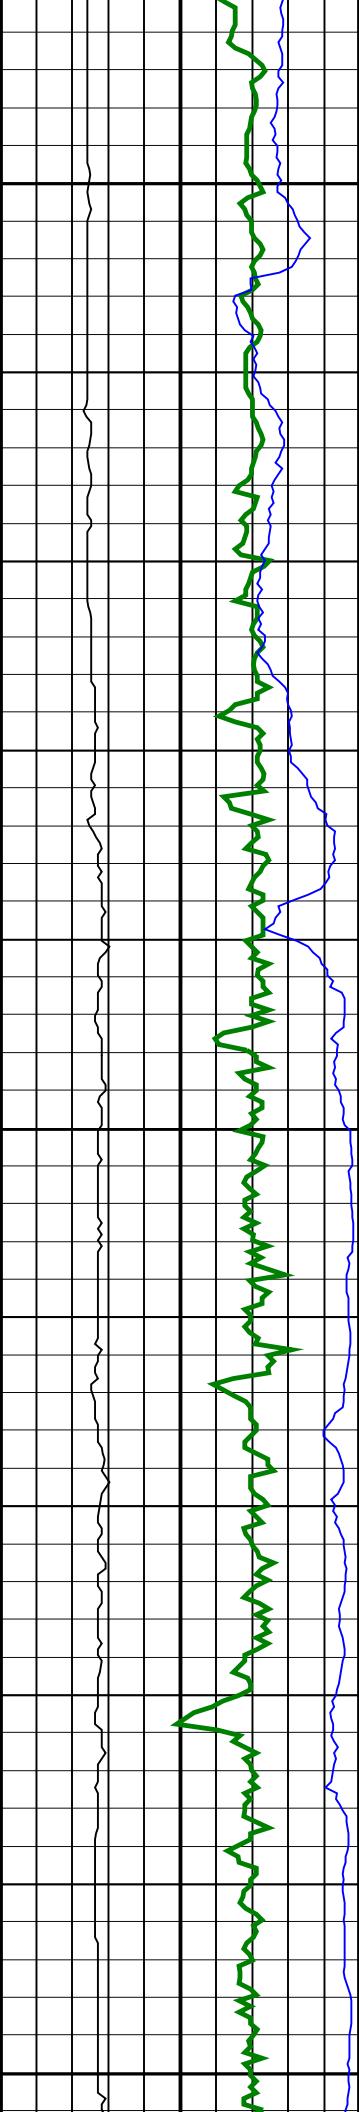


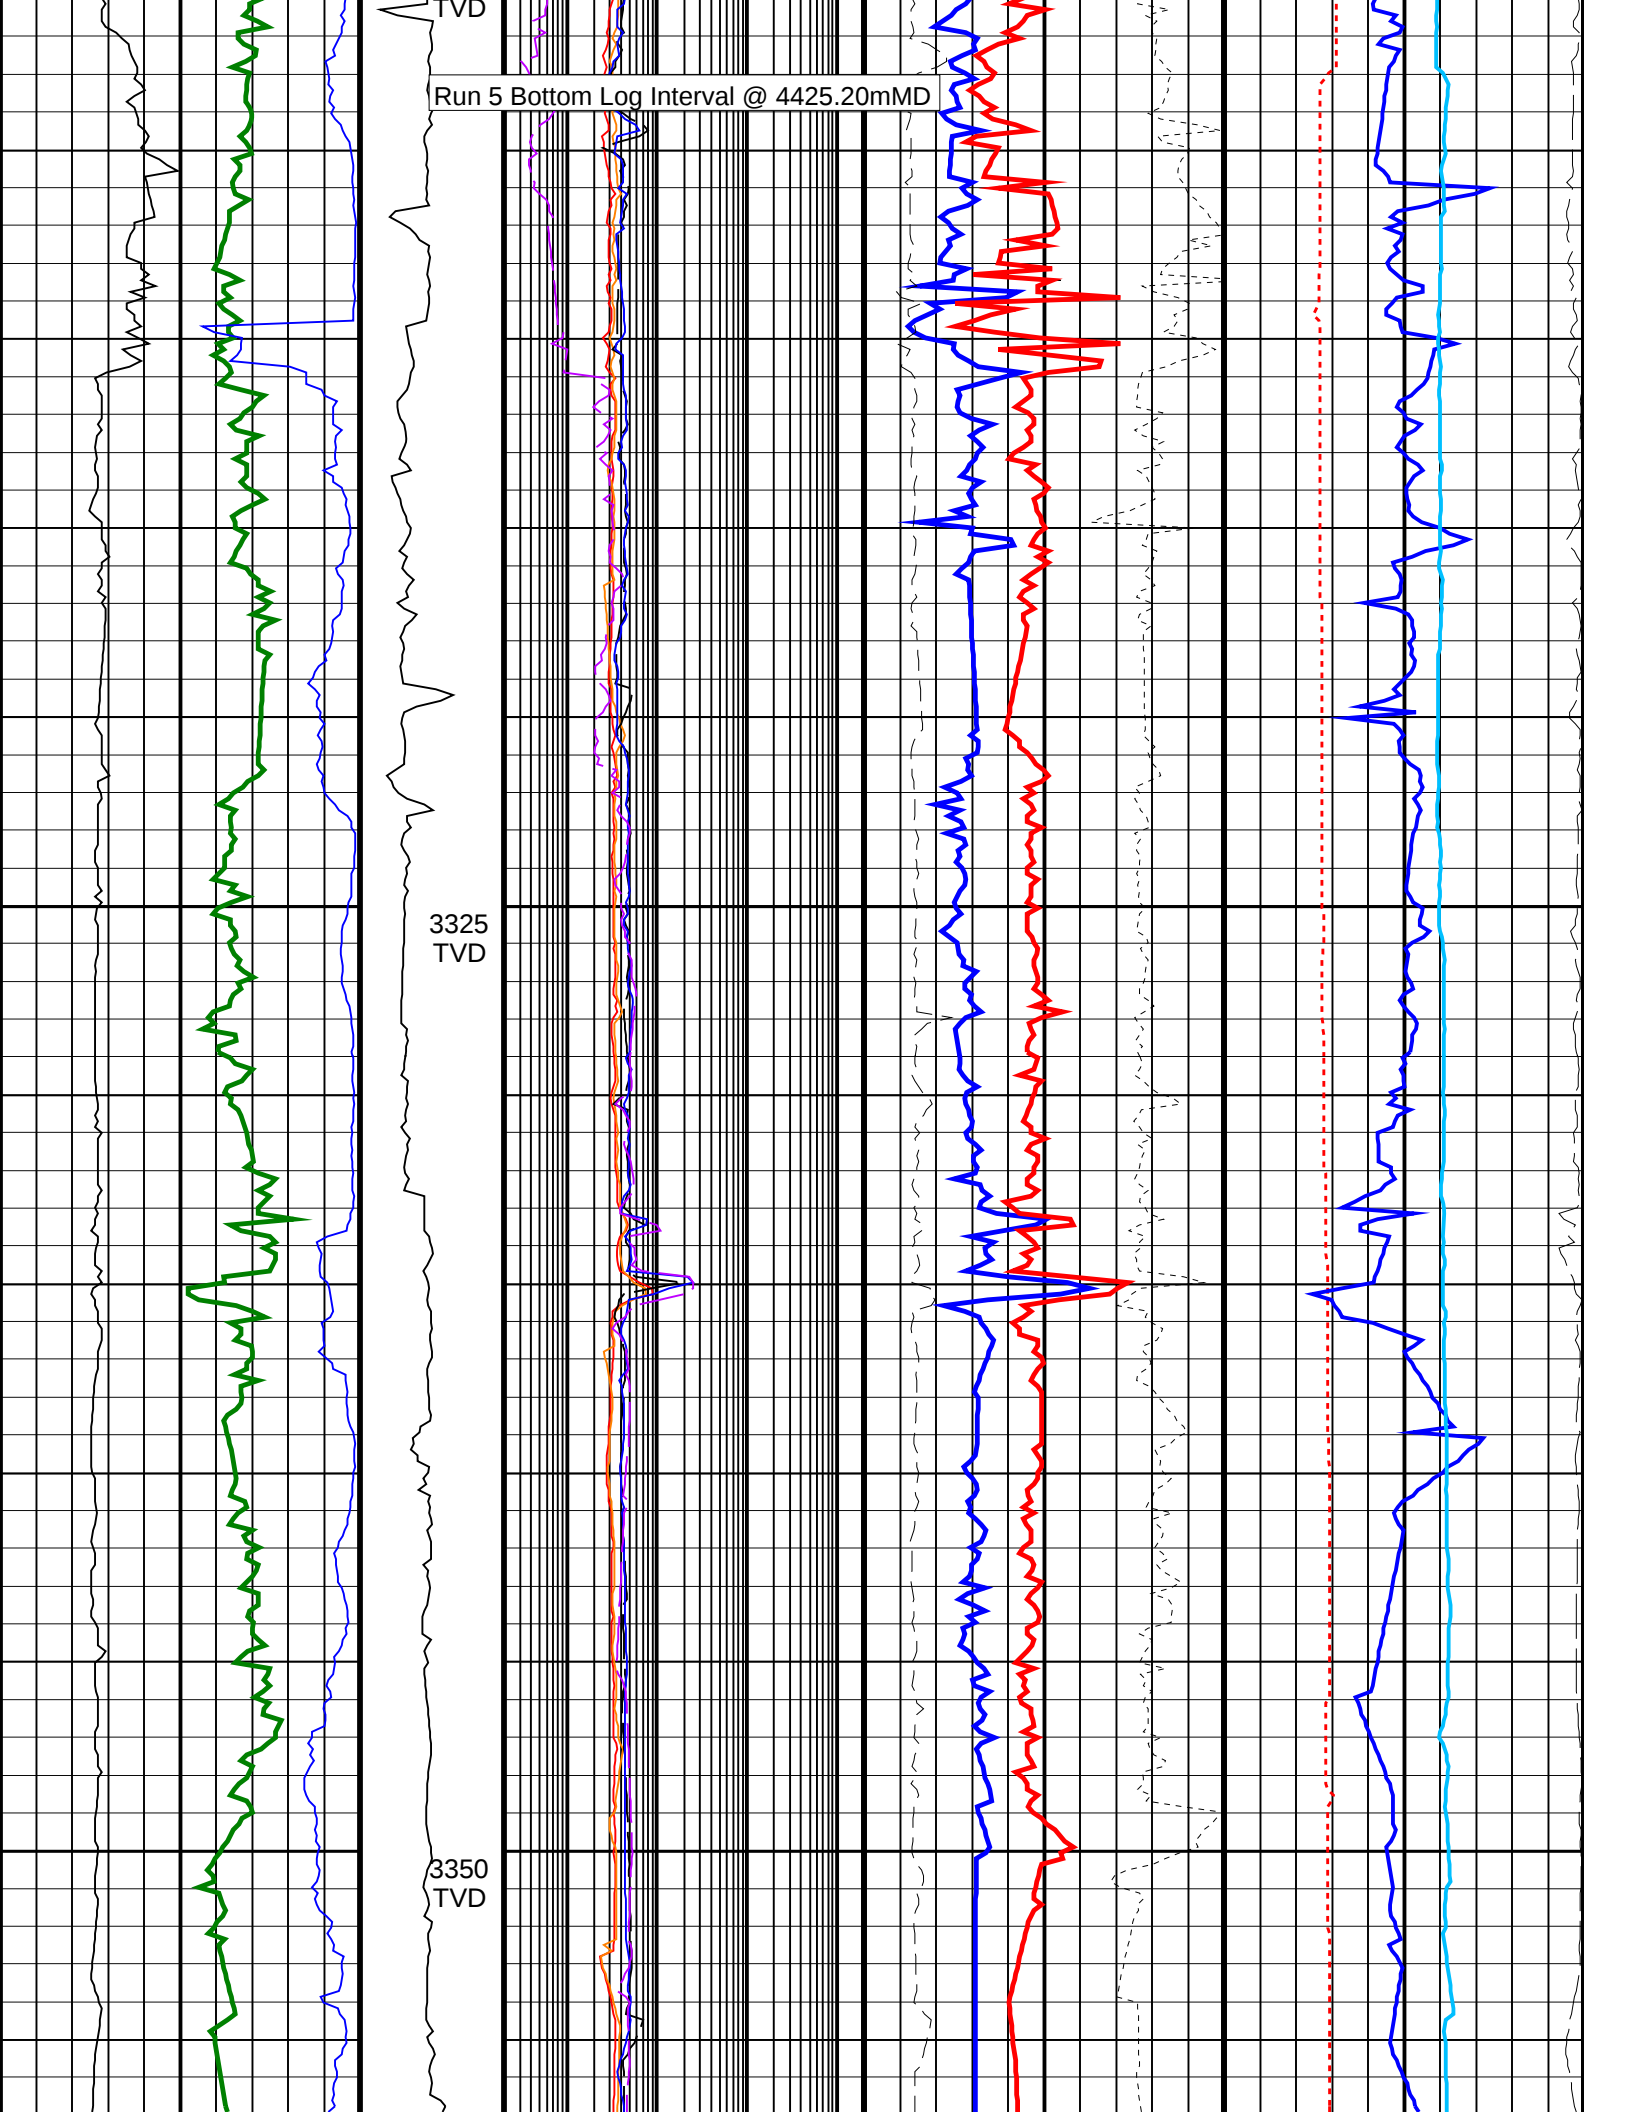



Run 5 Bottom Log Interval @ 4425.20mMD


3325
TVD


3350
TVD

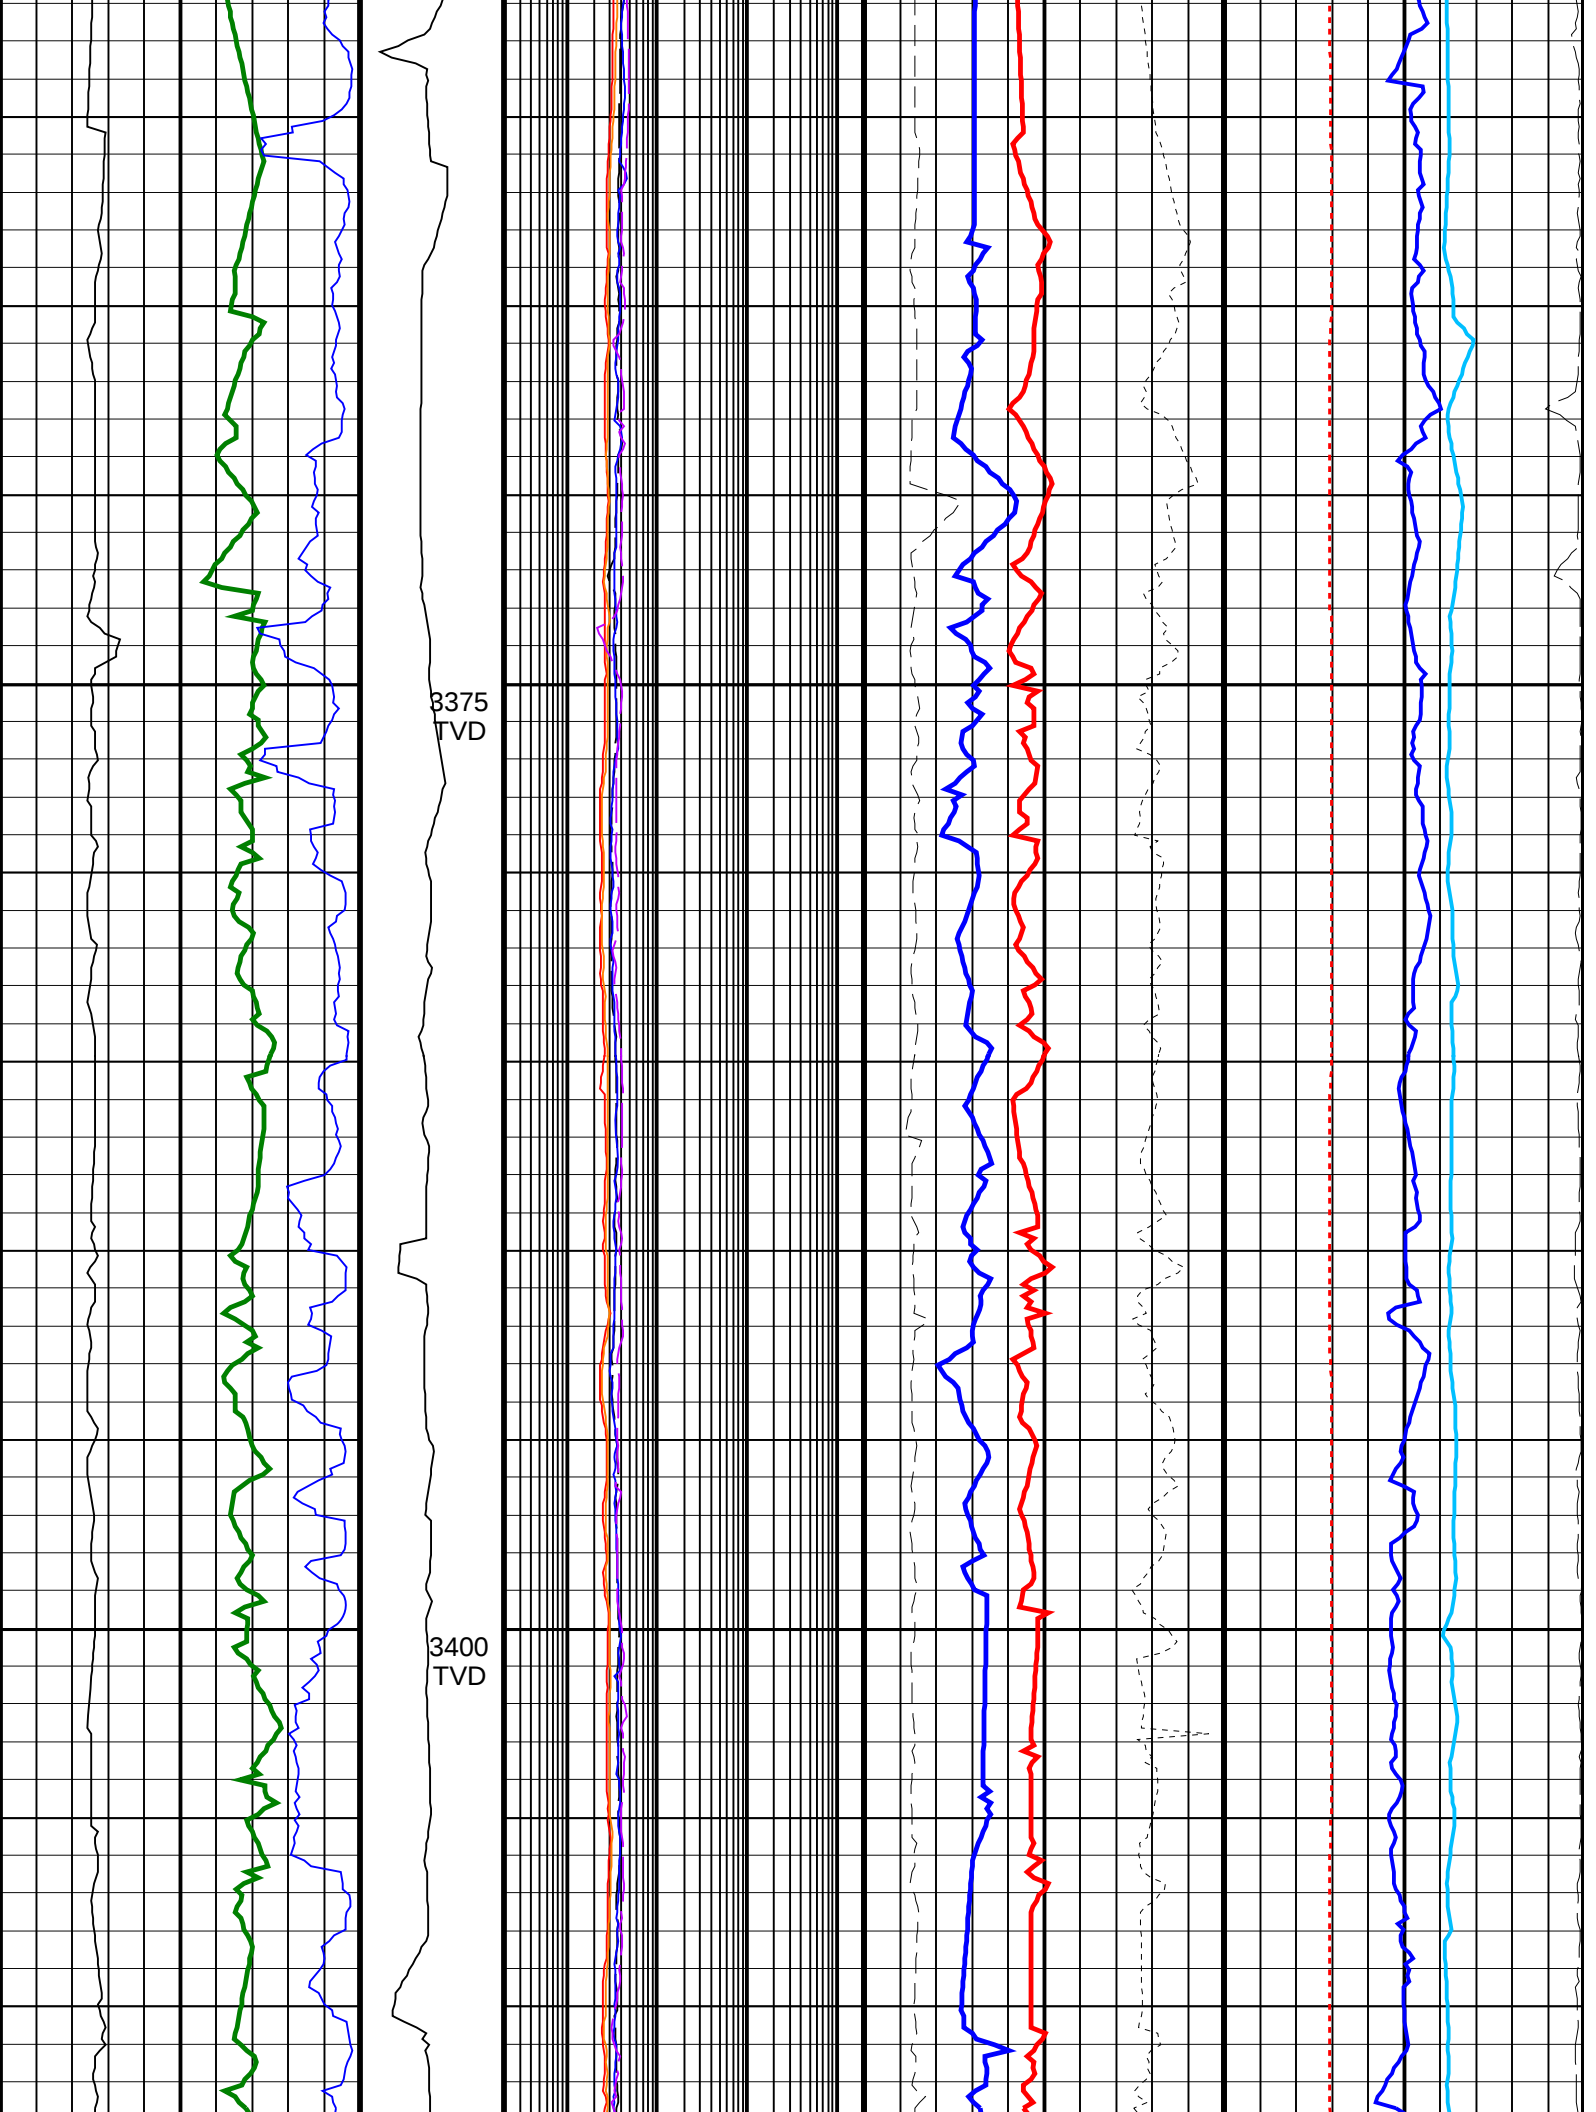


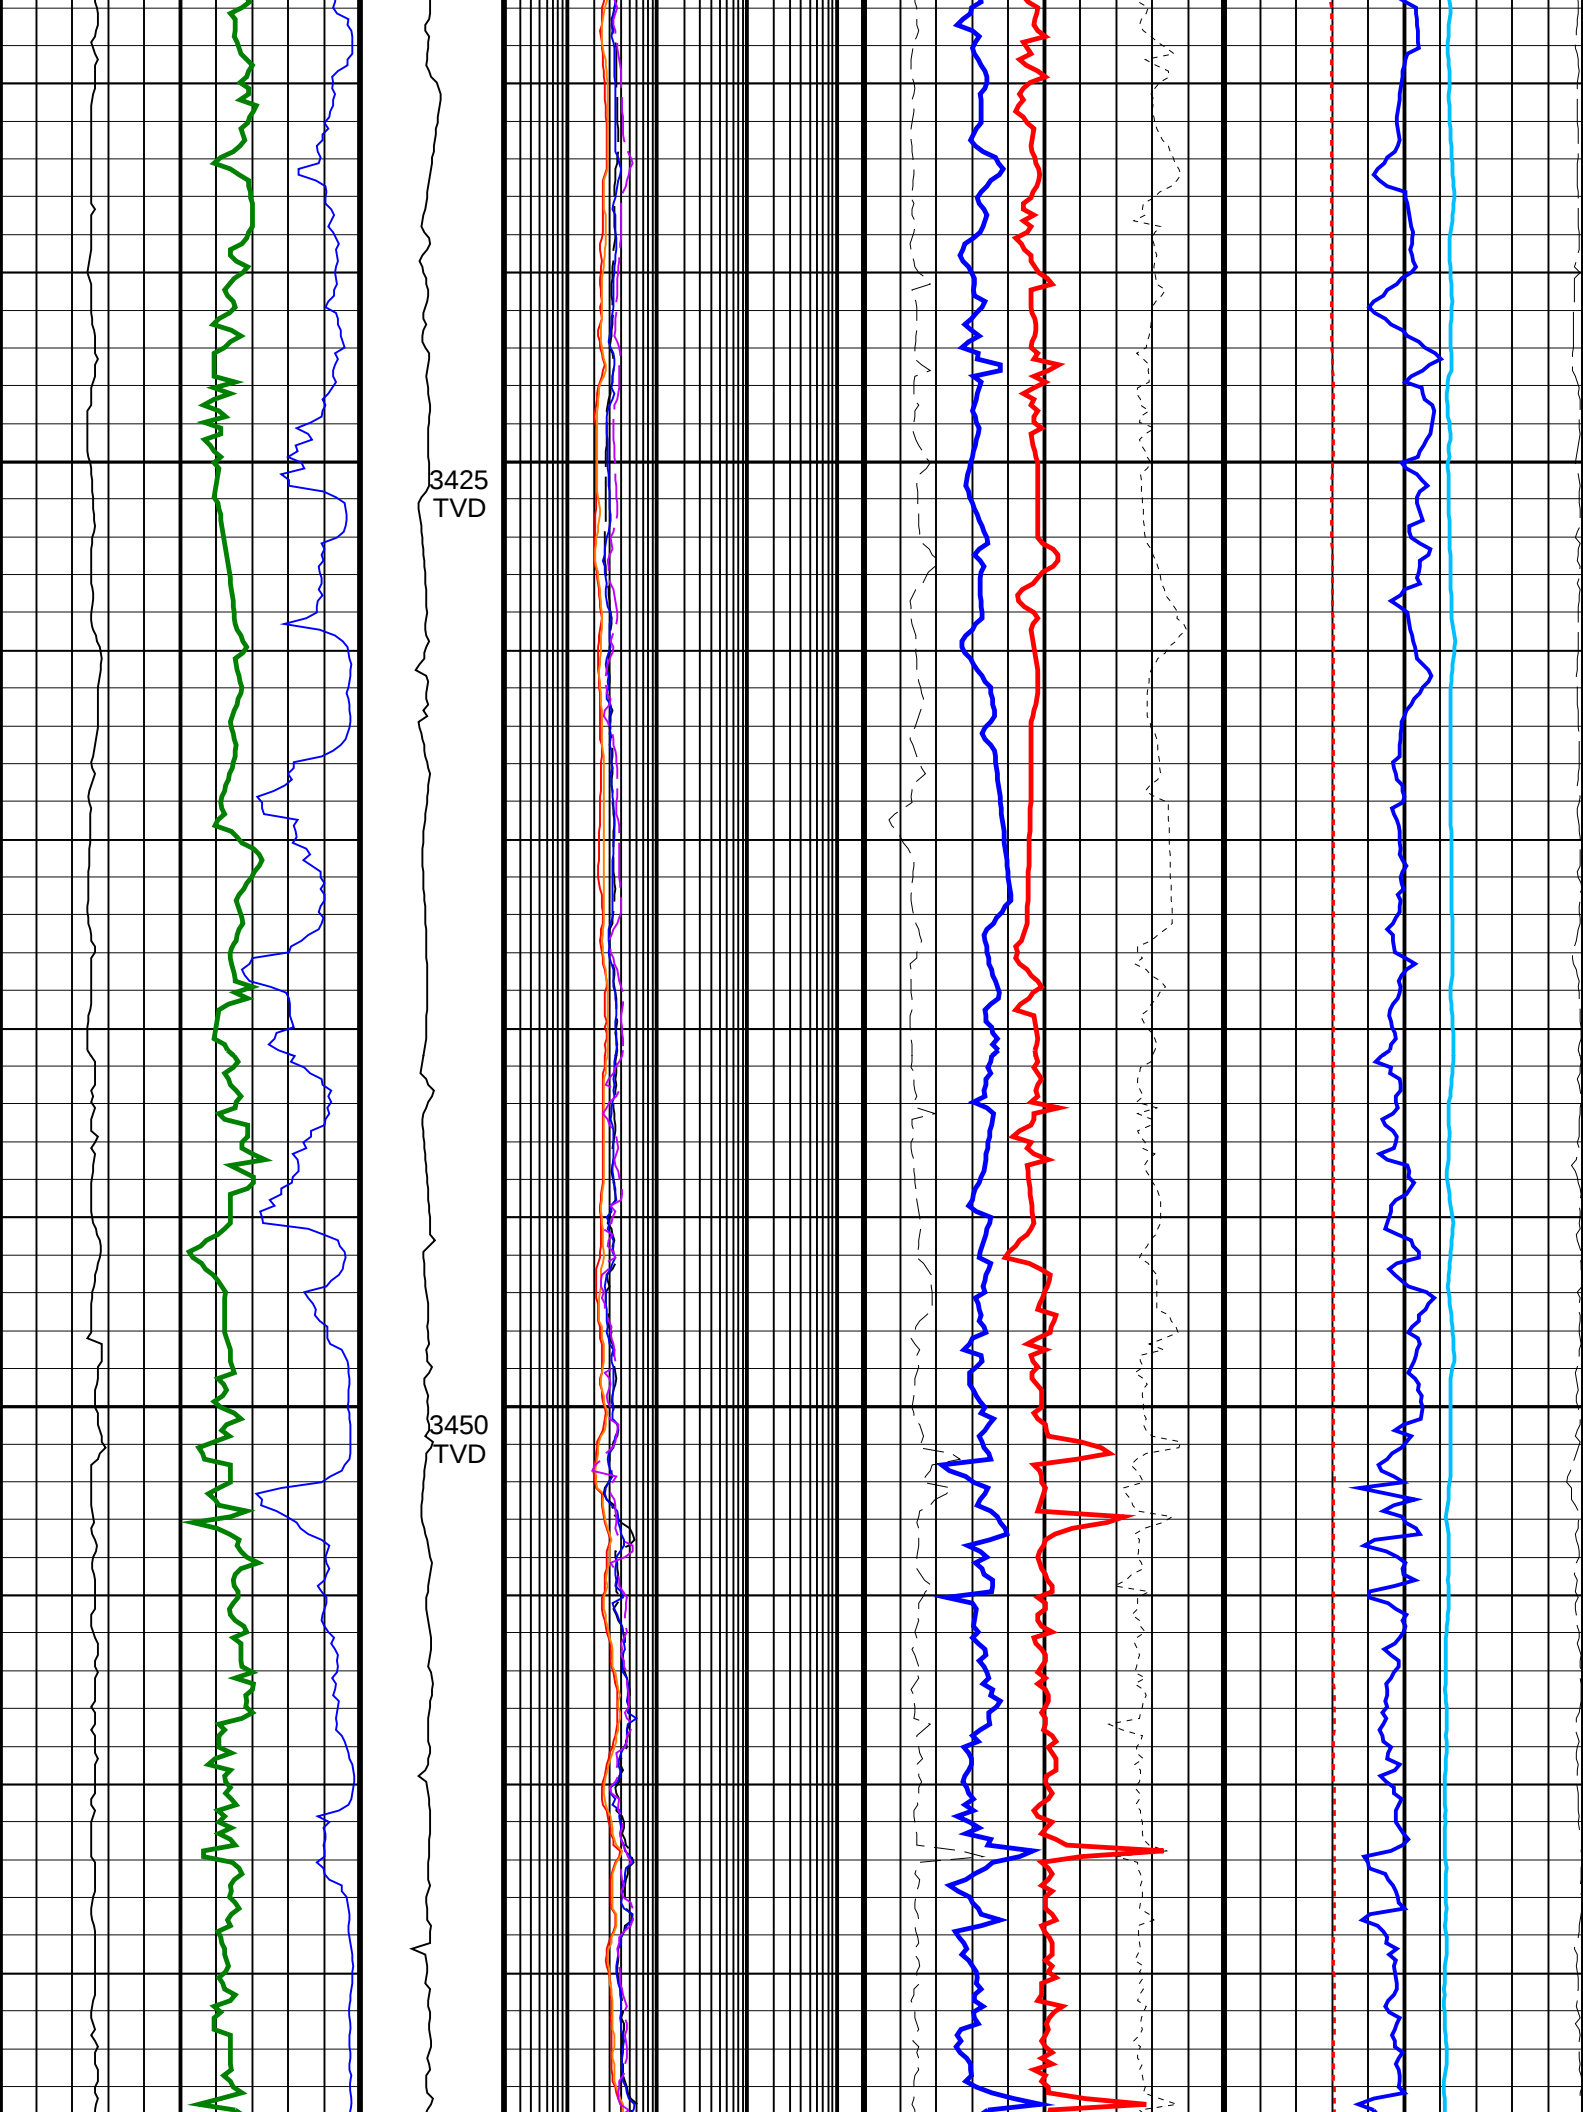

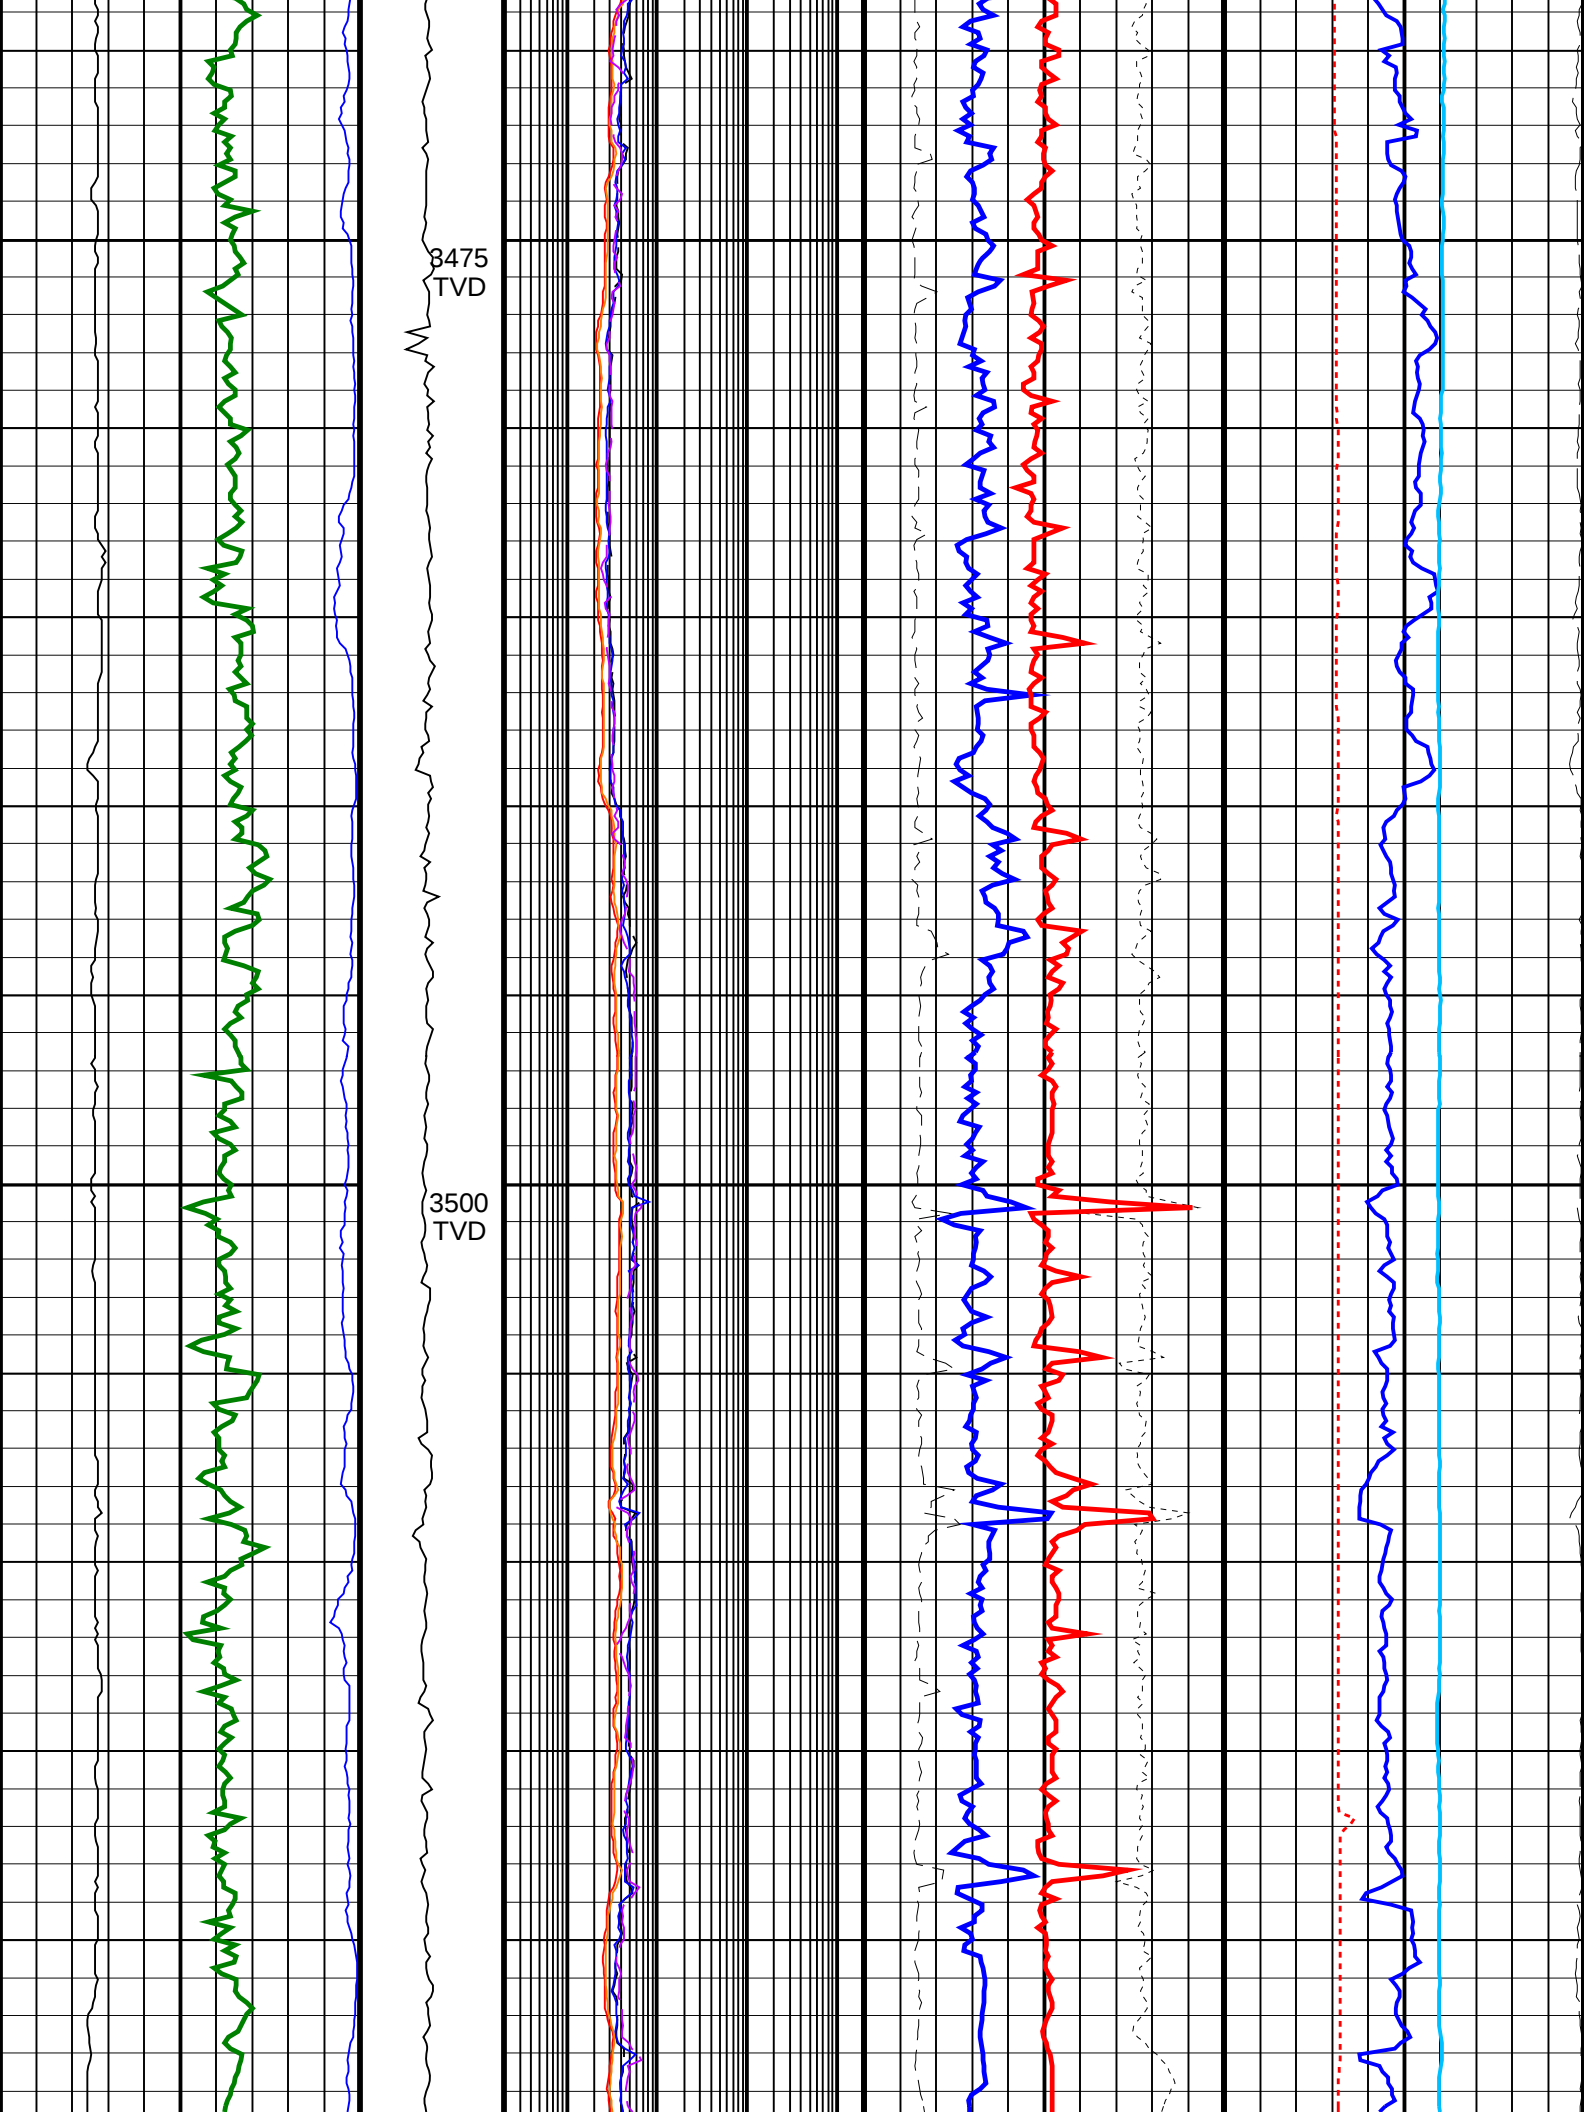





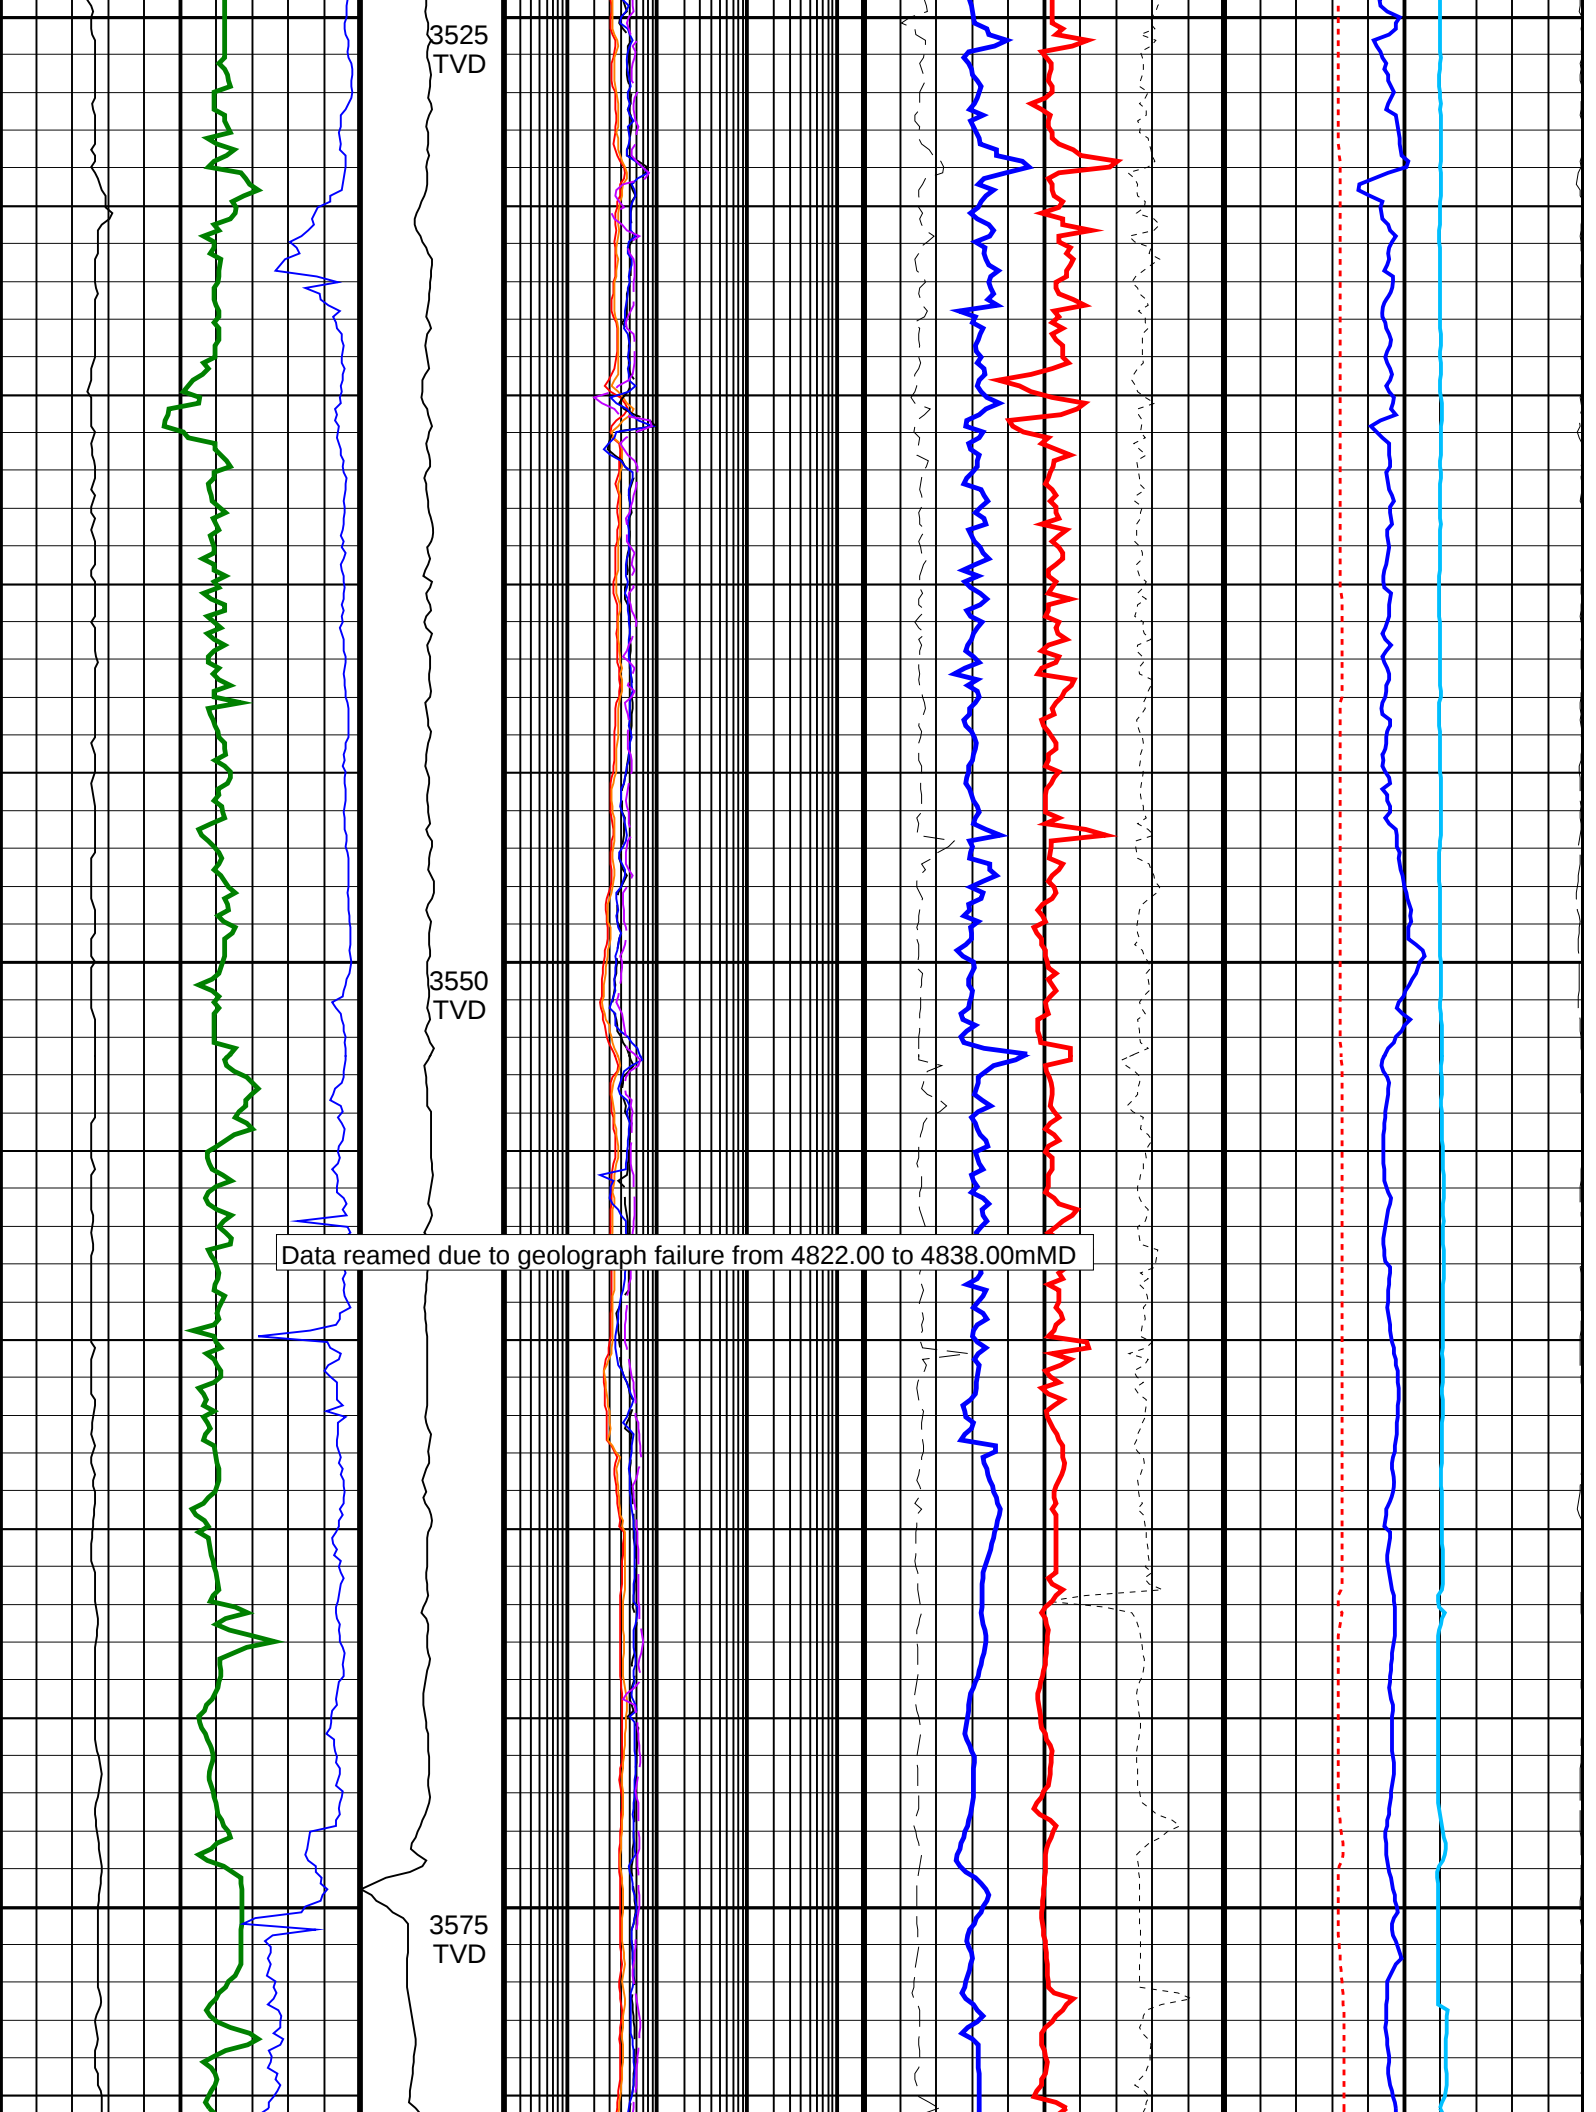


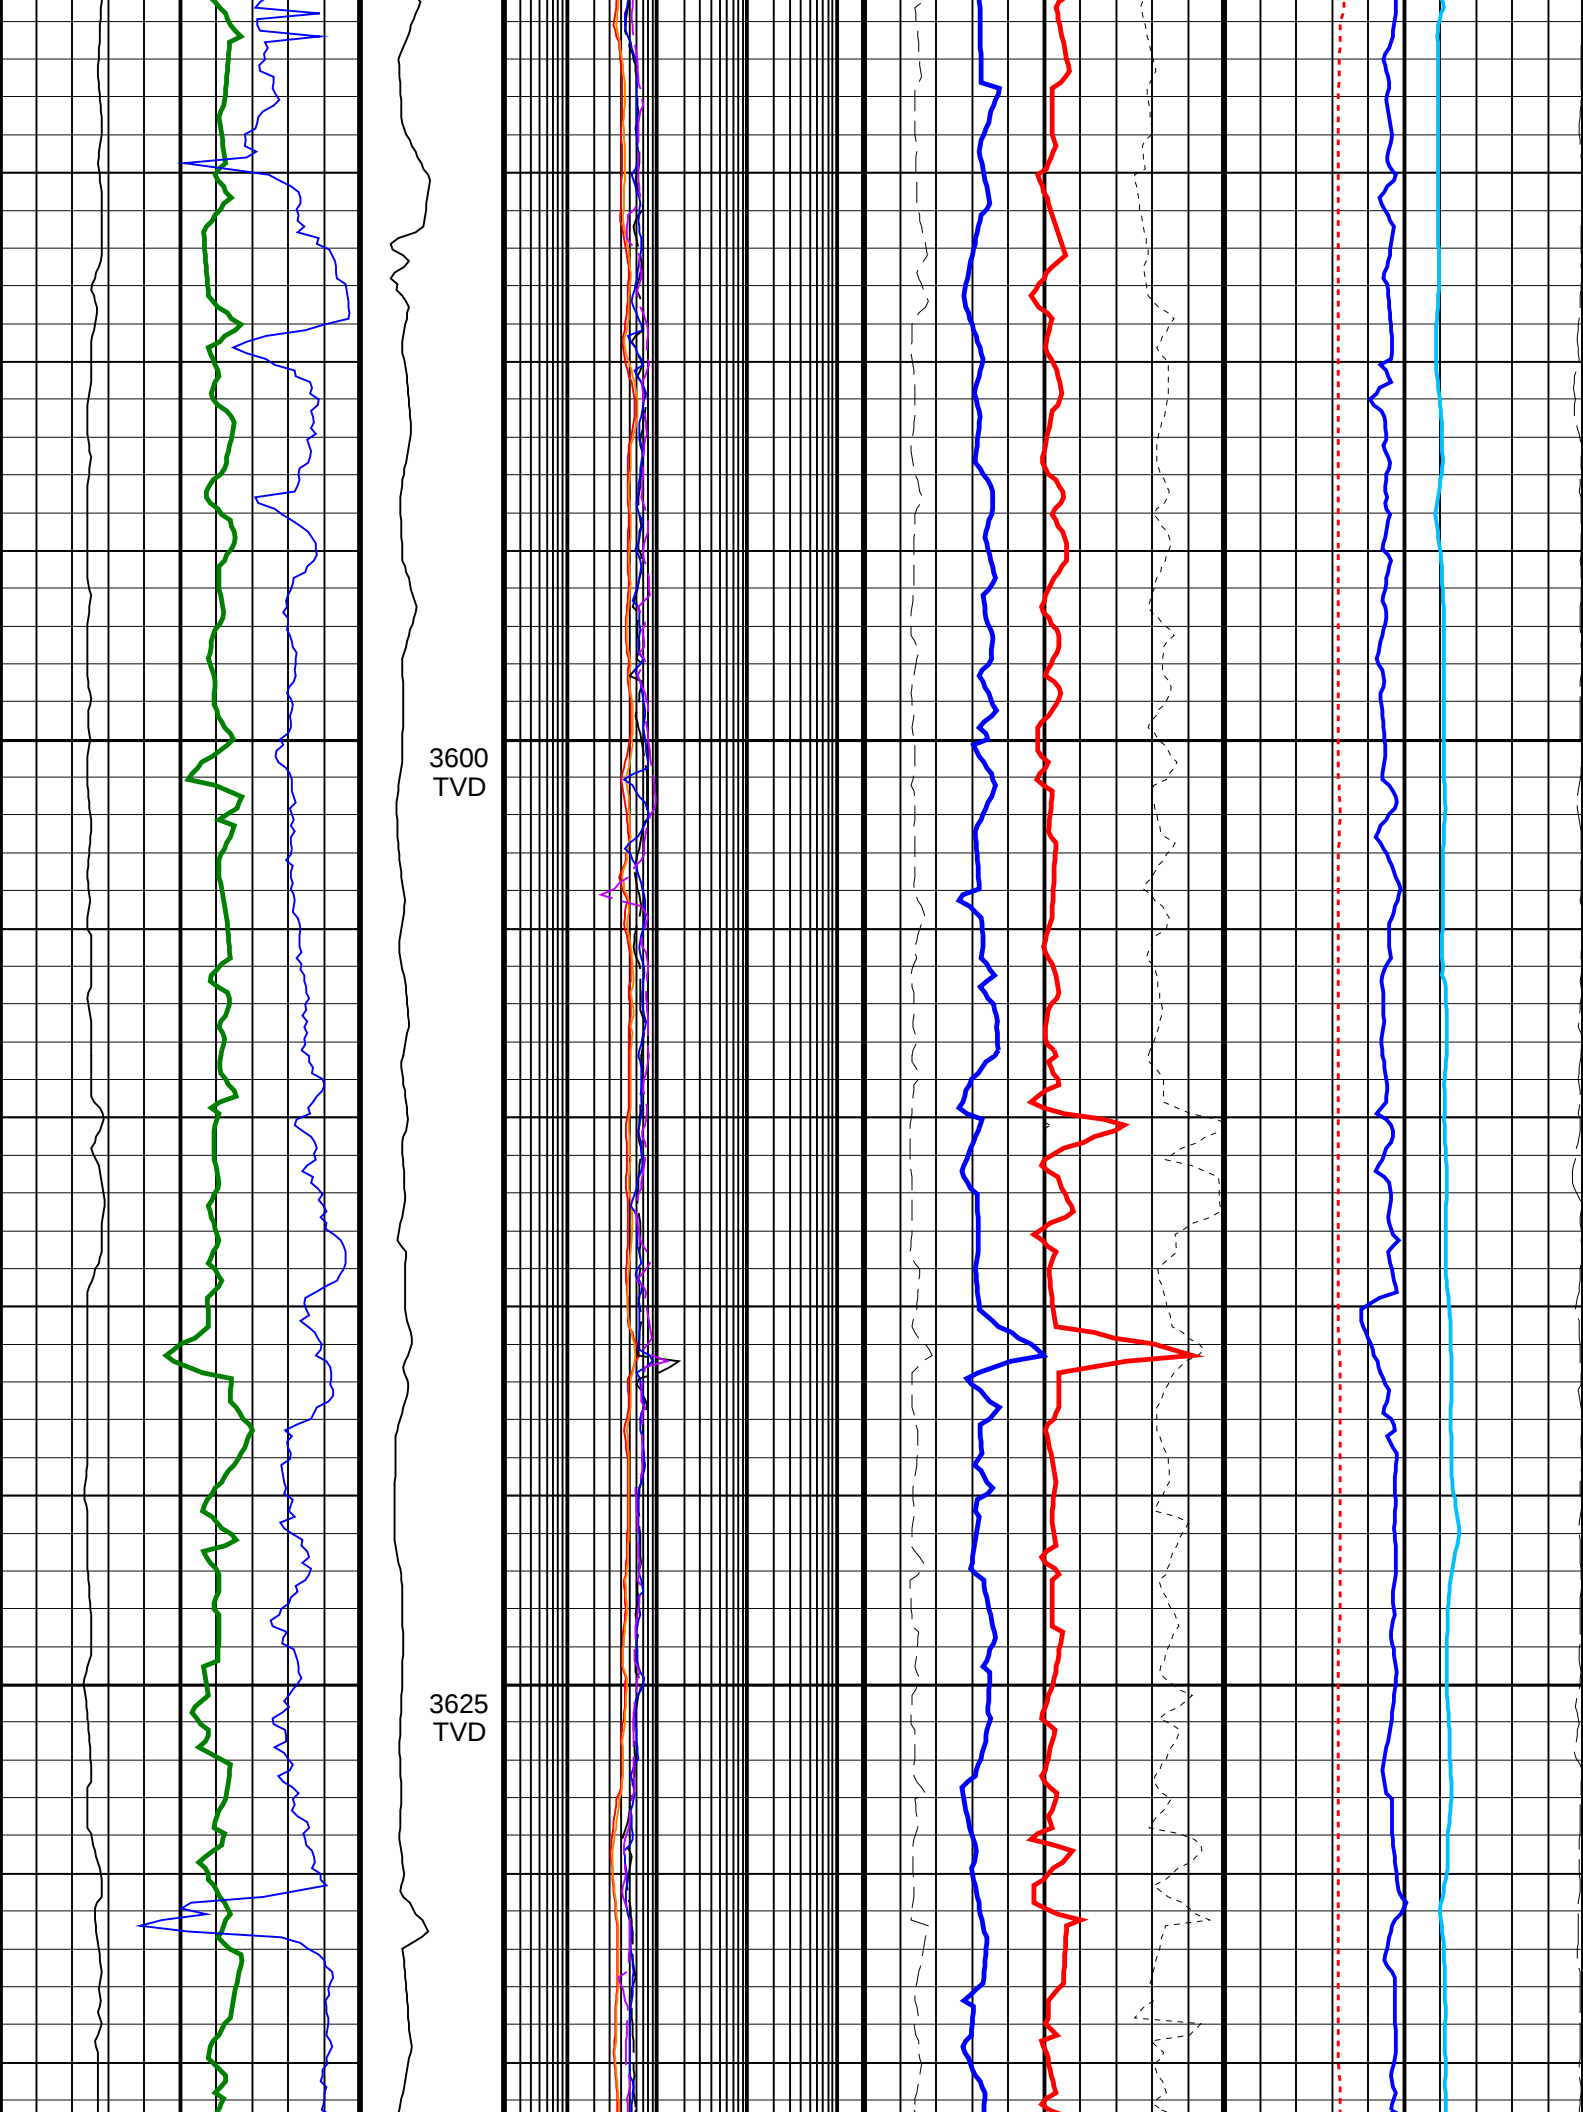


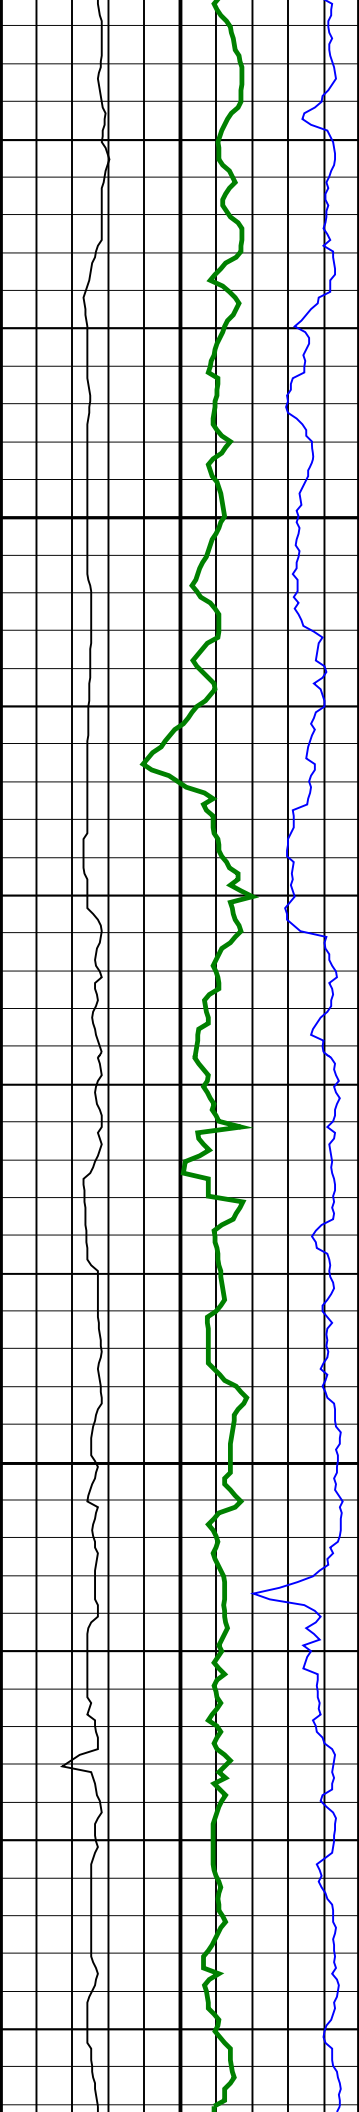



3650
TVD





3675
TVD

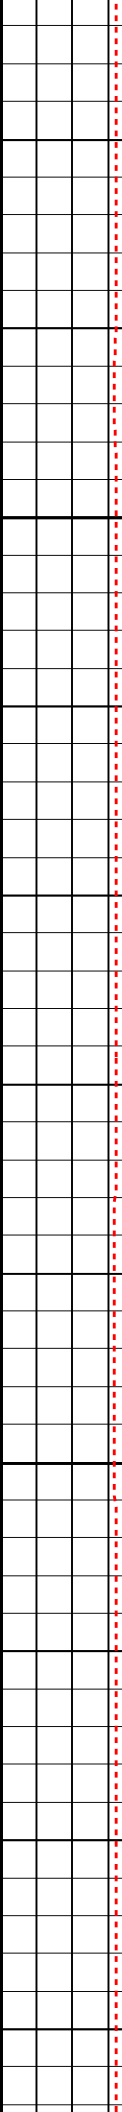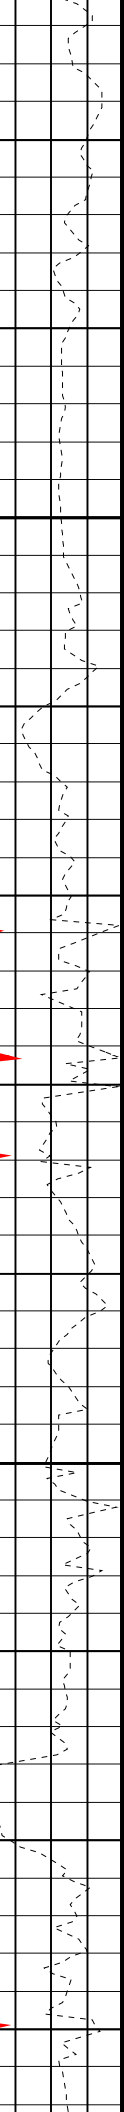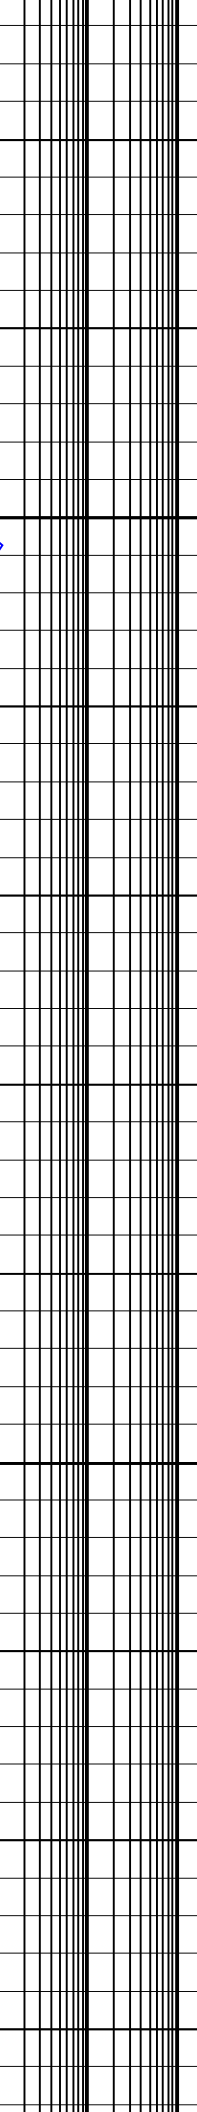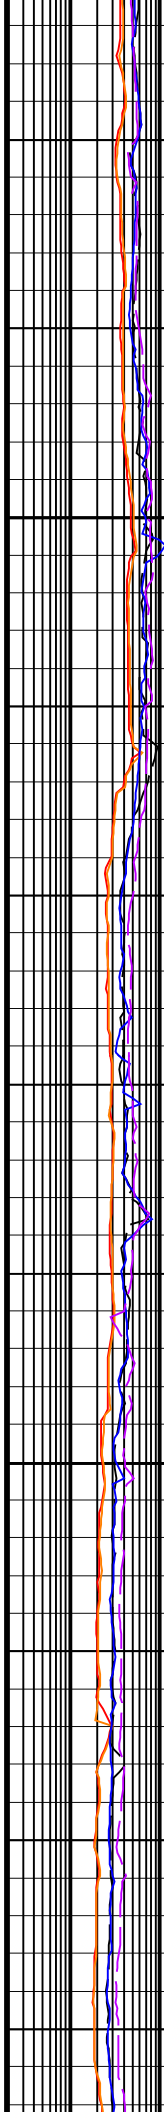

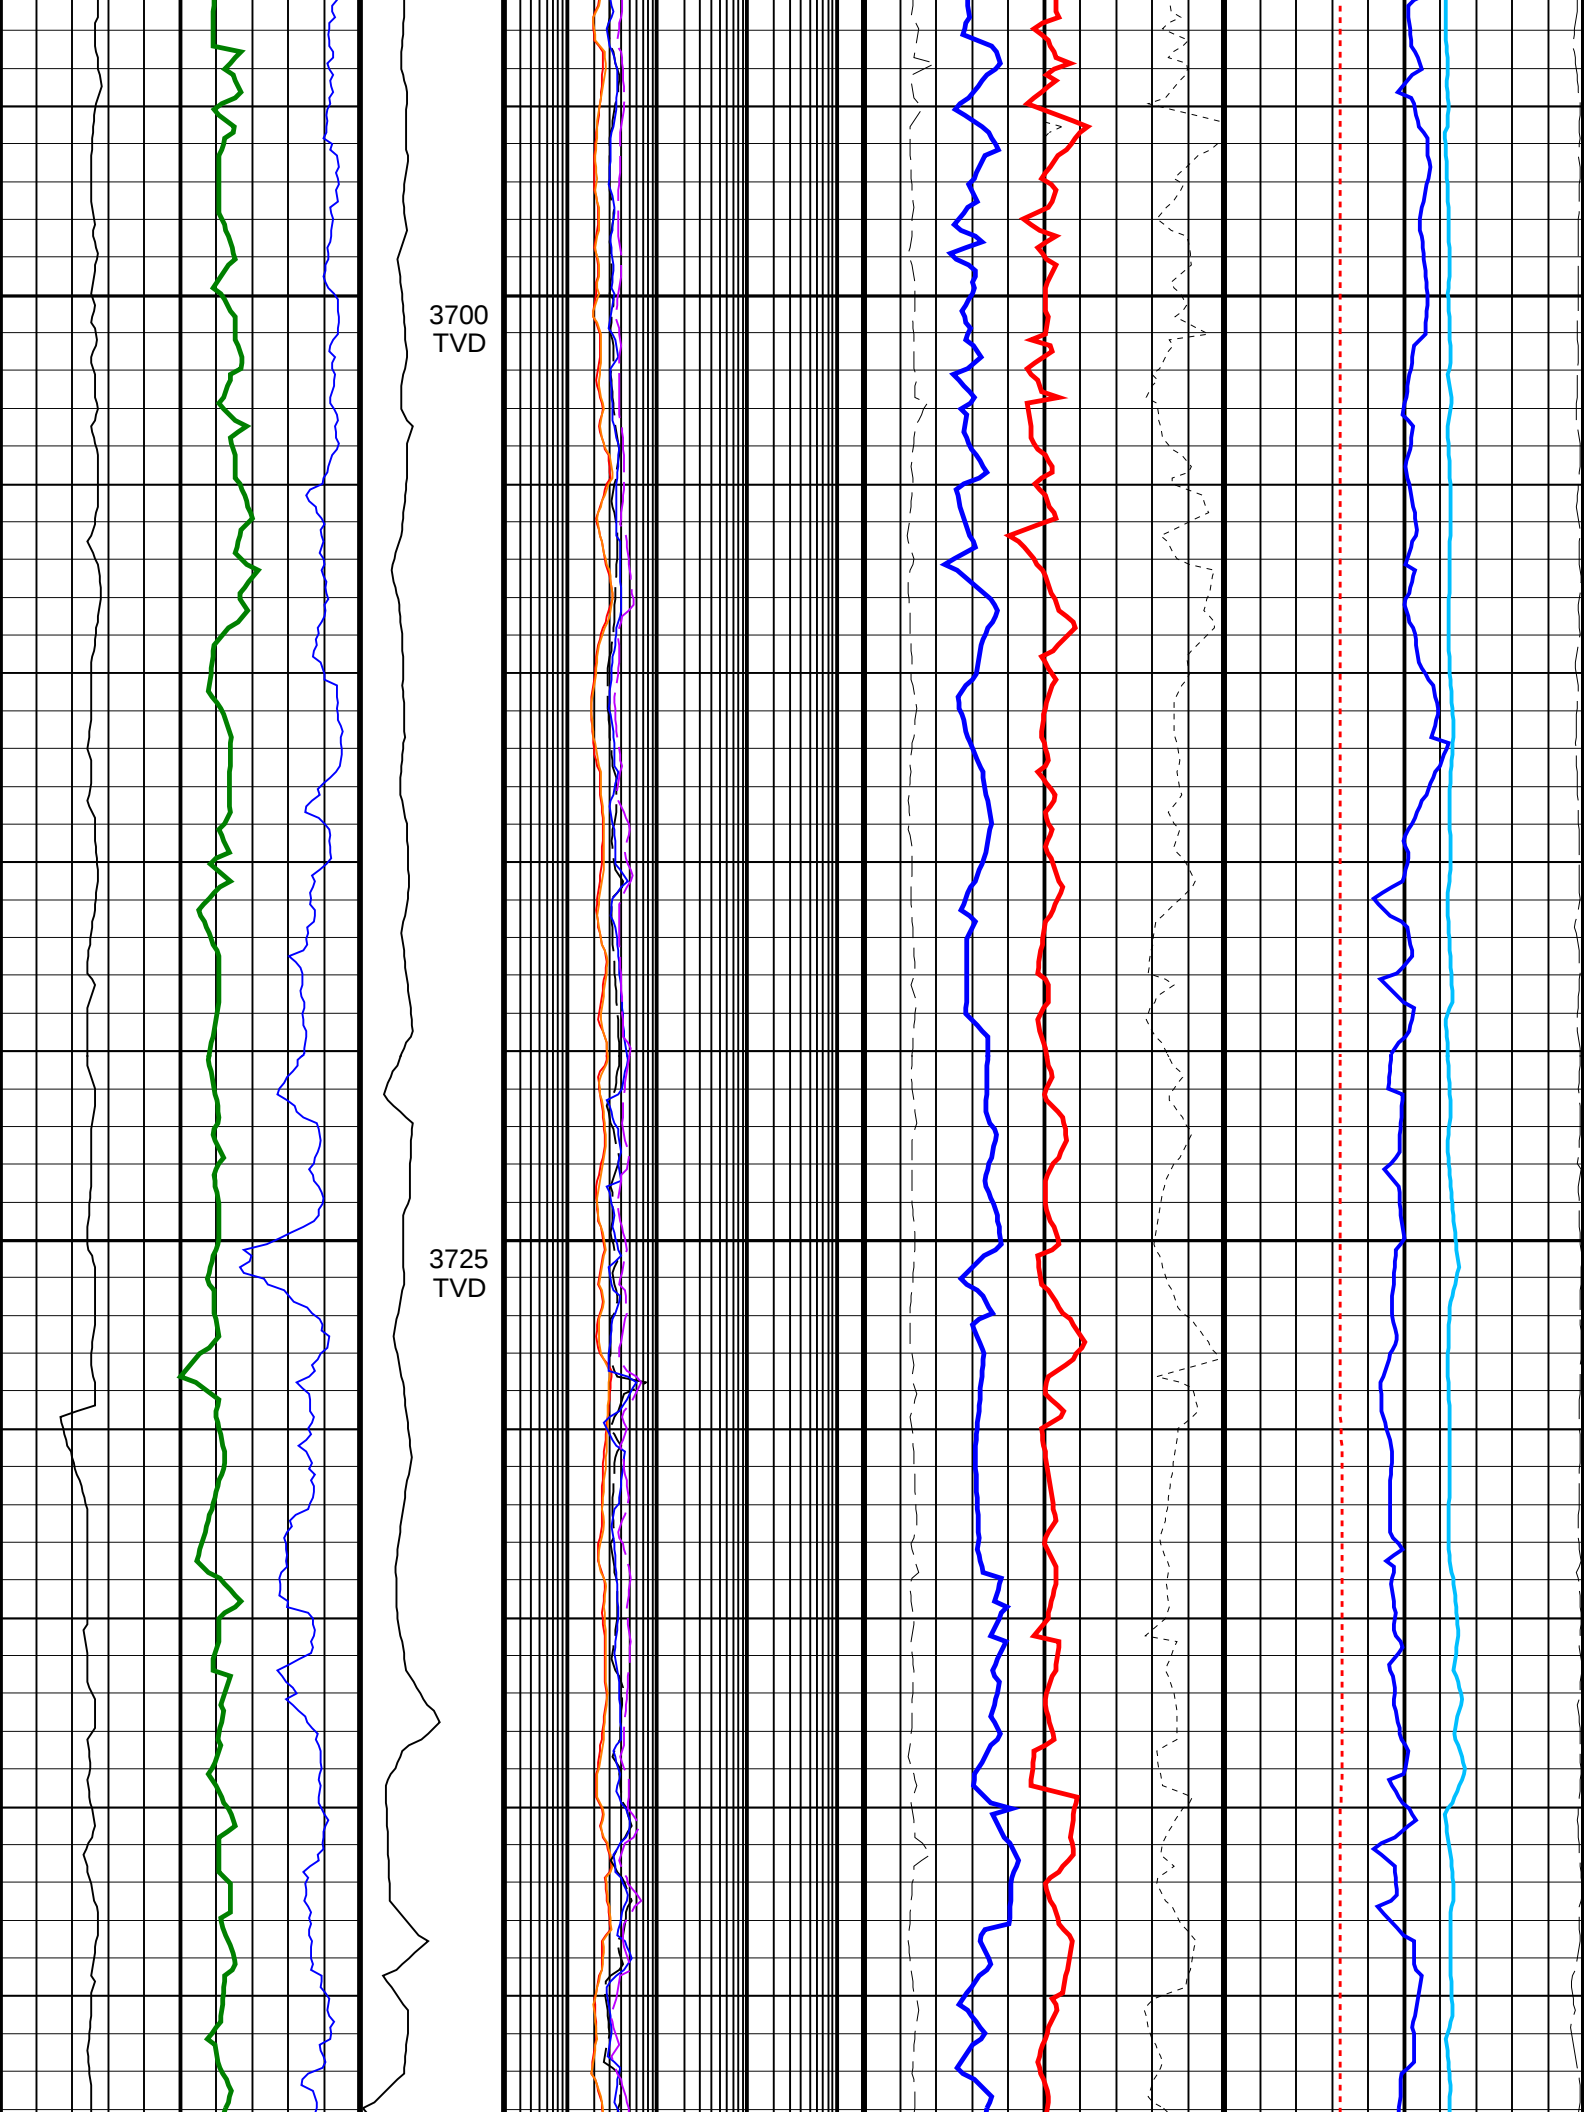

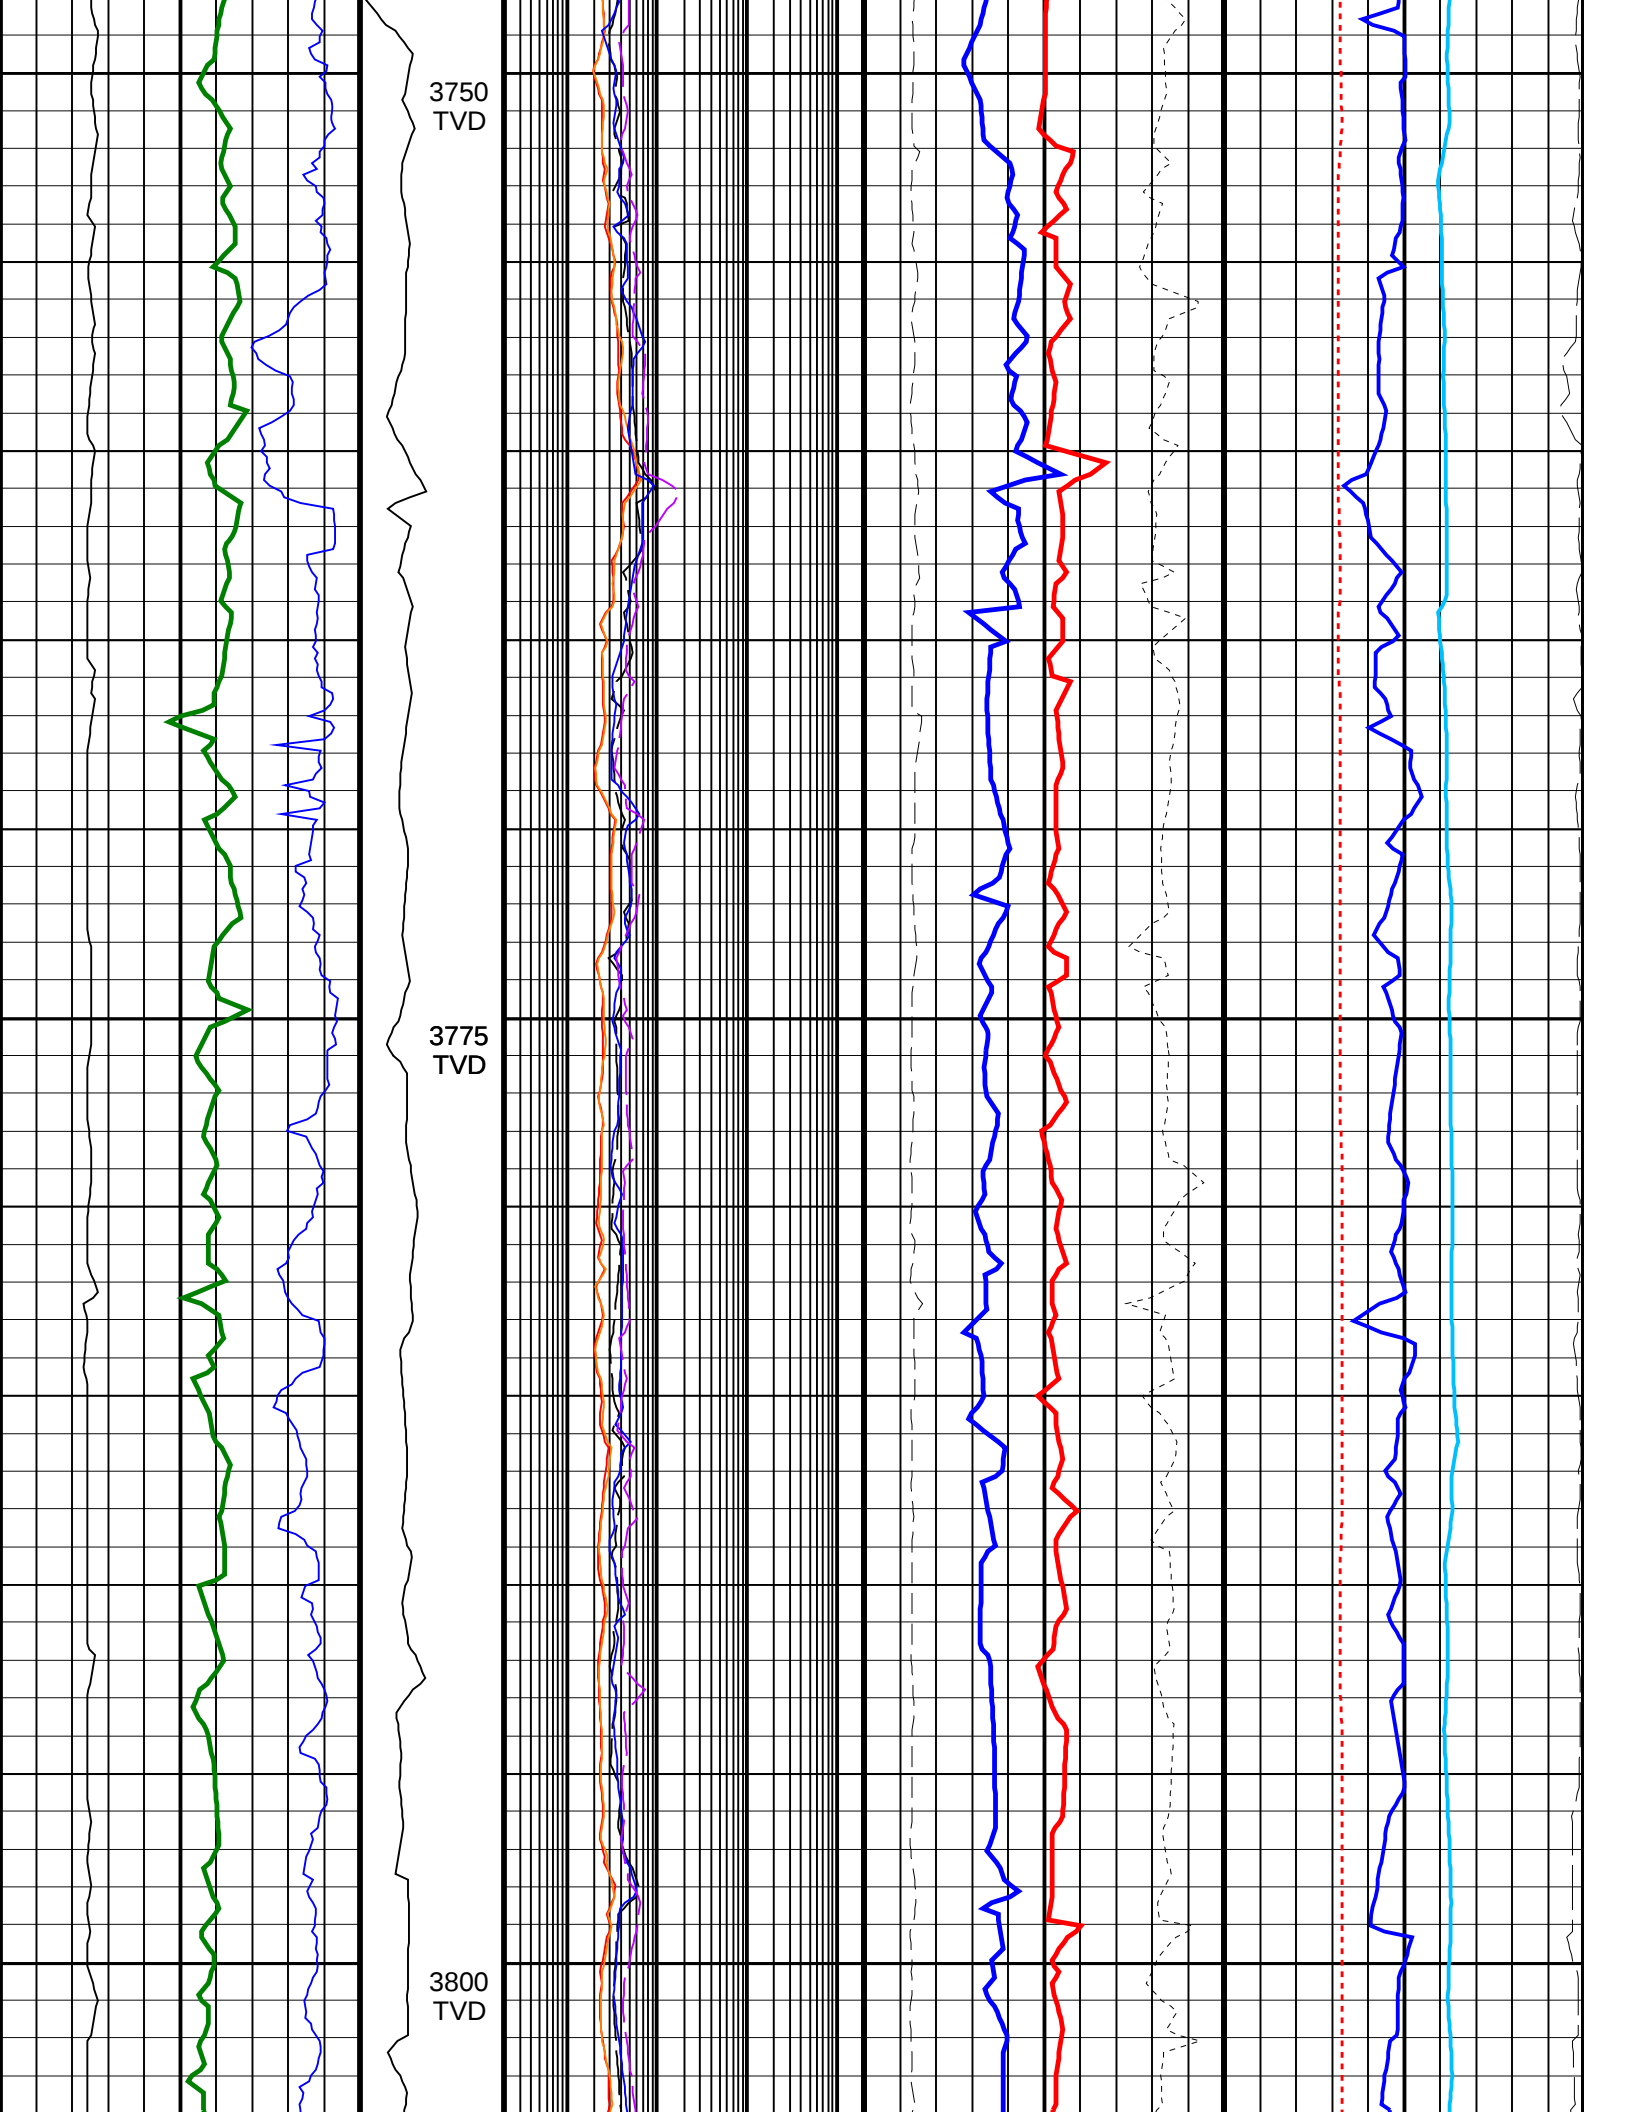

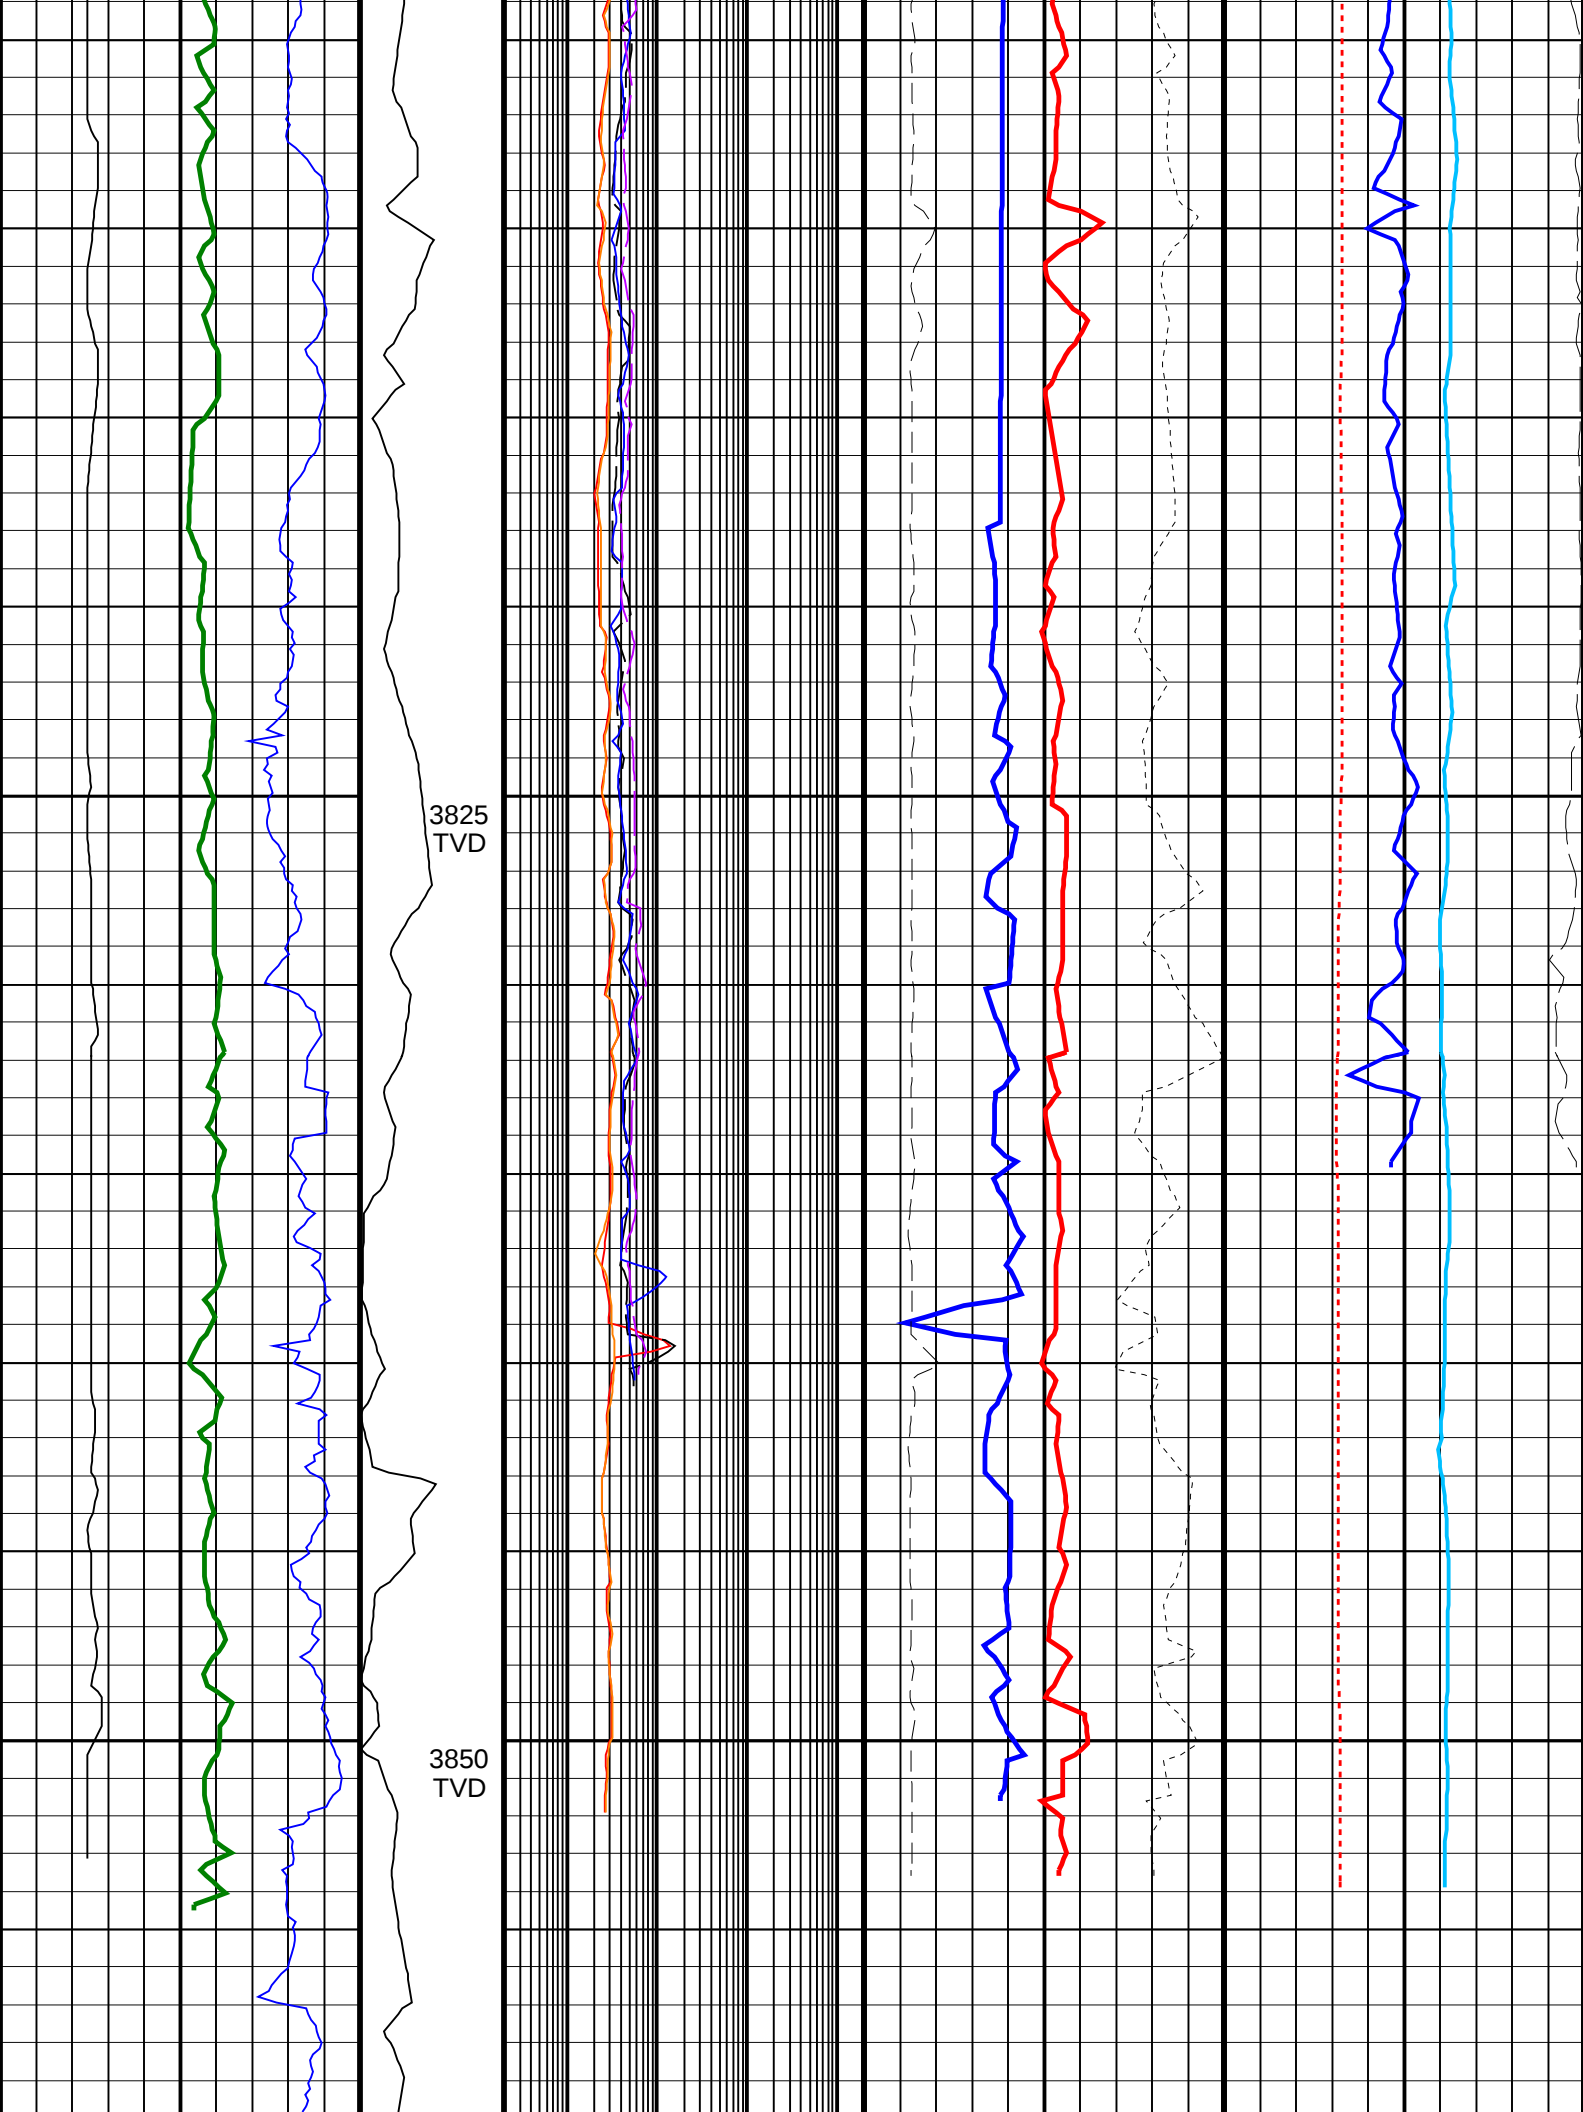

								
ROP*5 (ROP5) 200 (M/HR)0		MWD Collar RPM (CRPM_RT) (RPM) 0400	ARC Phase Shift Resistivity 16 inch at 2 MHz, Real-Time (P16H_ECO_RT) 0.2 (OHMM)2000		Best Thermal Neutron Porosity, Average, Real-Time (BPHI_ECO_RT) 0.45 (V/V)-0.15		Downhole Annulus Temperature, Real Time, Computed Downhole (DHAT_DH_ECO_RT) 0 (DEGC)200	
Gamma Ray, Average, Real-Time (GRMA_ECO_RT) 0 (GAPI)200			ARC Phase Shift Resistivity 40 inch at 2 MHz, Real-Time (P40H_ECO_RT) 0.2 (OHMM)2000		Bulk Density, Bottom, Real-Time, Computed Downhole (ROBB_DH_ECO_RT) 1.95 (G/C3)2.95		Coherence at Compressional Peak, Real-Time (CHCO_RT) -4 (----)1	
Ultrasonic Caliper, Average Diameter, Real-Time, Recomputed at Surface (UCAV_ECO_RT) 6 (IN)16			Ring Resistivity, Real-Time (RES_RING_RT) 0.2 (OHMM)2000		Photoelectric Factor, Bottom, Real-Time, Computed Downhole (PEB_DH_ECO_RT) 0 (----)10	Bulk Density Correction, Bottom, Real-Time Computed Downhole (DRHB_DH_ECO_RT) -0.25 (G/C3)0.25	Delta-T Compressional, Real-Time (DTCO_RT) 40 (US/F)140	
			Deep Button Resistivity, Real-Time (RES_BD_RT) 0.2 (OHMM)2000				Equivalent Circulating Density, Real-Time (ECD_ECO_RT) 0.8 (G/C3)1.6	
		Shallow Button Resistivity, Real-Time (RES_BS_RT) 0.2 (OHMM)2000						
IDEAL Version: ID13_0C_08								
IDF								