

# Elver-1\_EcoScope\_GeoVISION Service RM 200MD

Format: Elver-1\_EcoScope\_GVR\_200MD

Vertical Scale: 1:200

Graphics File Created: 13-Jan-2009 03:55


## PIP SUMMARY


- ┆ Gamma Ray Samples
- ┆ Resistivity Samples


Density Ticks, 0.1 ft ┆


Neutron Ticks, 0.1 ft ┆


	<b>Shallow Button Resistivity (RES_BS)</b> 0.2 (OHMM) 2000		
	<b>Medium Button Resistivity (RES_BM)</b> 0.2 (OHMM) 2000		
	<b>Deep Button Resistivity (RES_BD)</b> 0.2 (OHMM) 2000		
	<b>Ring Resistivity (RES_RING)</b> 0.2 (OHMM) 2000		
<b>Time after BIT (between drilling and measurement) (TAB_DEN)</b> 0 (HR) 10	<b>ARC Attenuation Resistivity 40 inch at 2 MHz (A40H)</b> 0.2 (OHMM) 2000		
<b>Rate of Penetration, Averaged over Last 5ft (ROP5_RM)</b> 200 (M/HR) 0	<b>ARC Phase Shift Resistivity 40 inch at 2 MHz (P40H)</b> 0.2 (OHMM) 2000	<b>Photoelectric Factor, Bottom (PEB)</b> 0 (-----) 10	<b>Bulk Density Correction, Bottom (DRHB)</b> -0.25 (G/C3) 0.25
<b>Gamma Ray, Average (GRMA)</b> 0 (GAPI) 200	<b>ARC Phase Shift Resistivity 28 inch at 2 MHz (P28H)</b> 0.2 (OHMM) 2000	<b>Bulk Density, Bottom (ROBB)</b> 1.95 (G/C3) 2.95	
<b>Ultrasonic Caliper Average (UCAV)</b> 6 (IN) 16	<b>Collar Rotational Speed (CRPM) (RPM)</b> 0 400	<b>ARC Phase Shift Resistivity 16 inch at 2 MHz (P16H)</b> 0.2 (OHMM) 2000	<b>Best Thermal Neutron Porosity, Average (BPHI)</b> 0.45 (V/V) -0.15

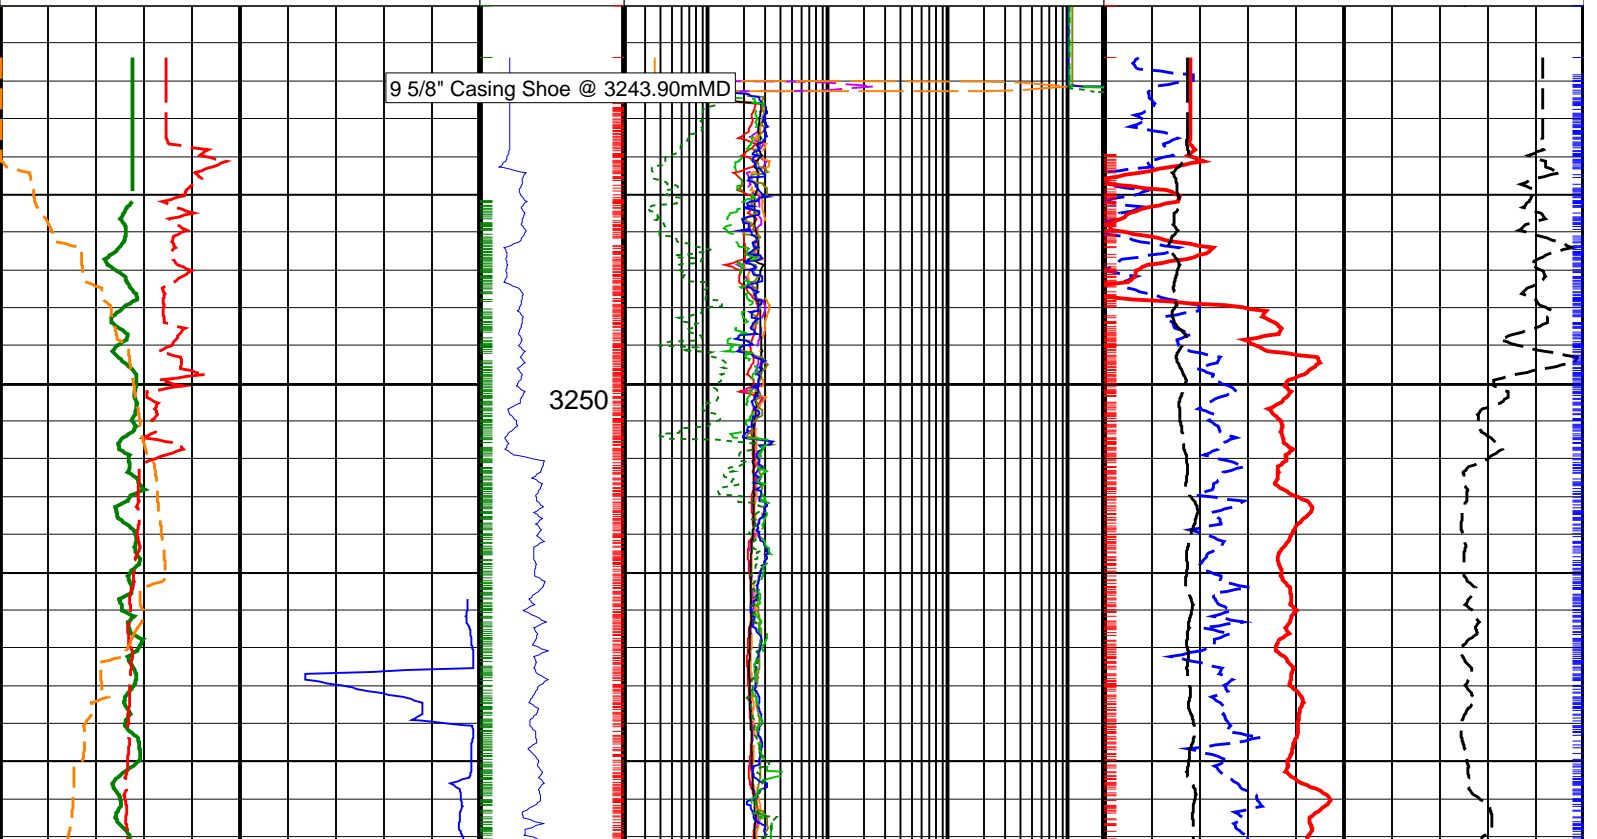


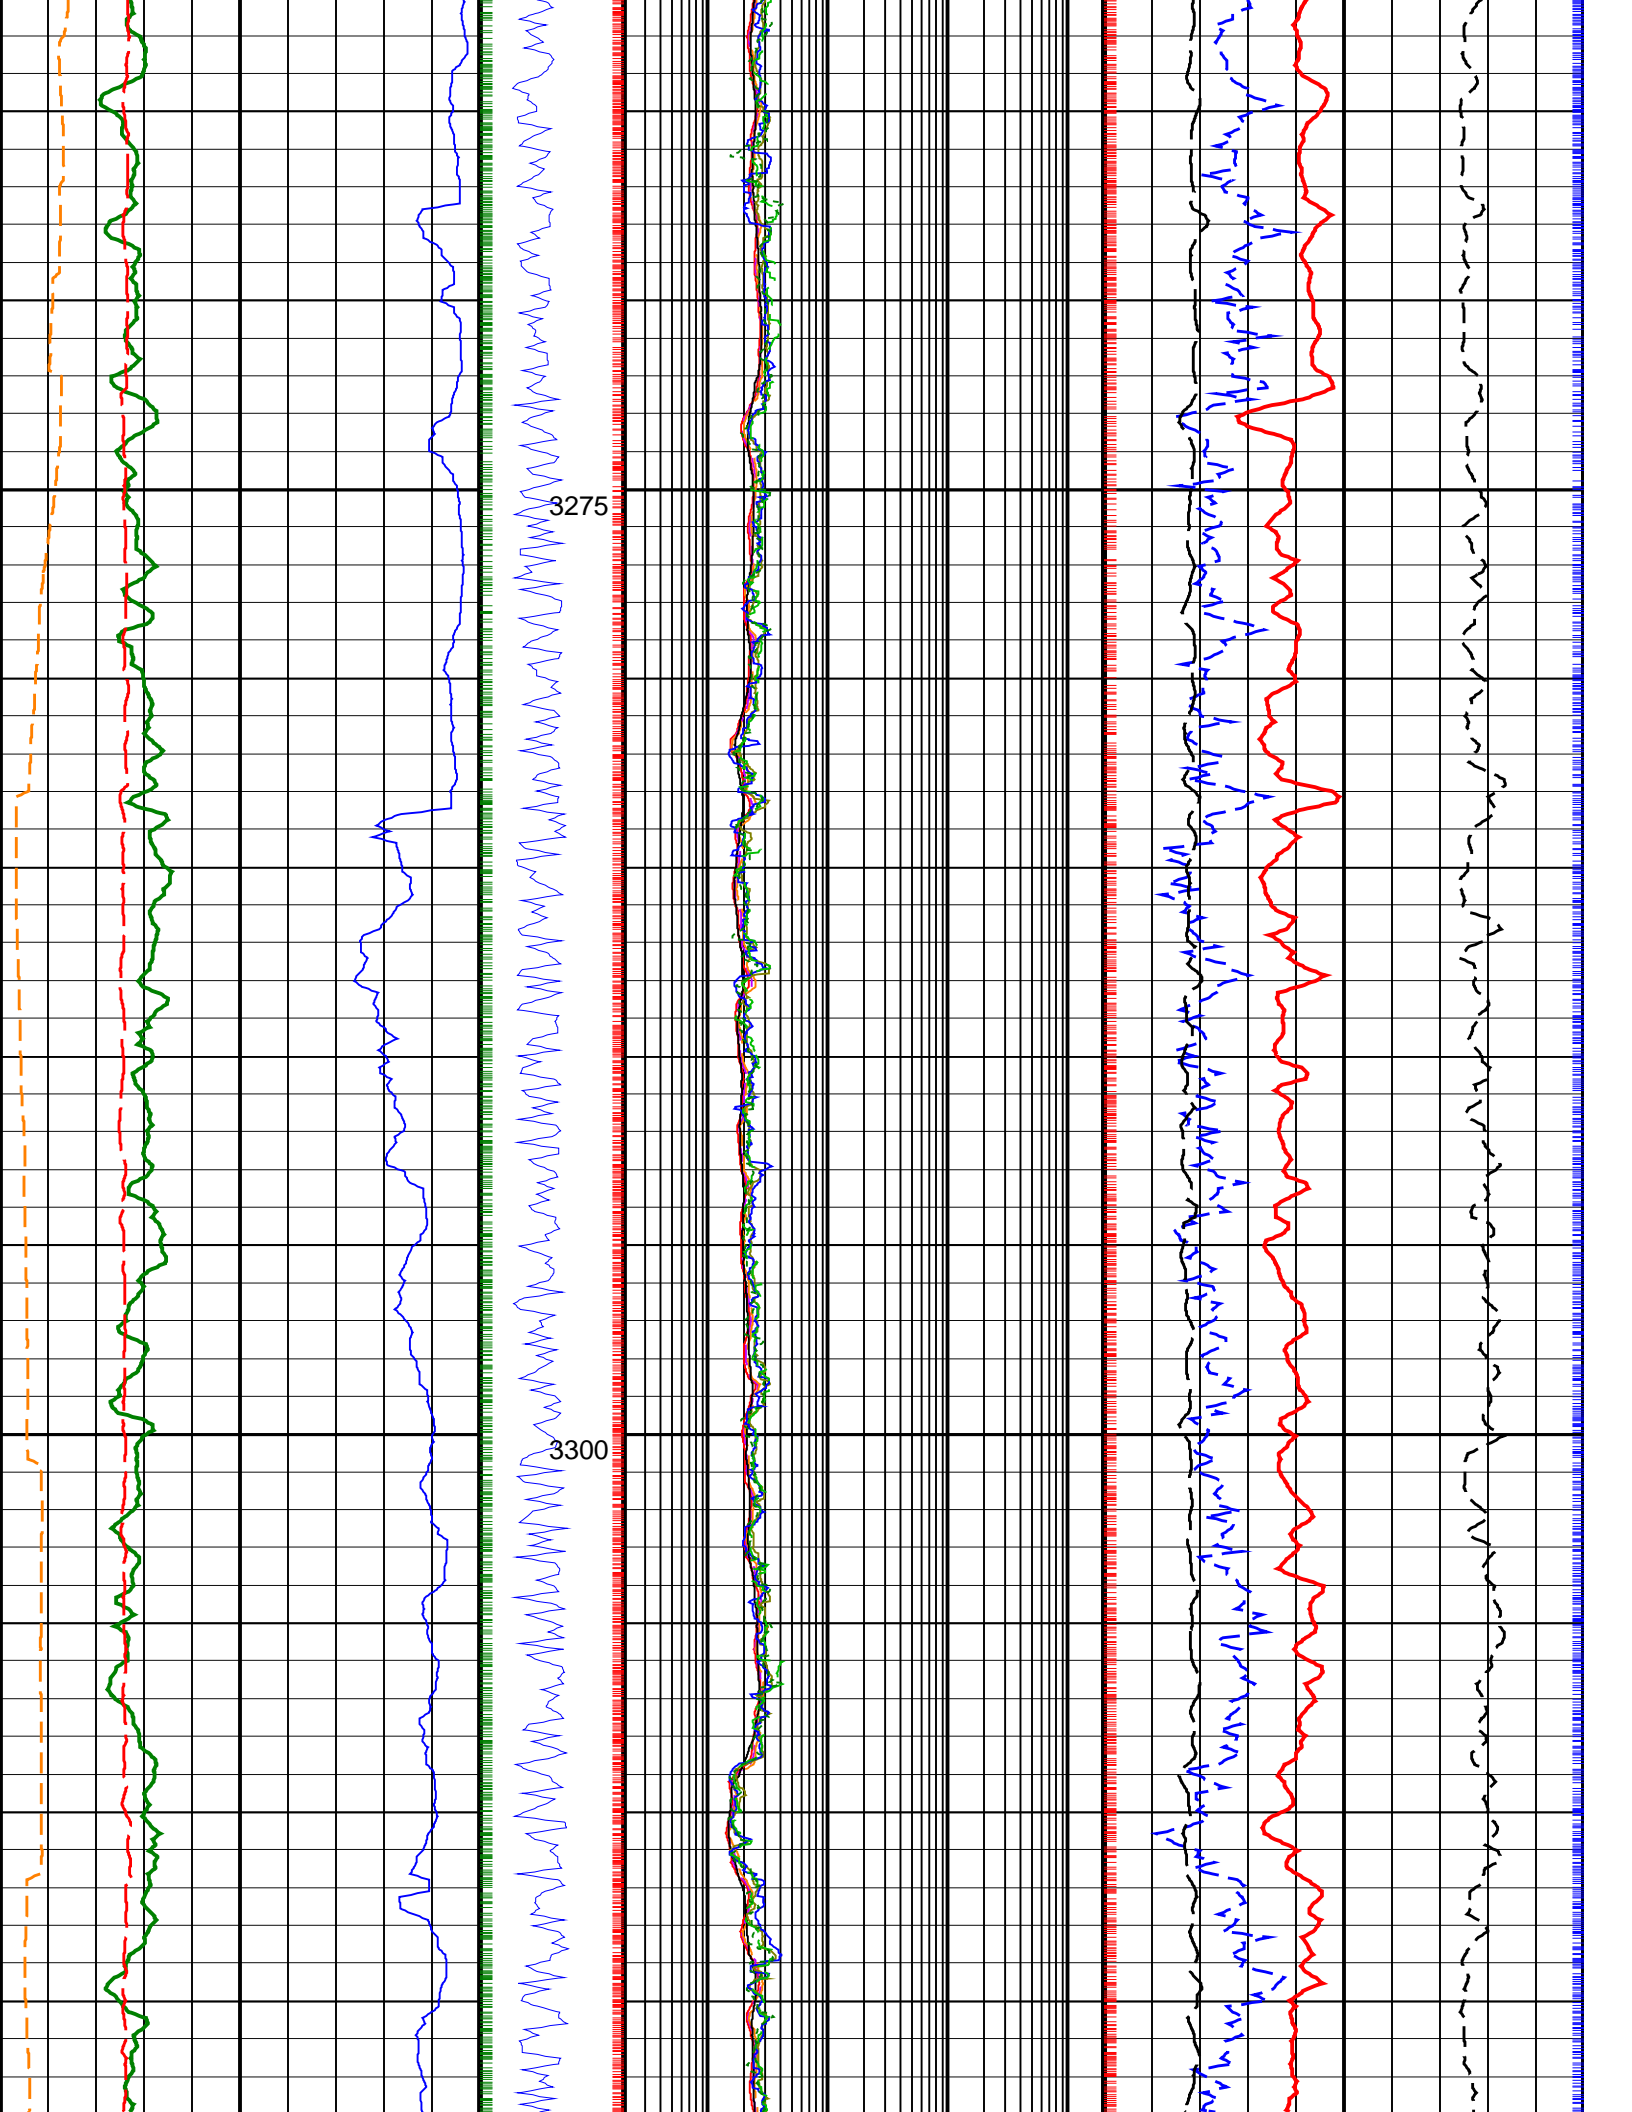


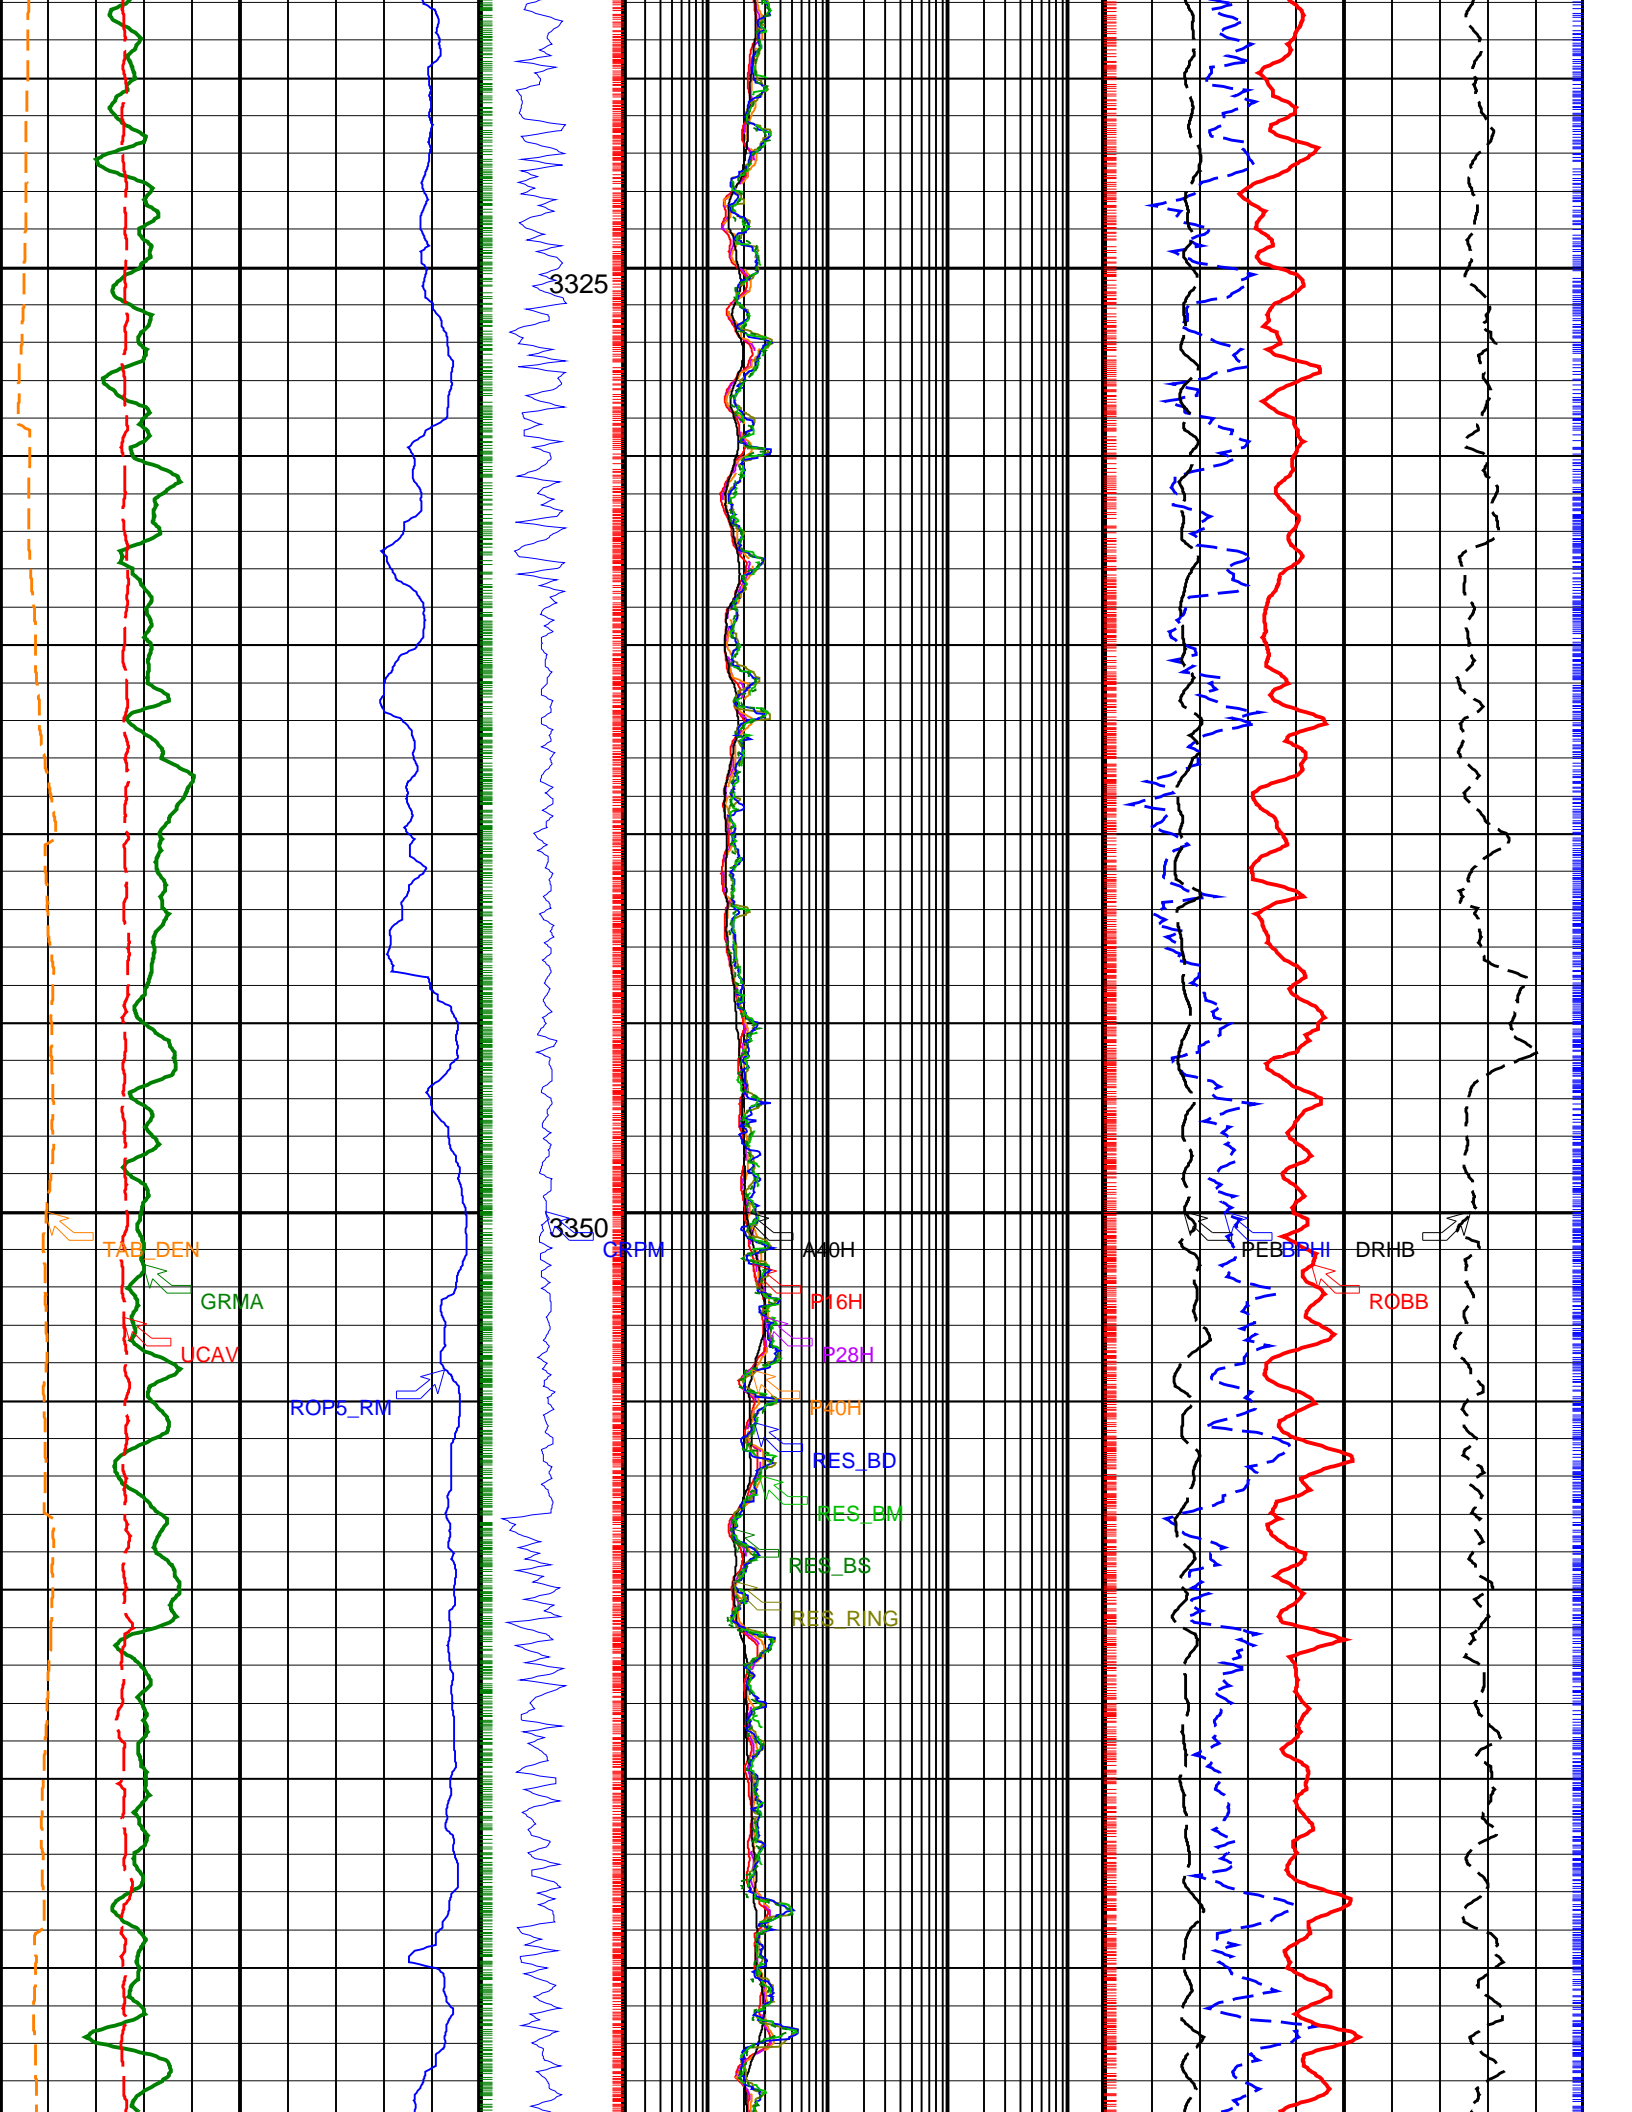


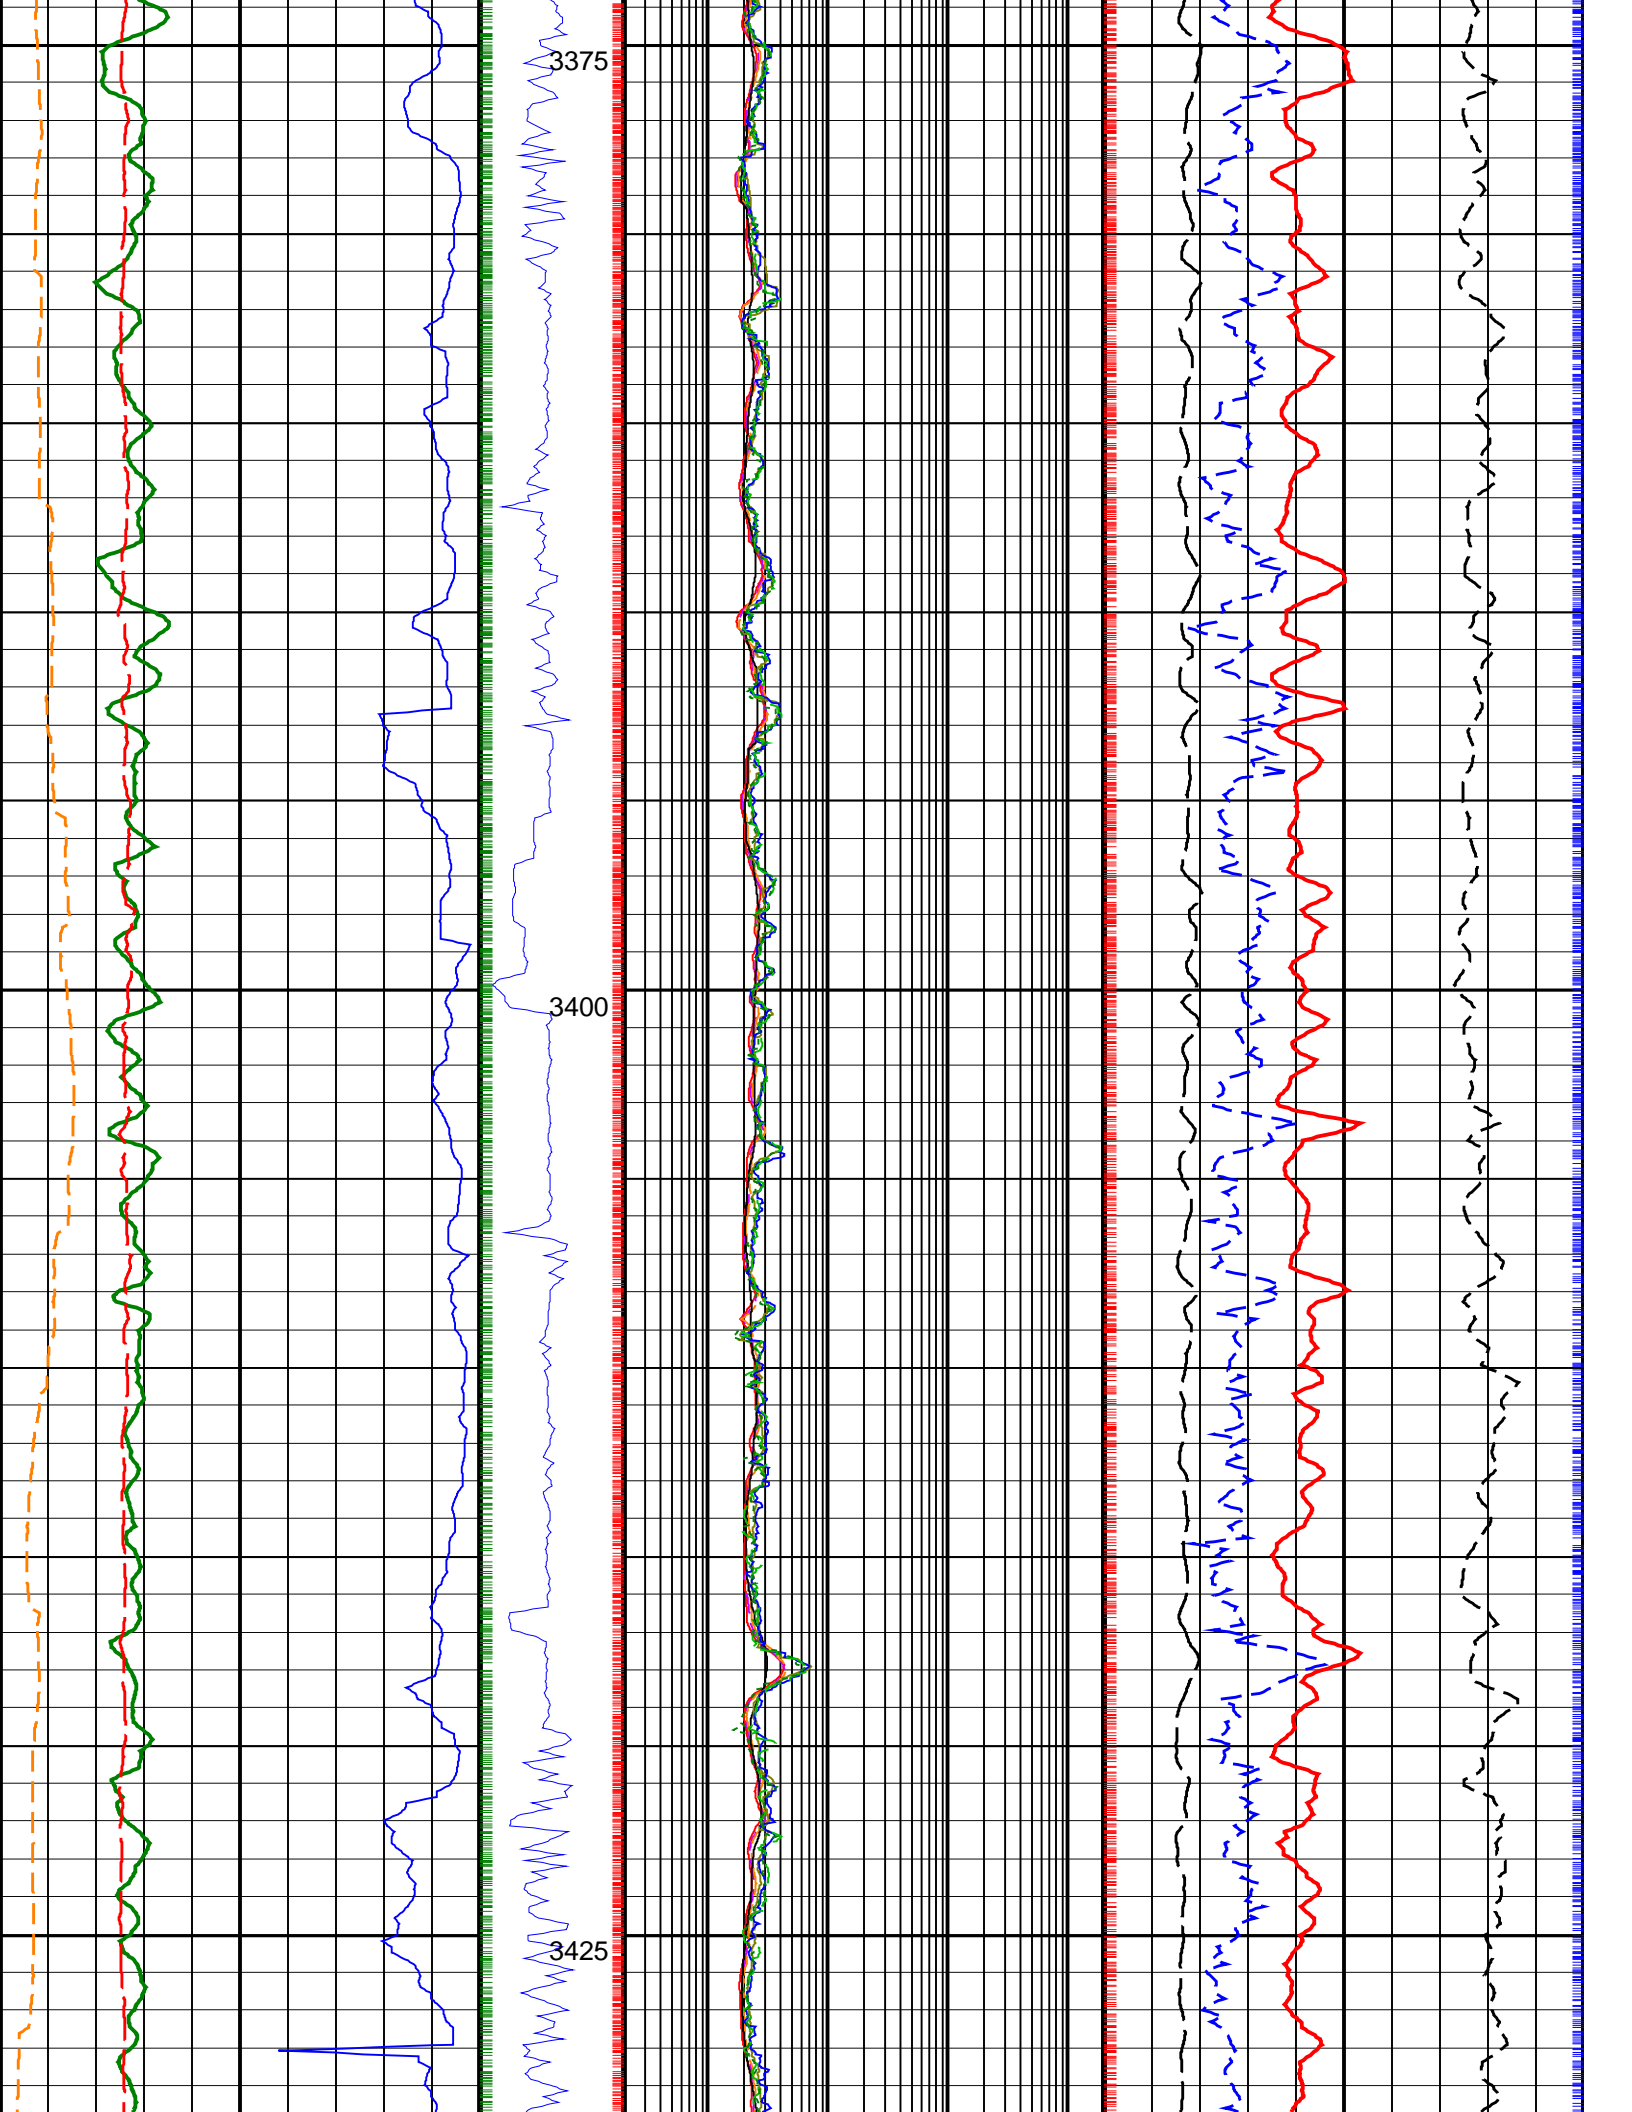

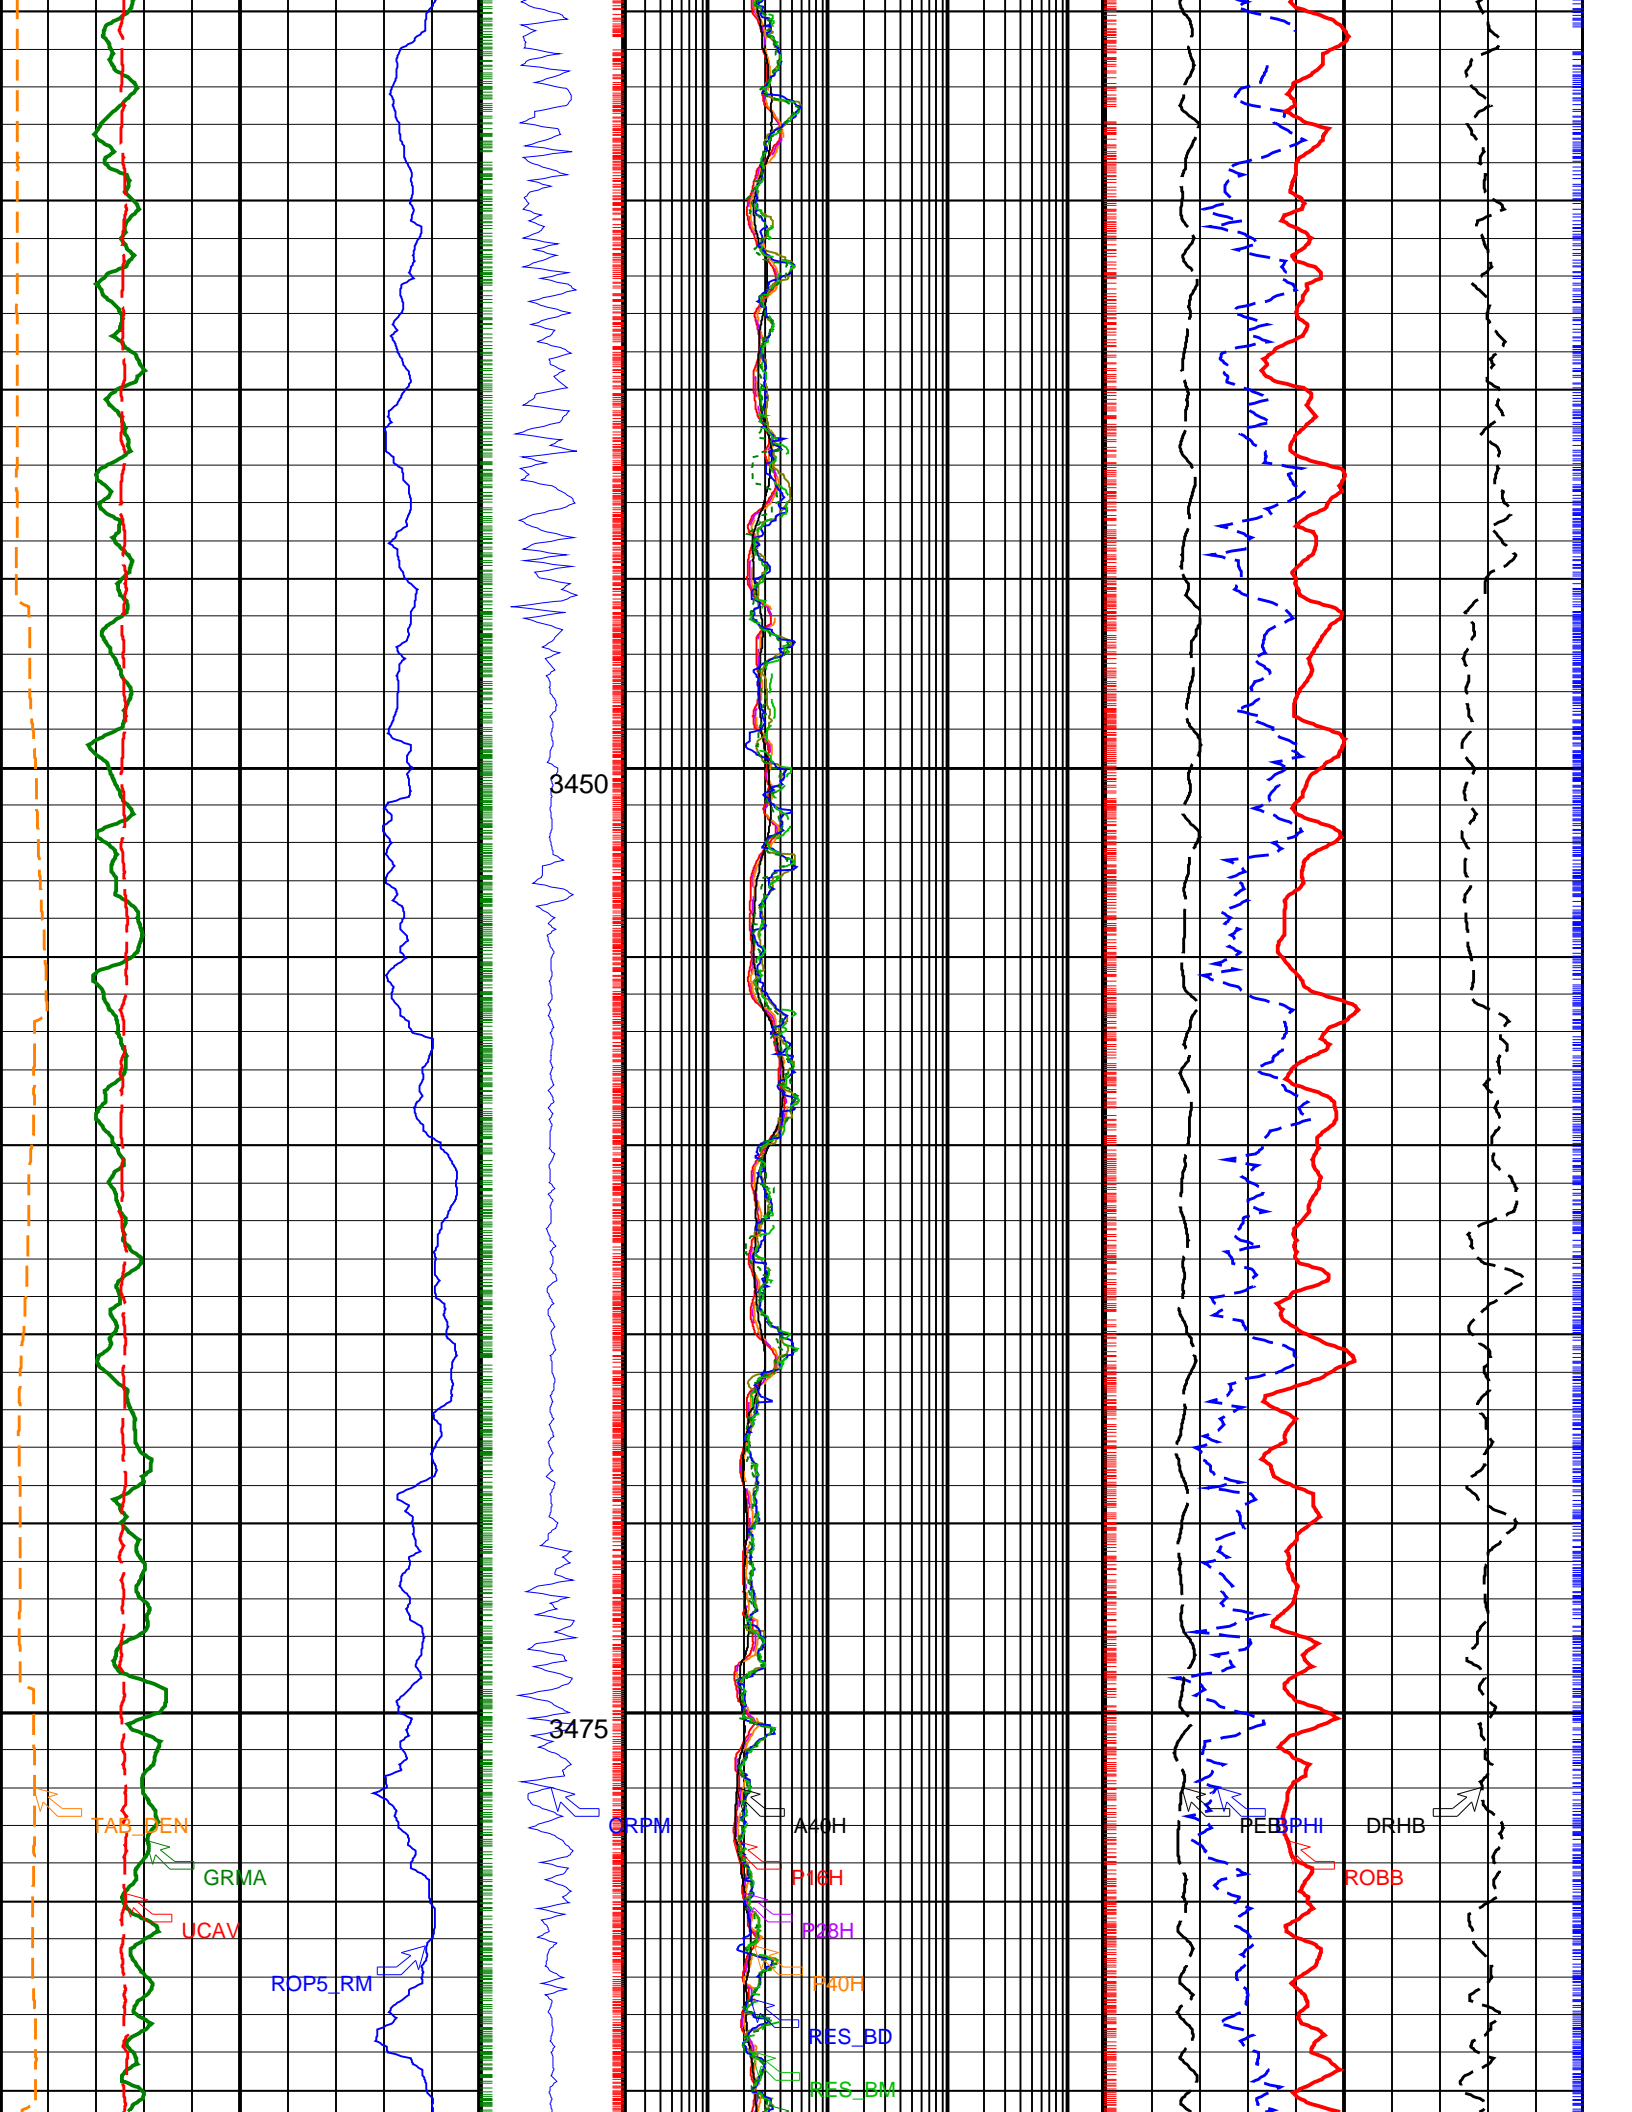


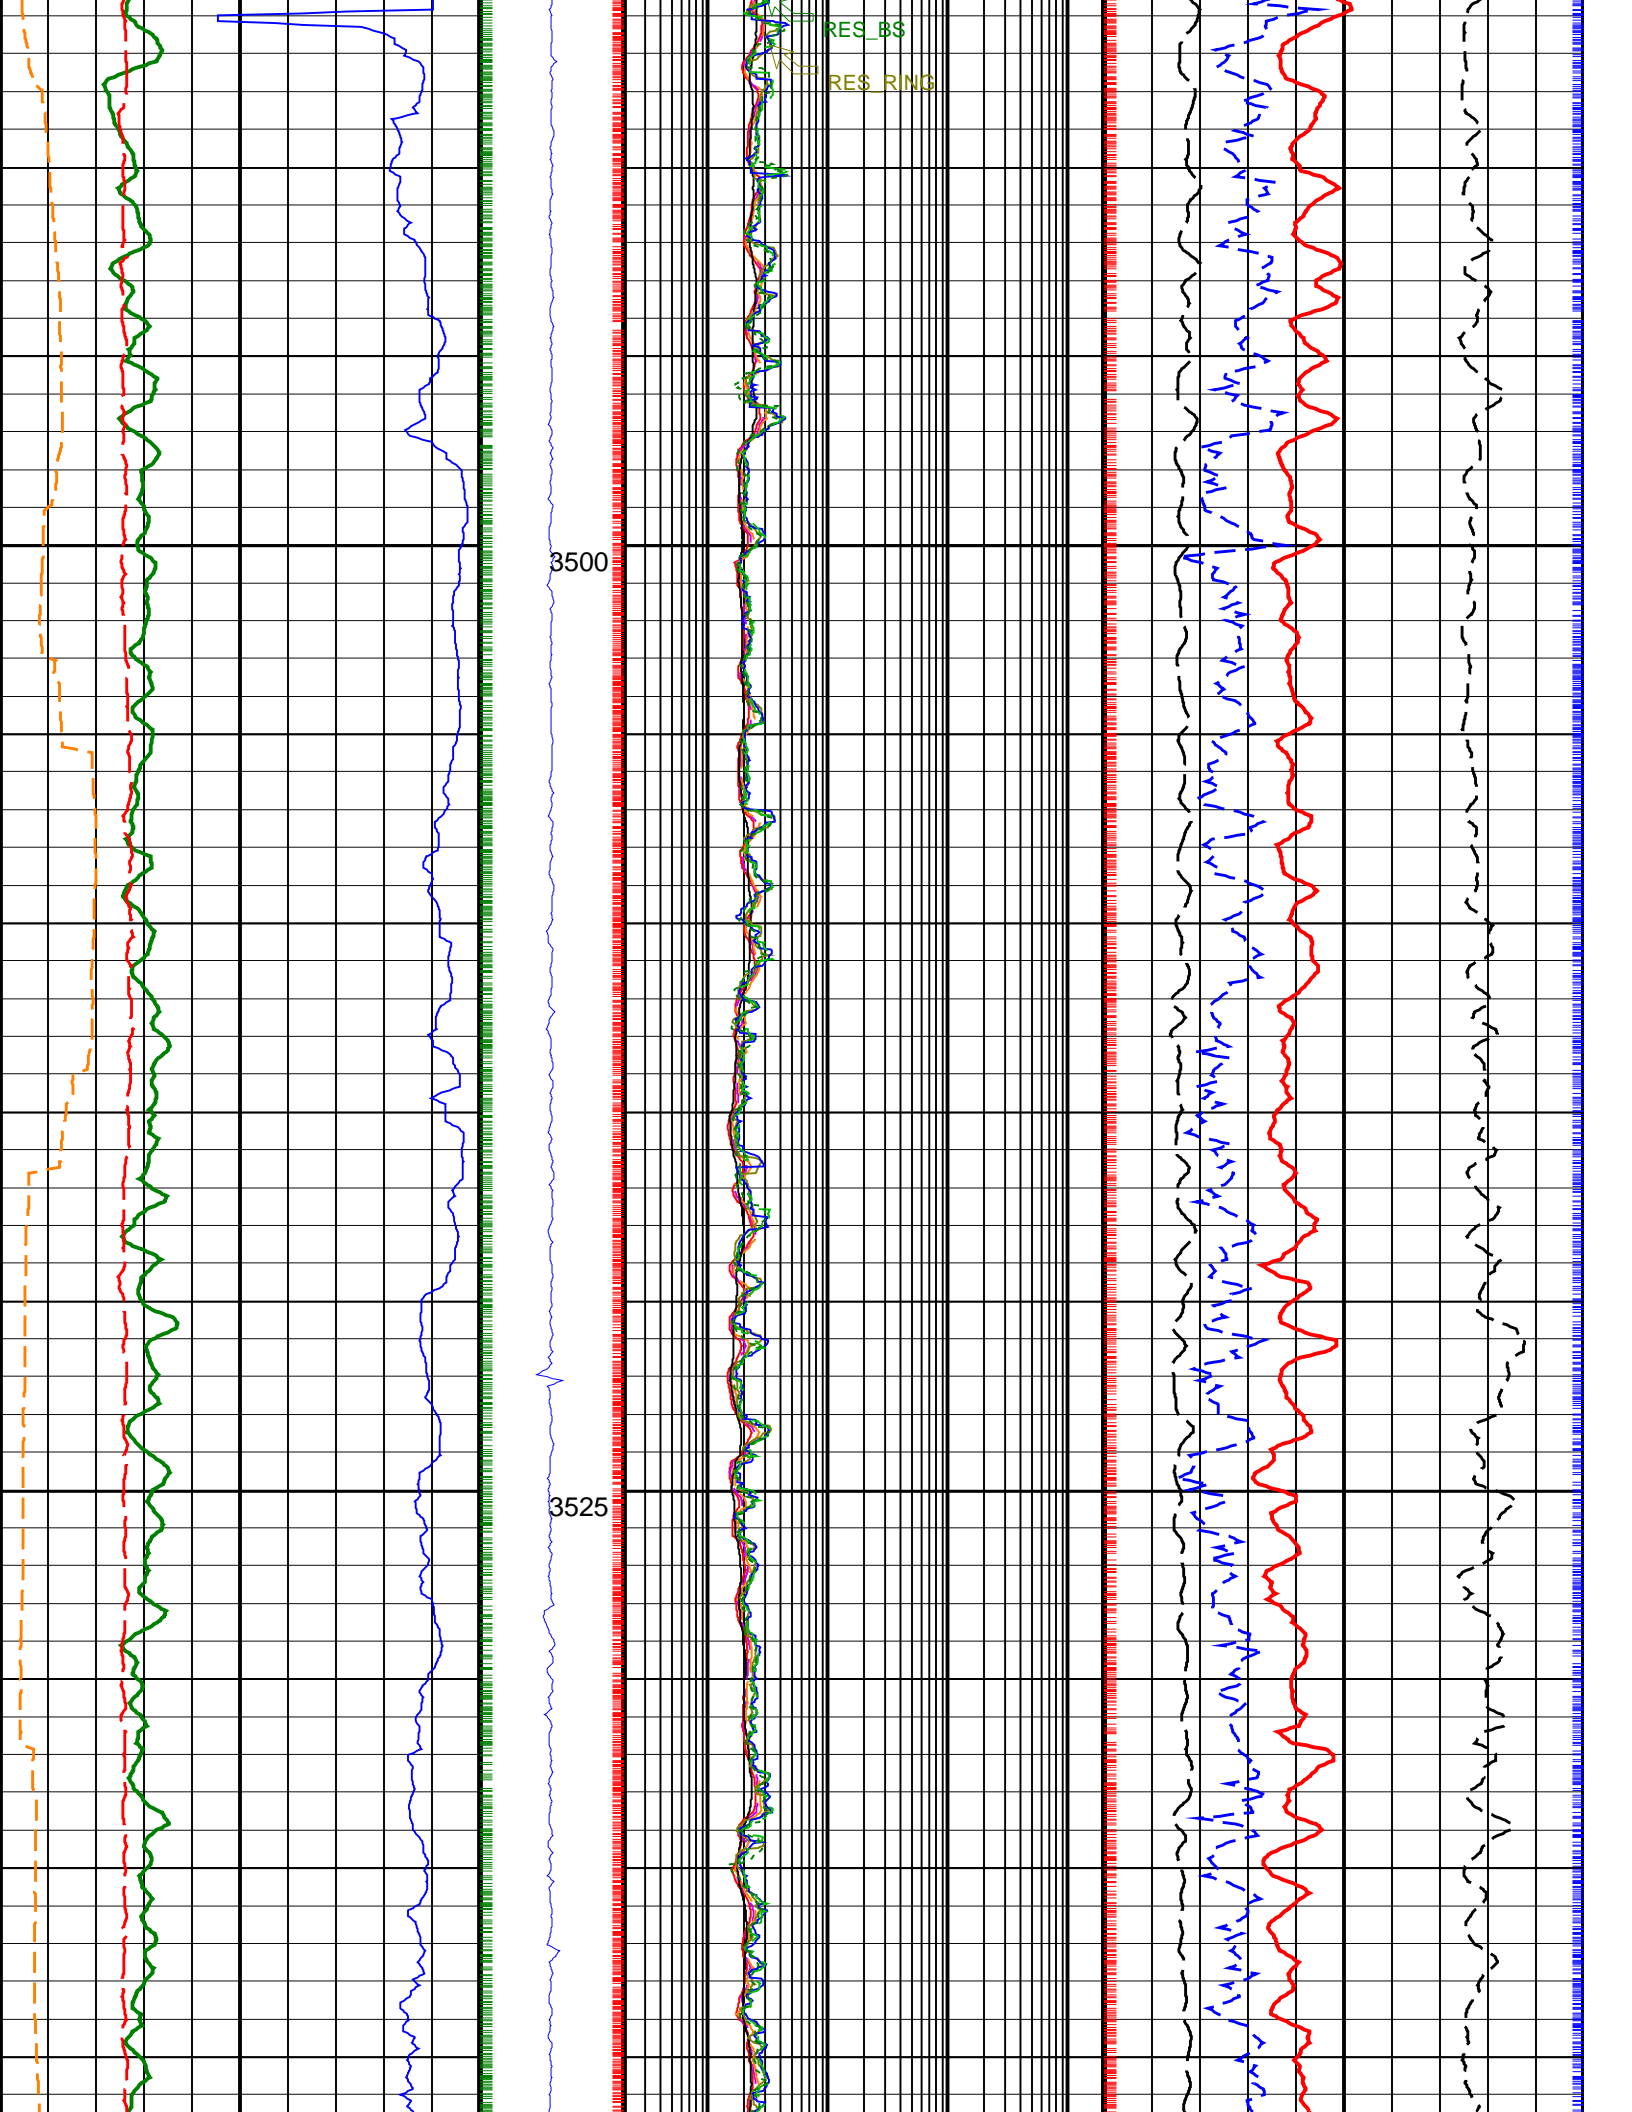


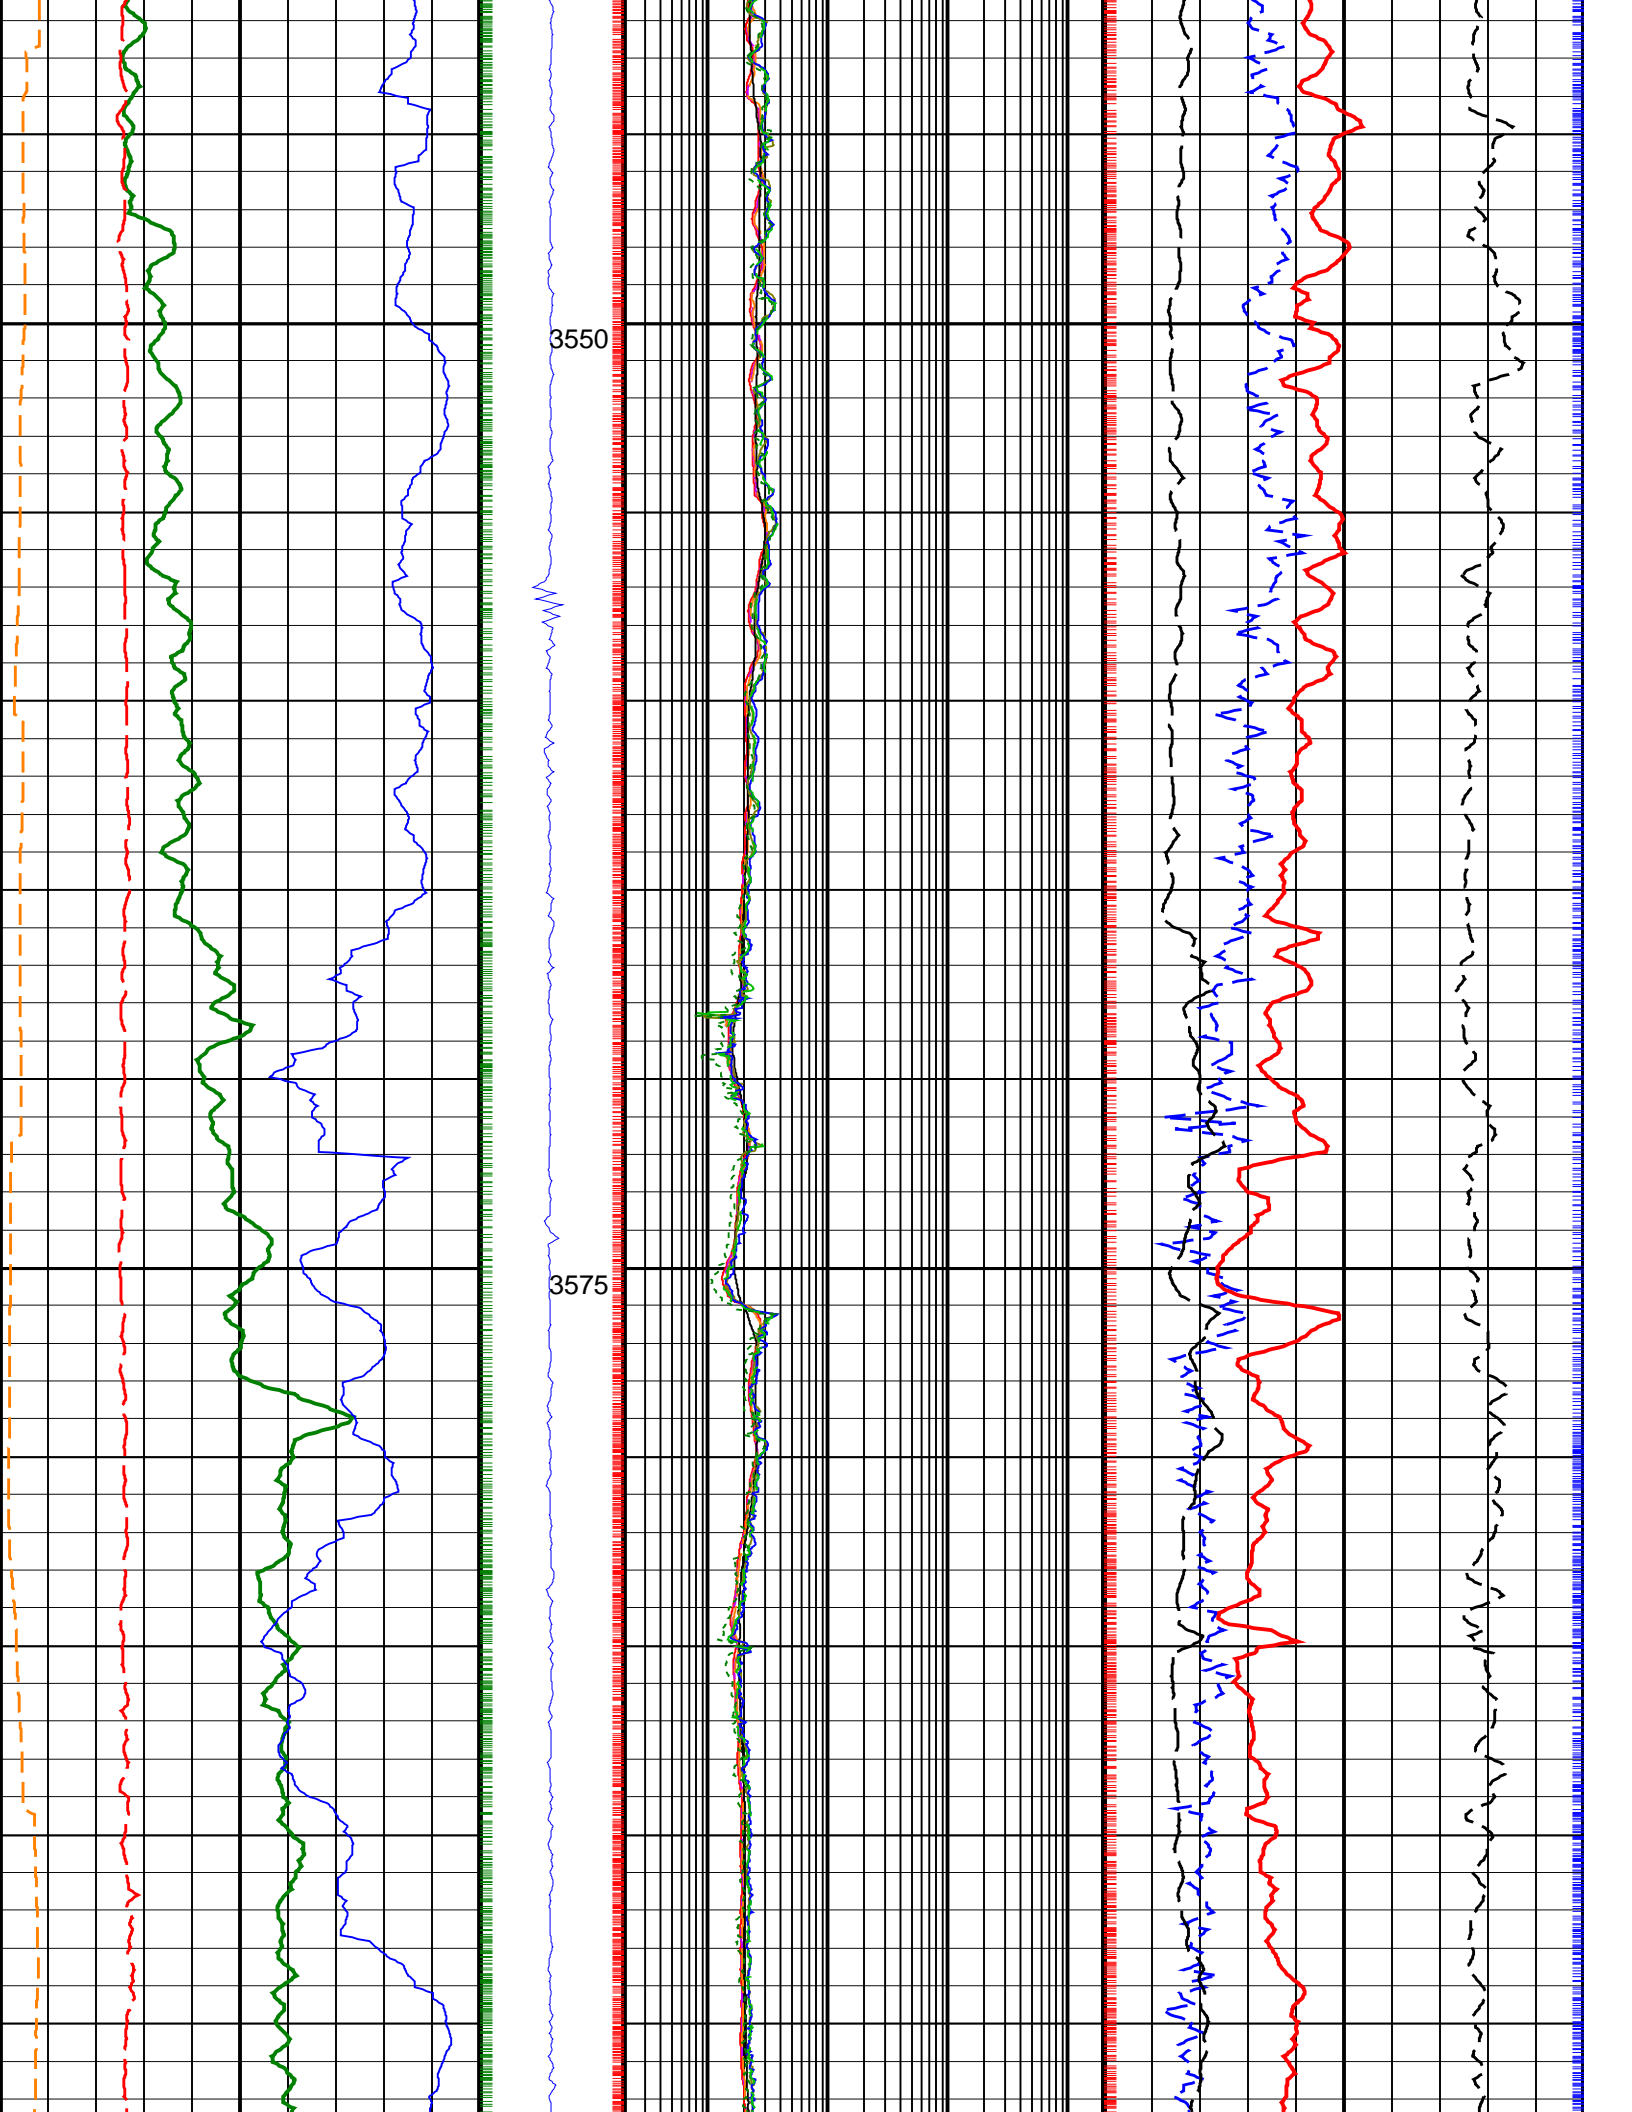


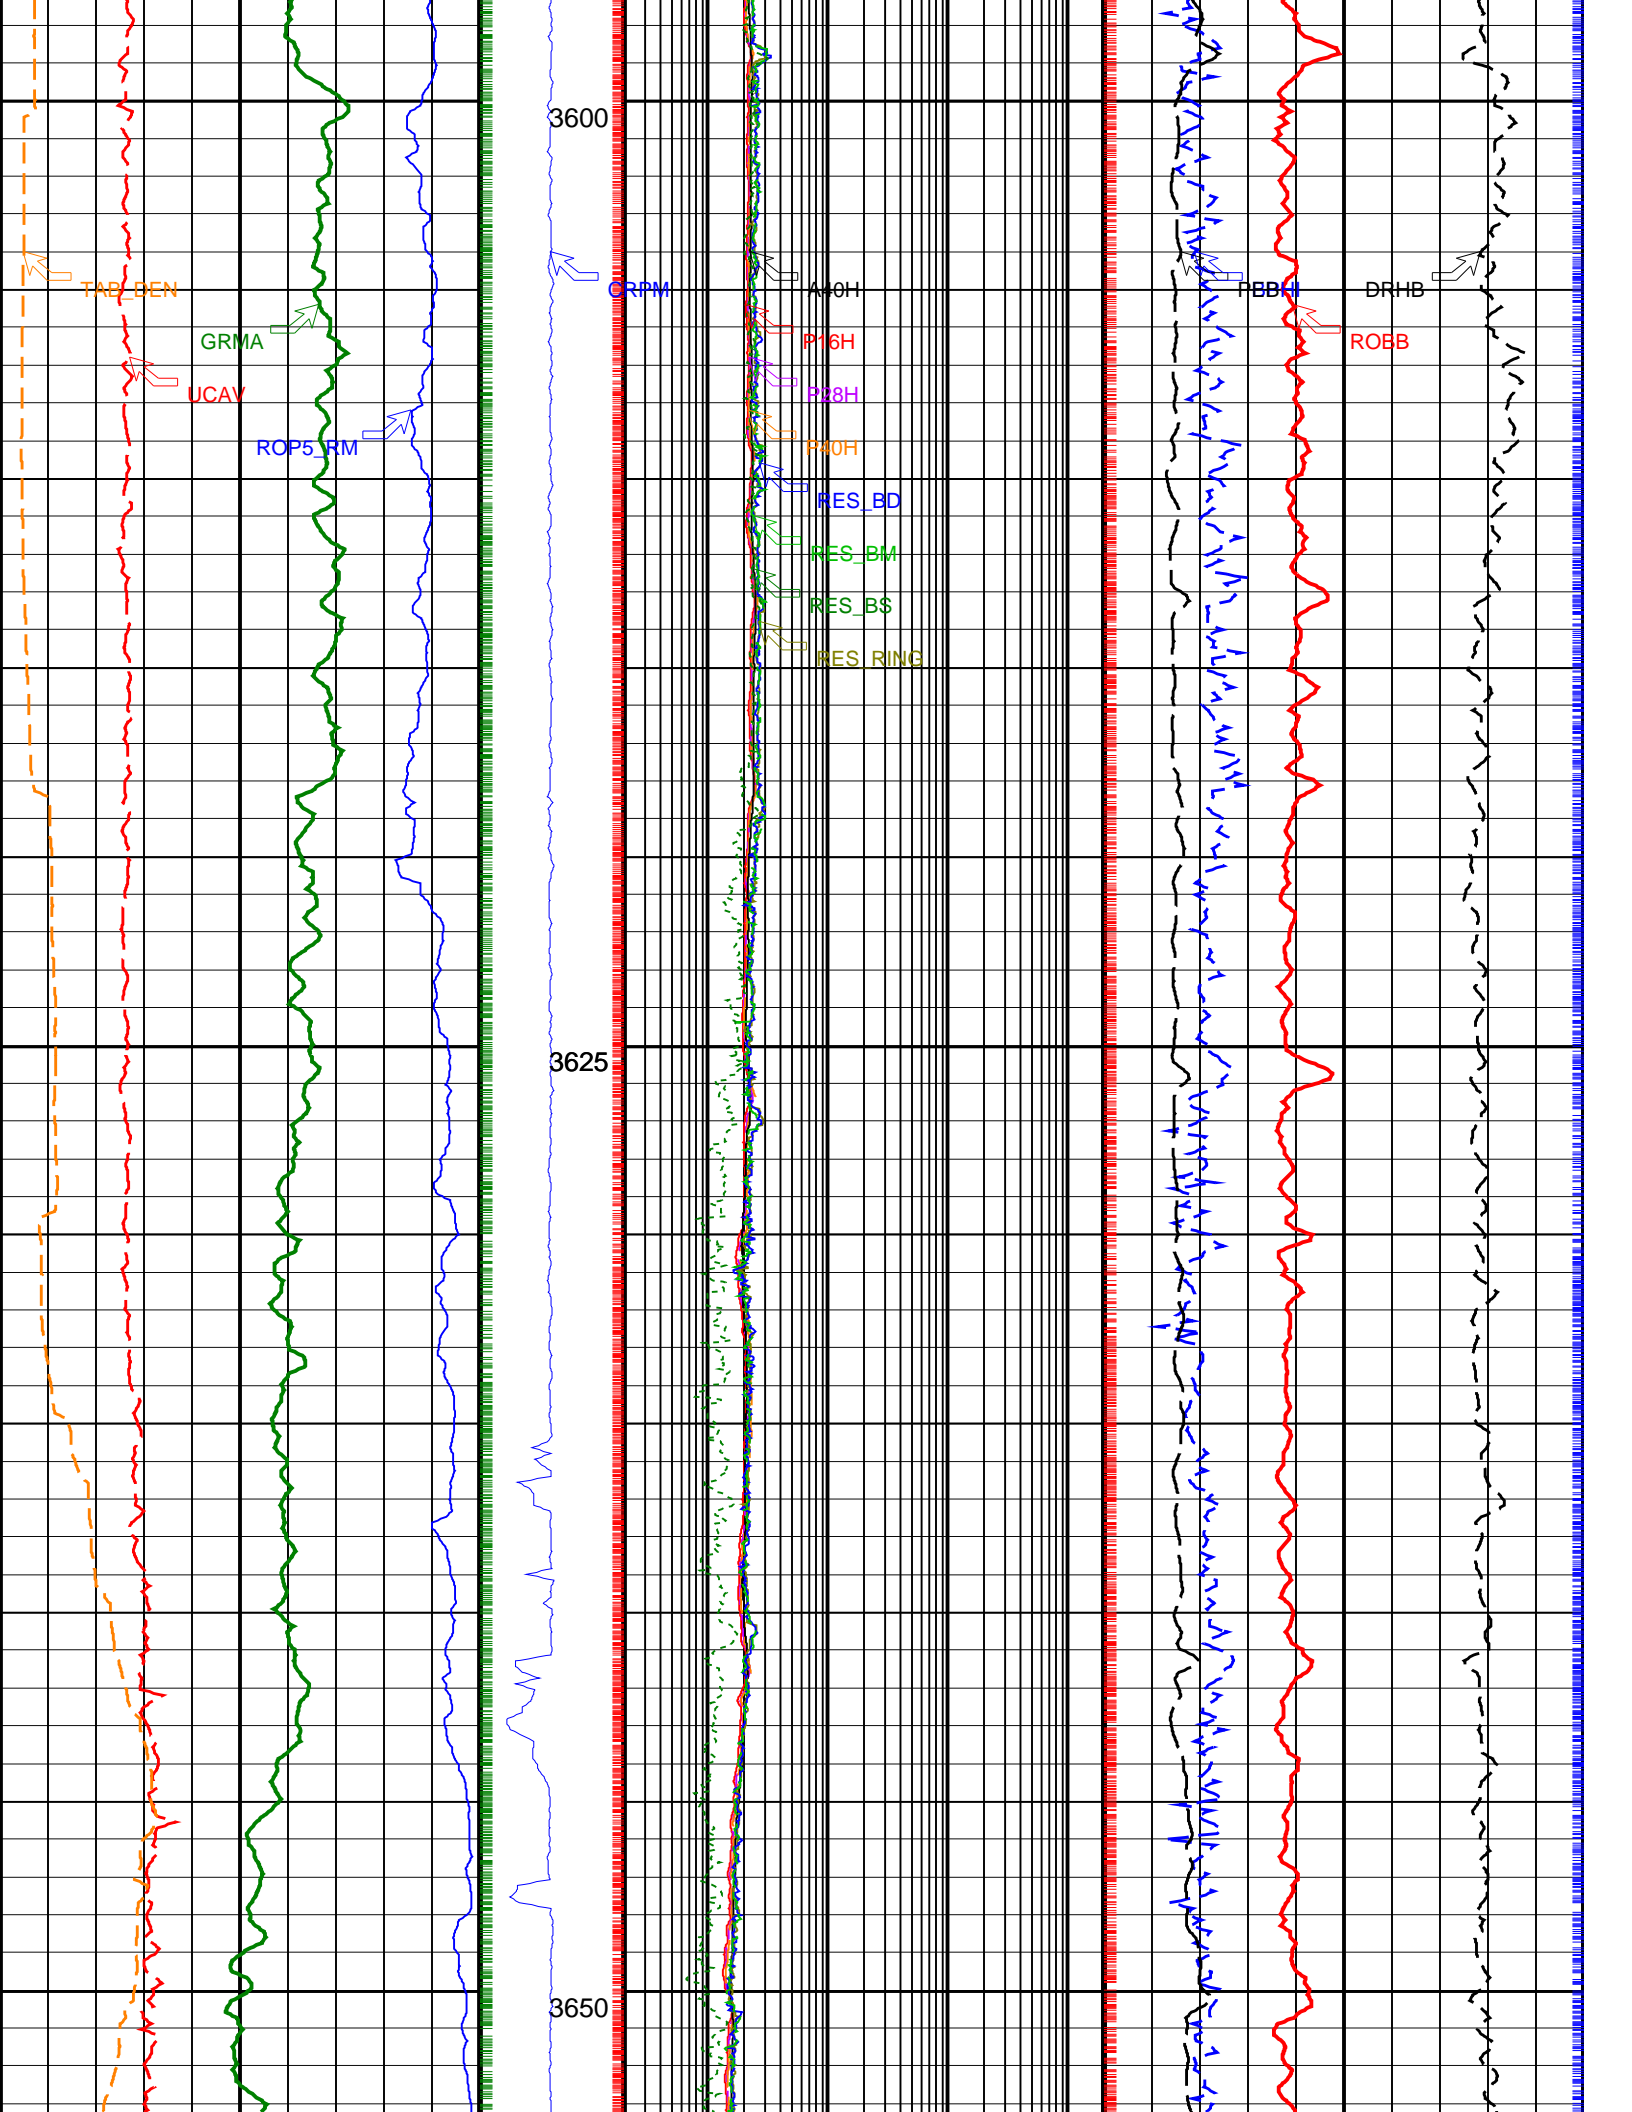





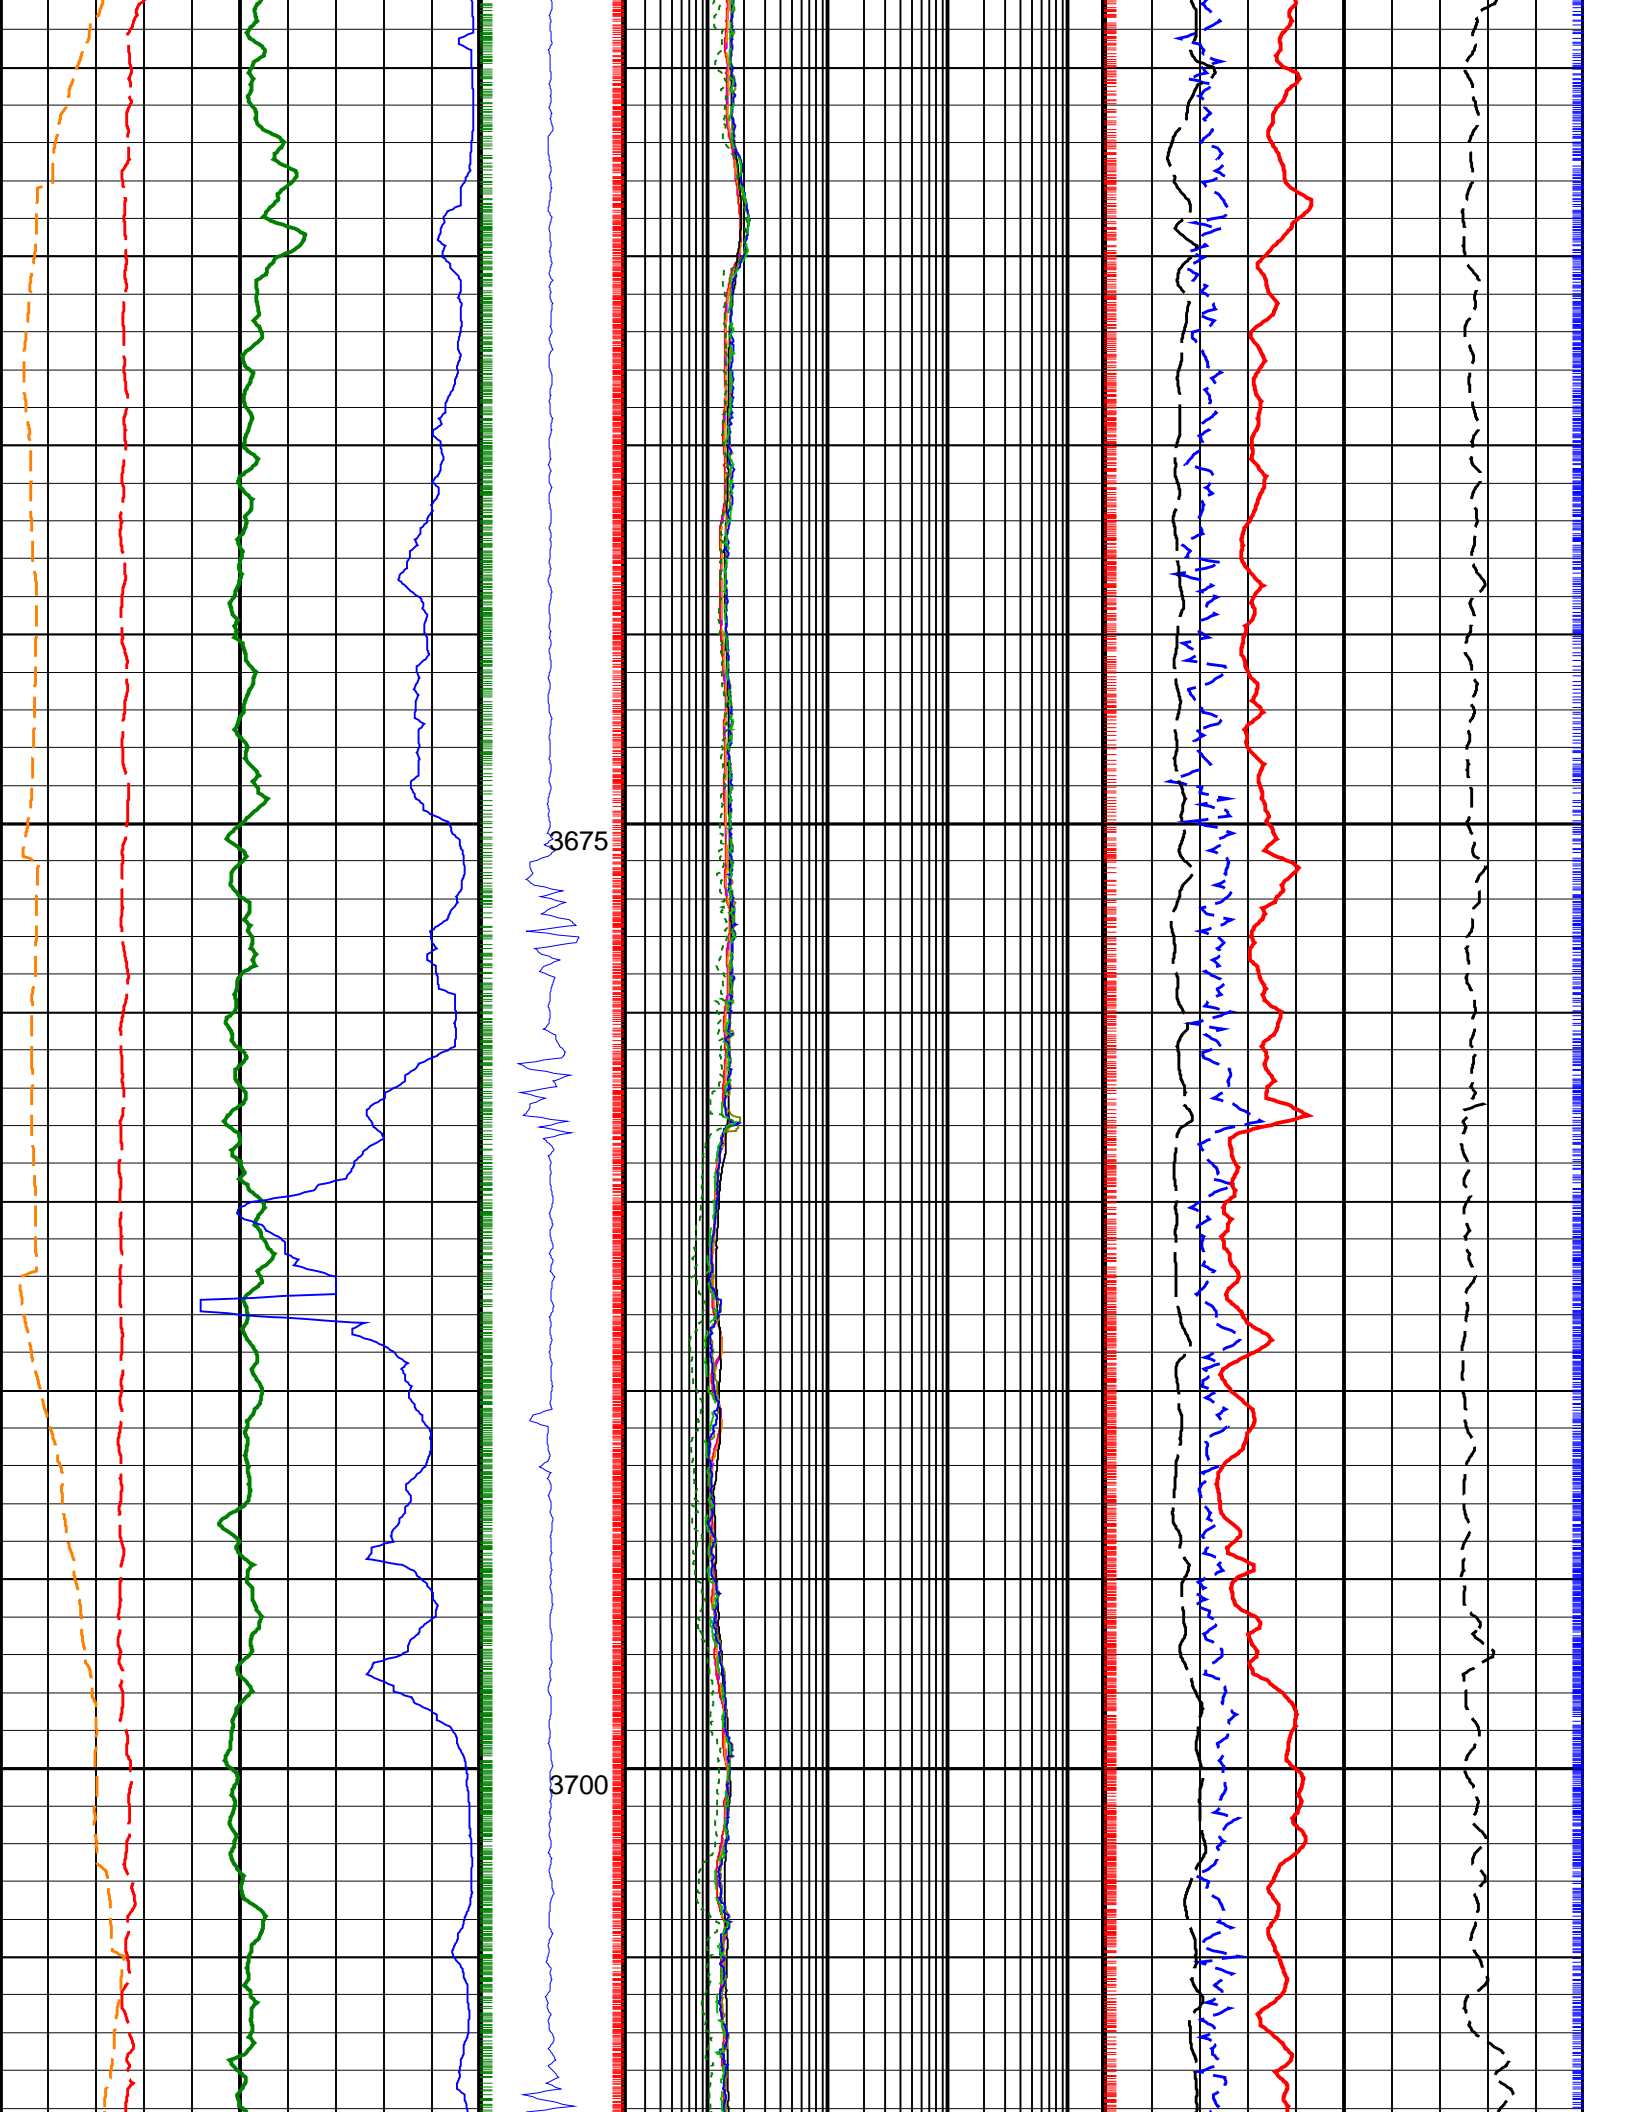


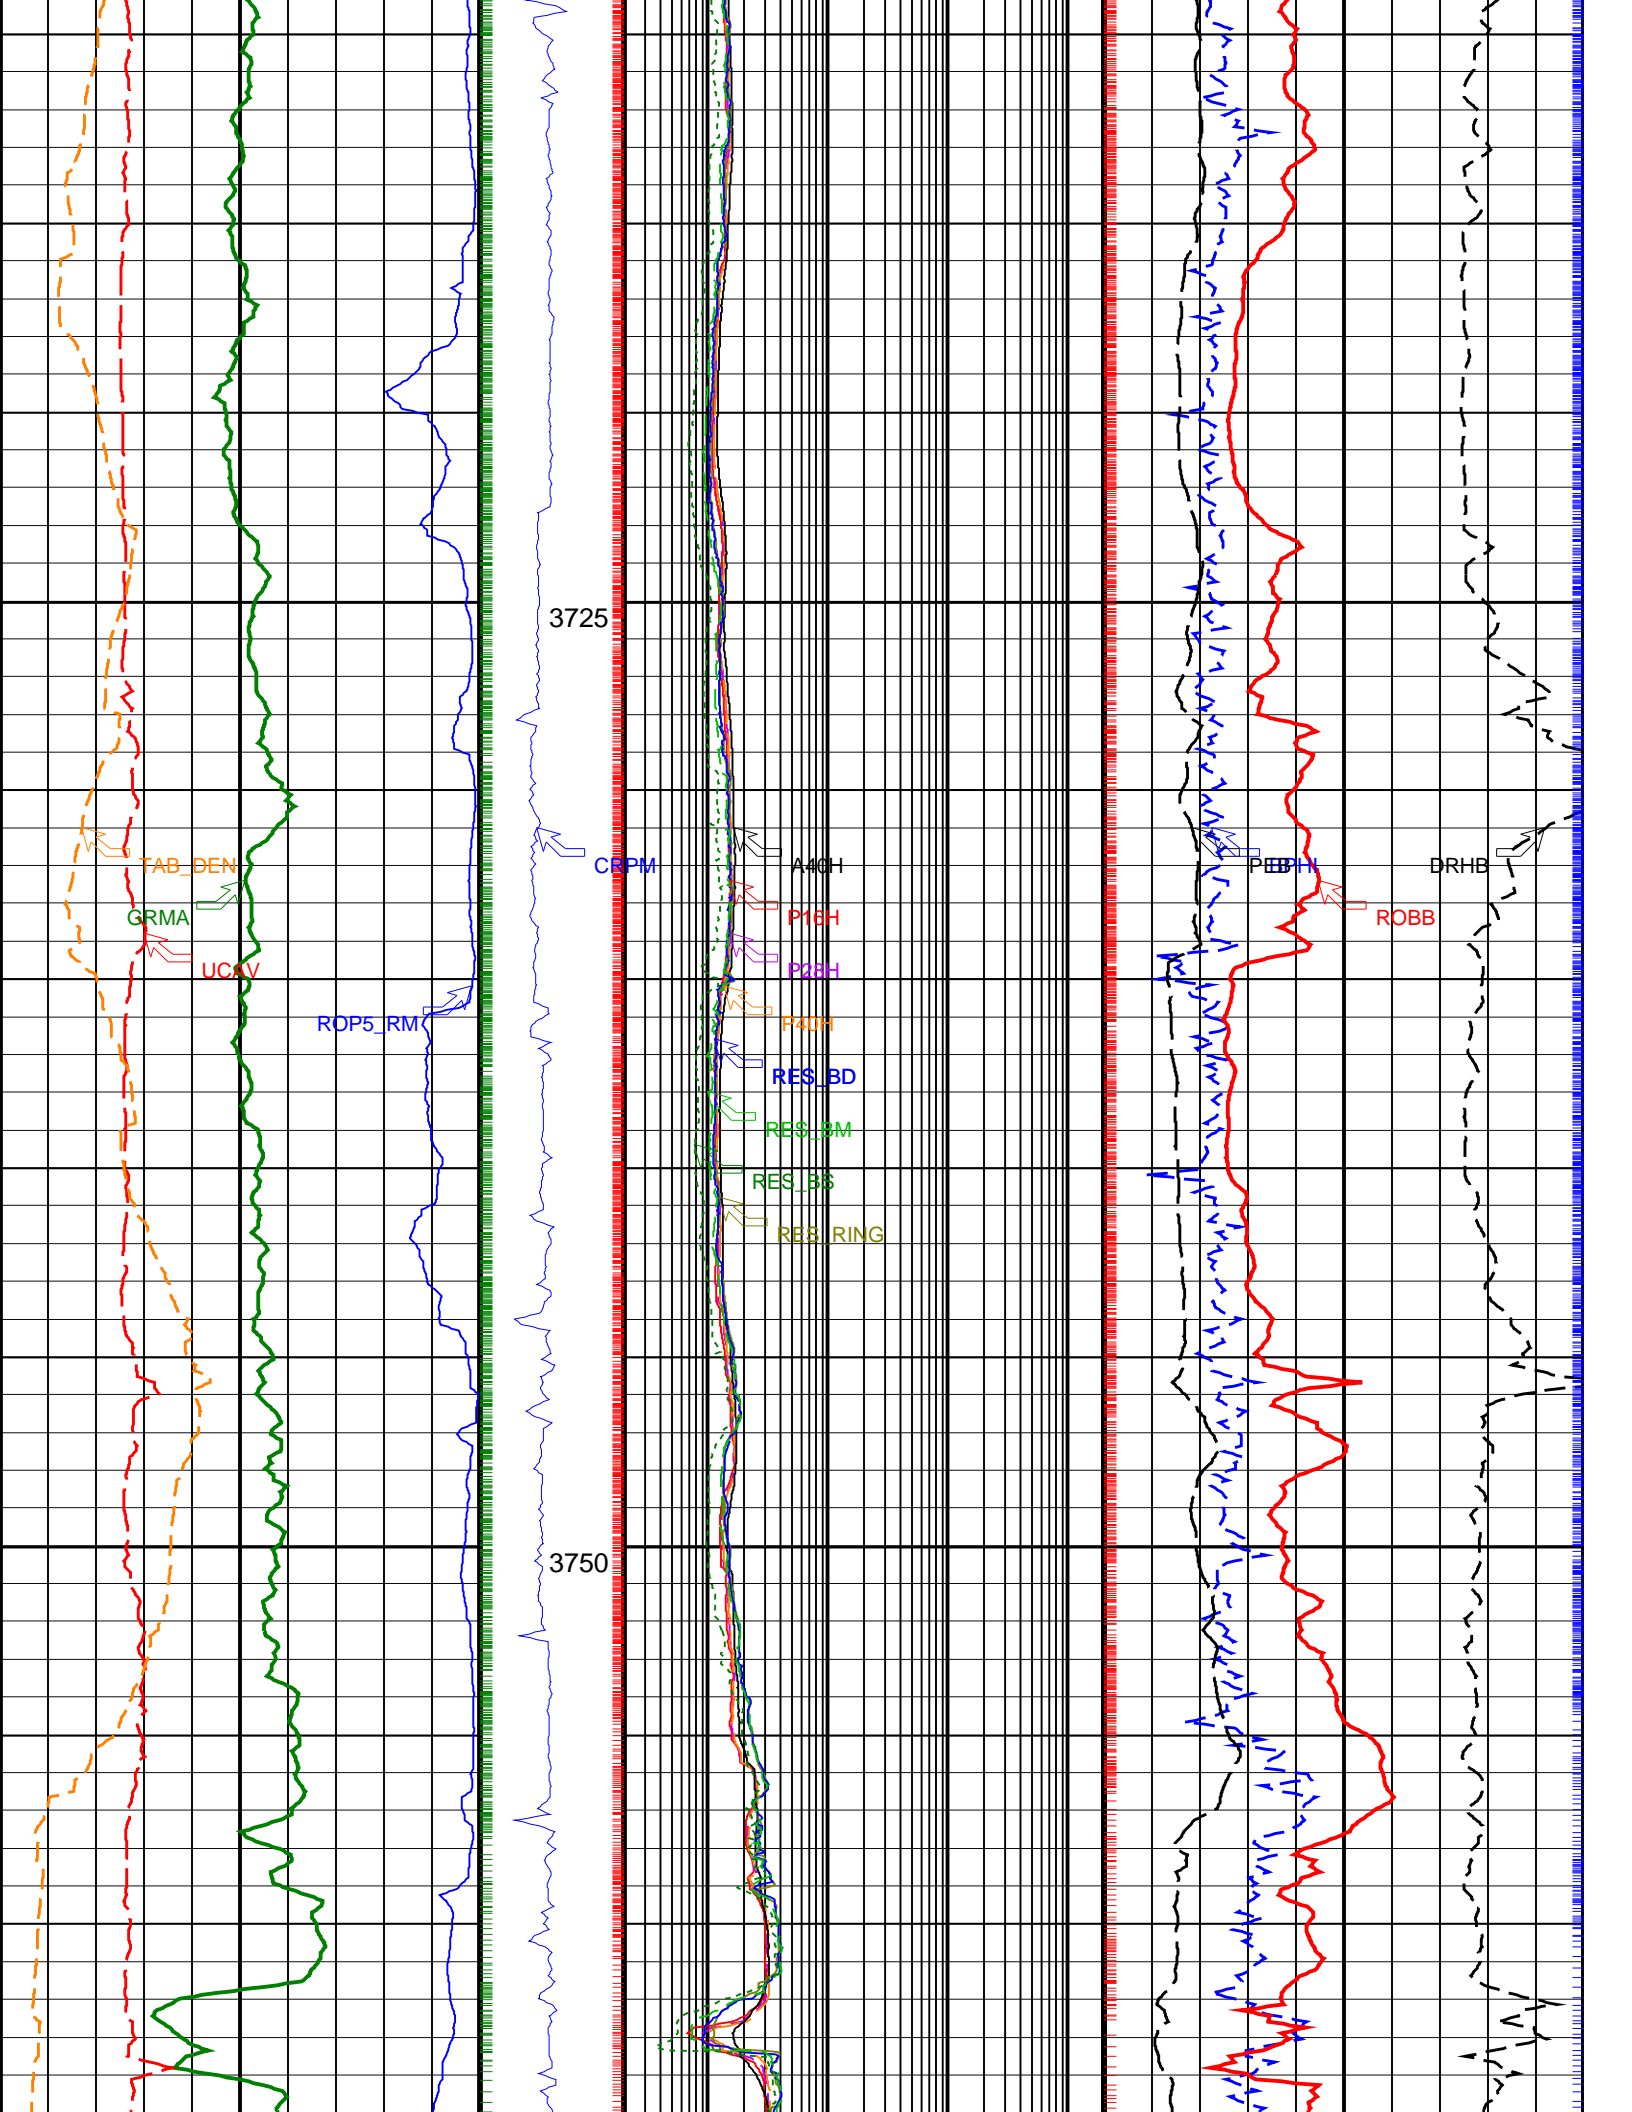


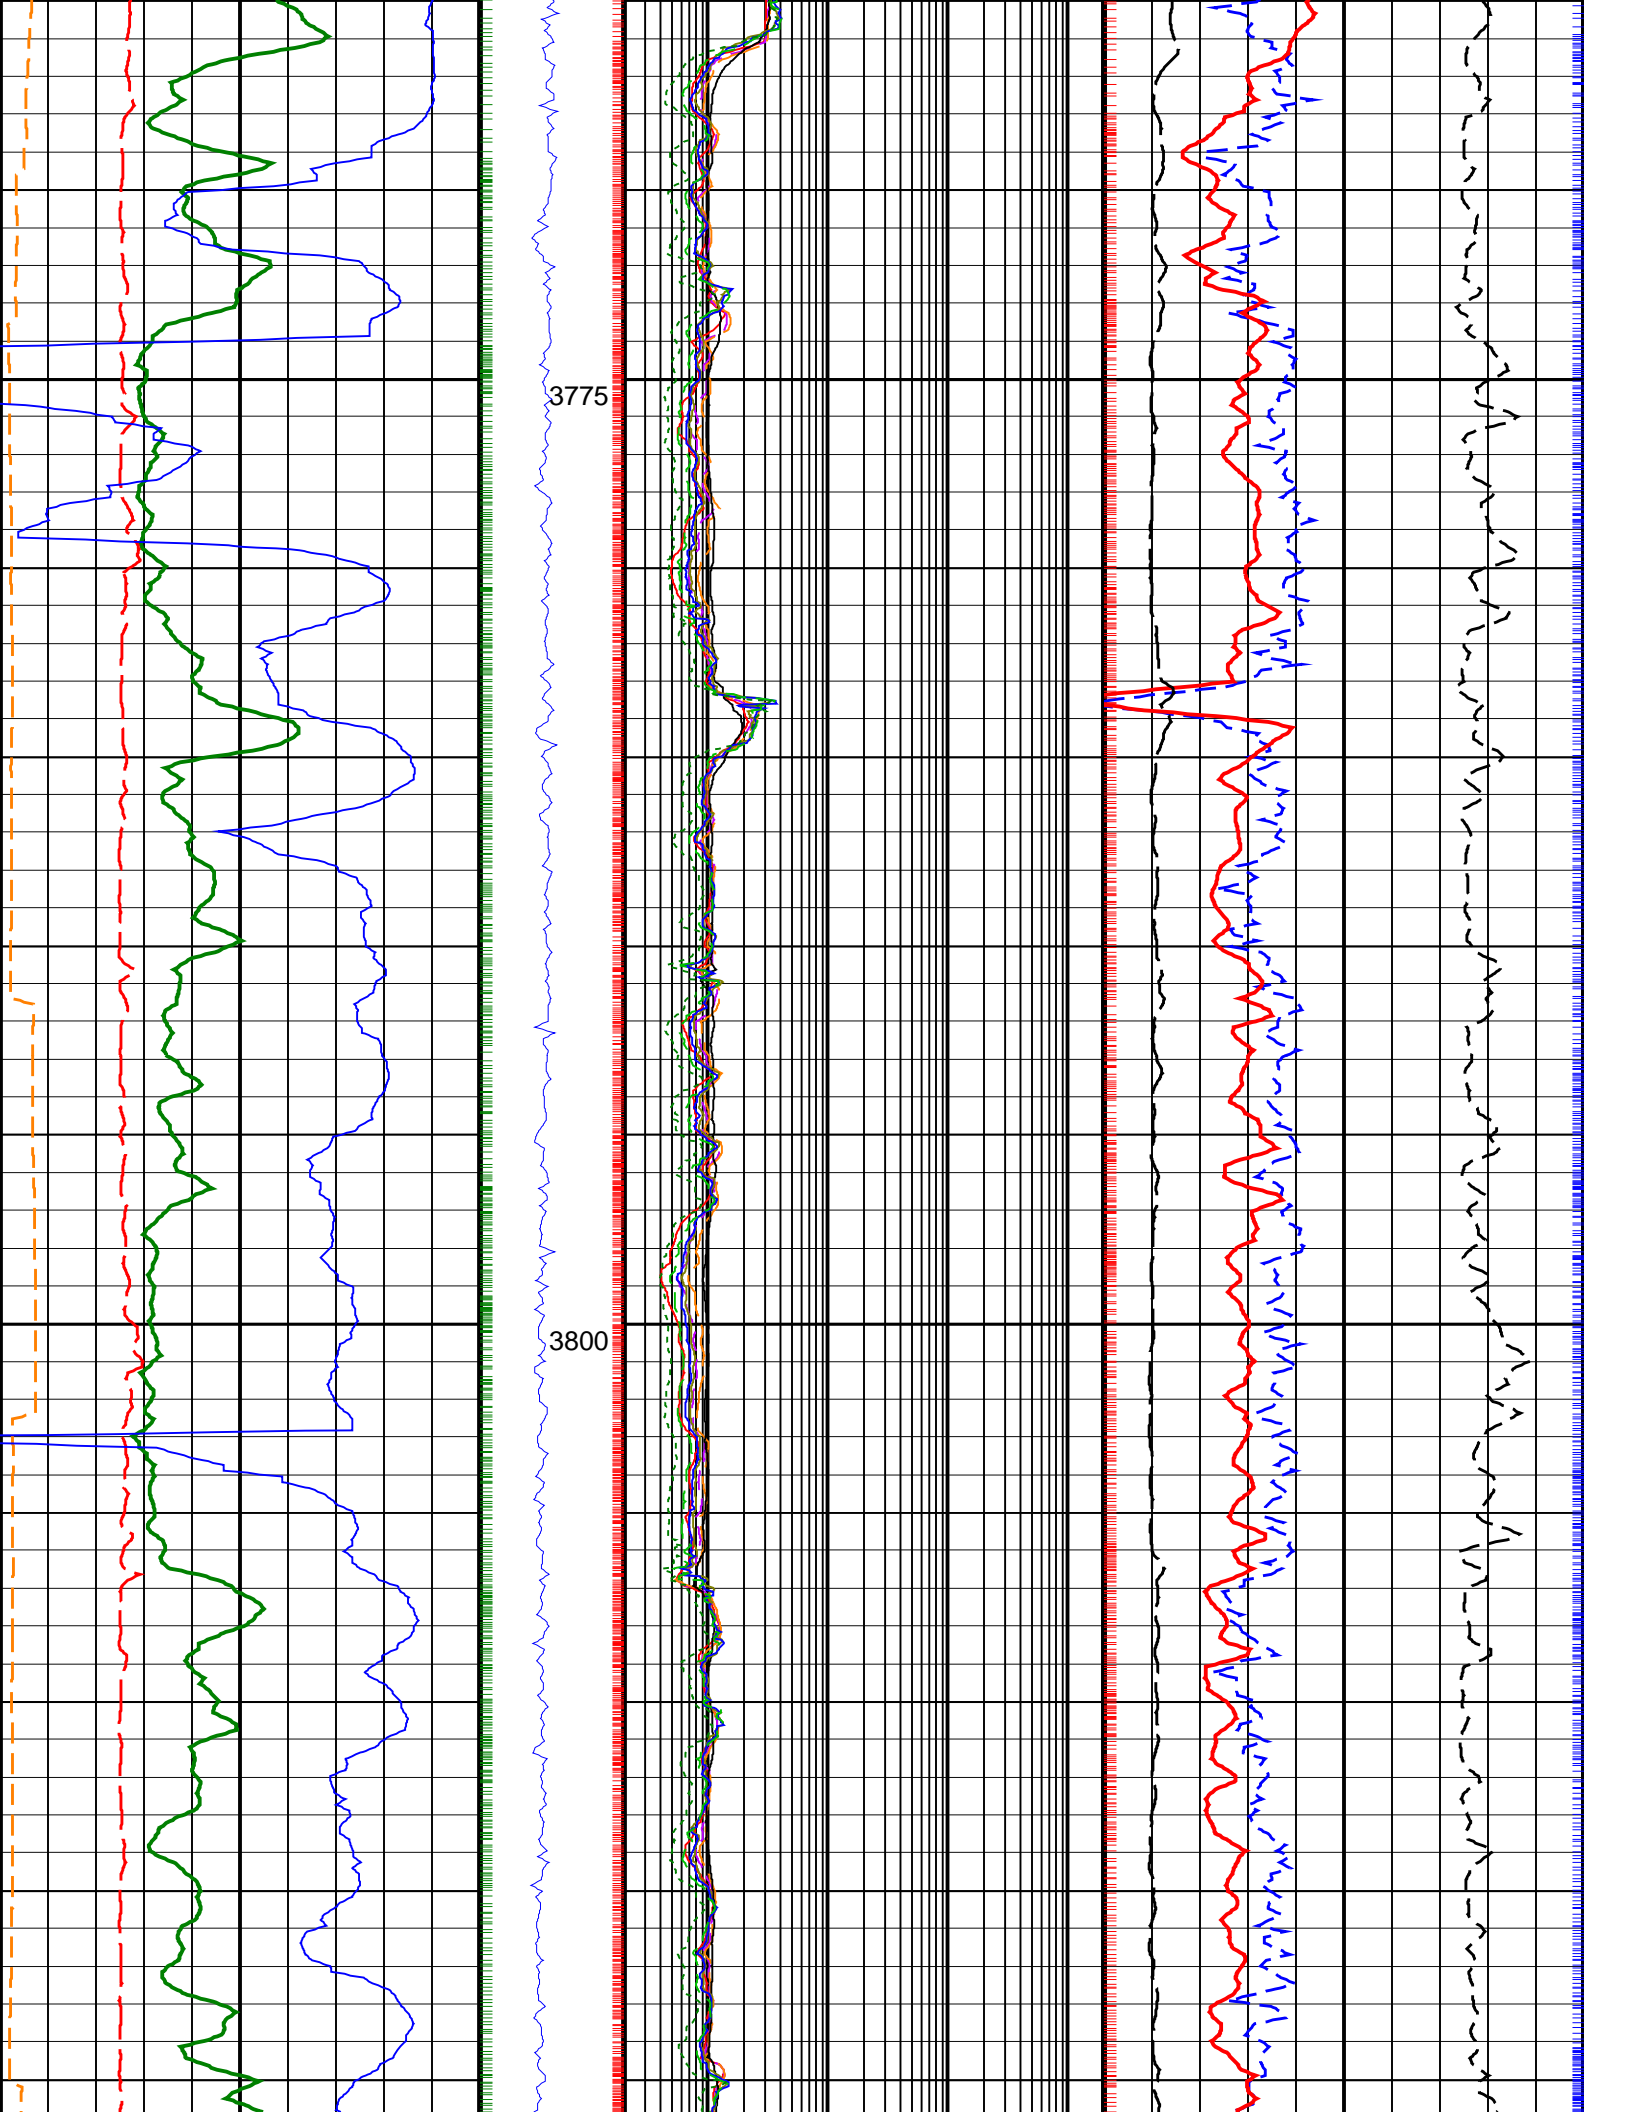


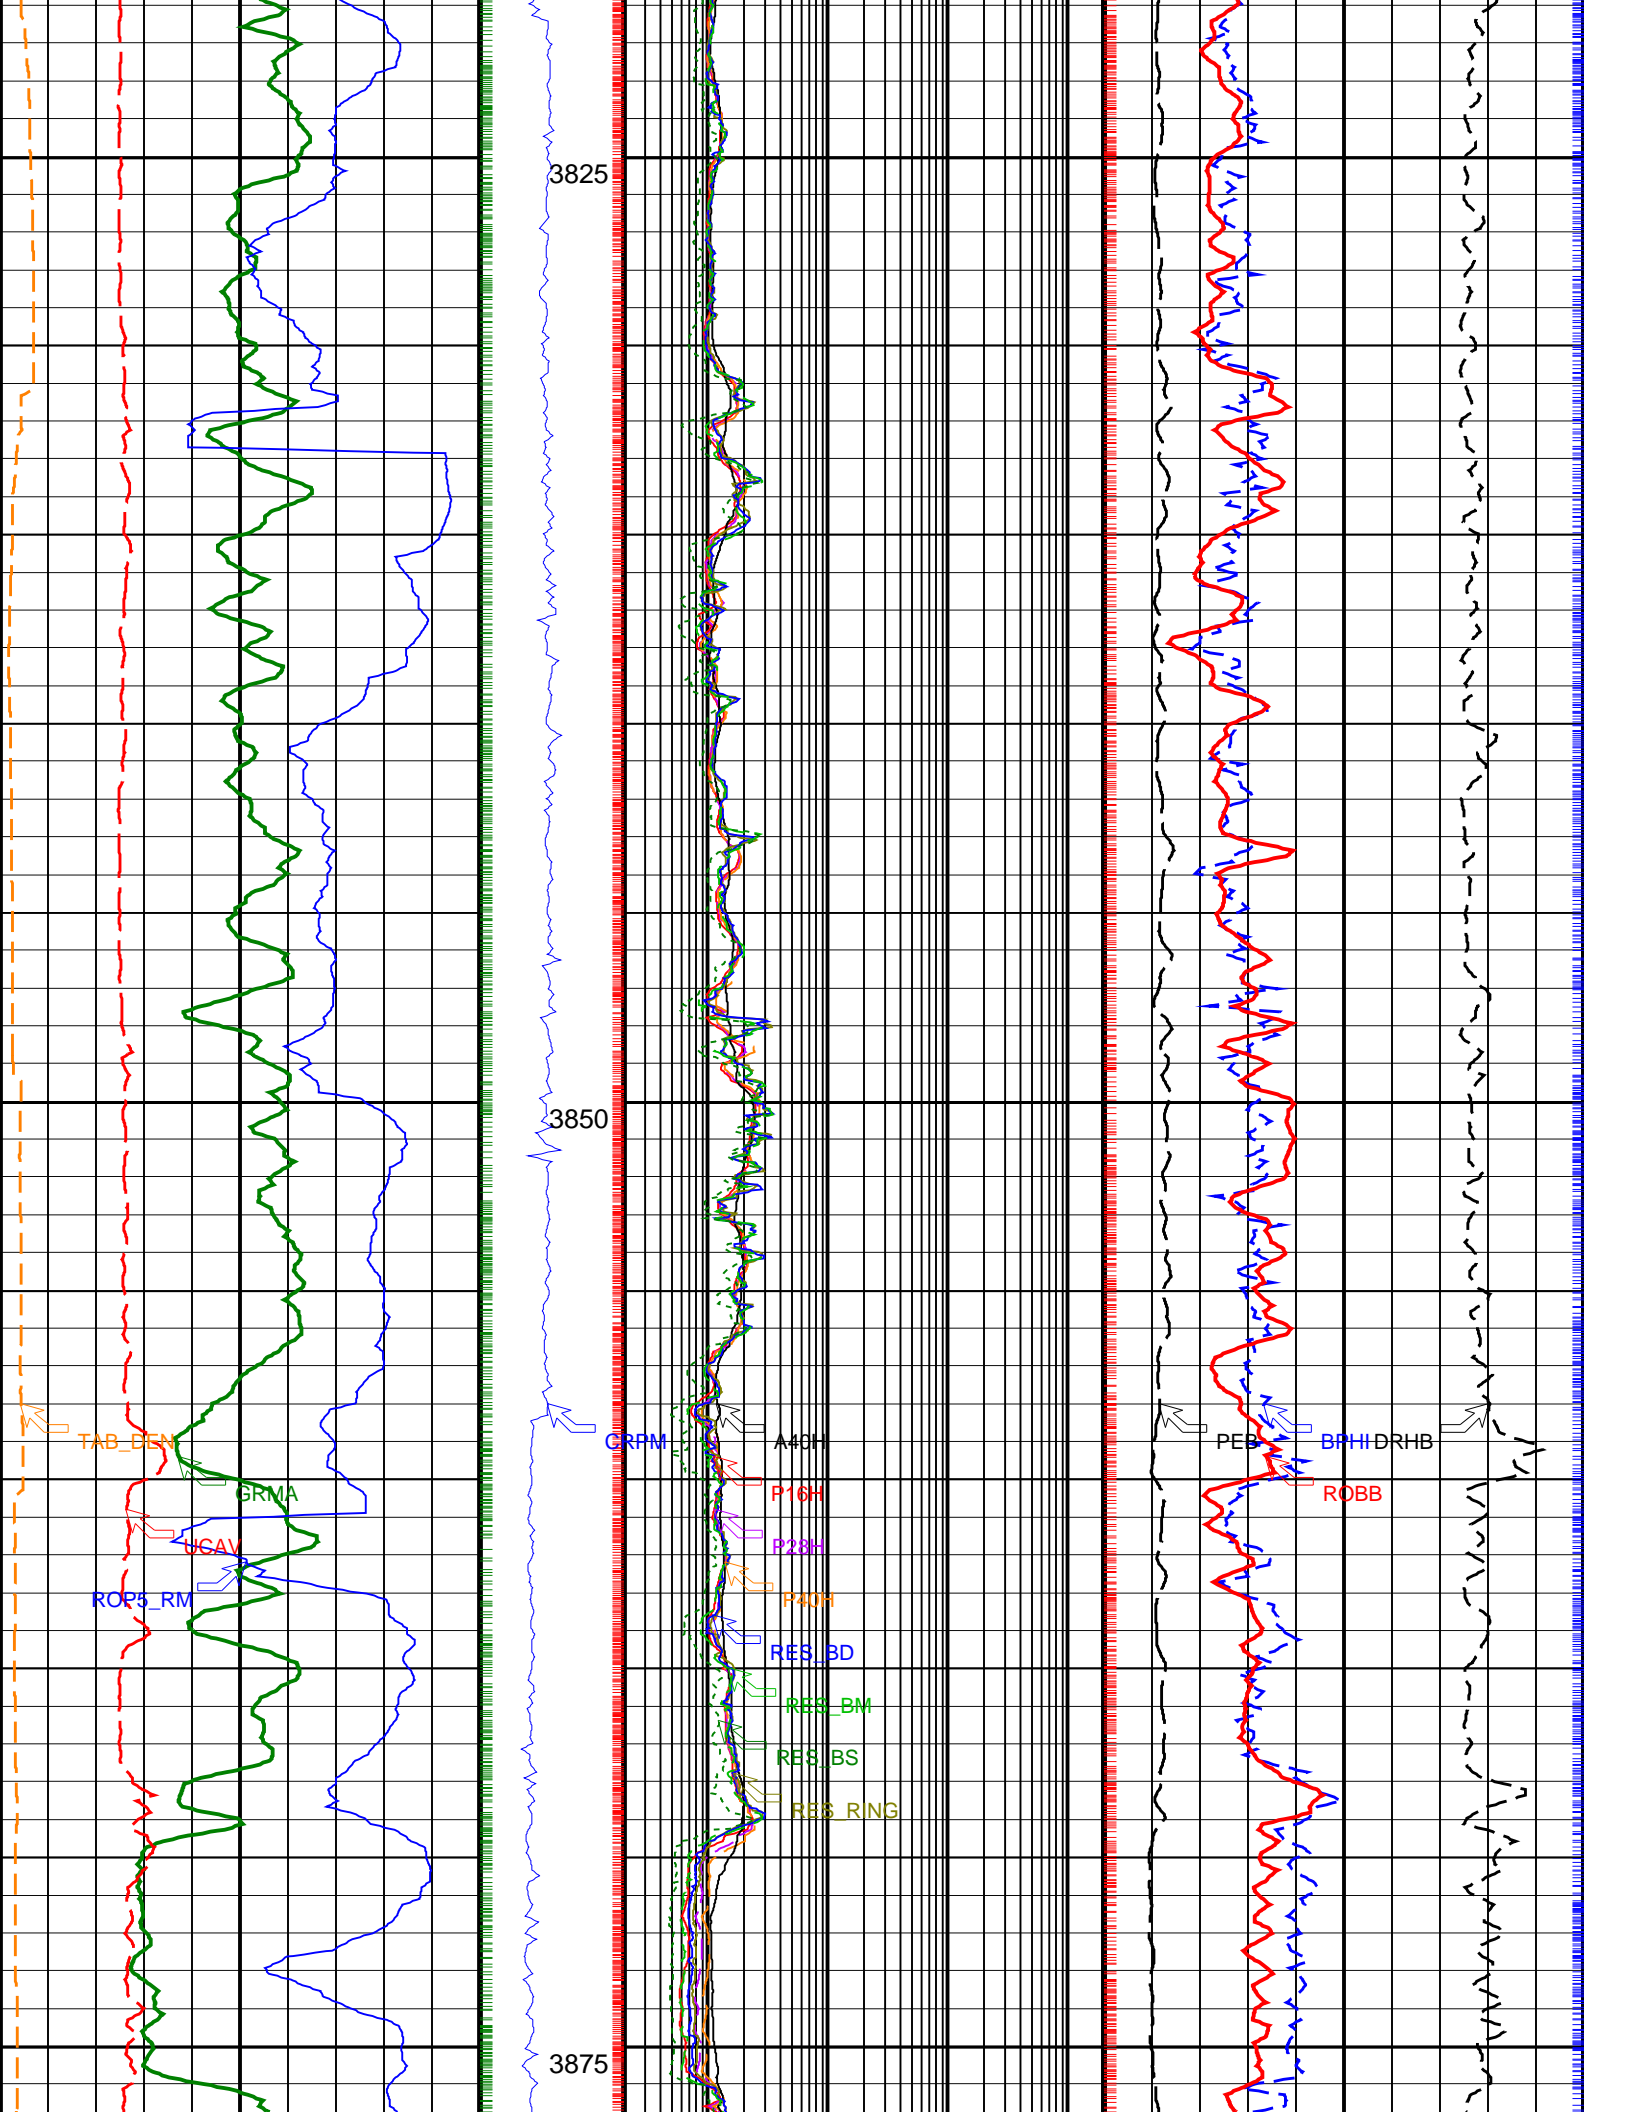

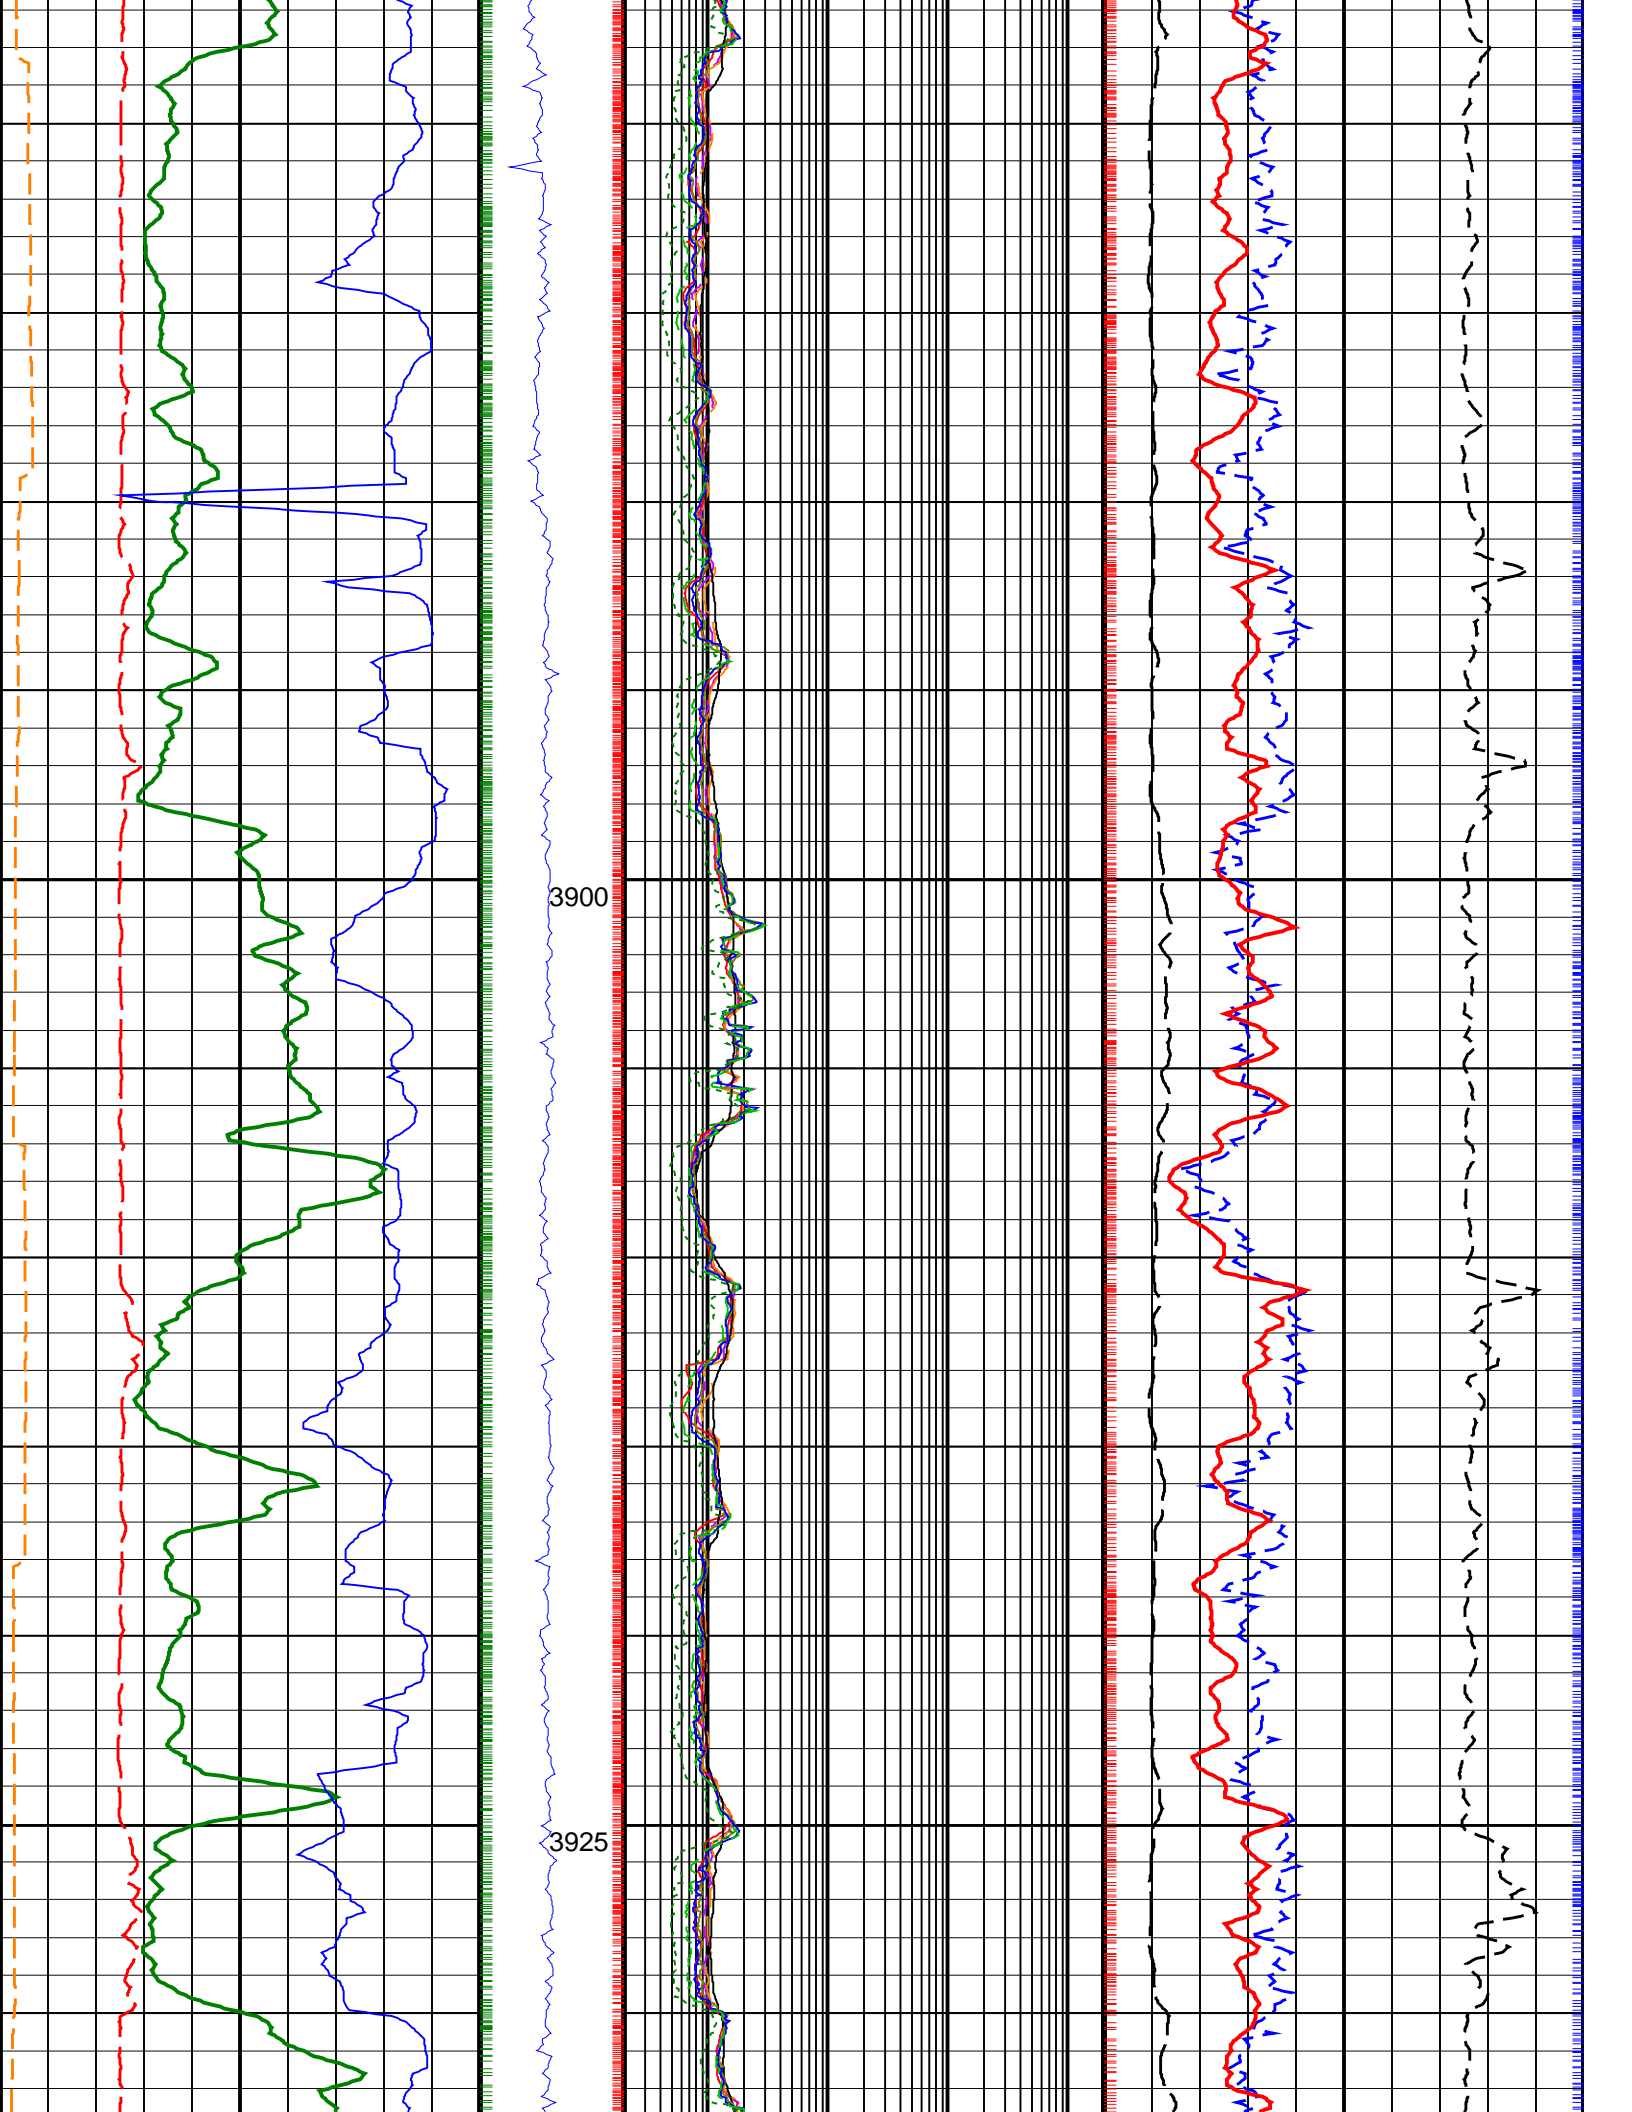


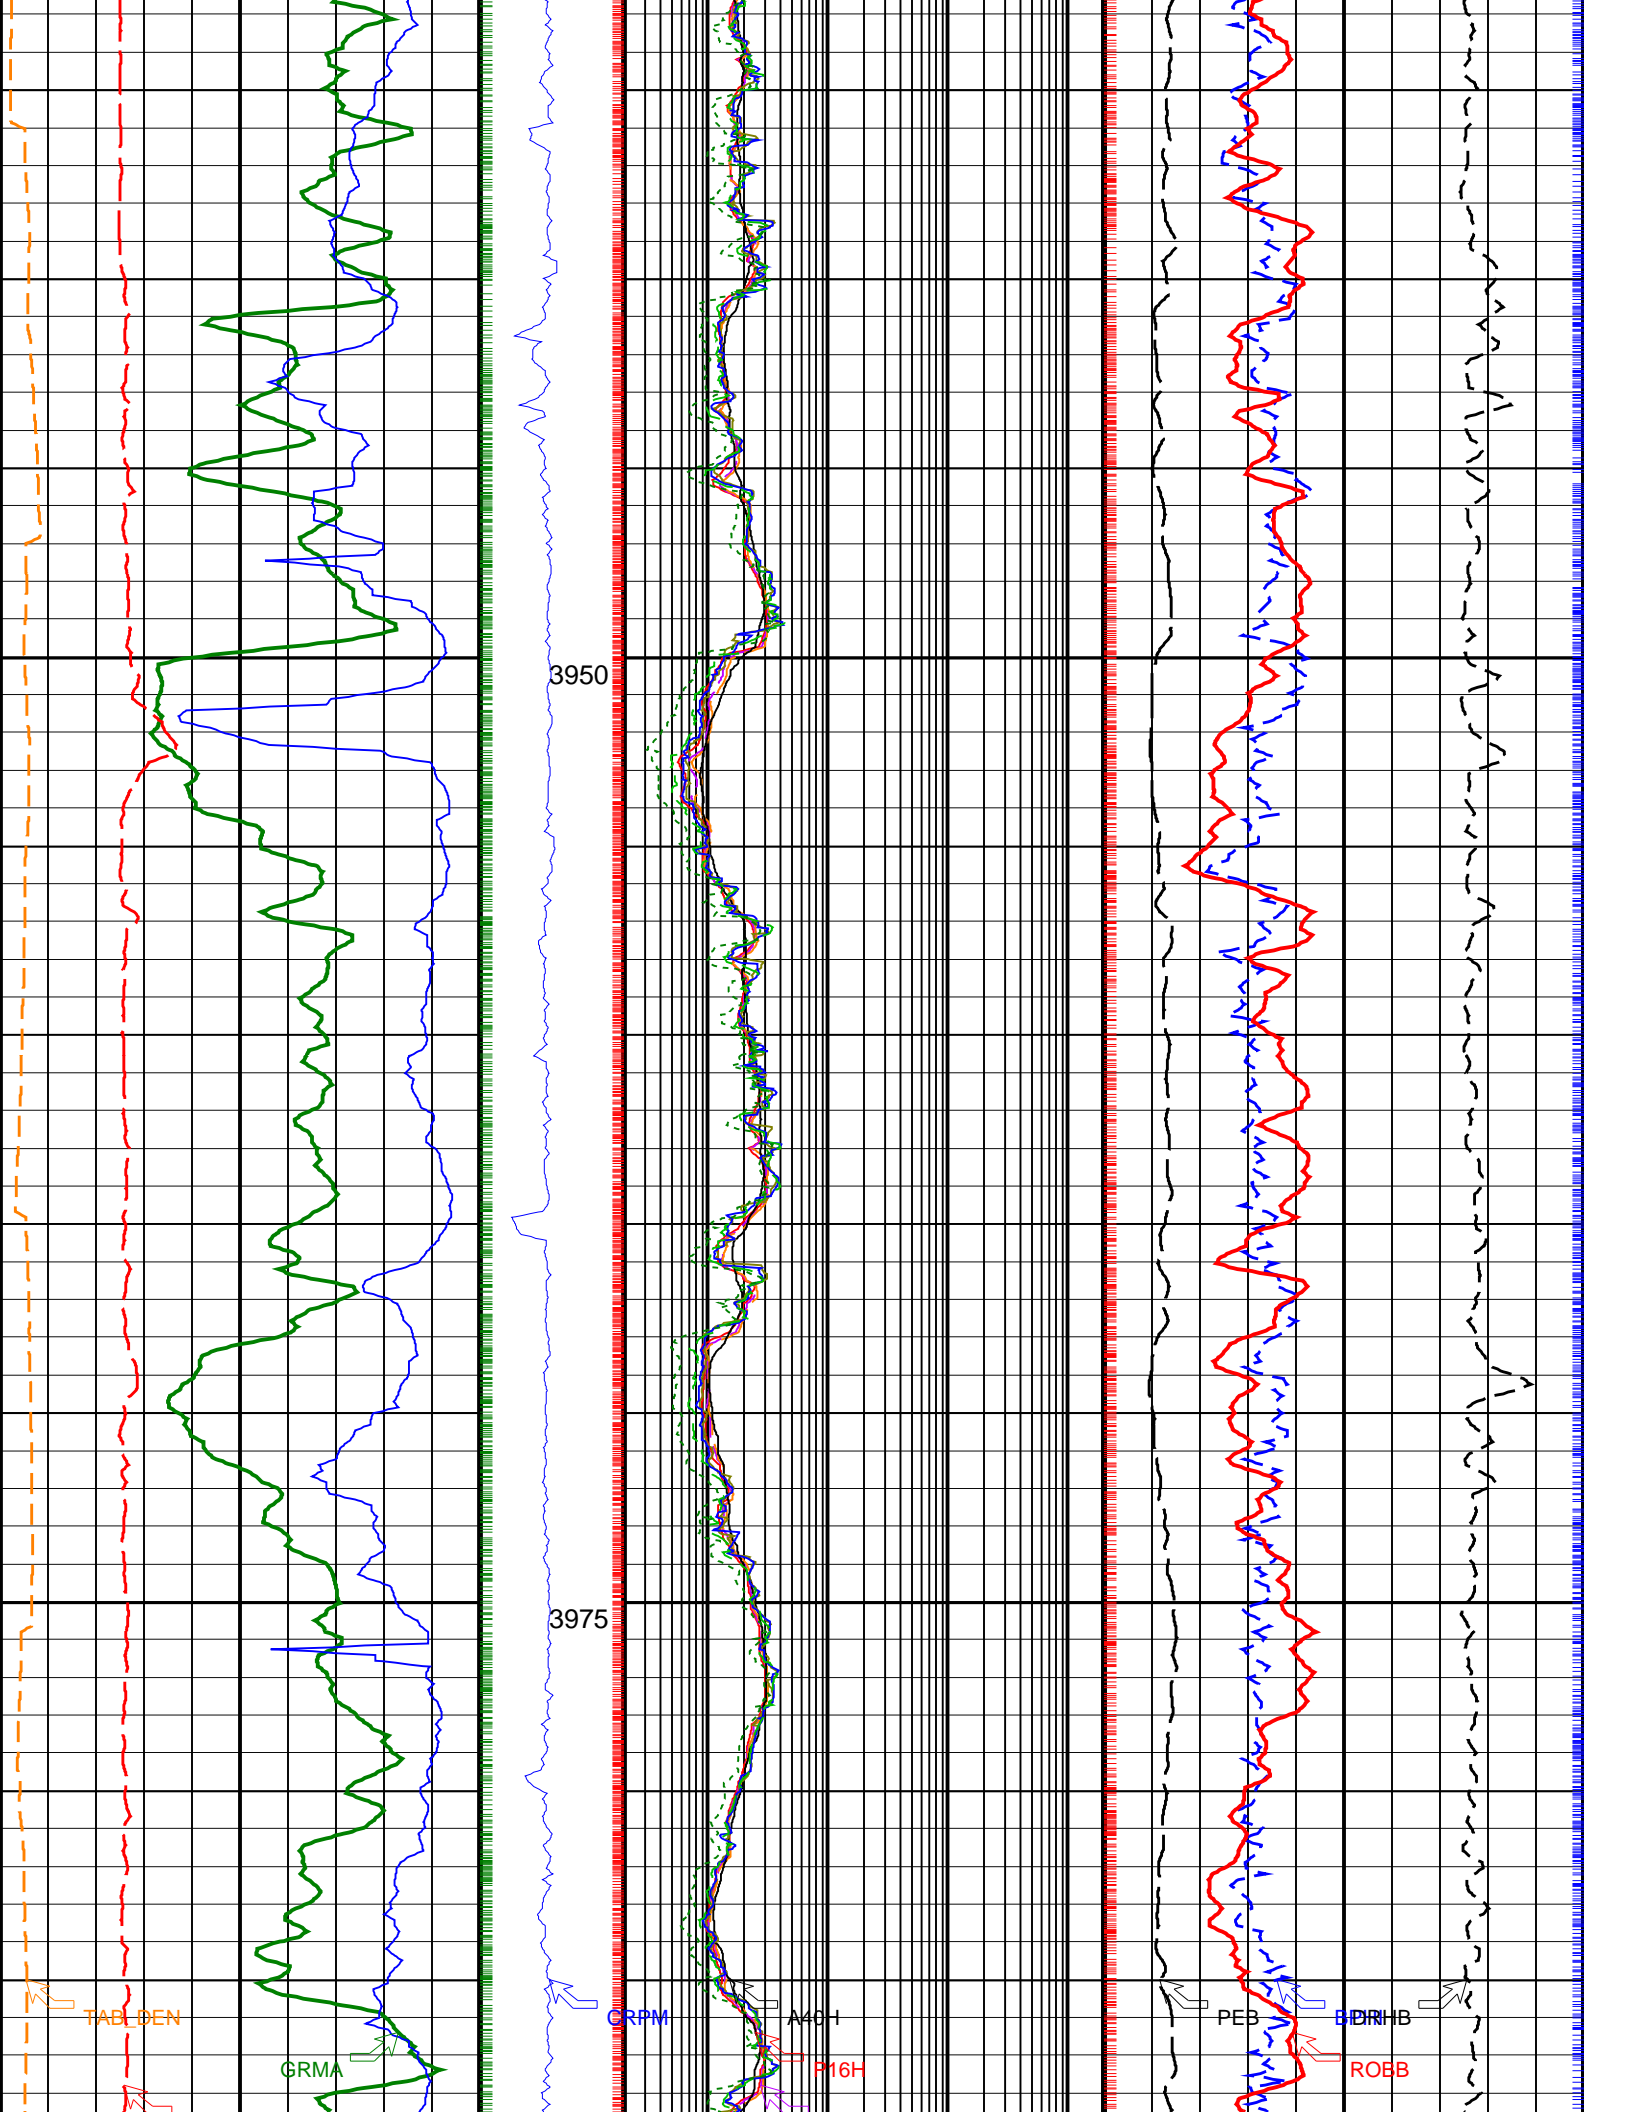


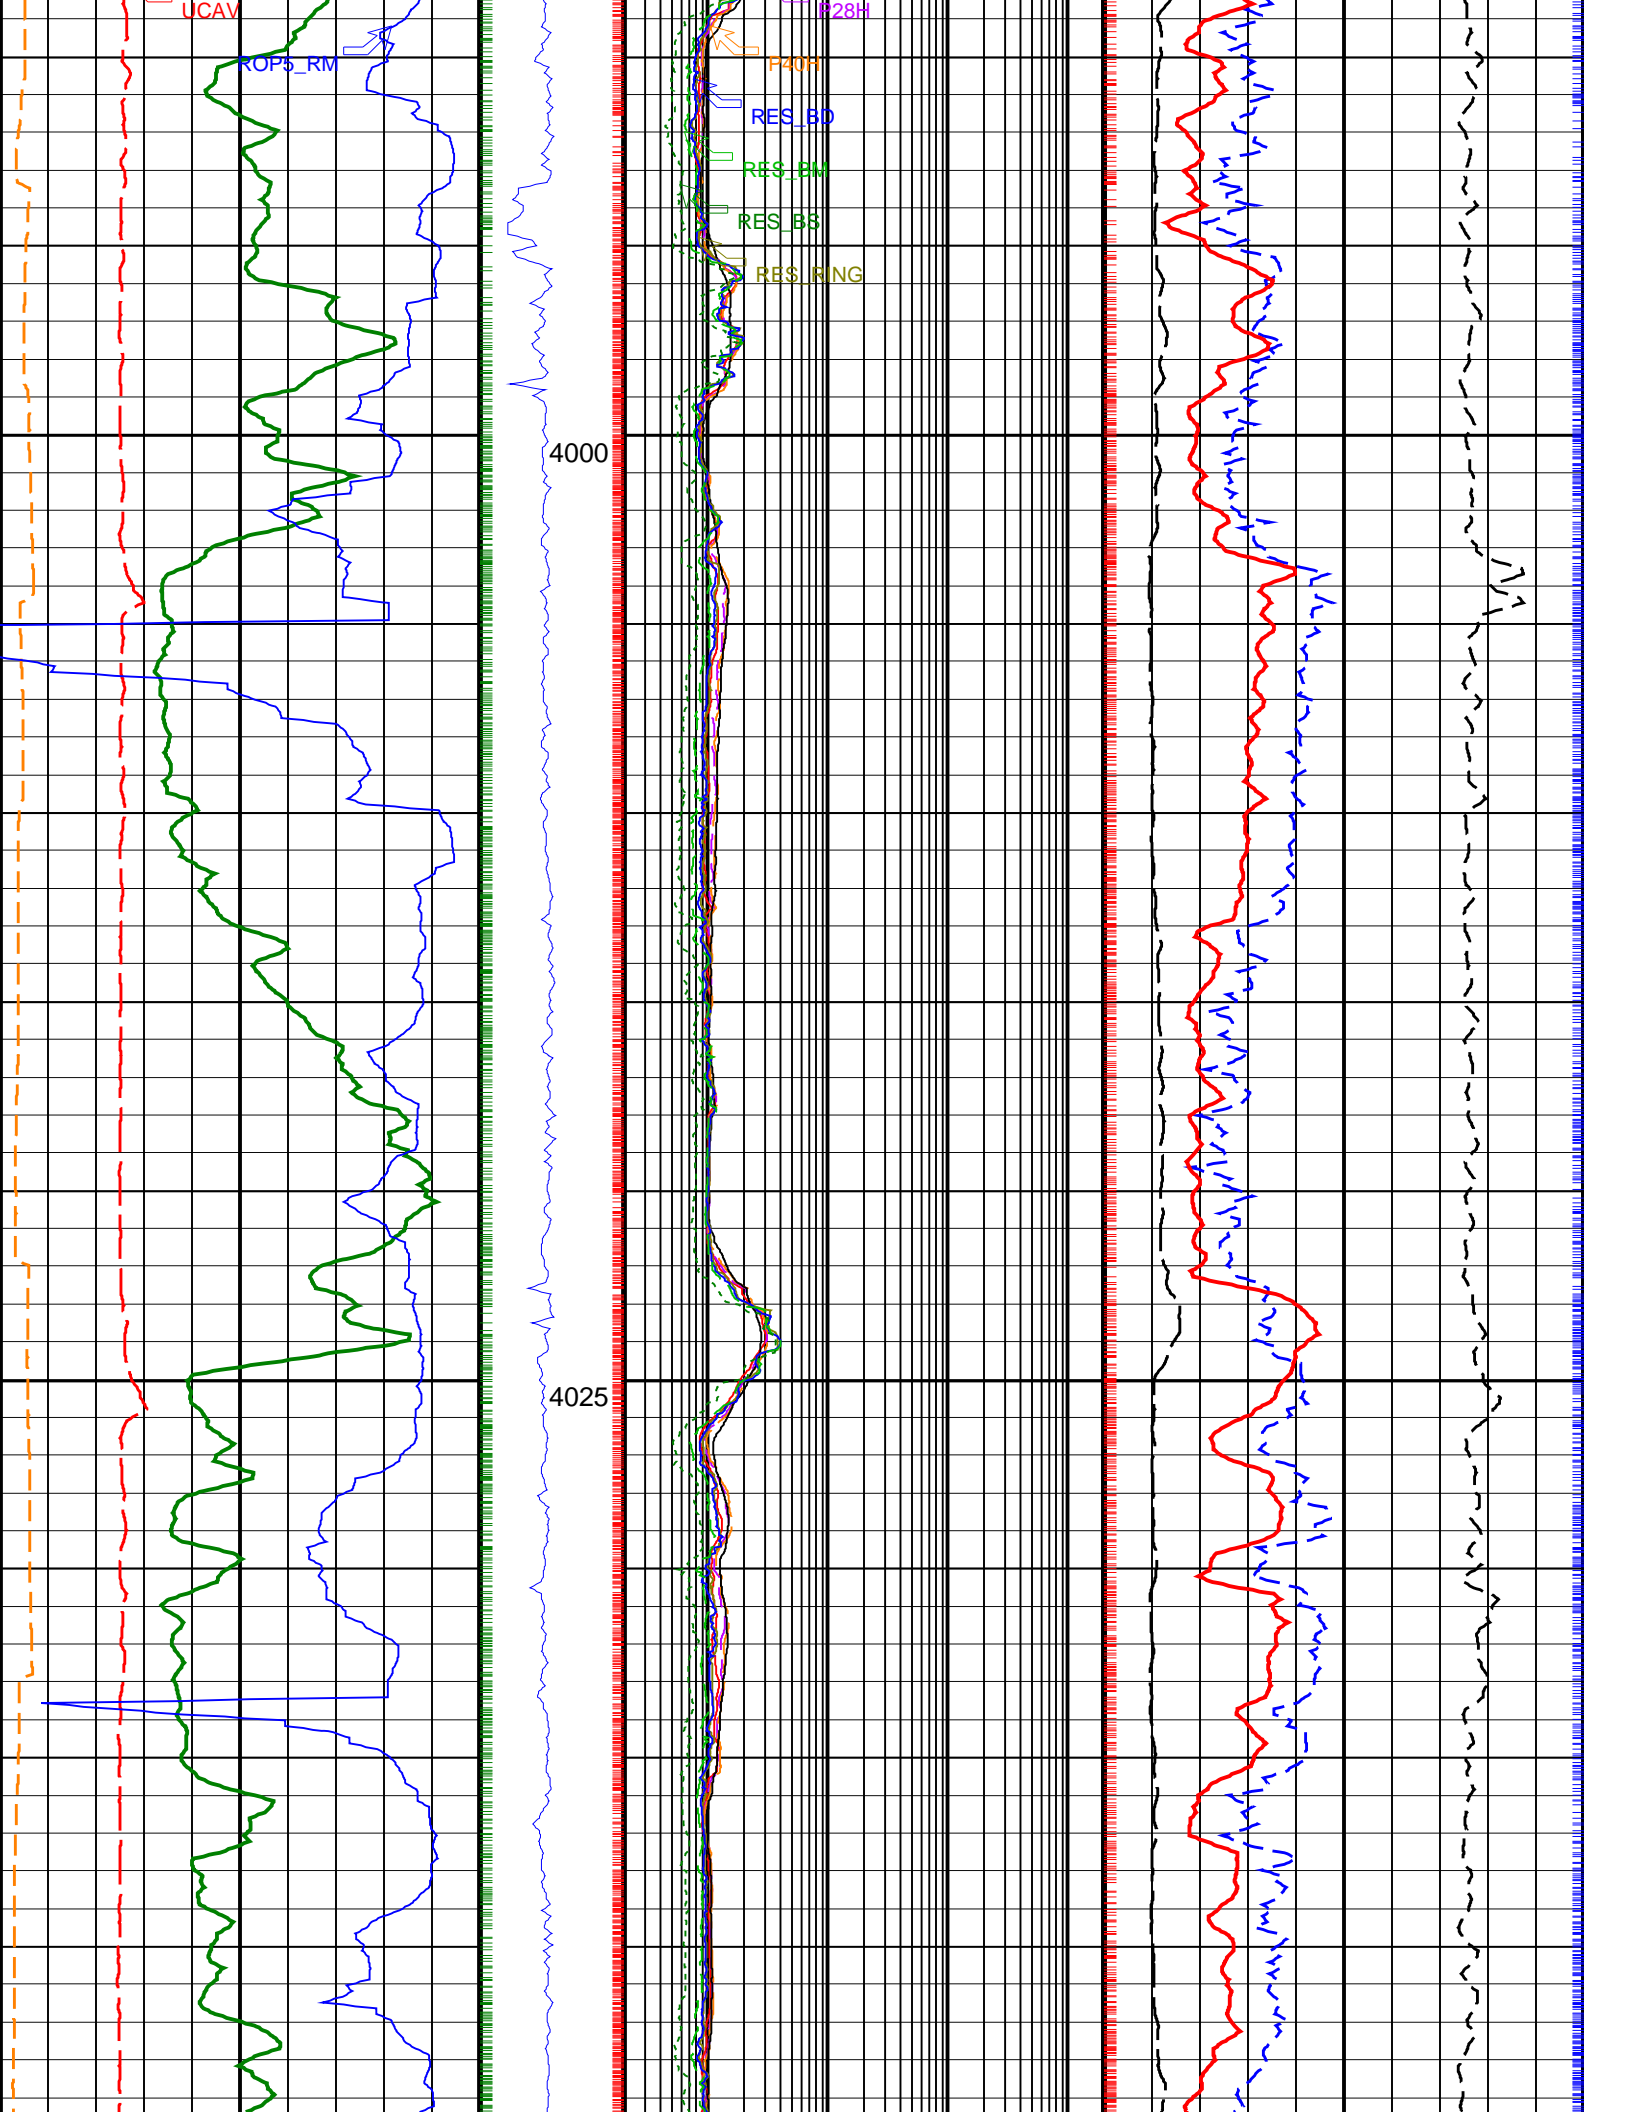


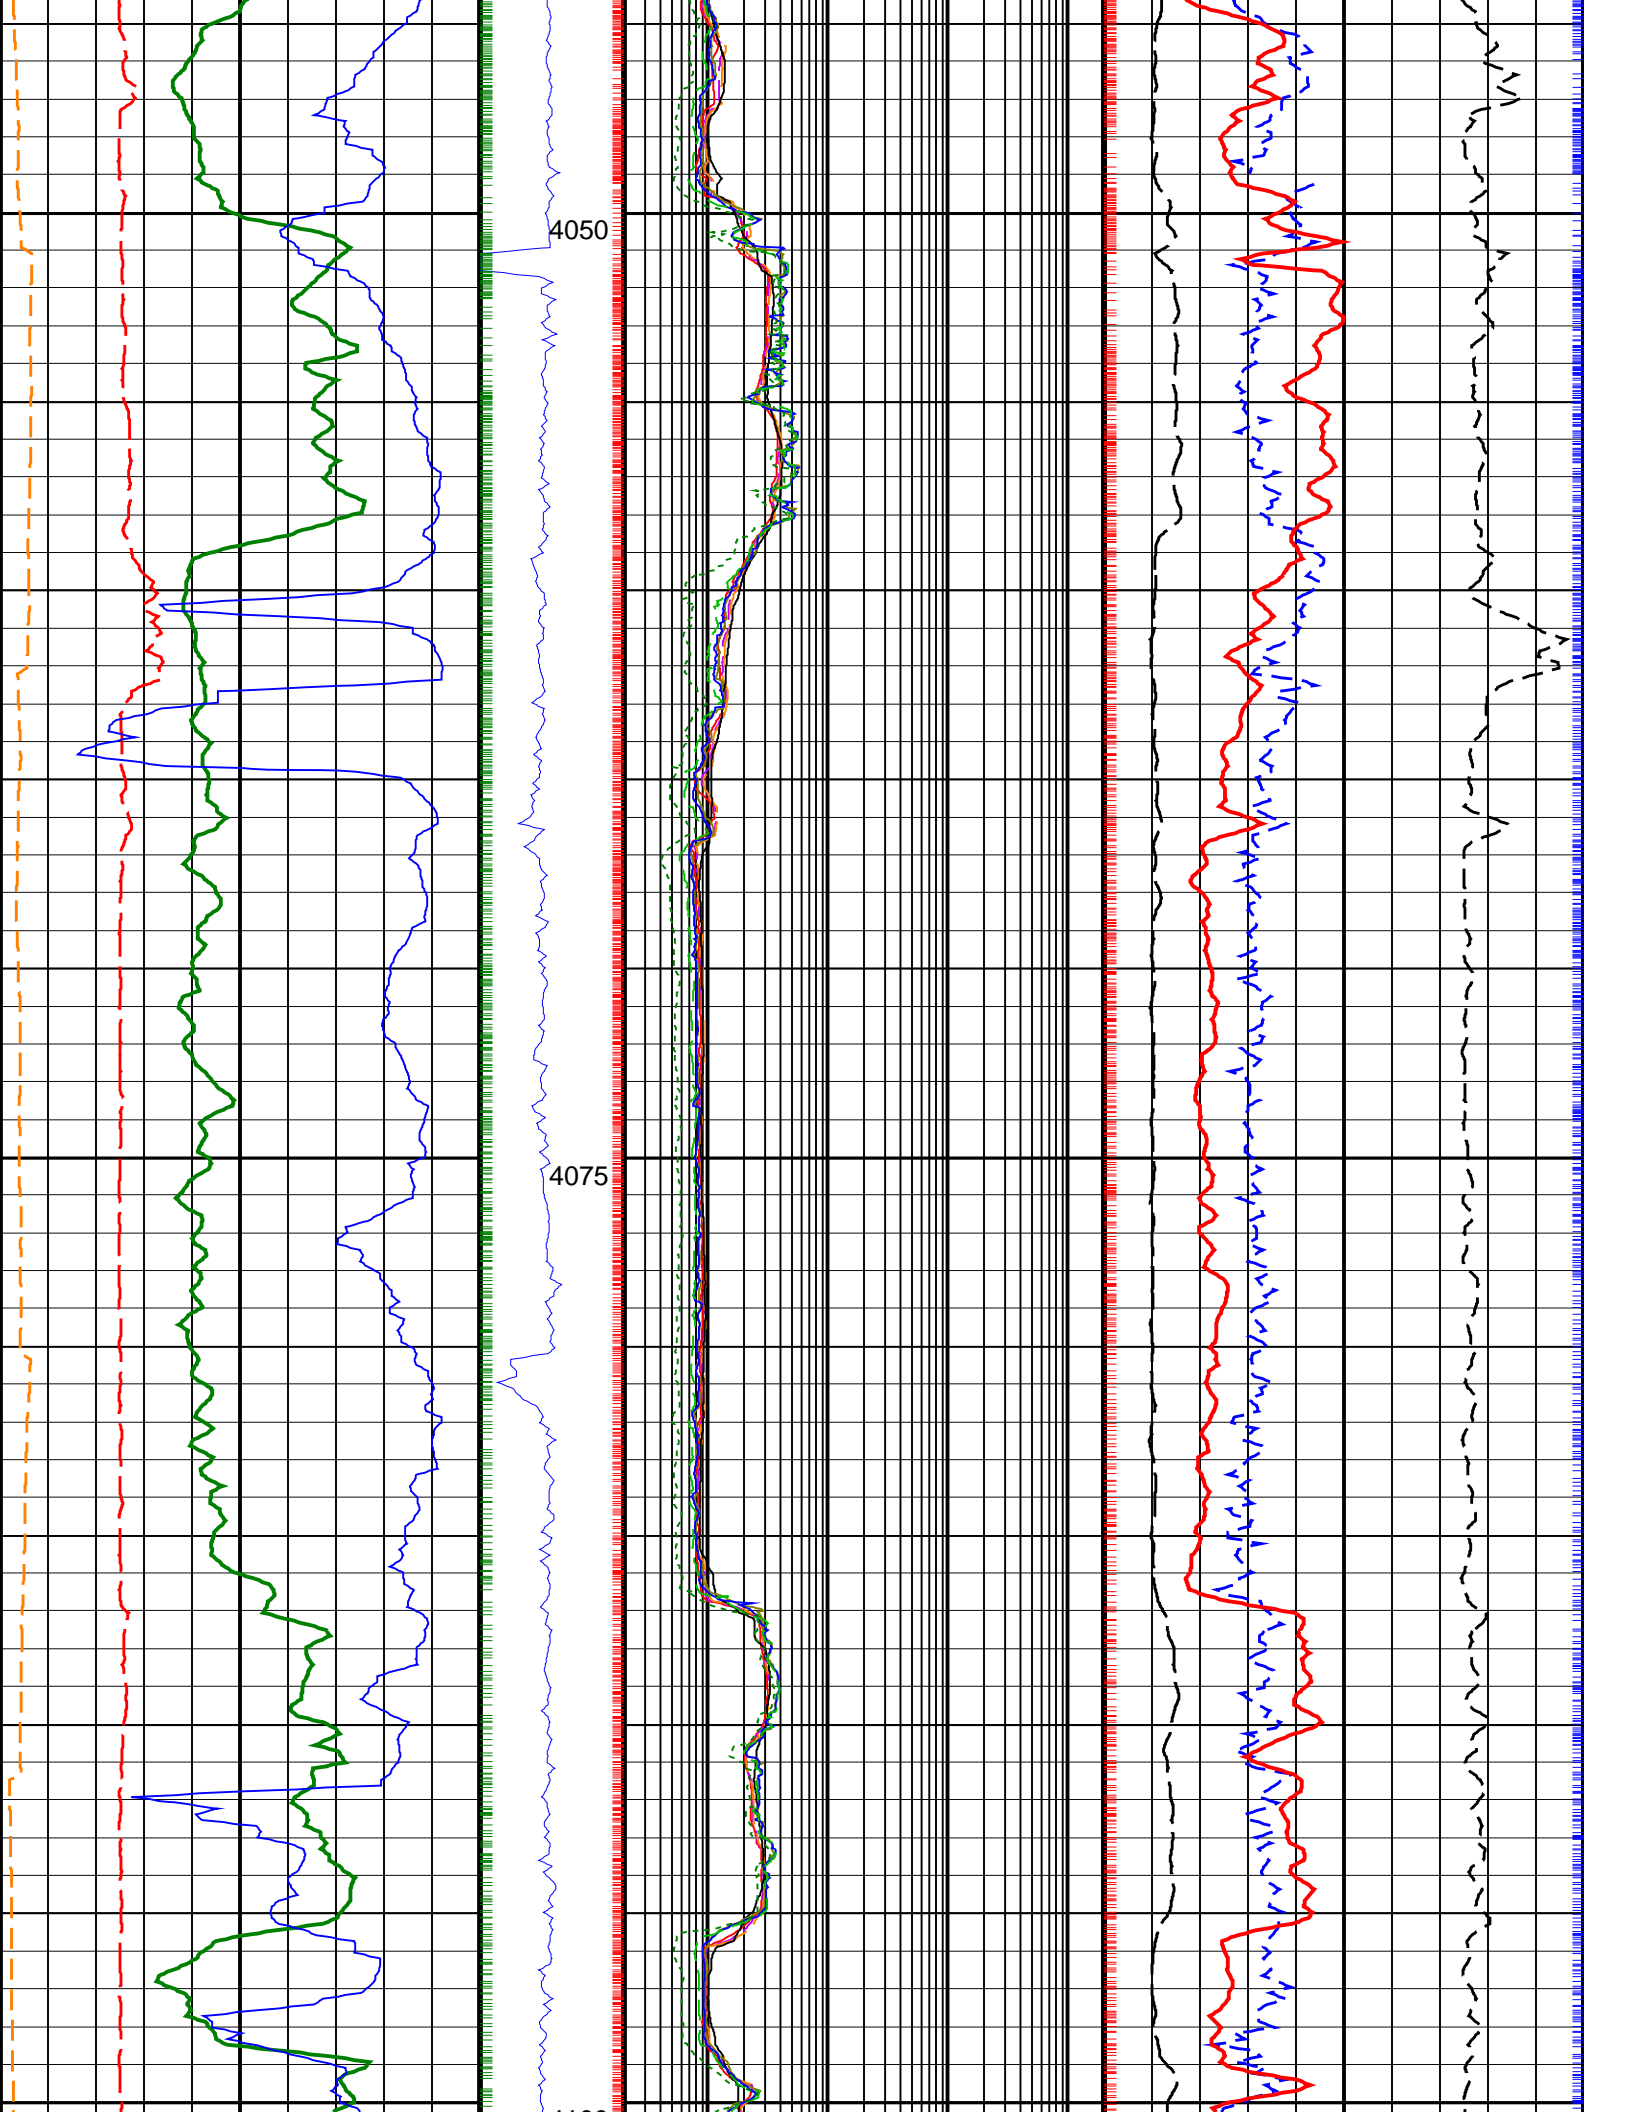





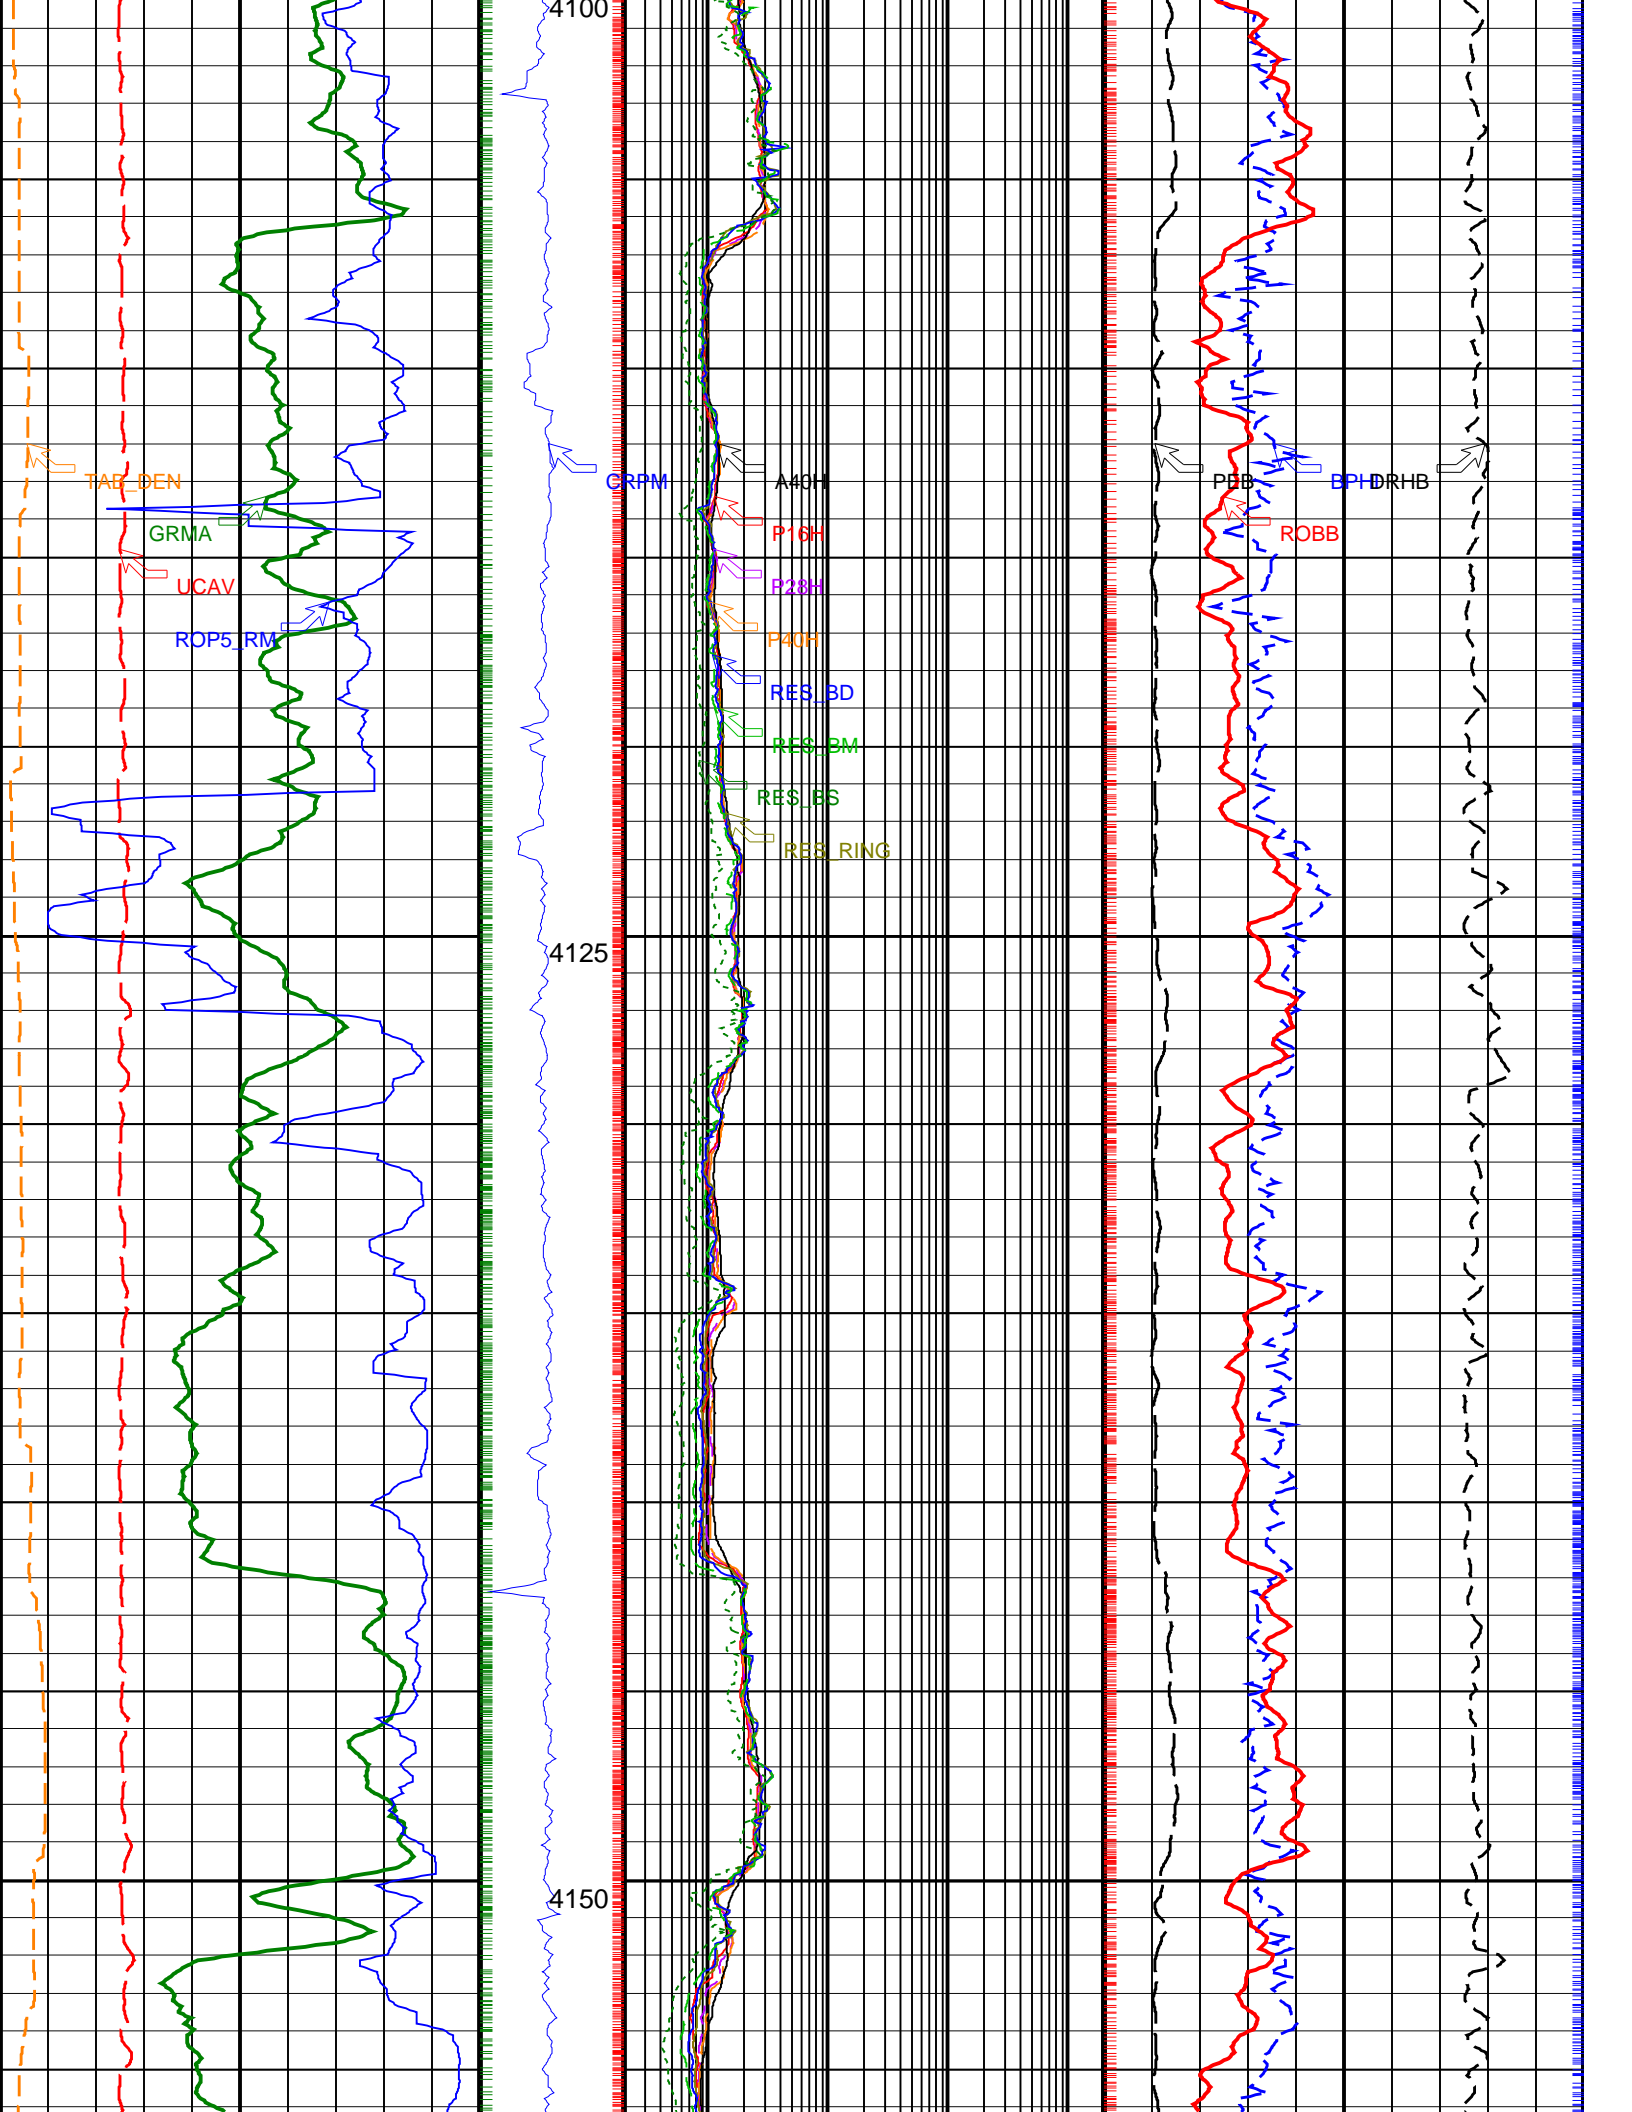


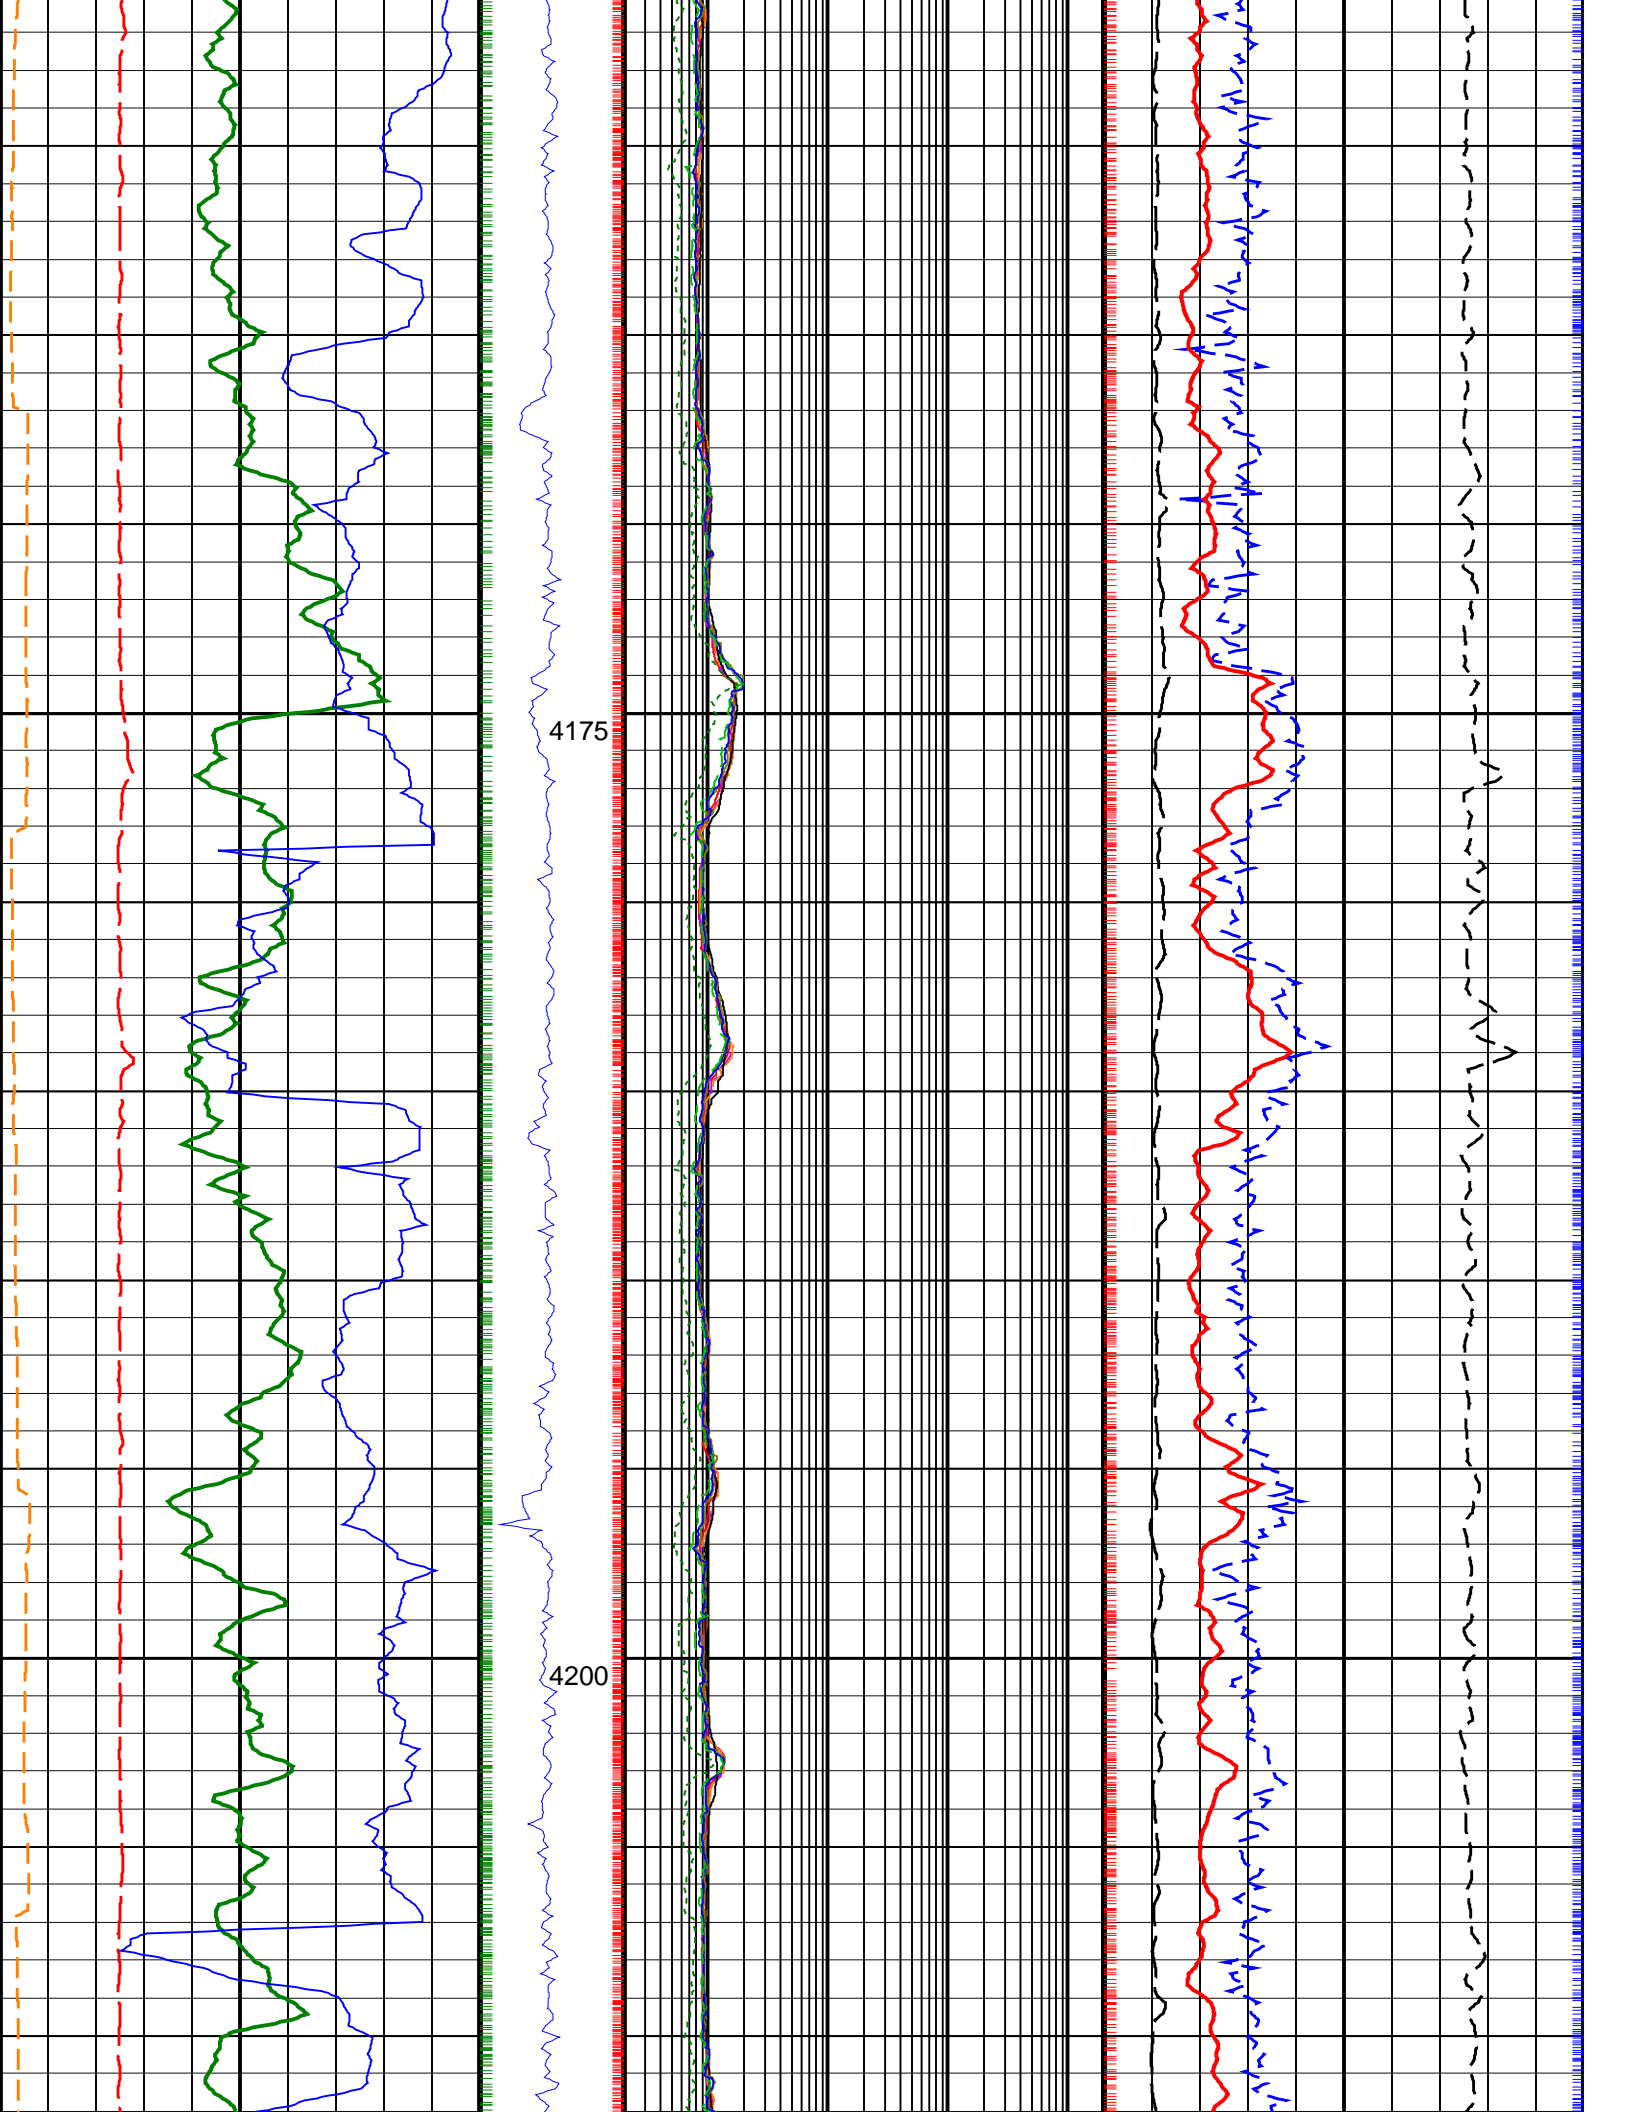


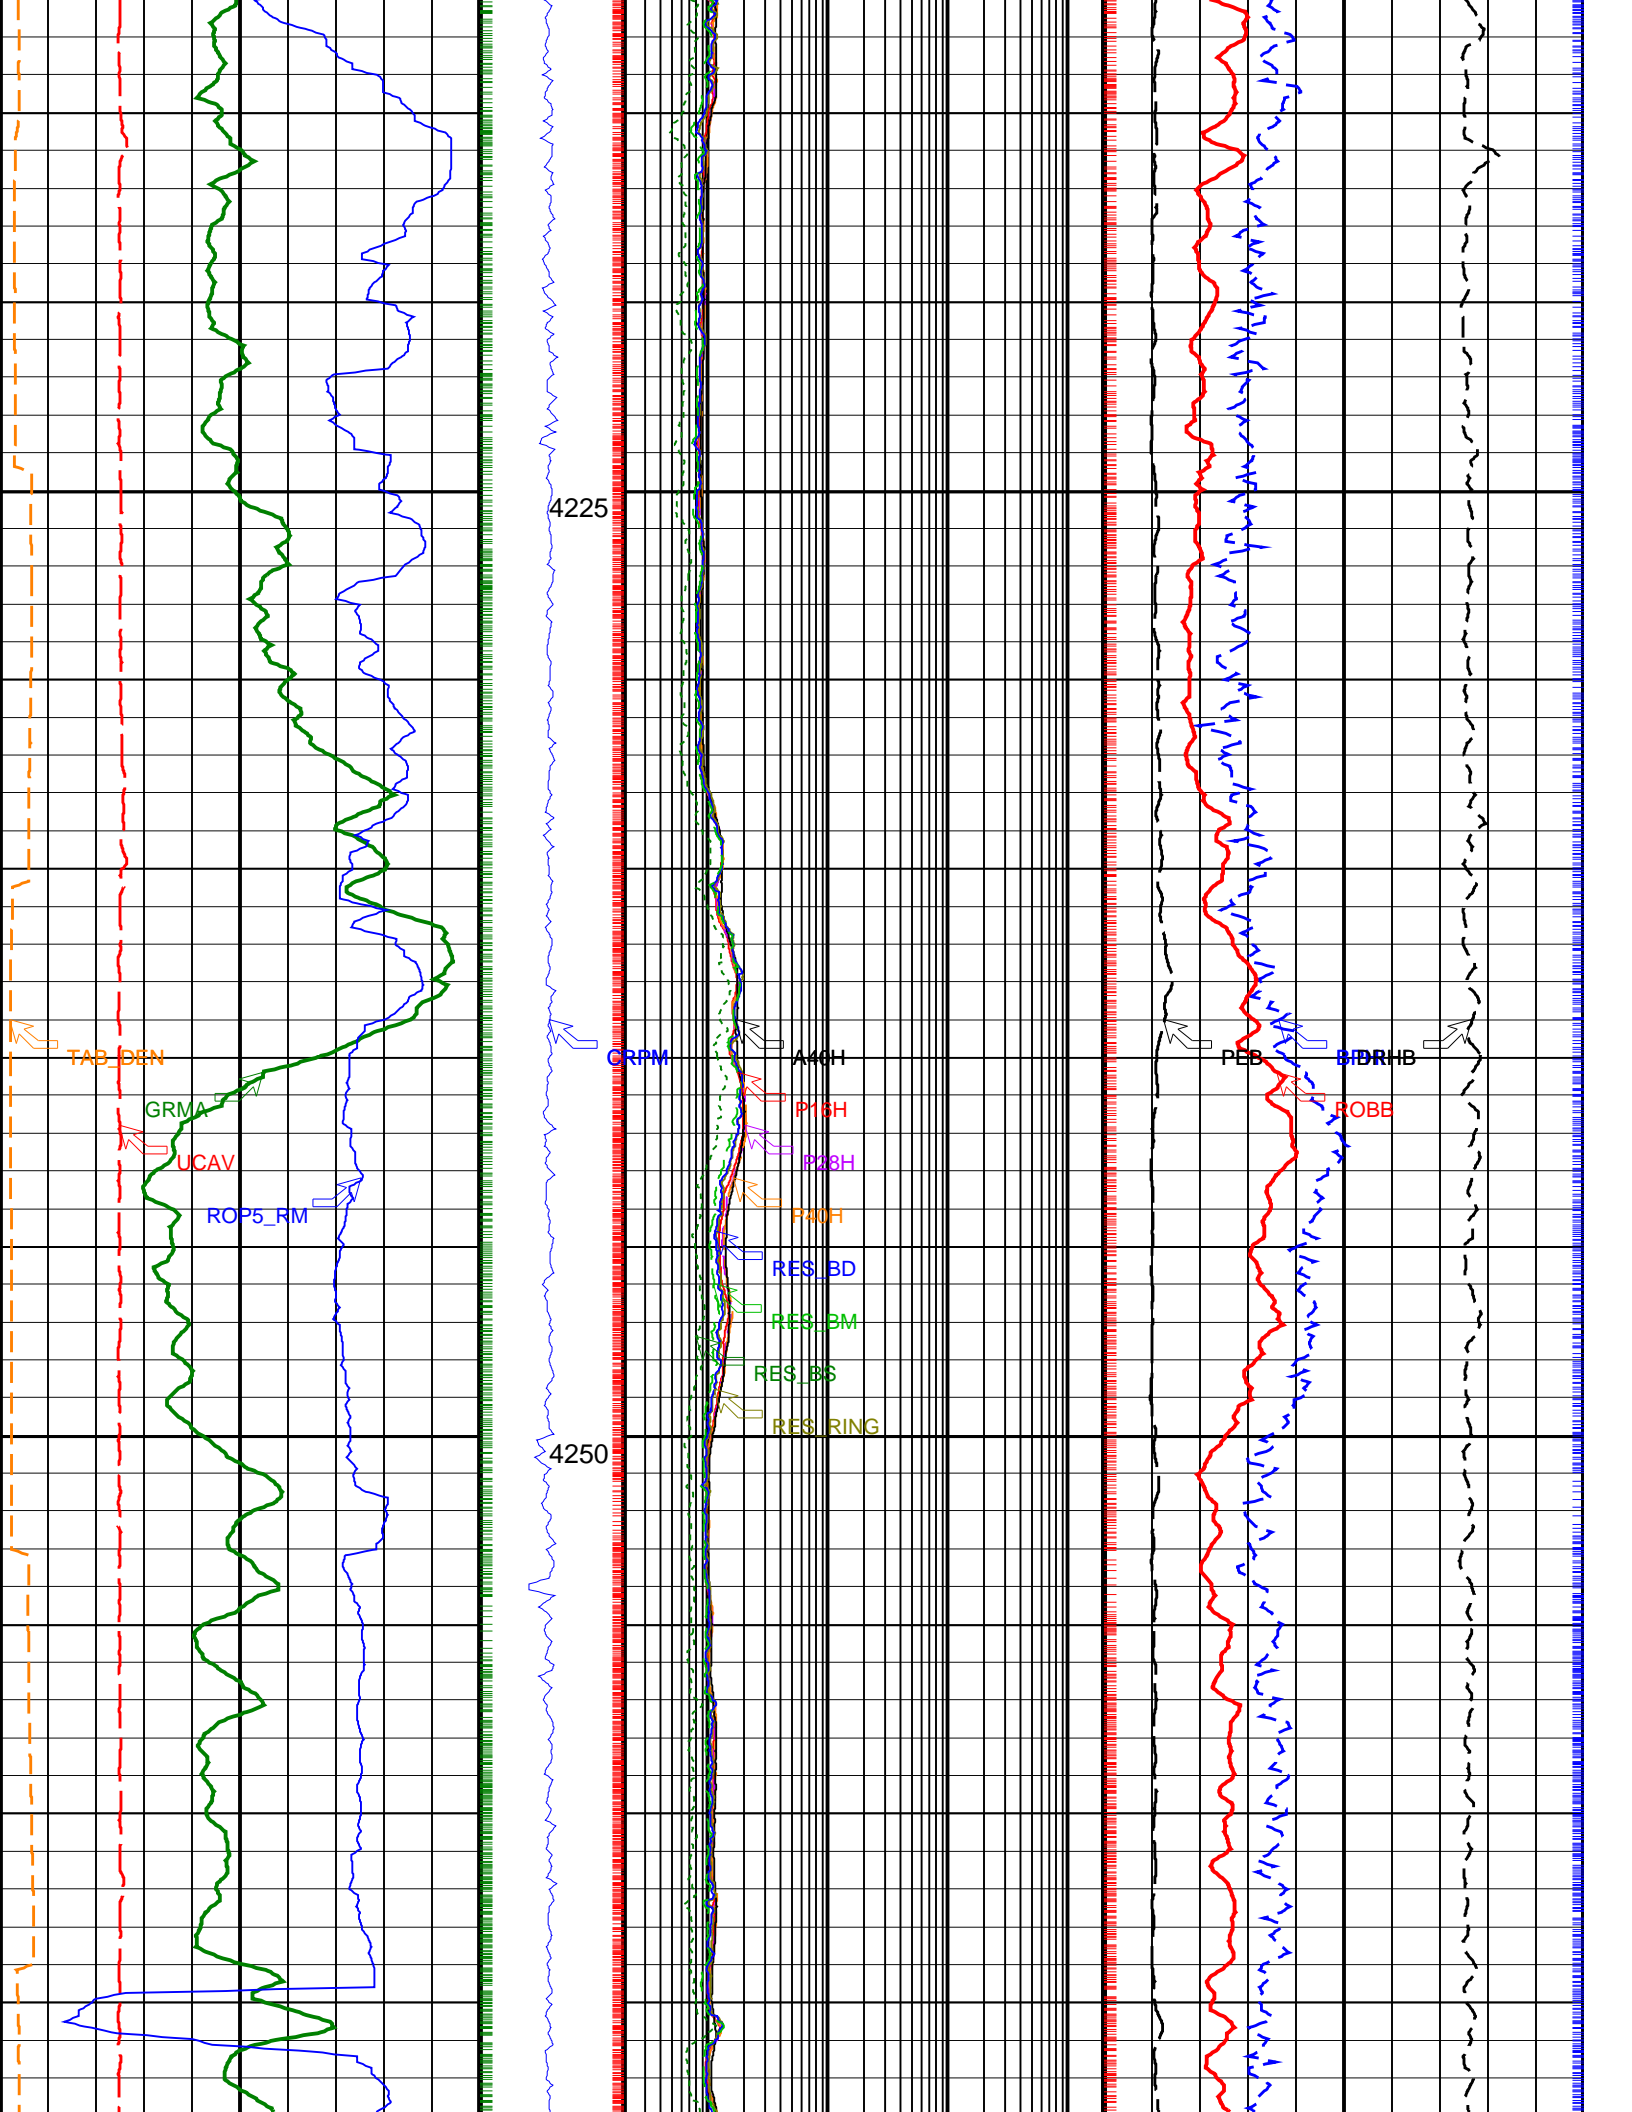


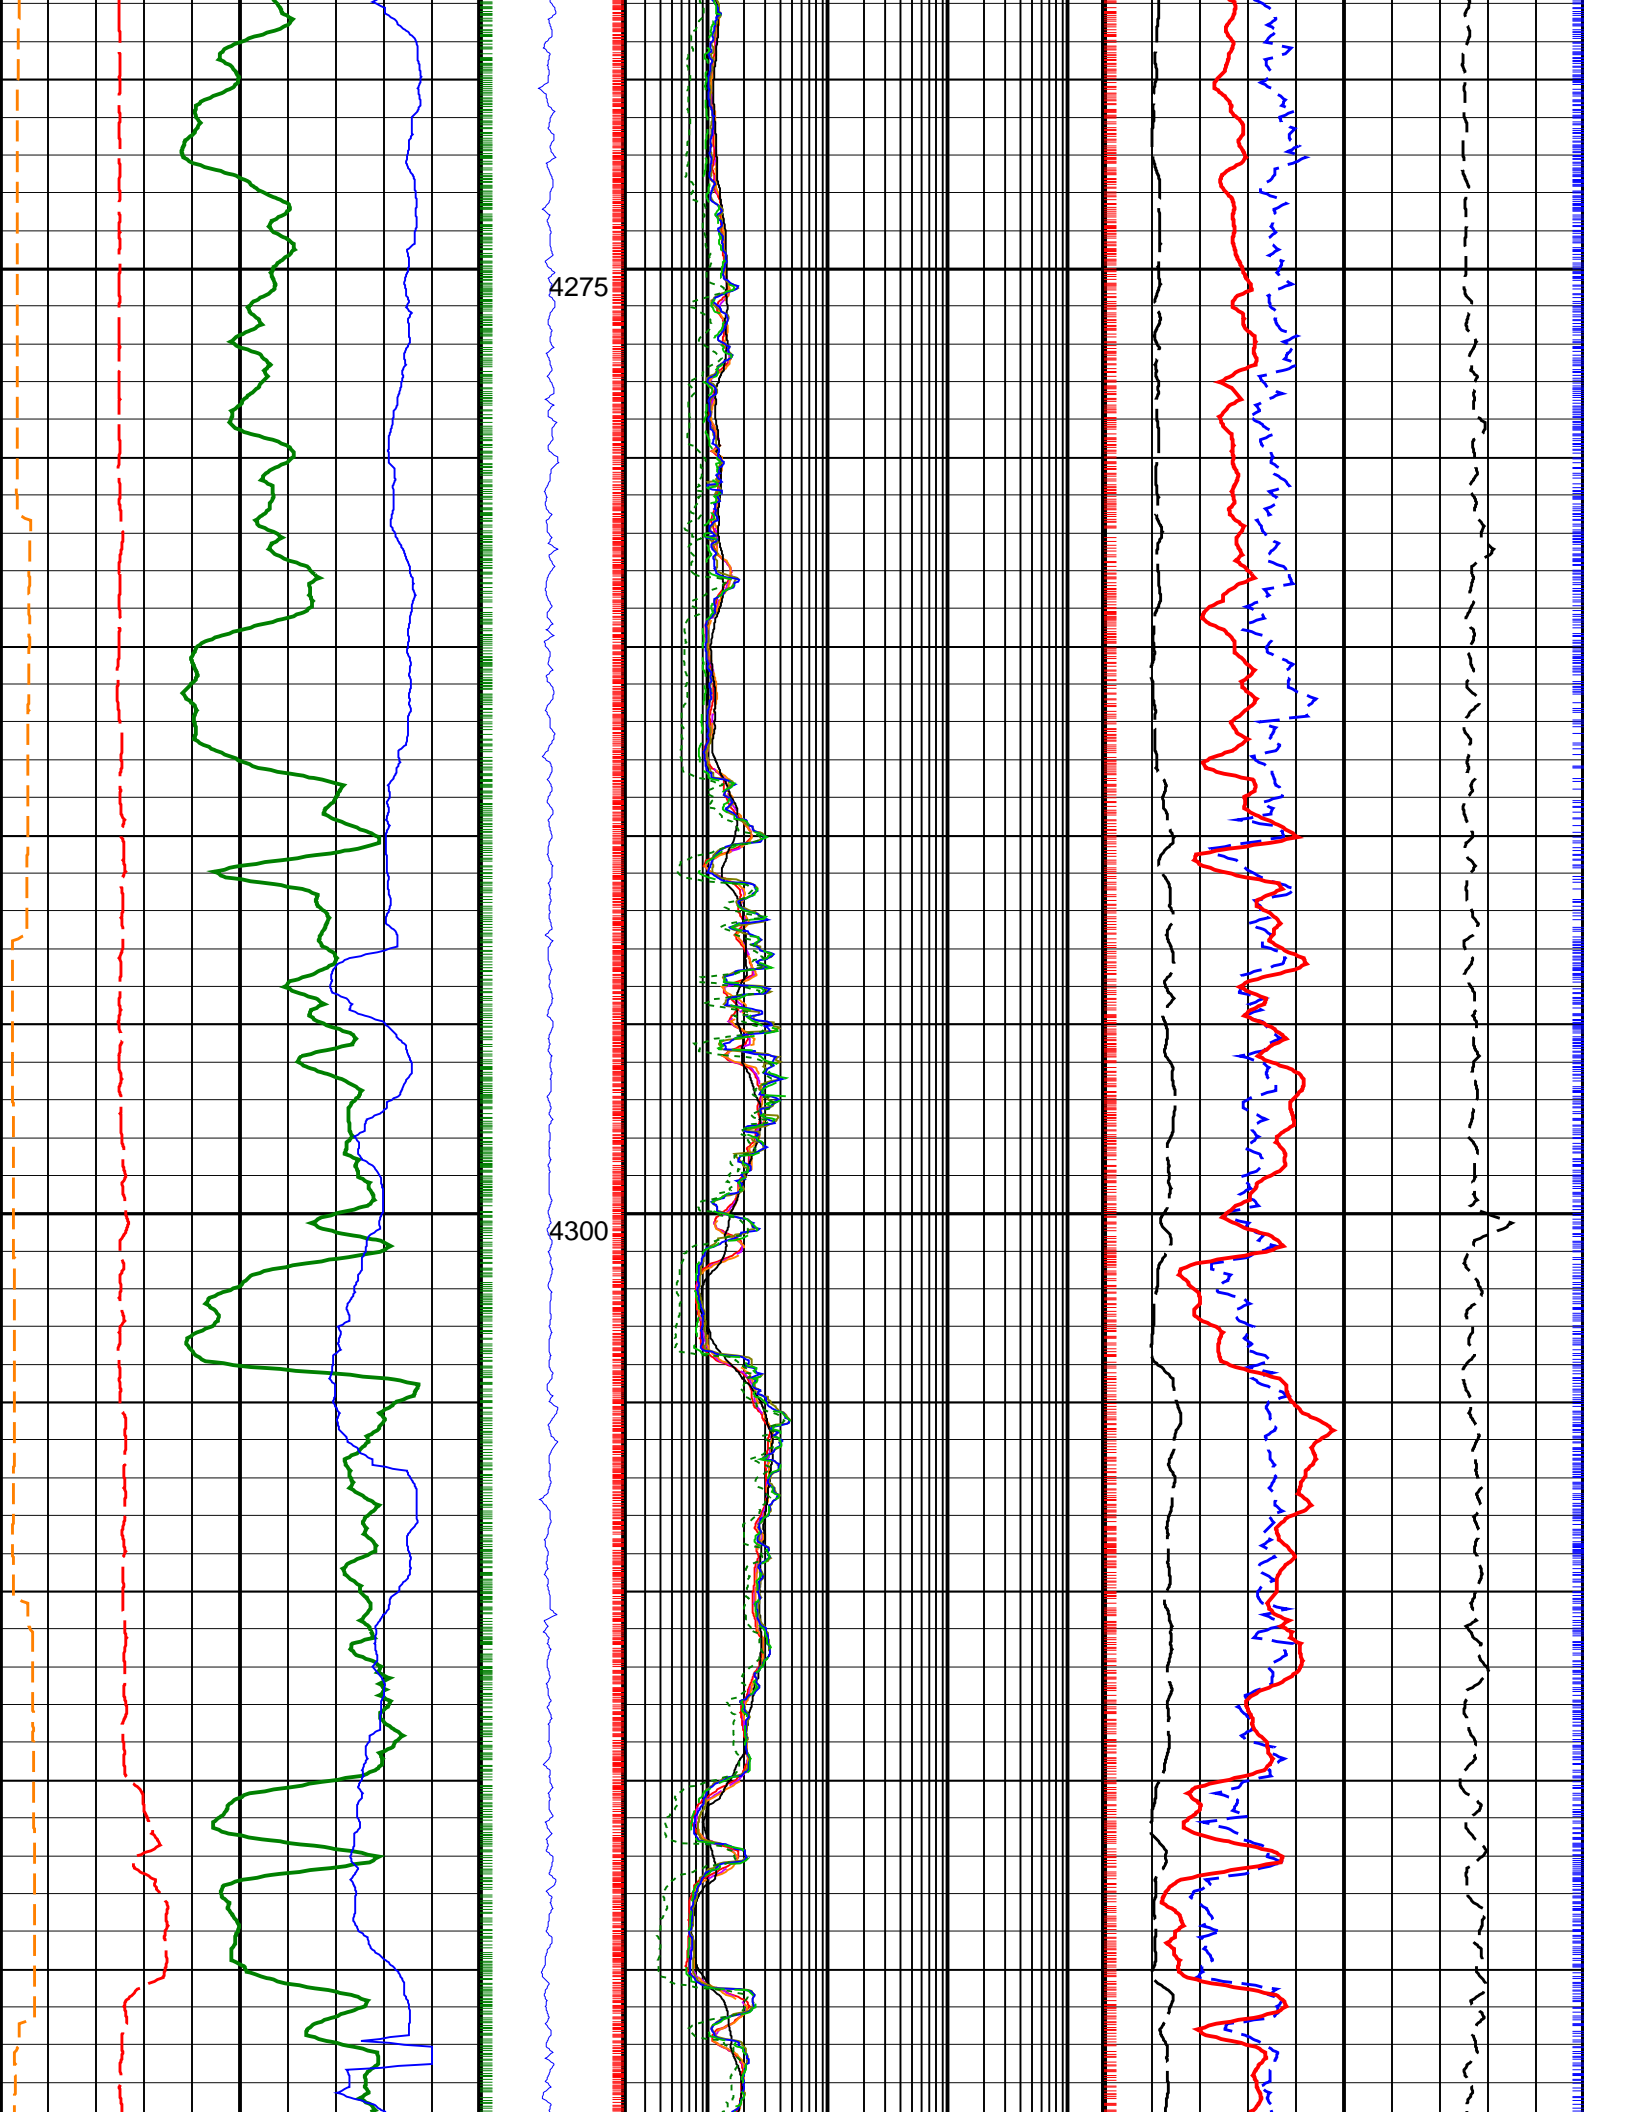

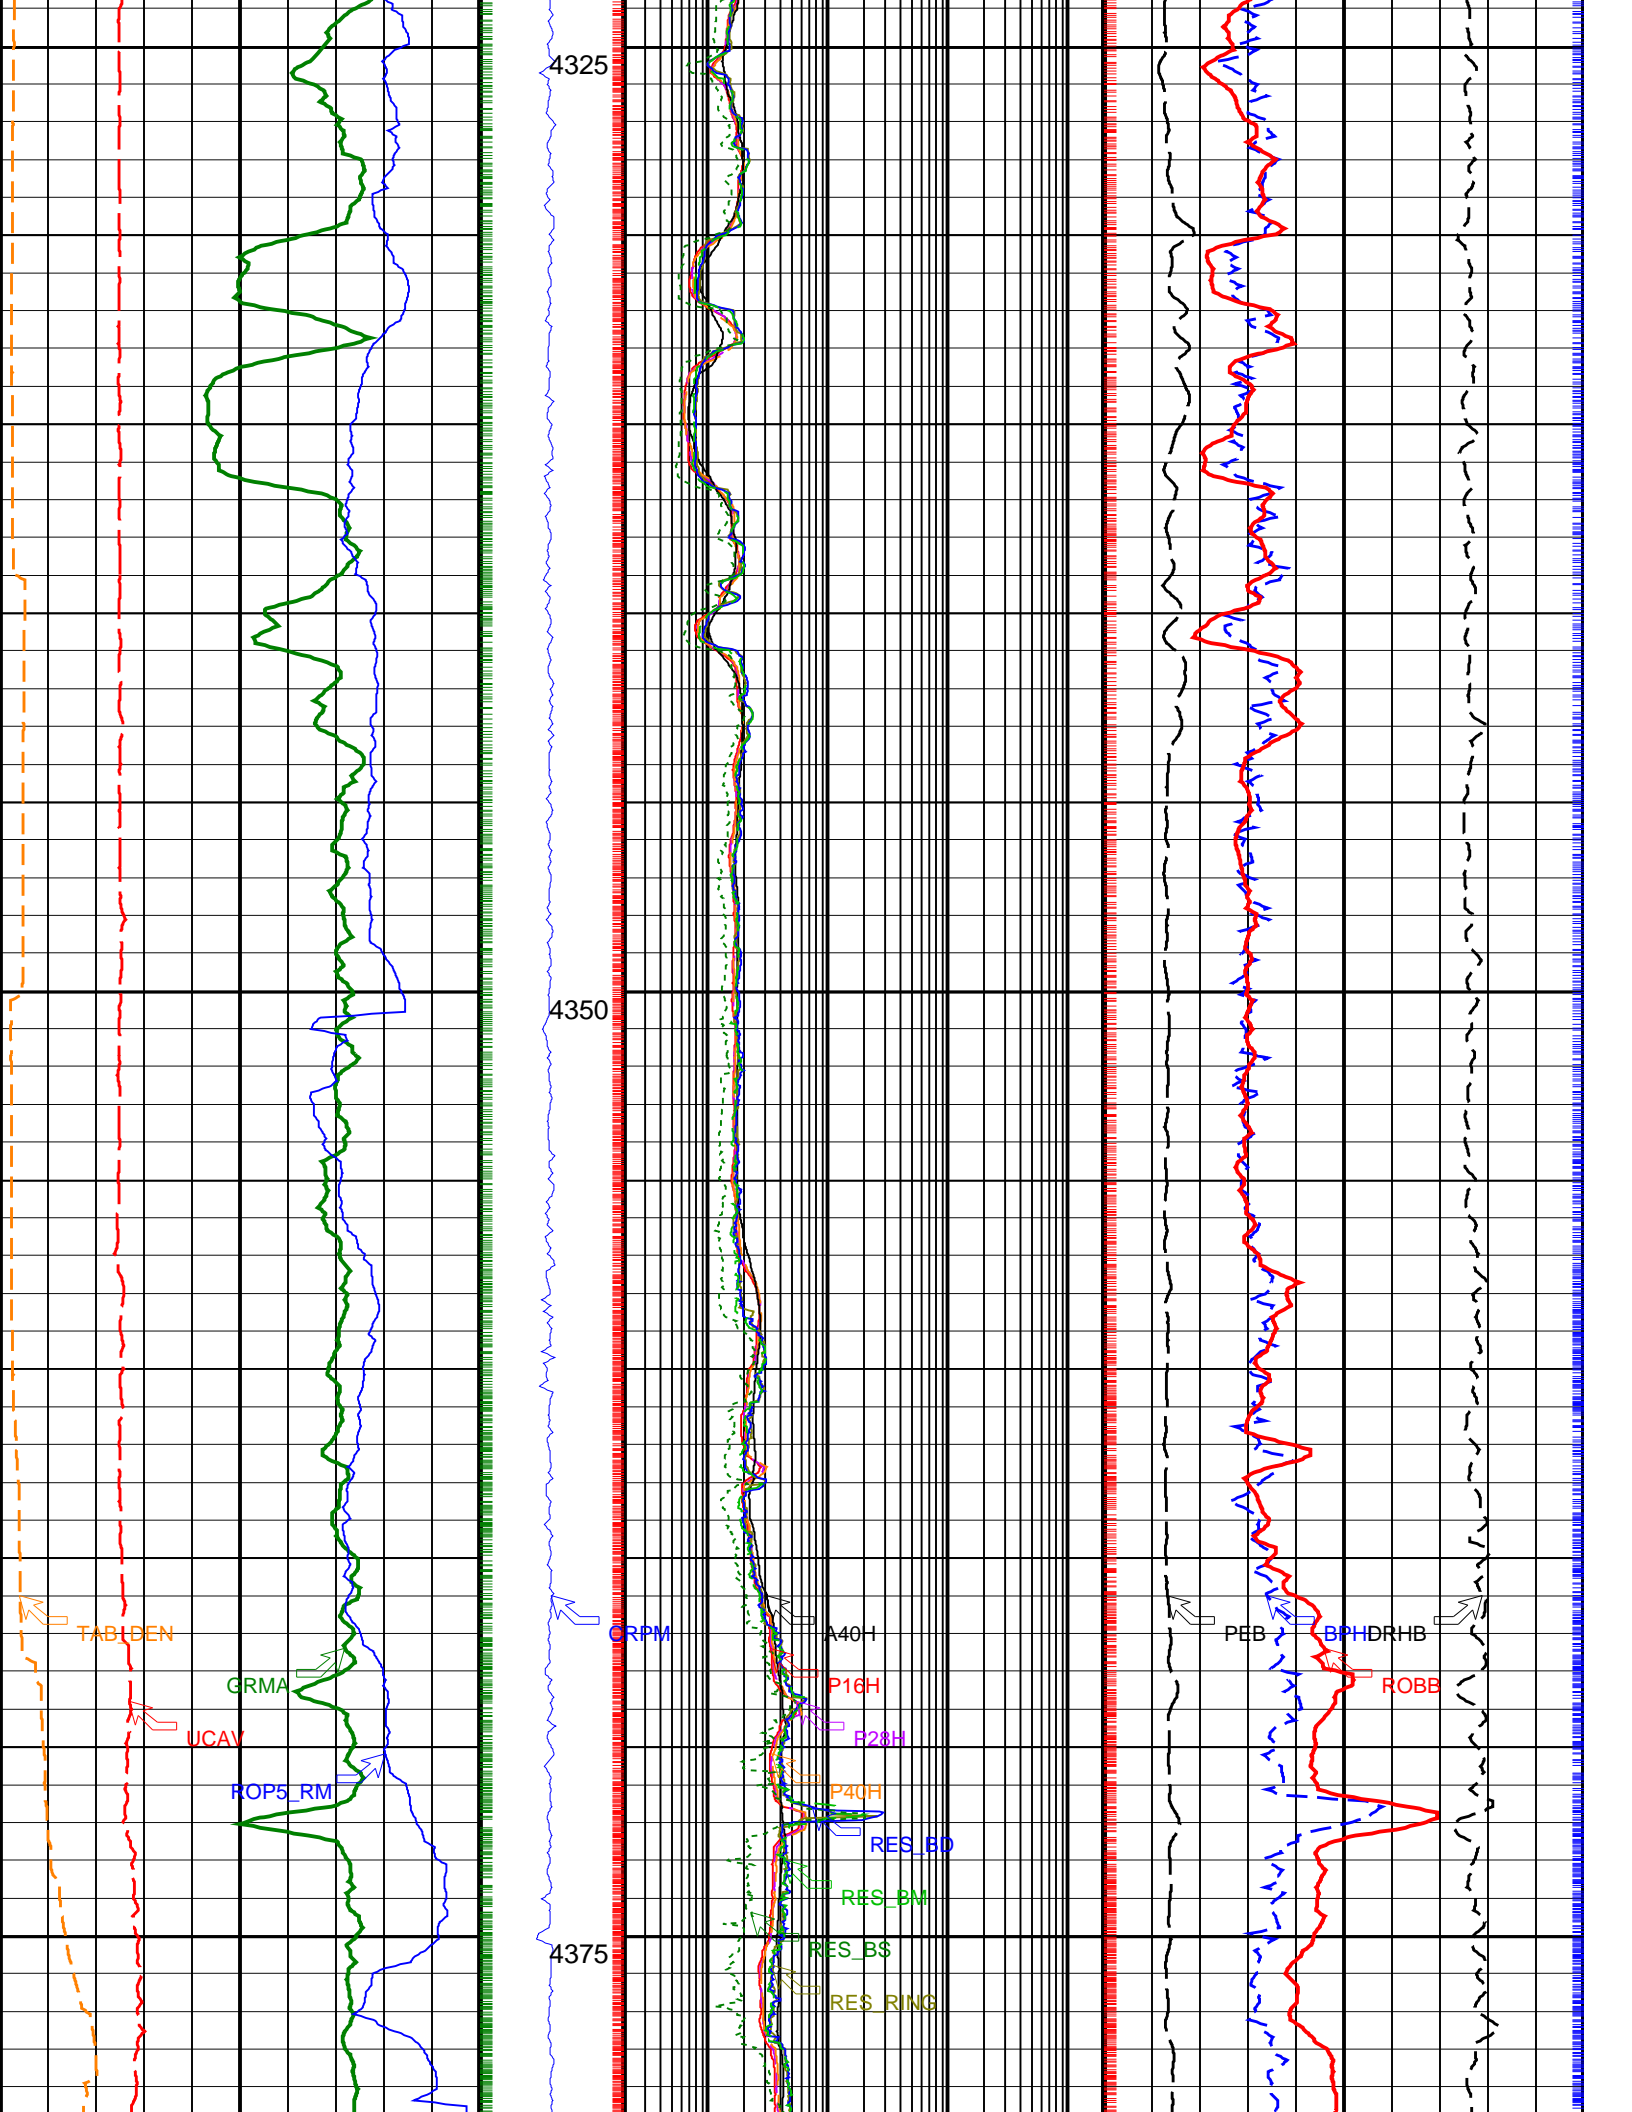


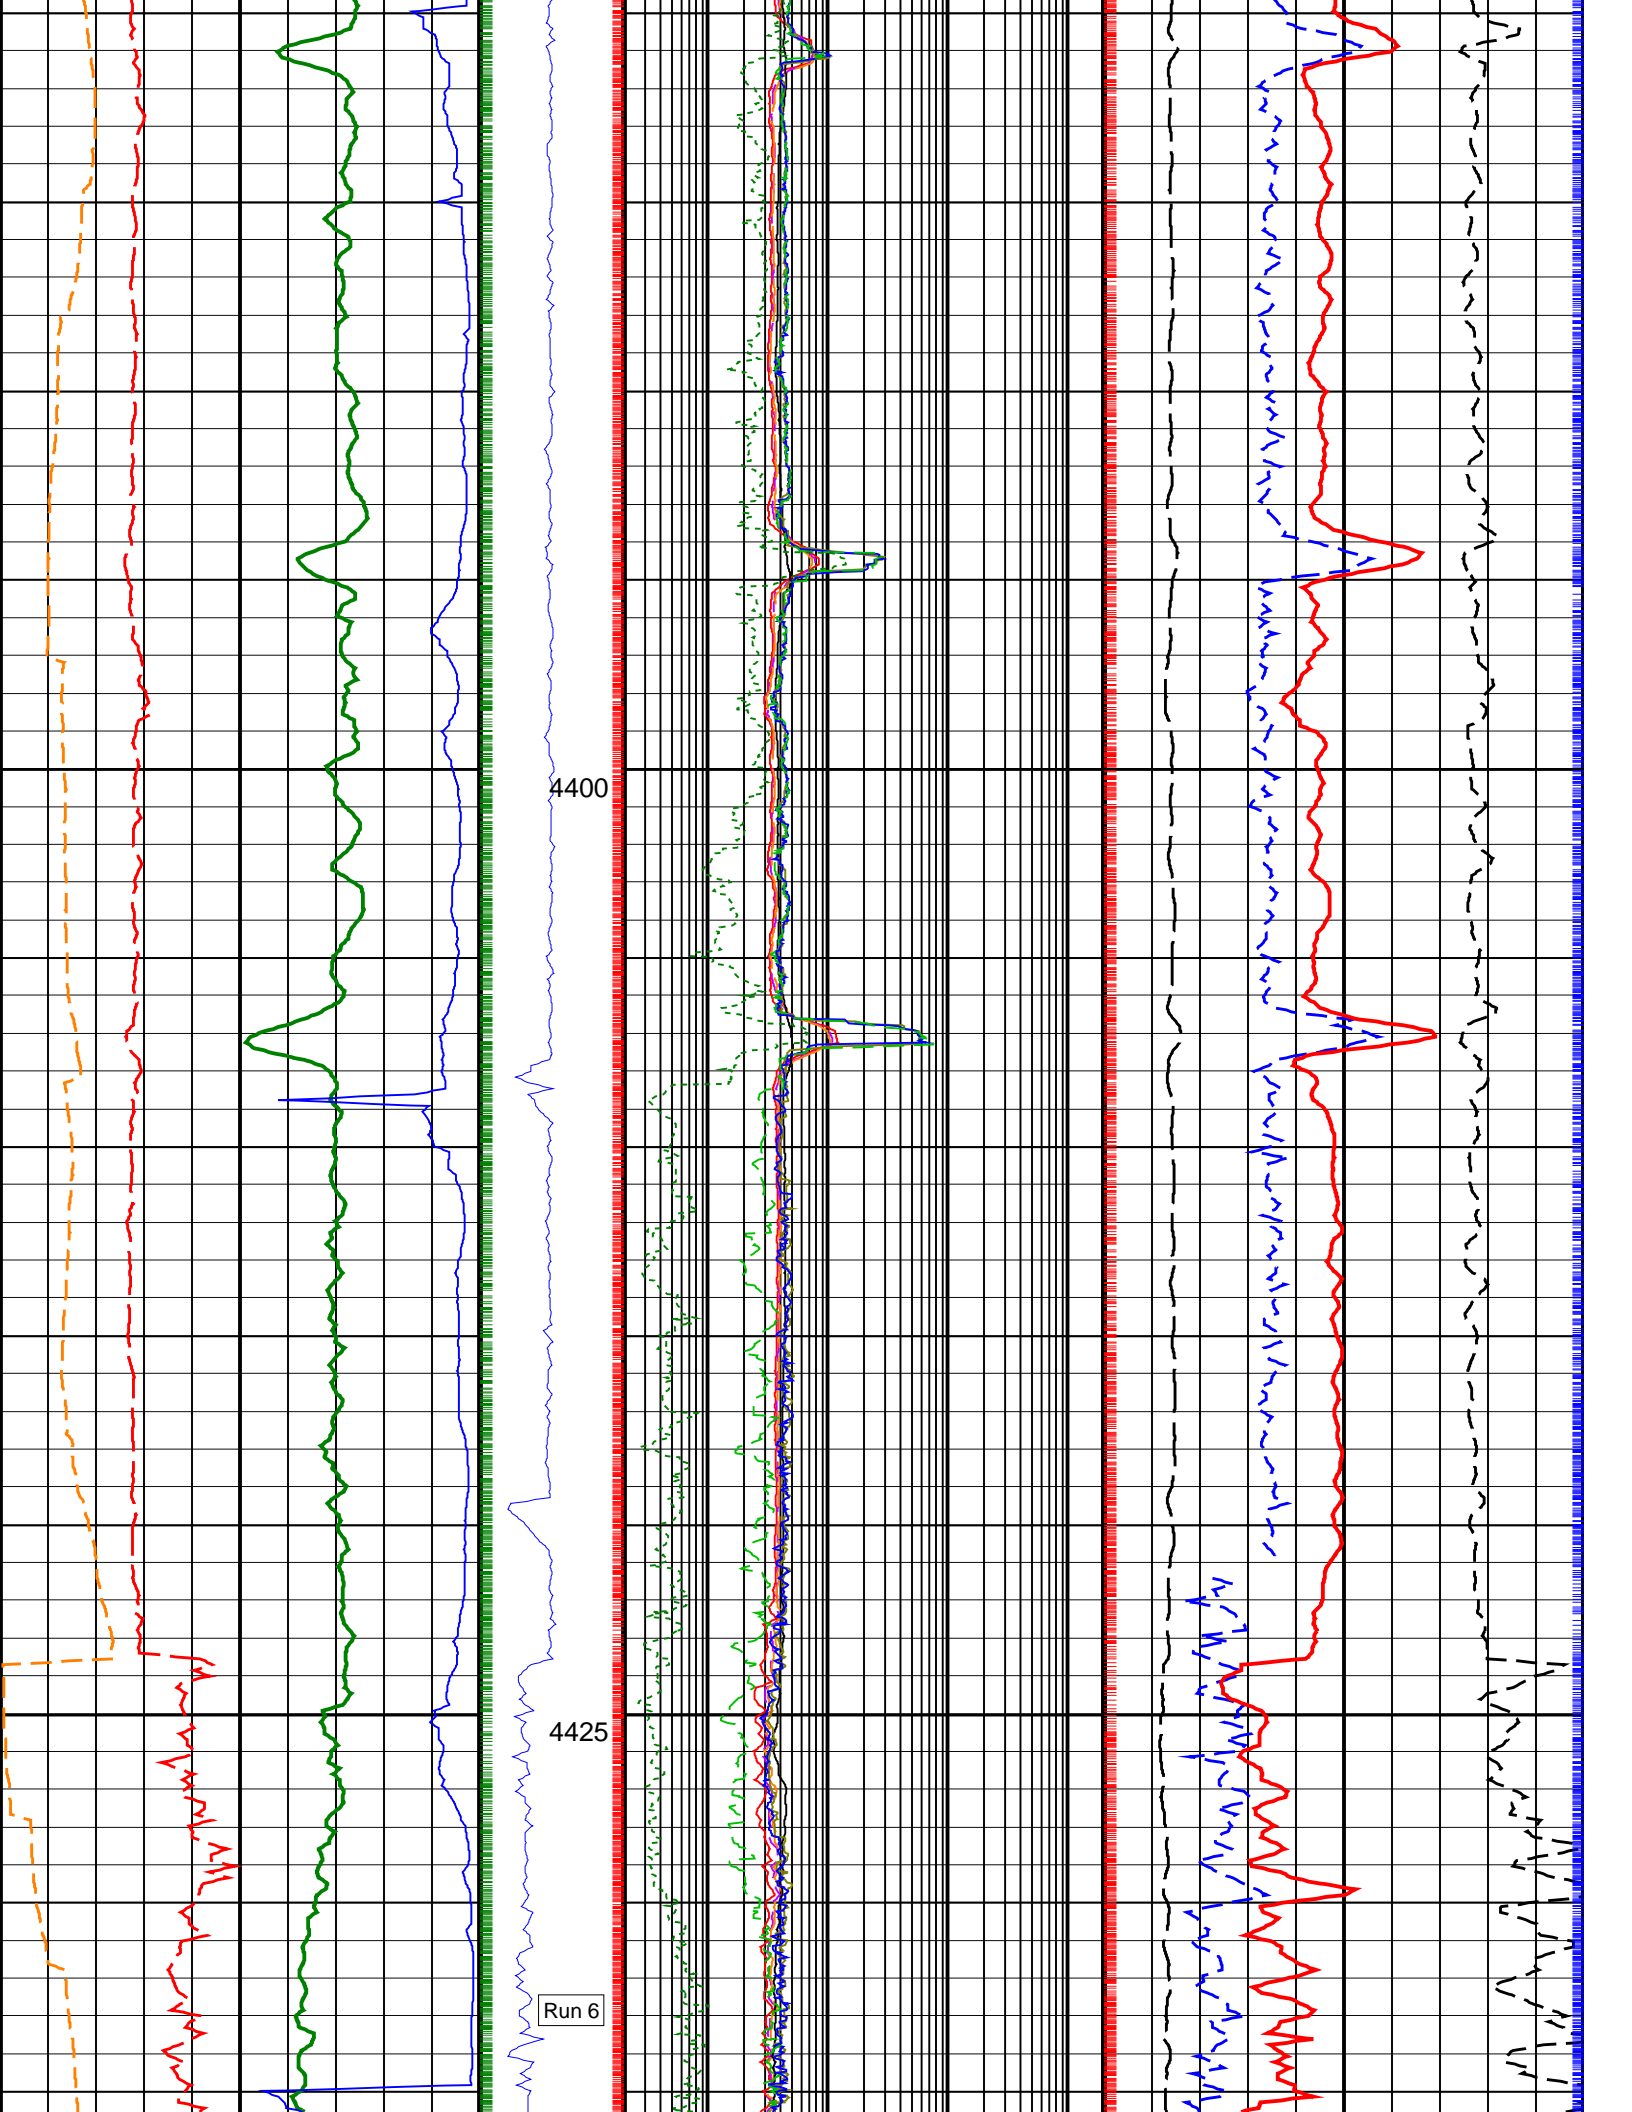


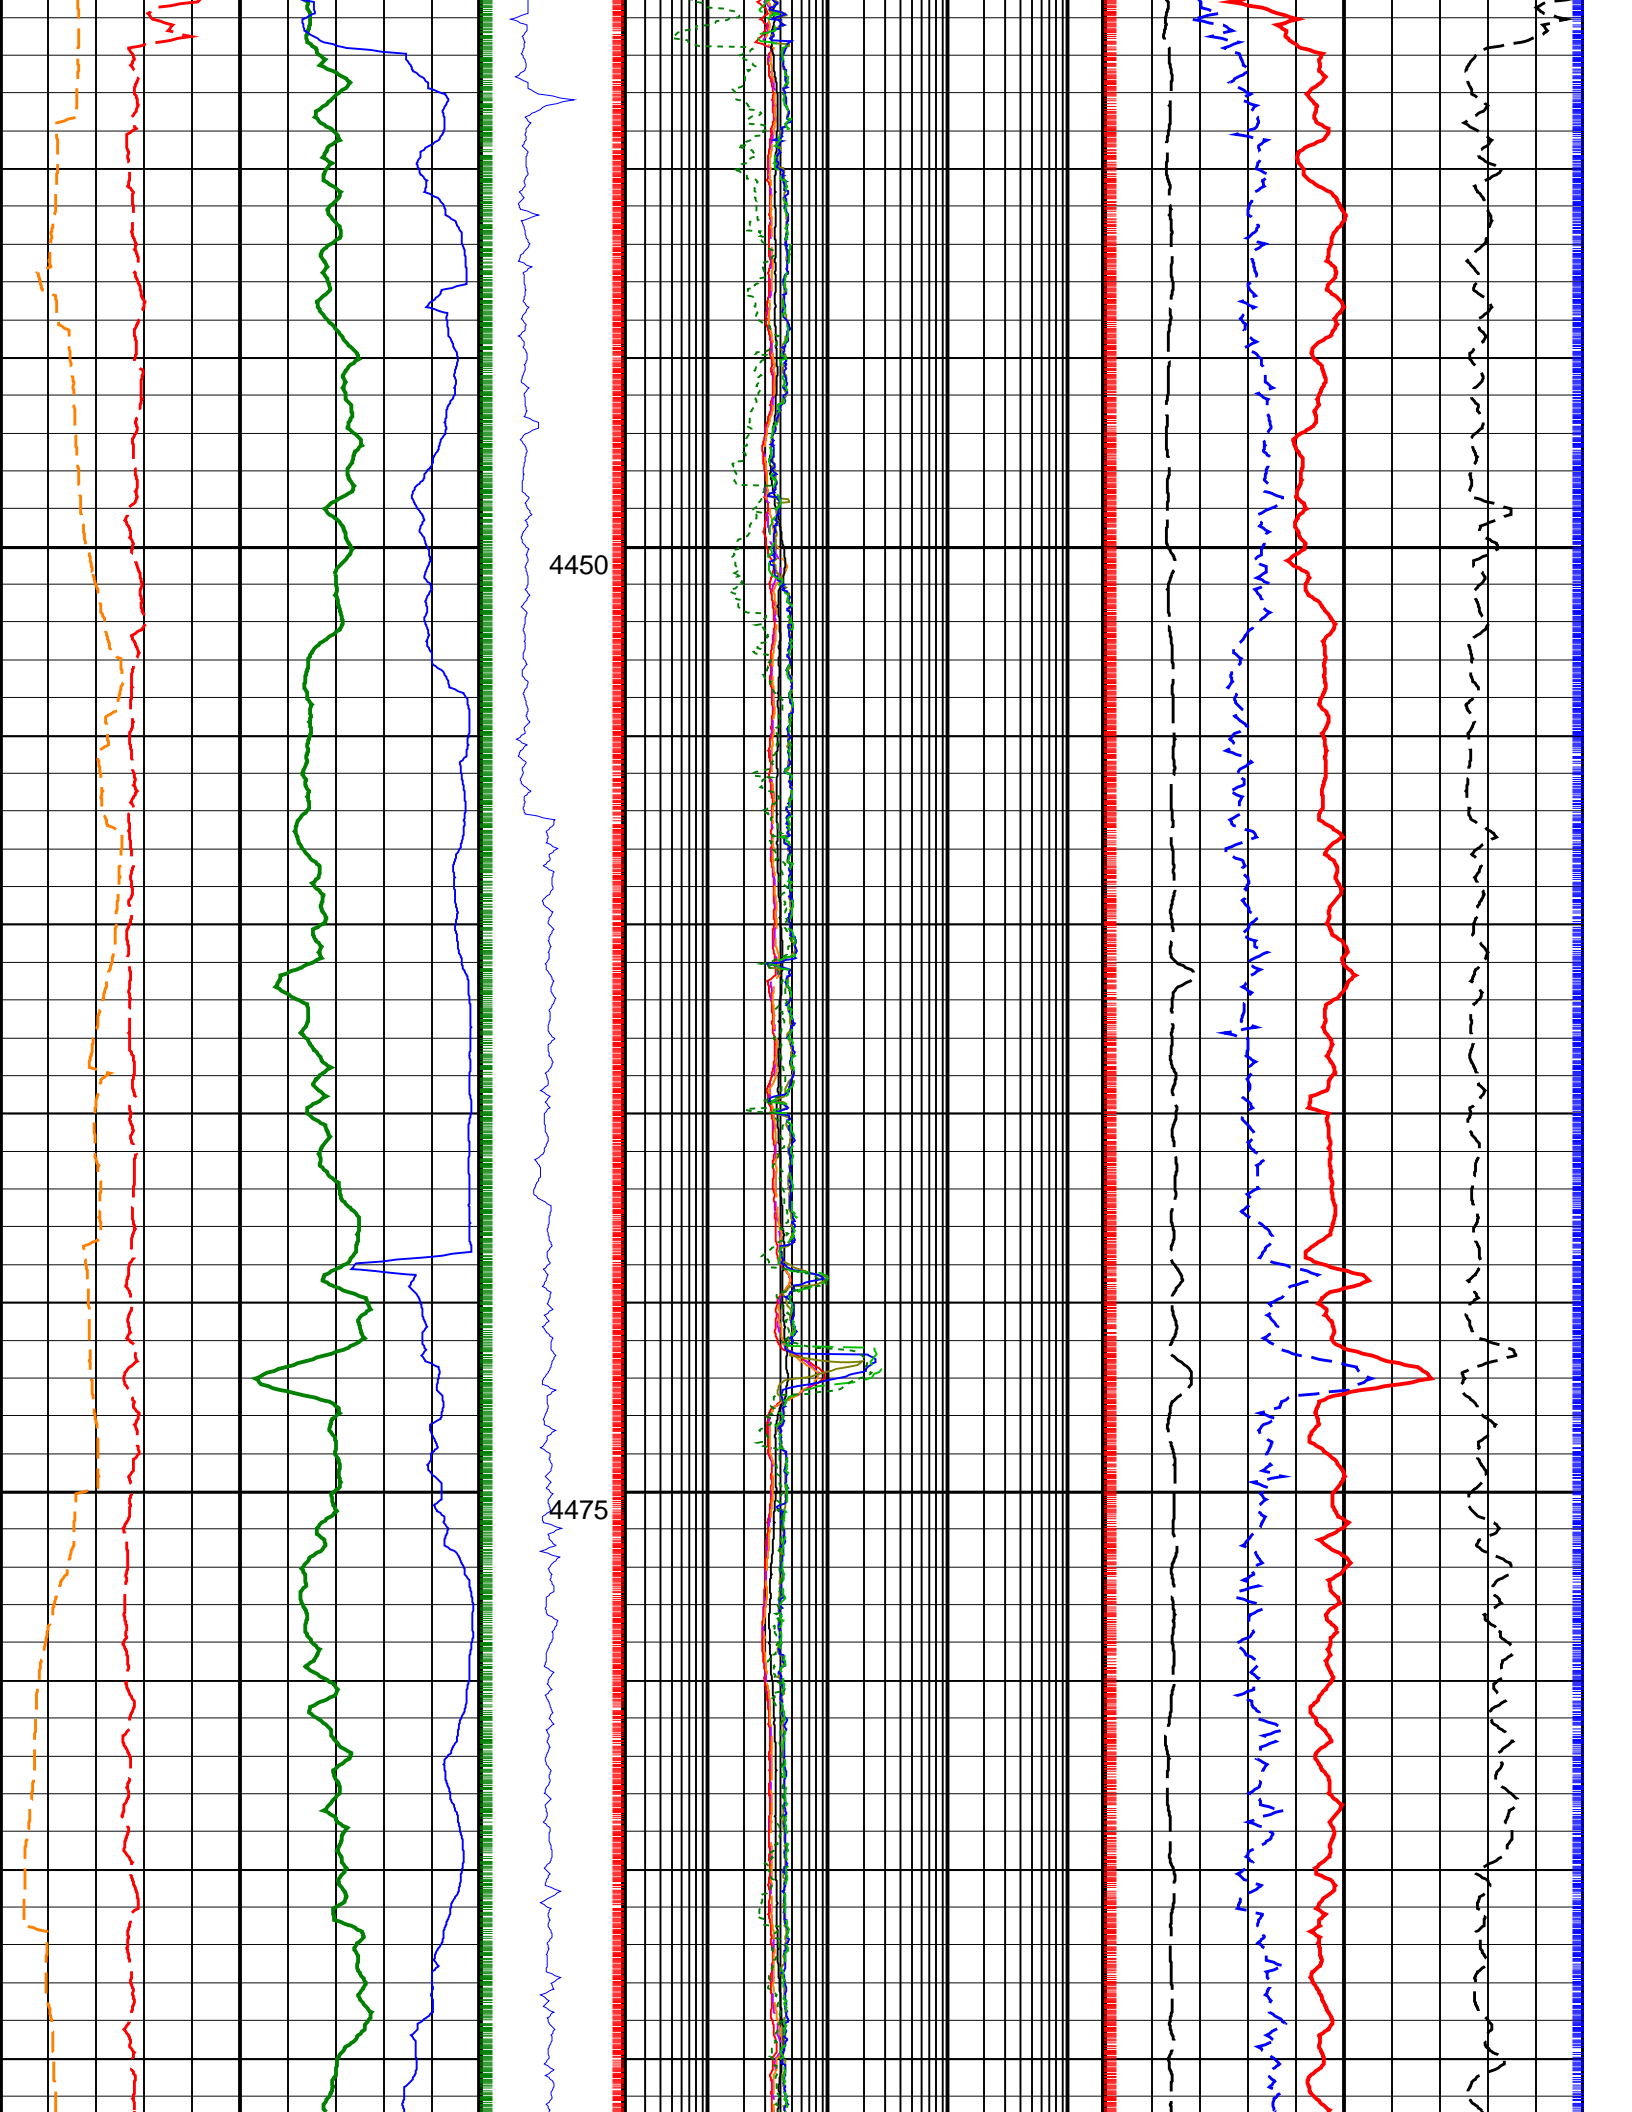


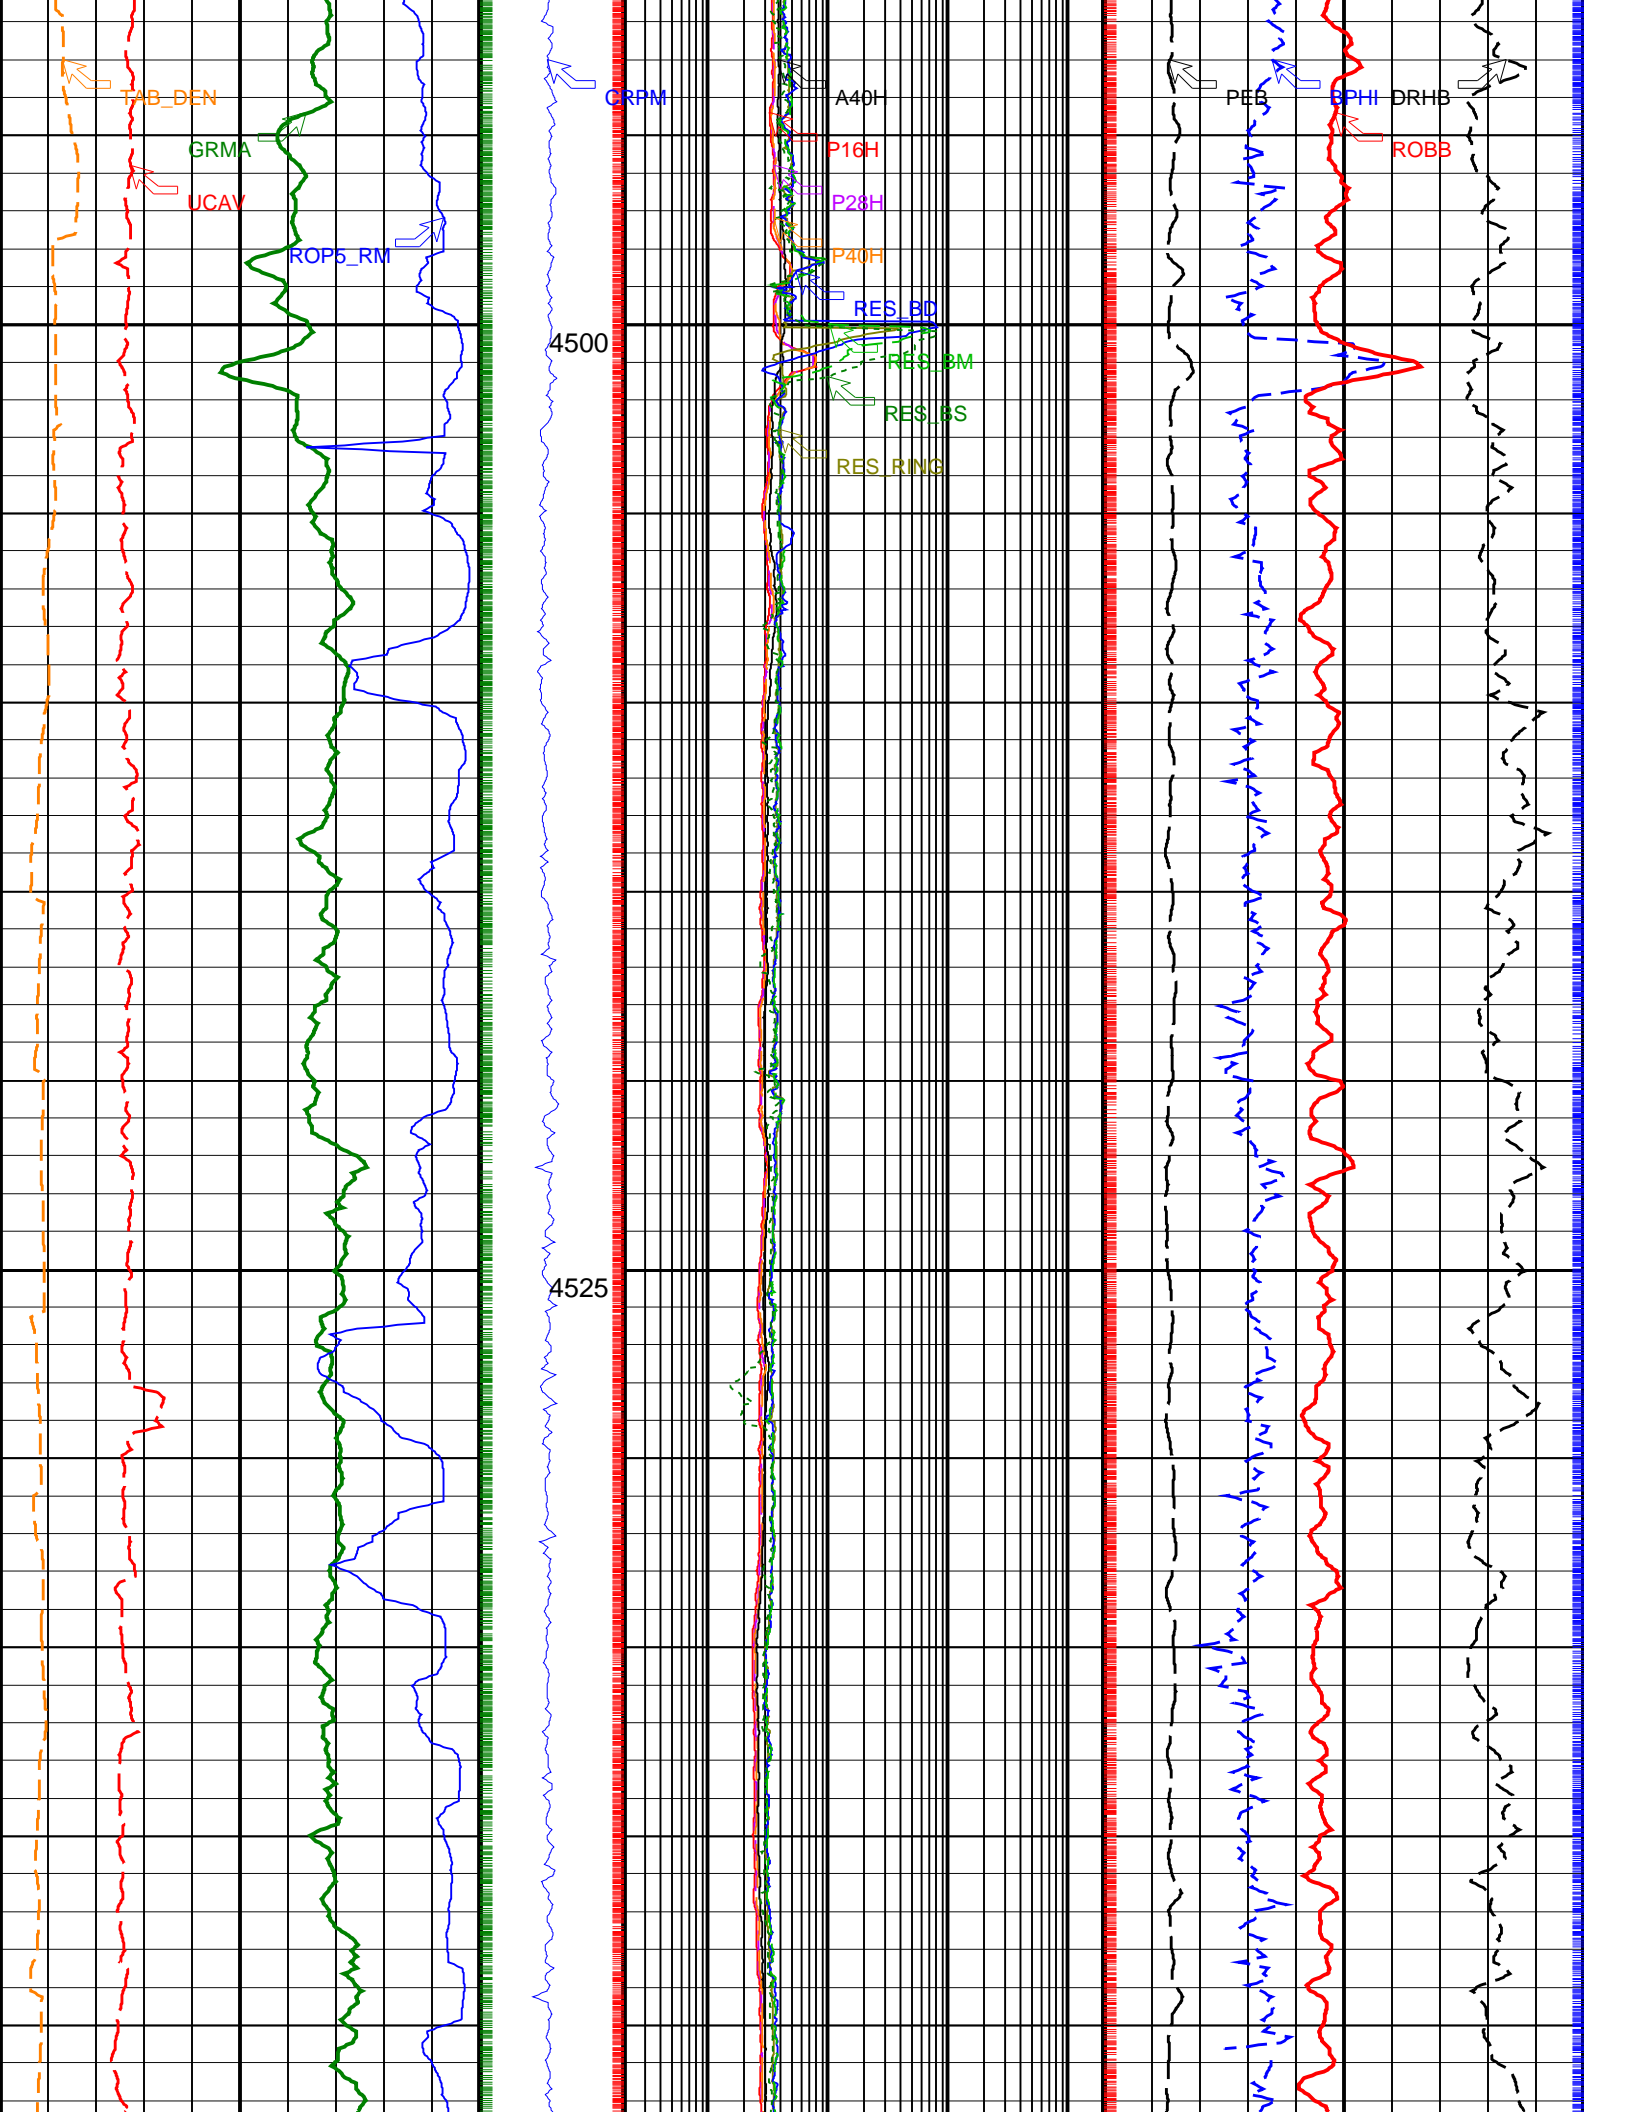





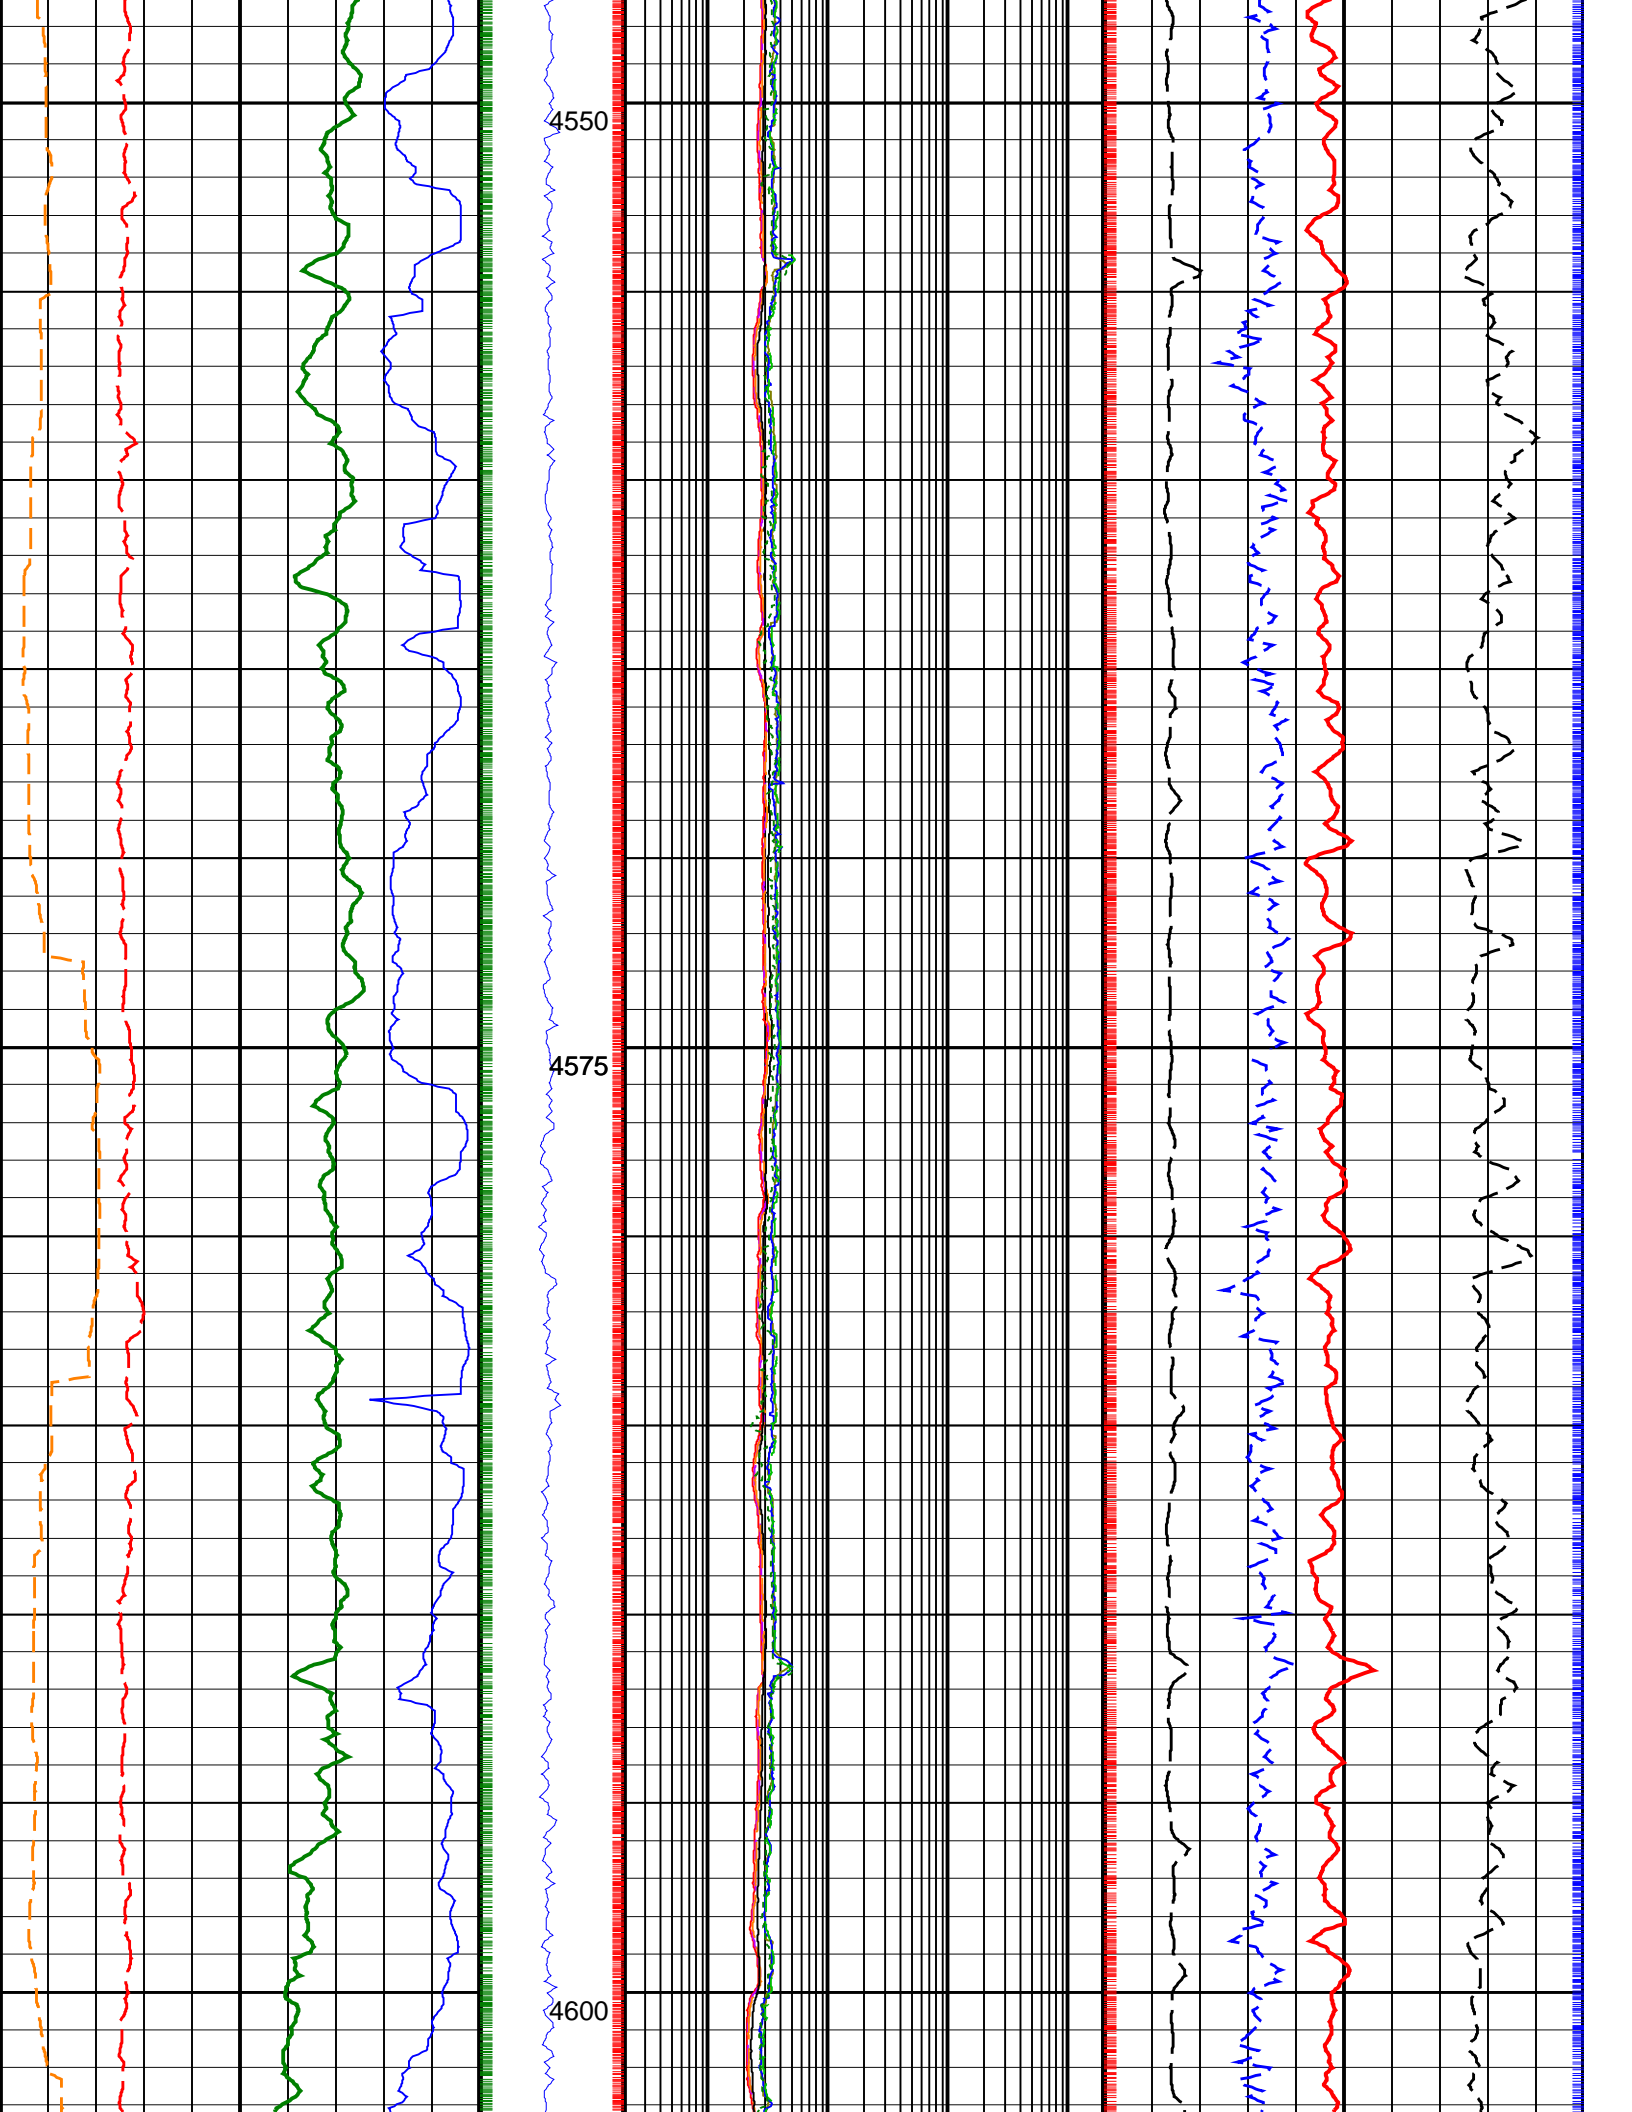


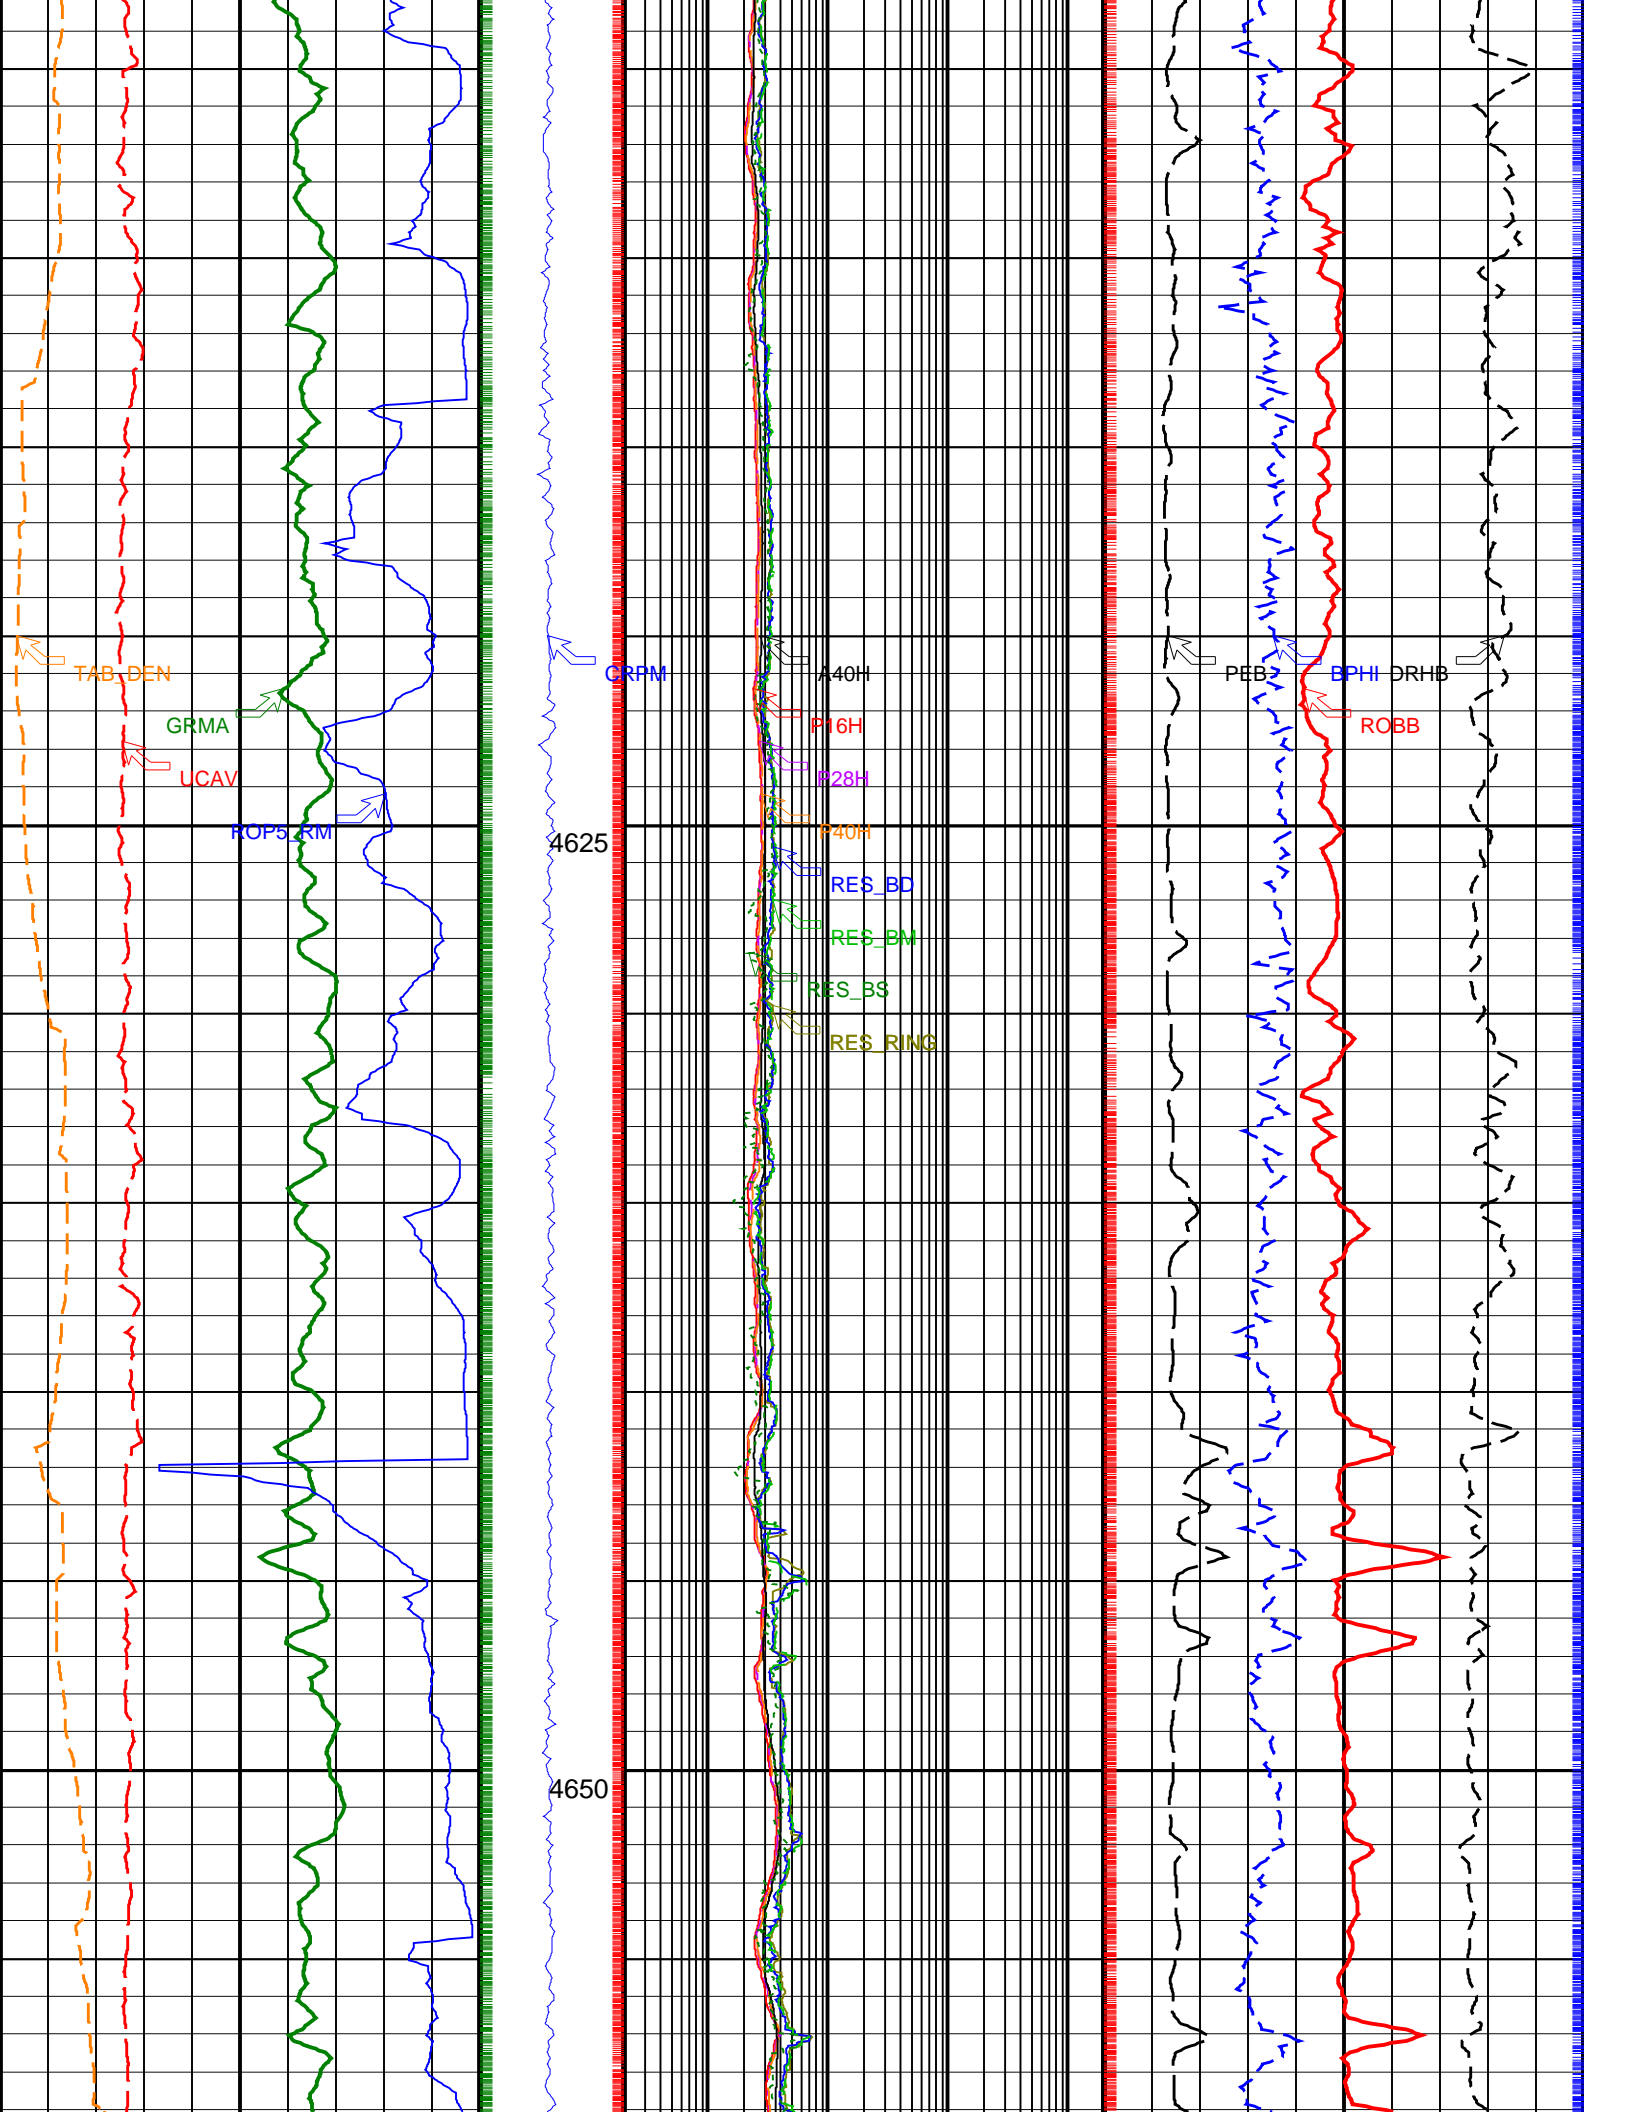


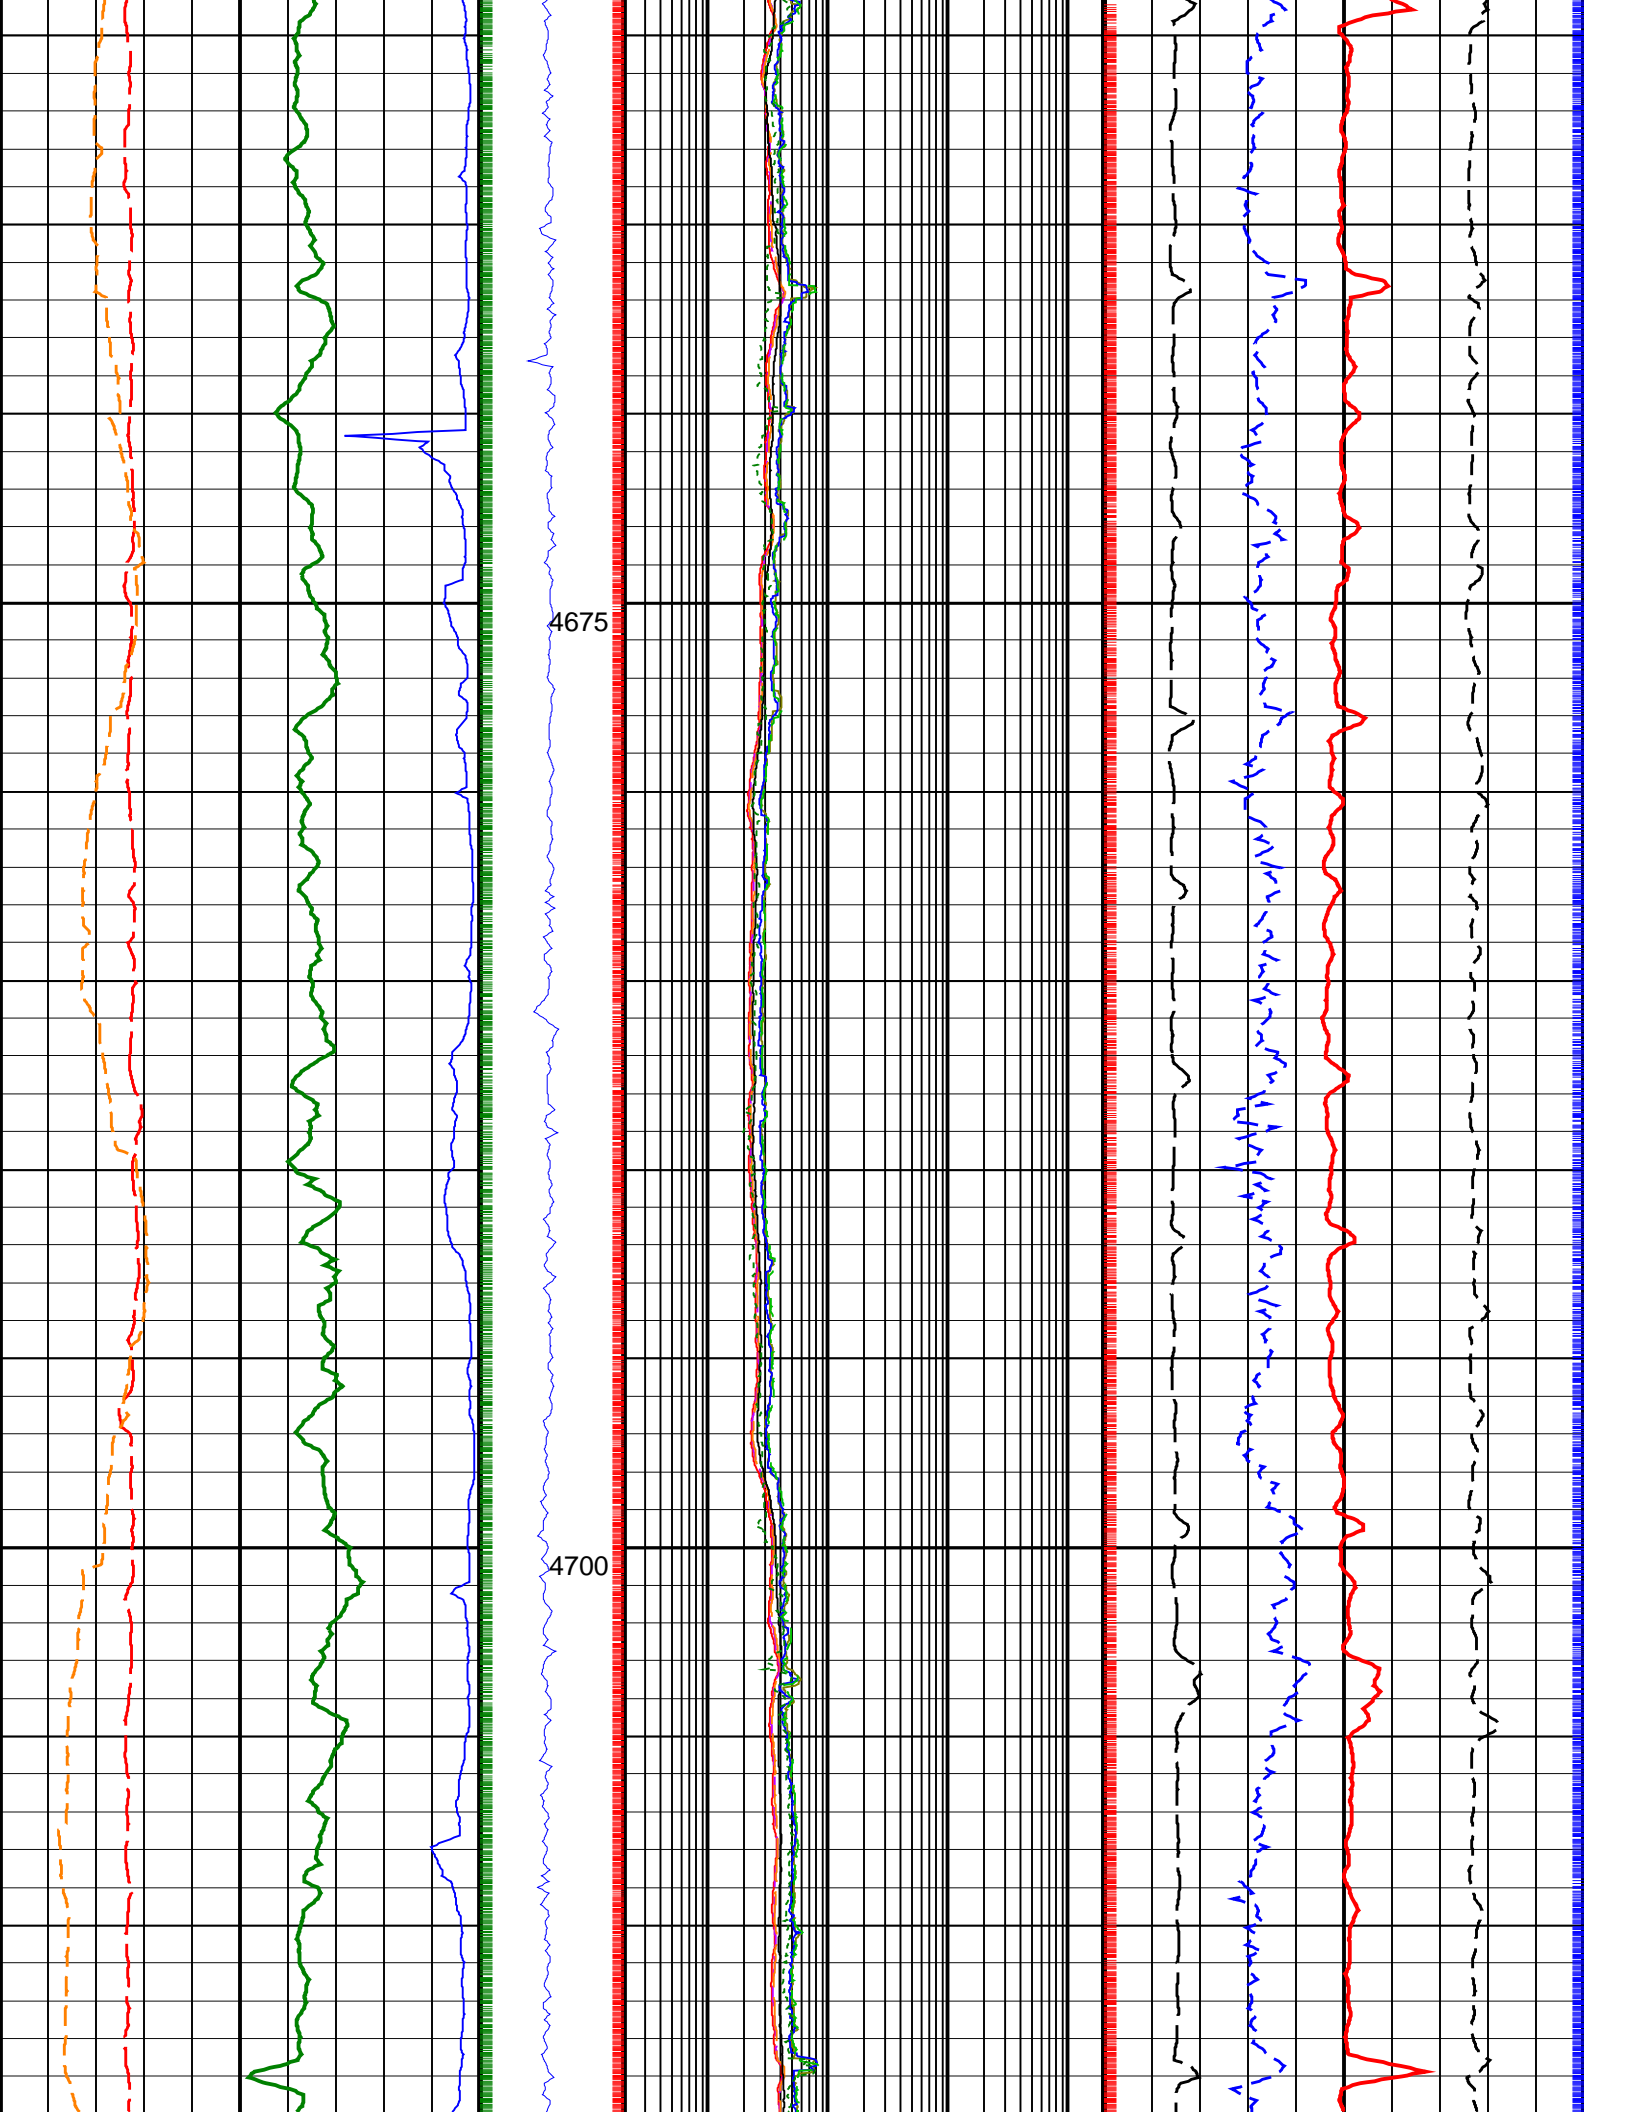


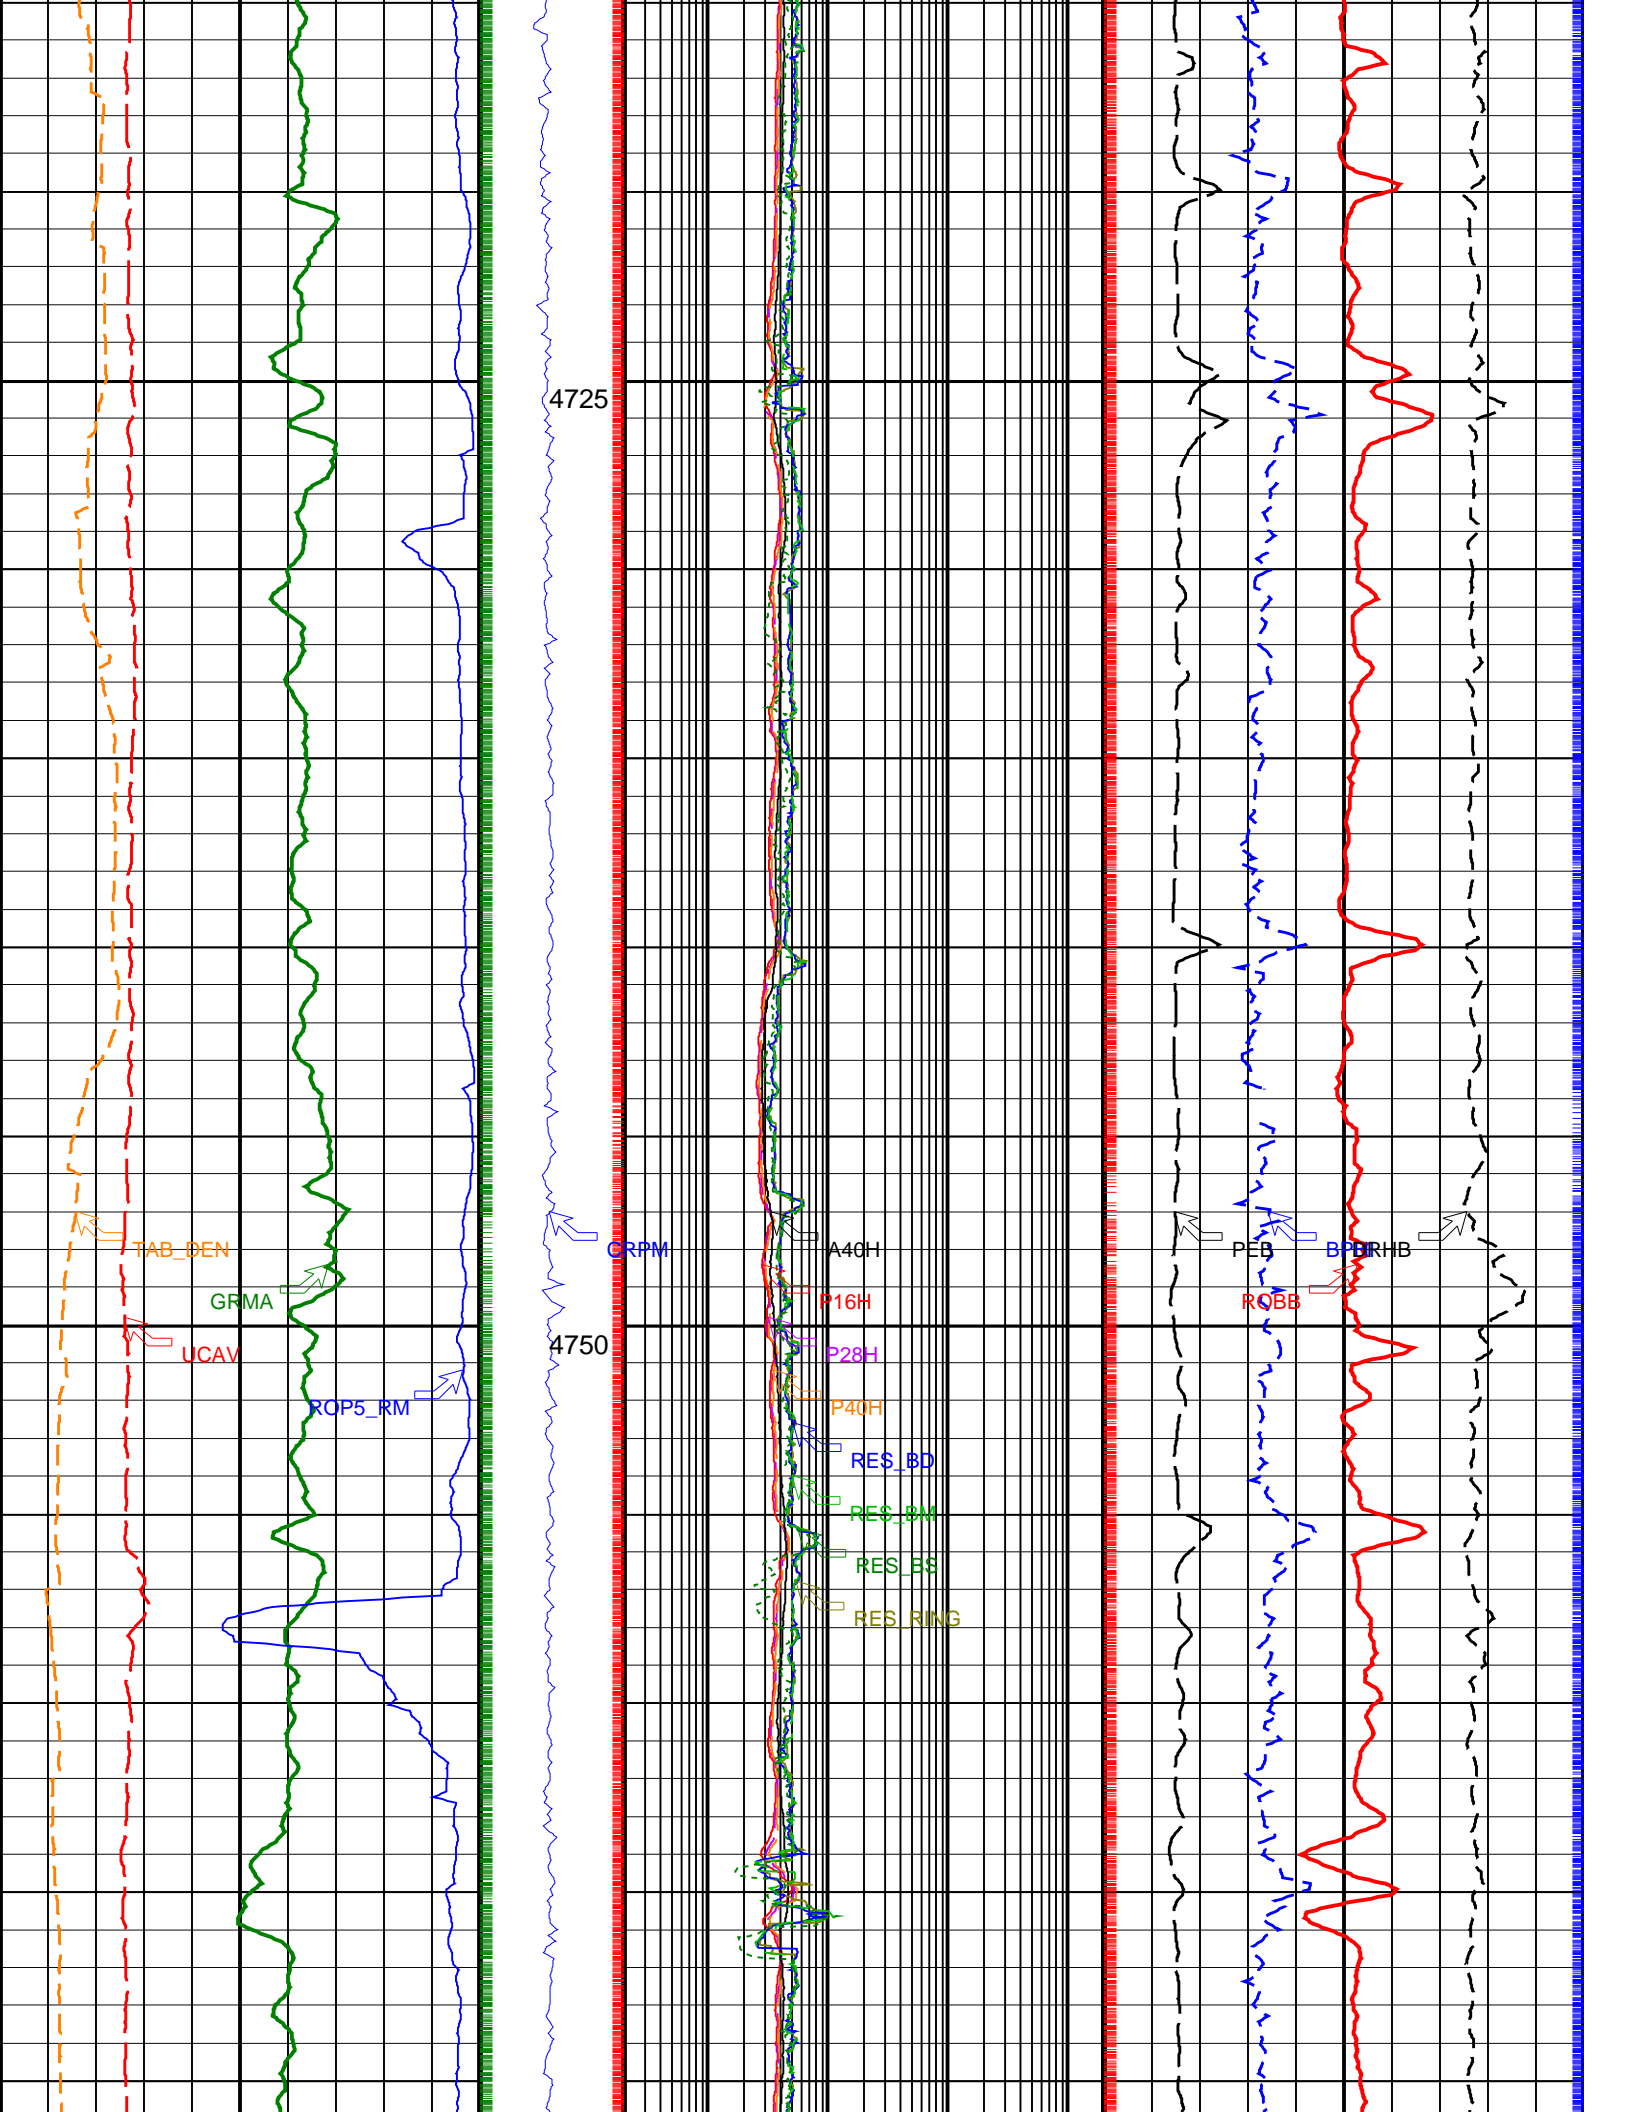

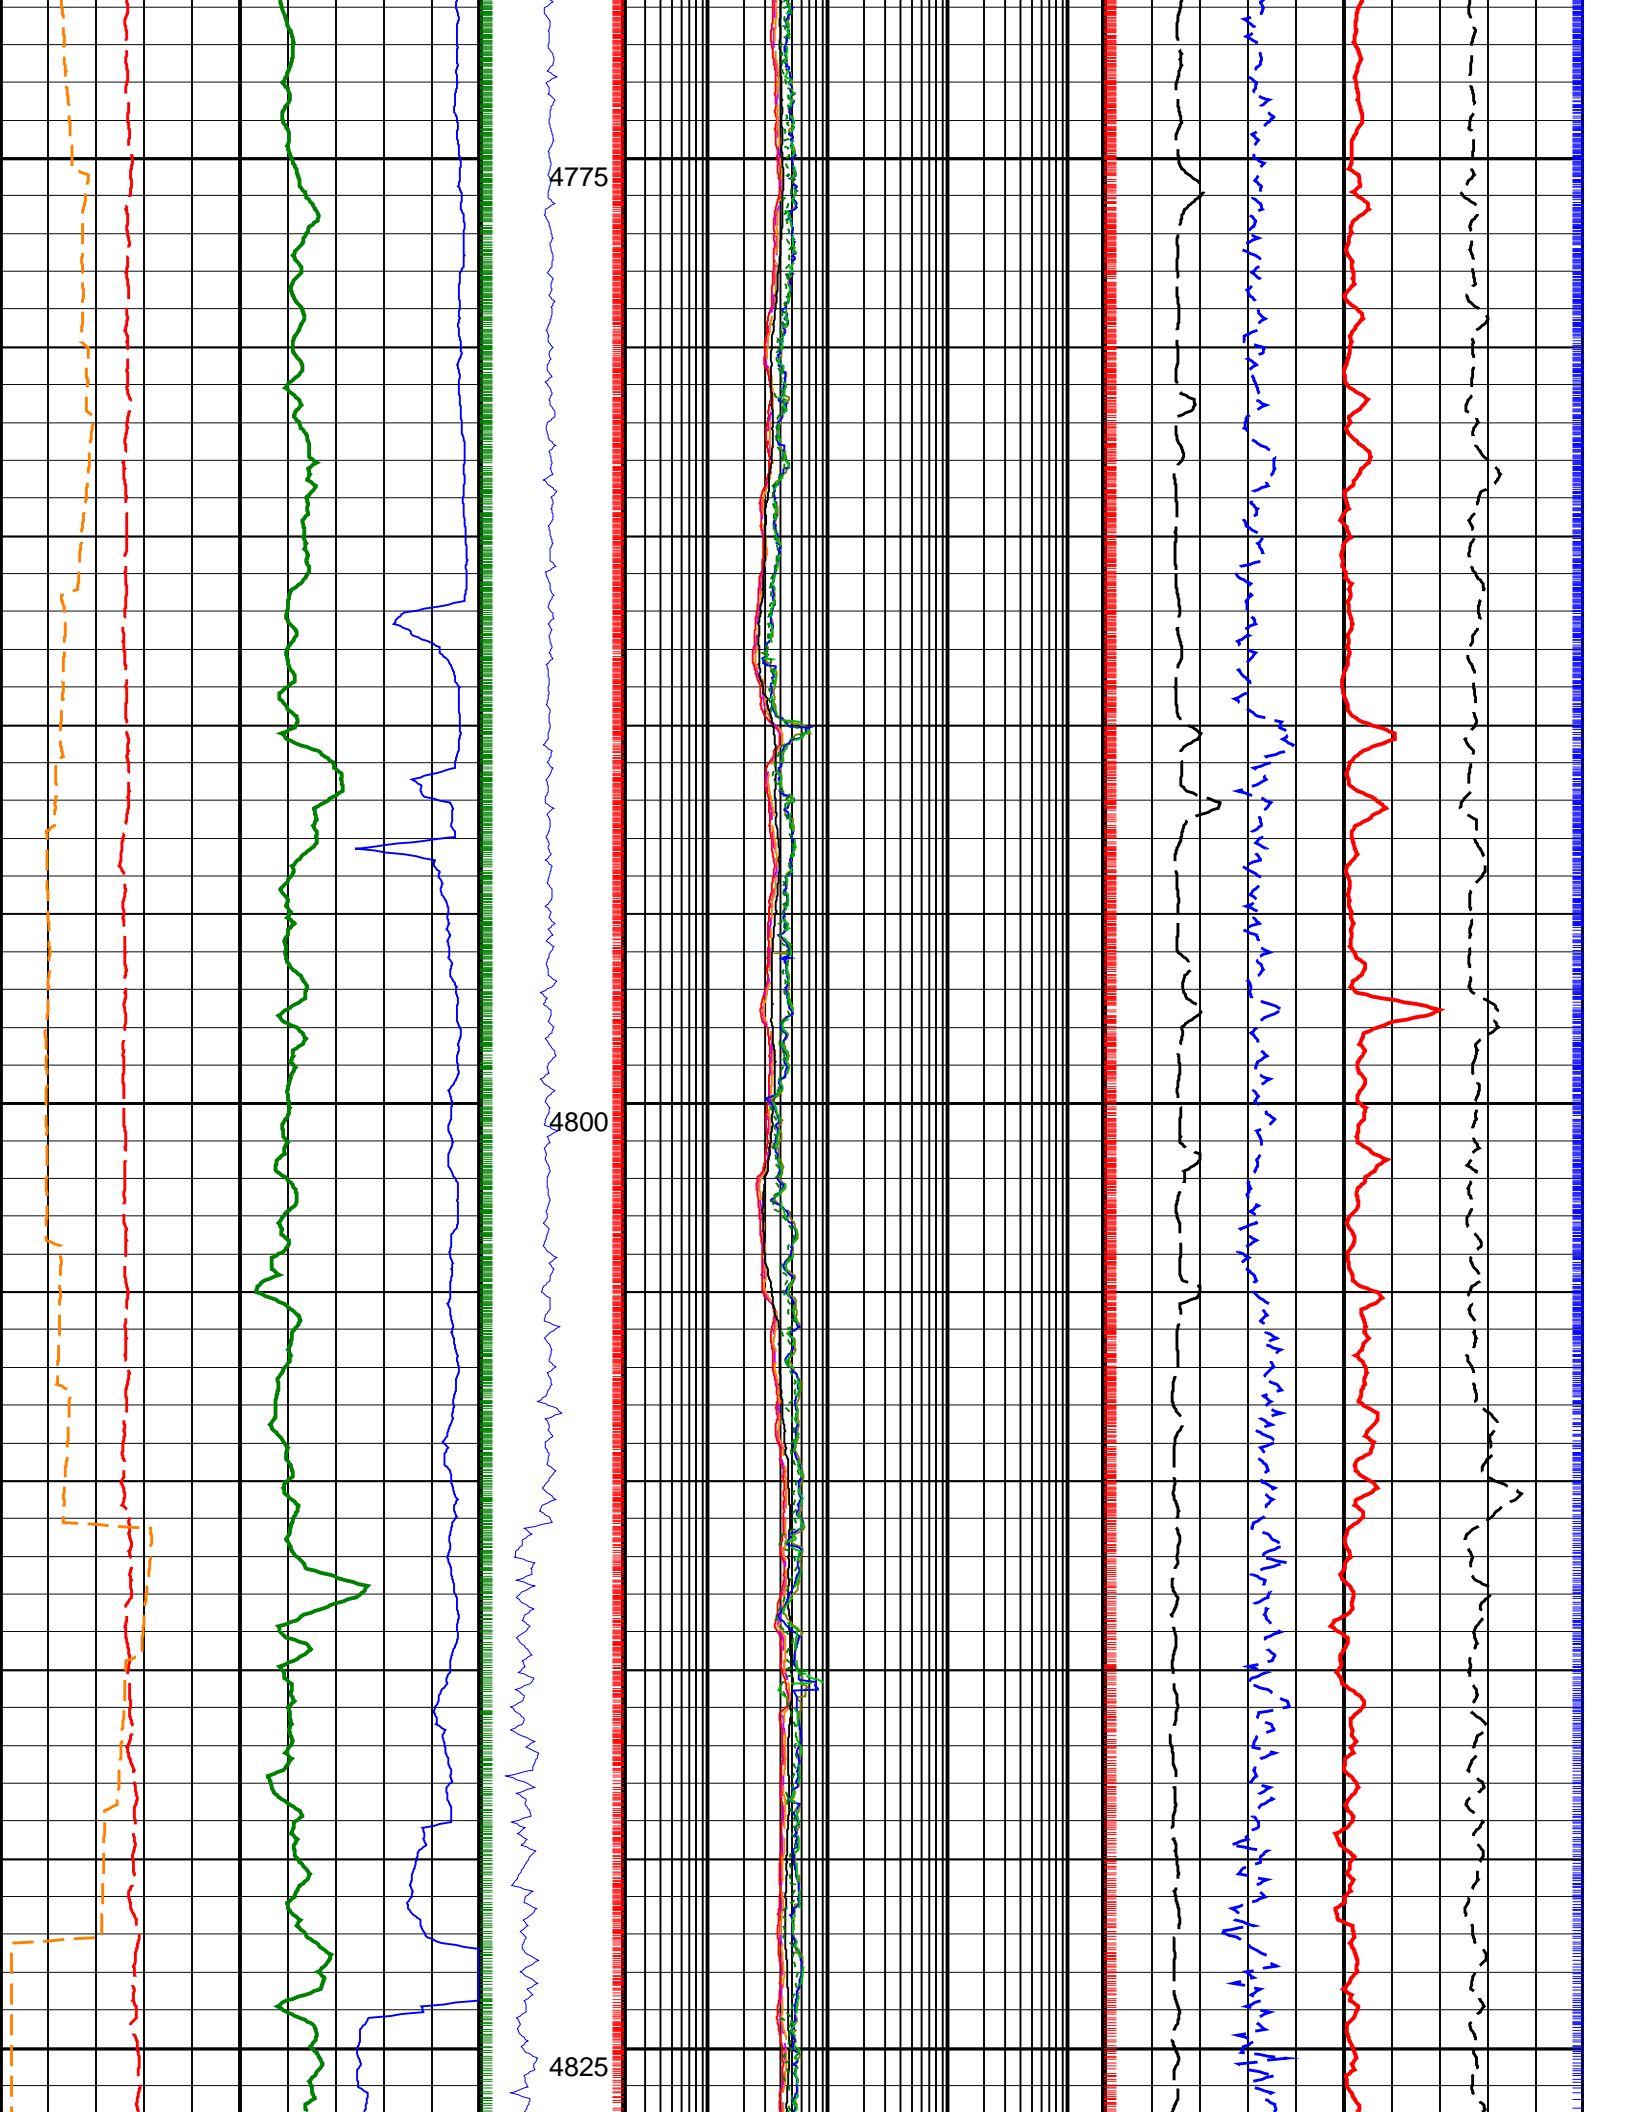


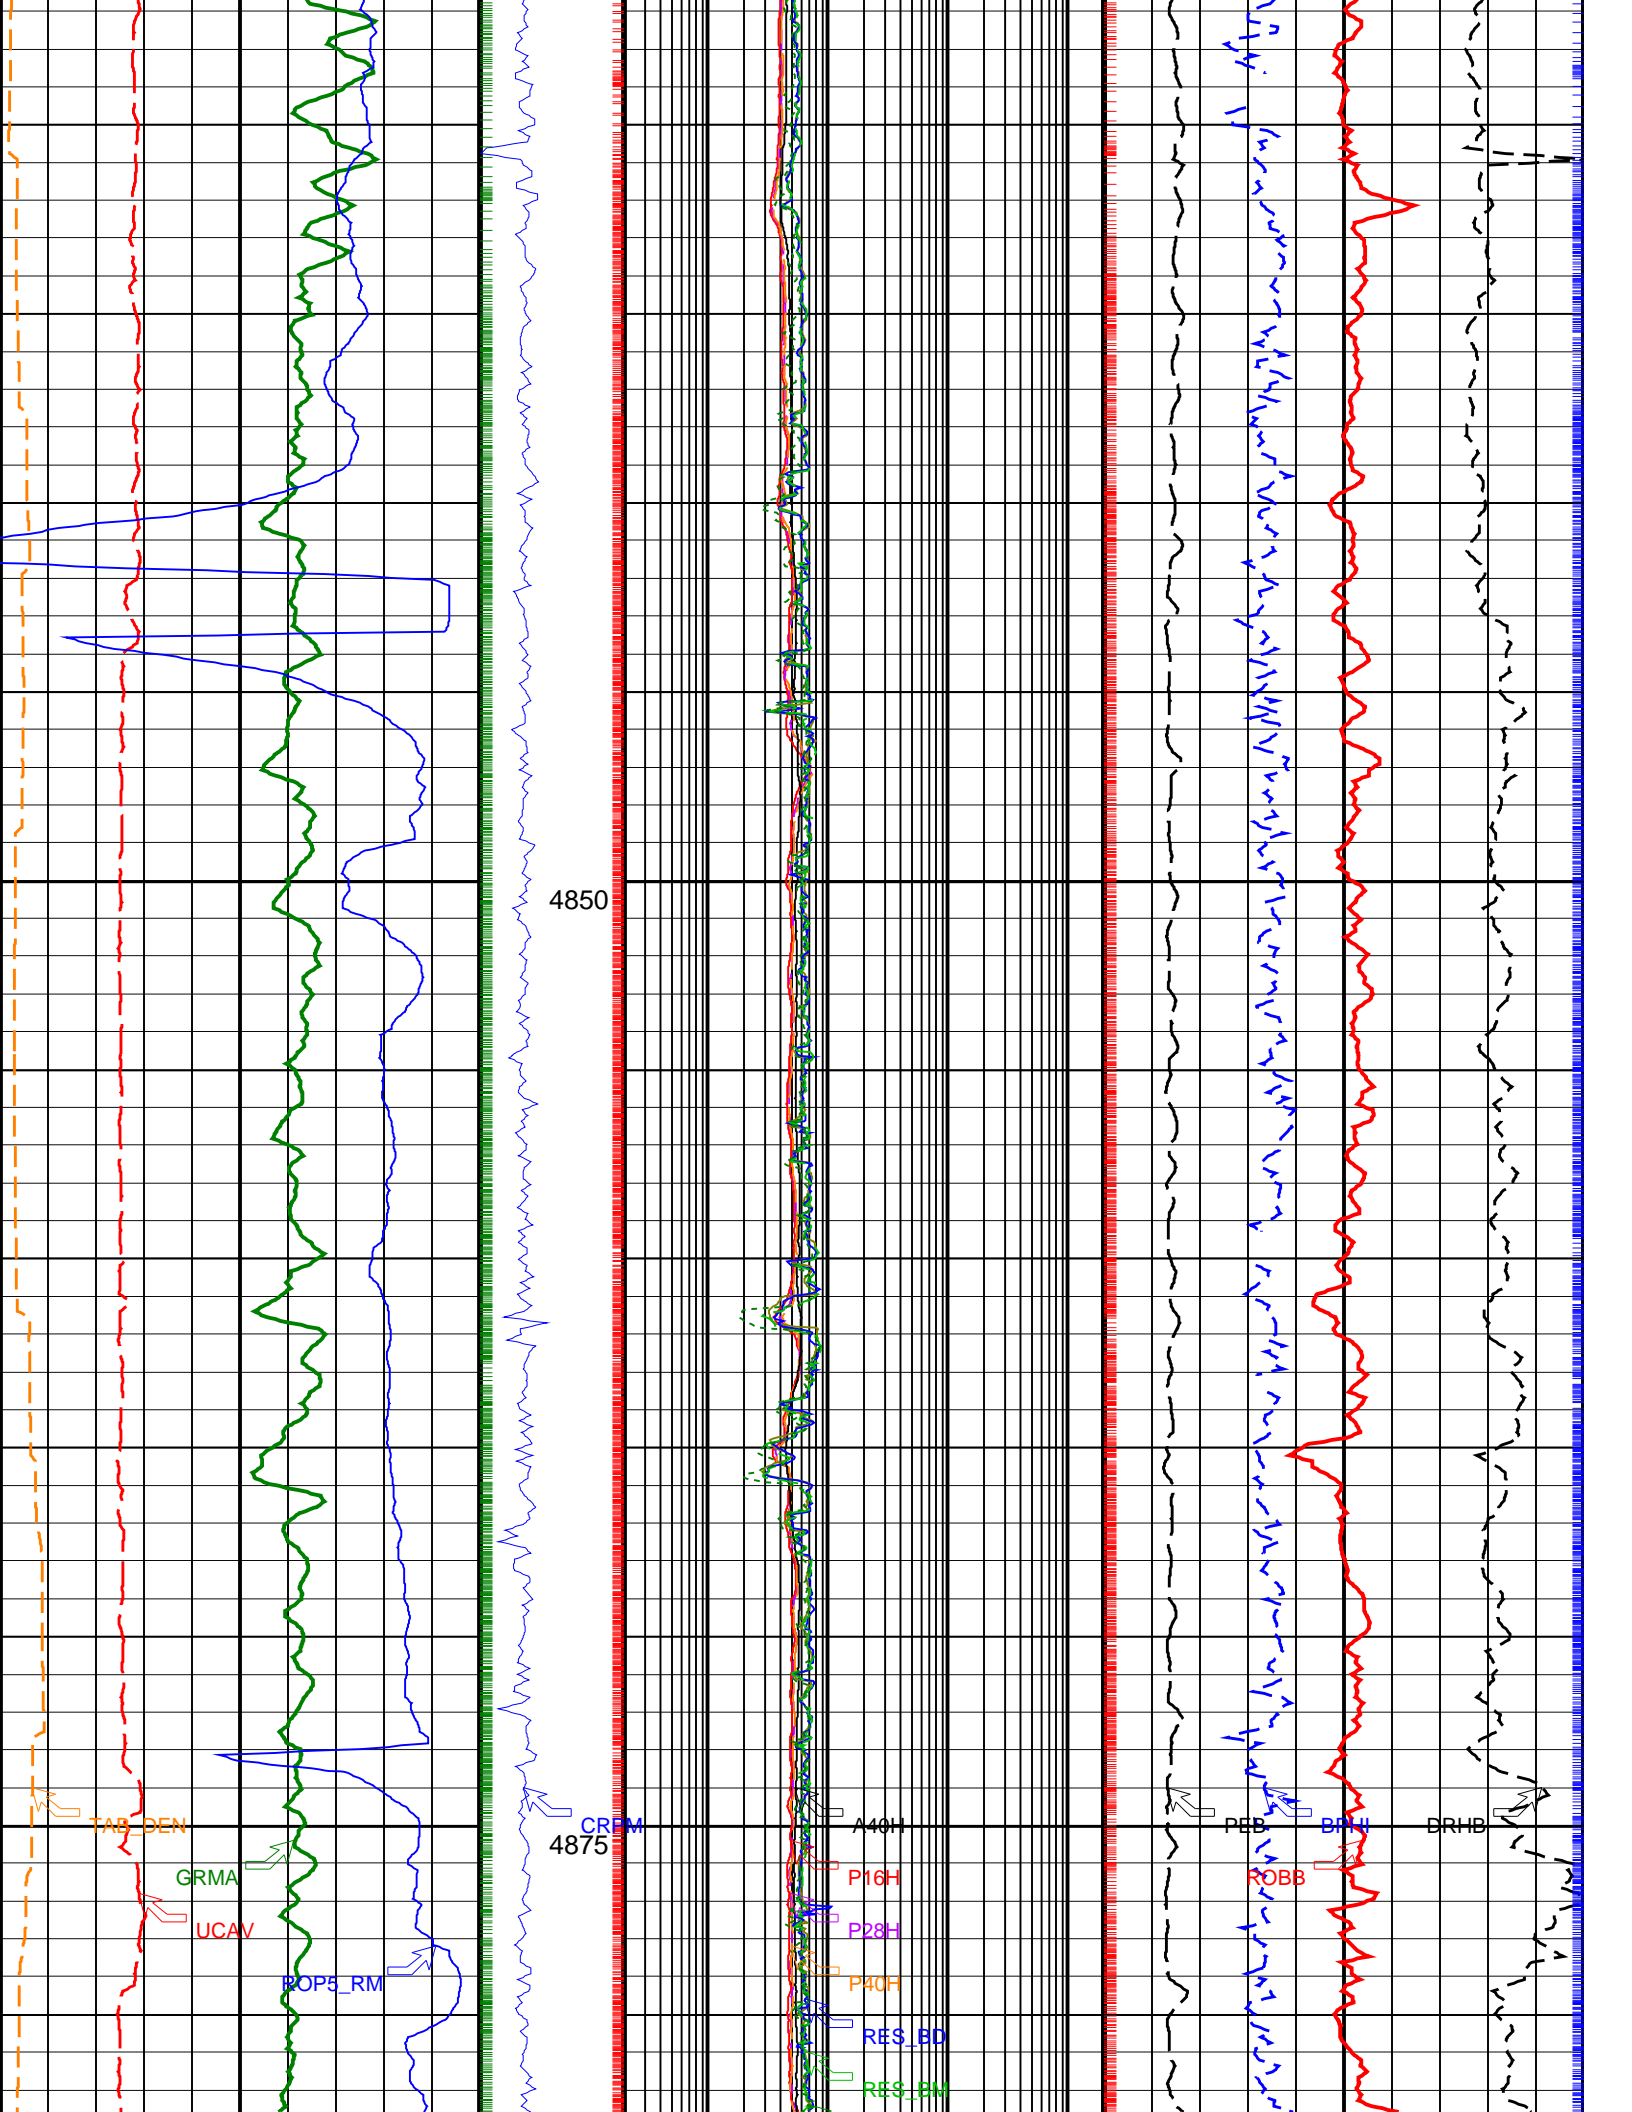


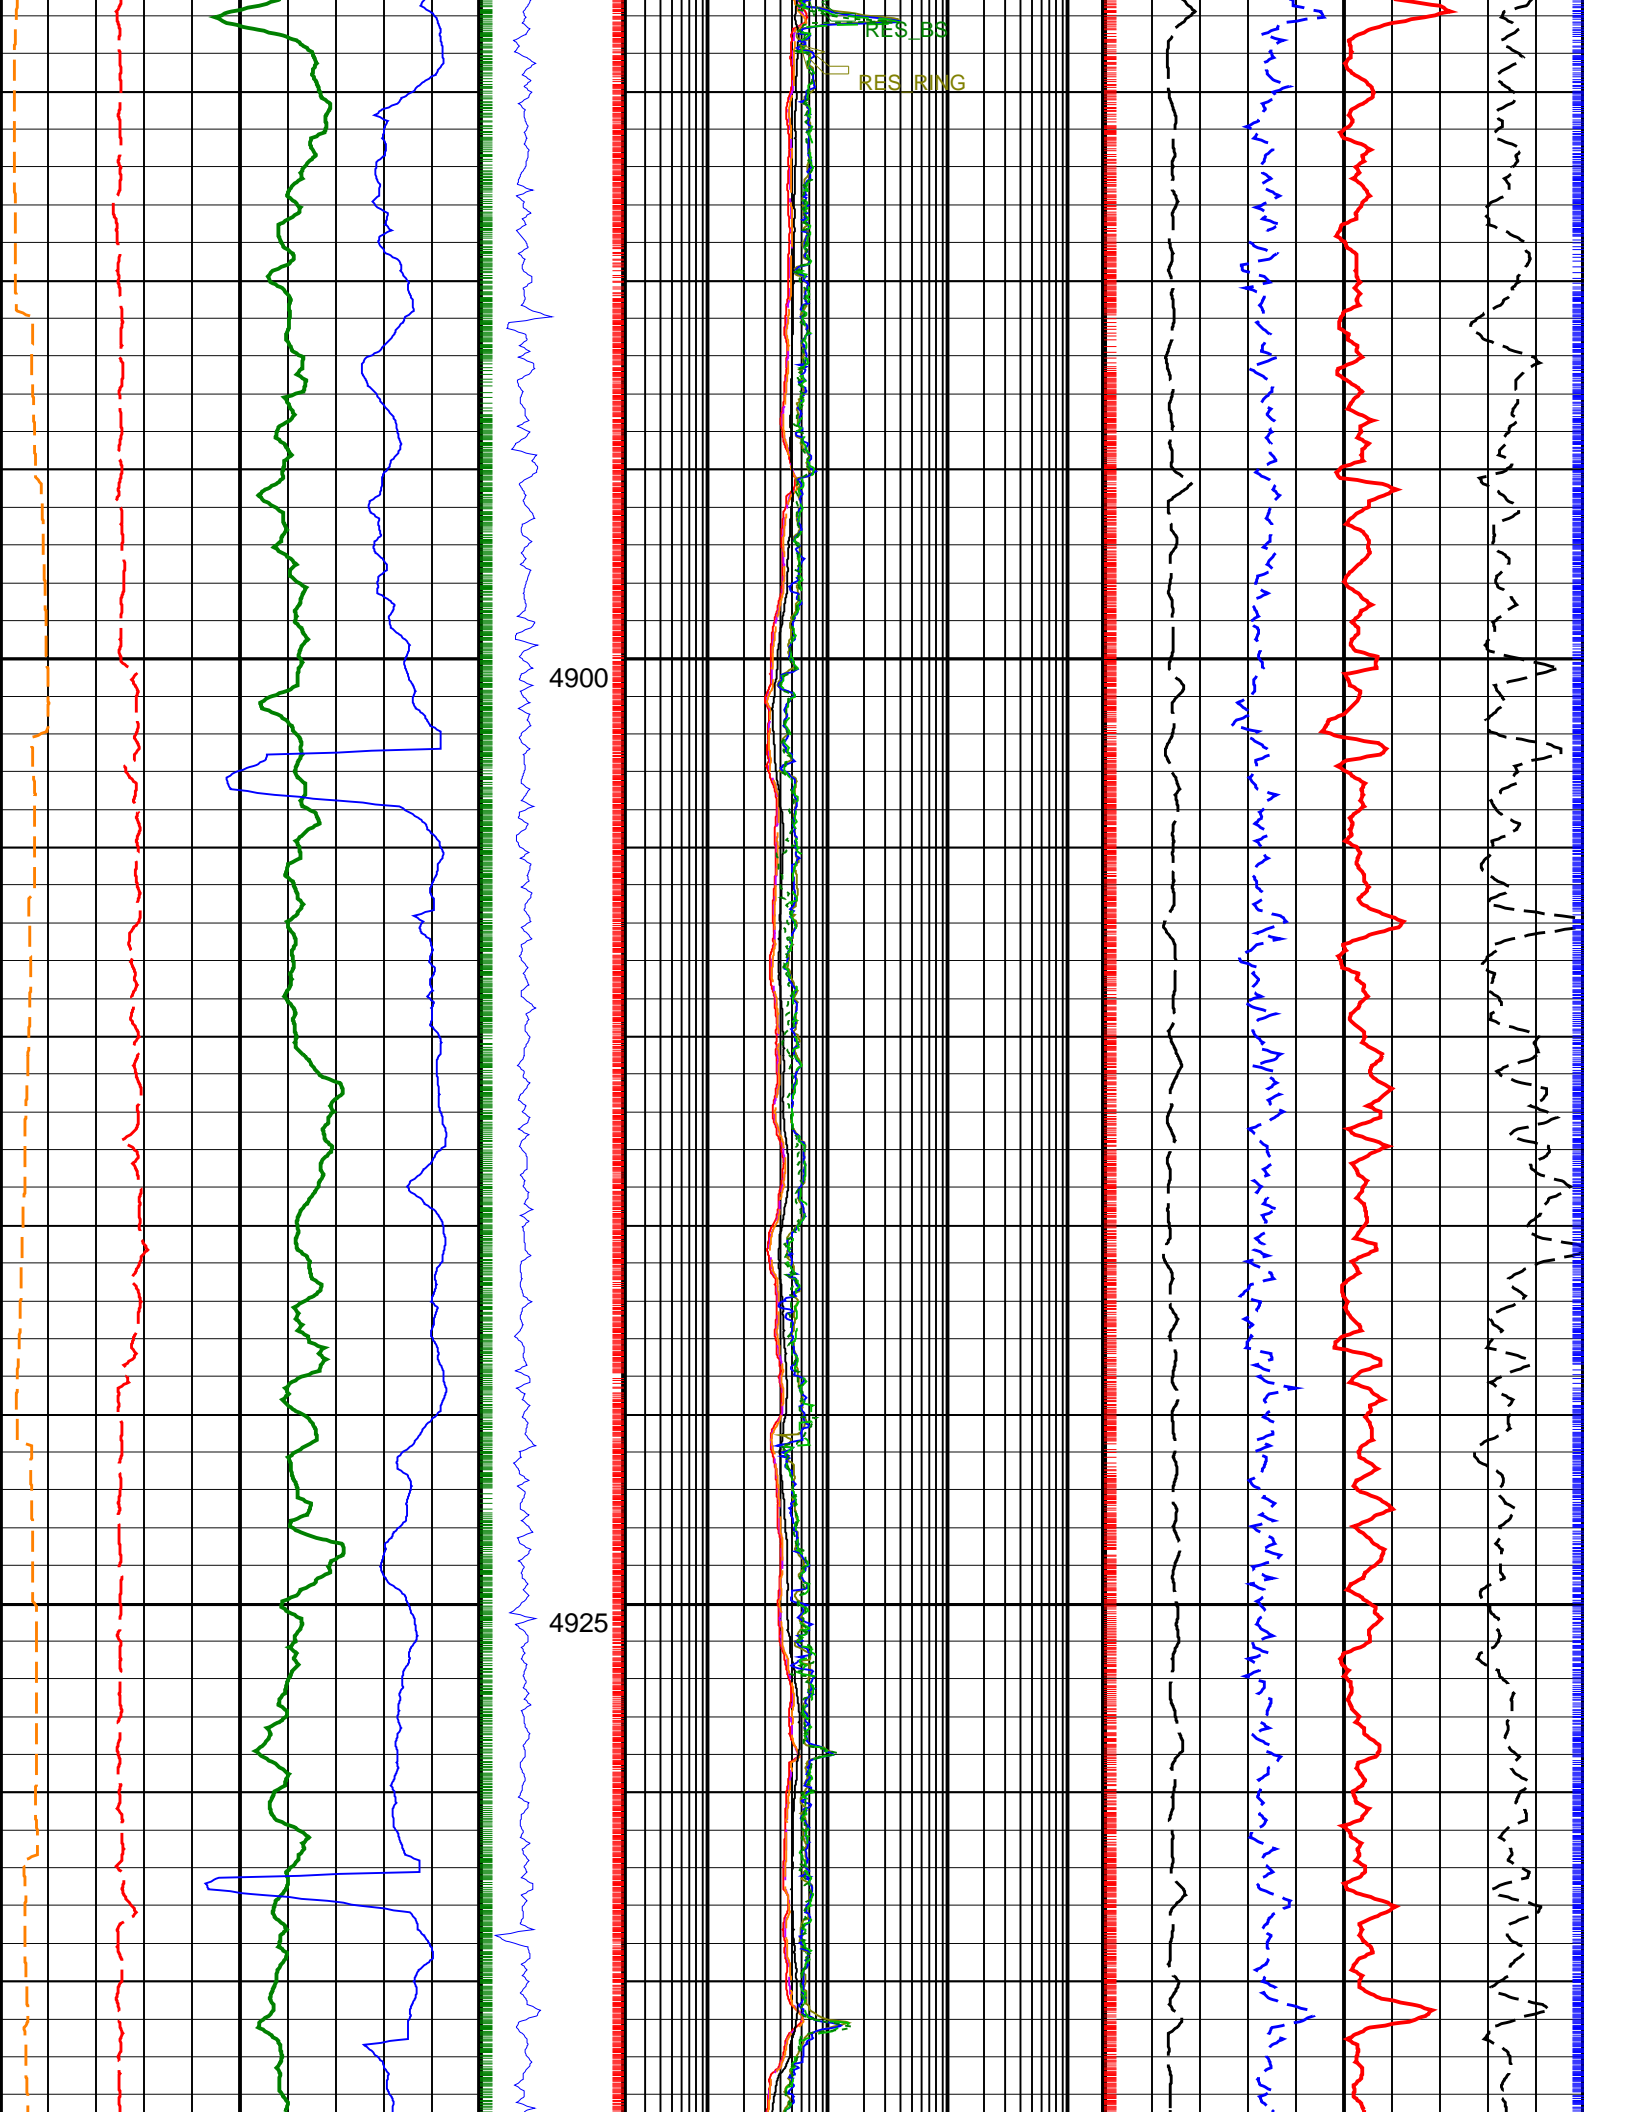


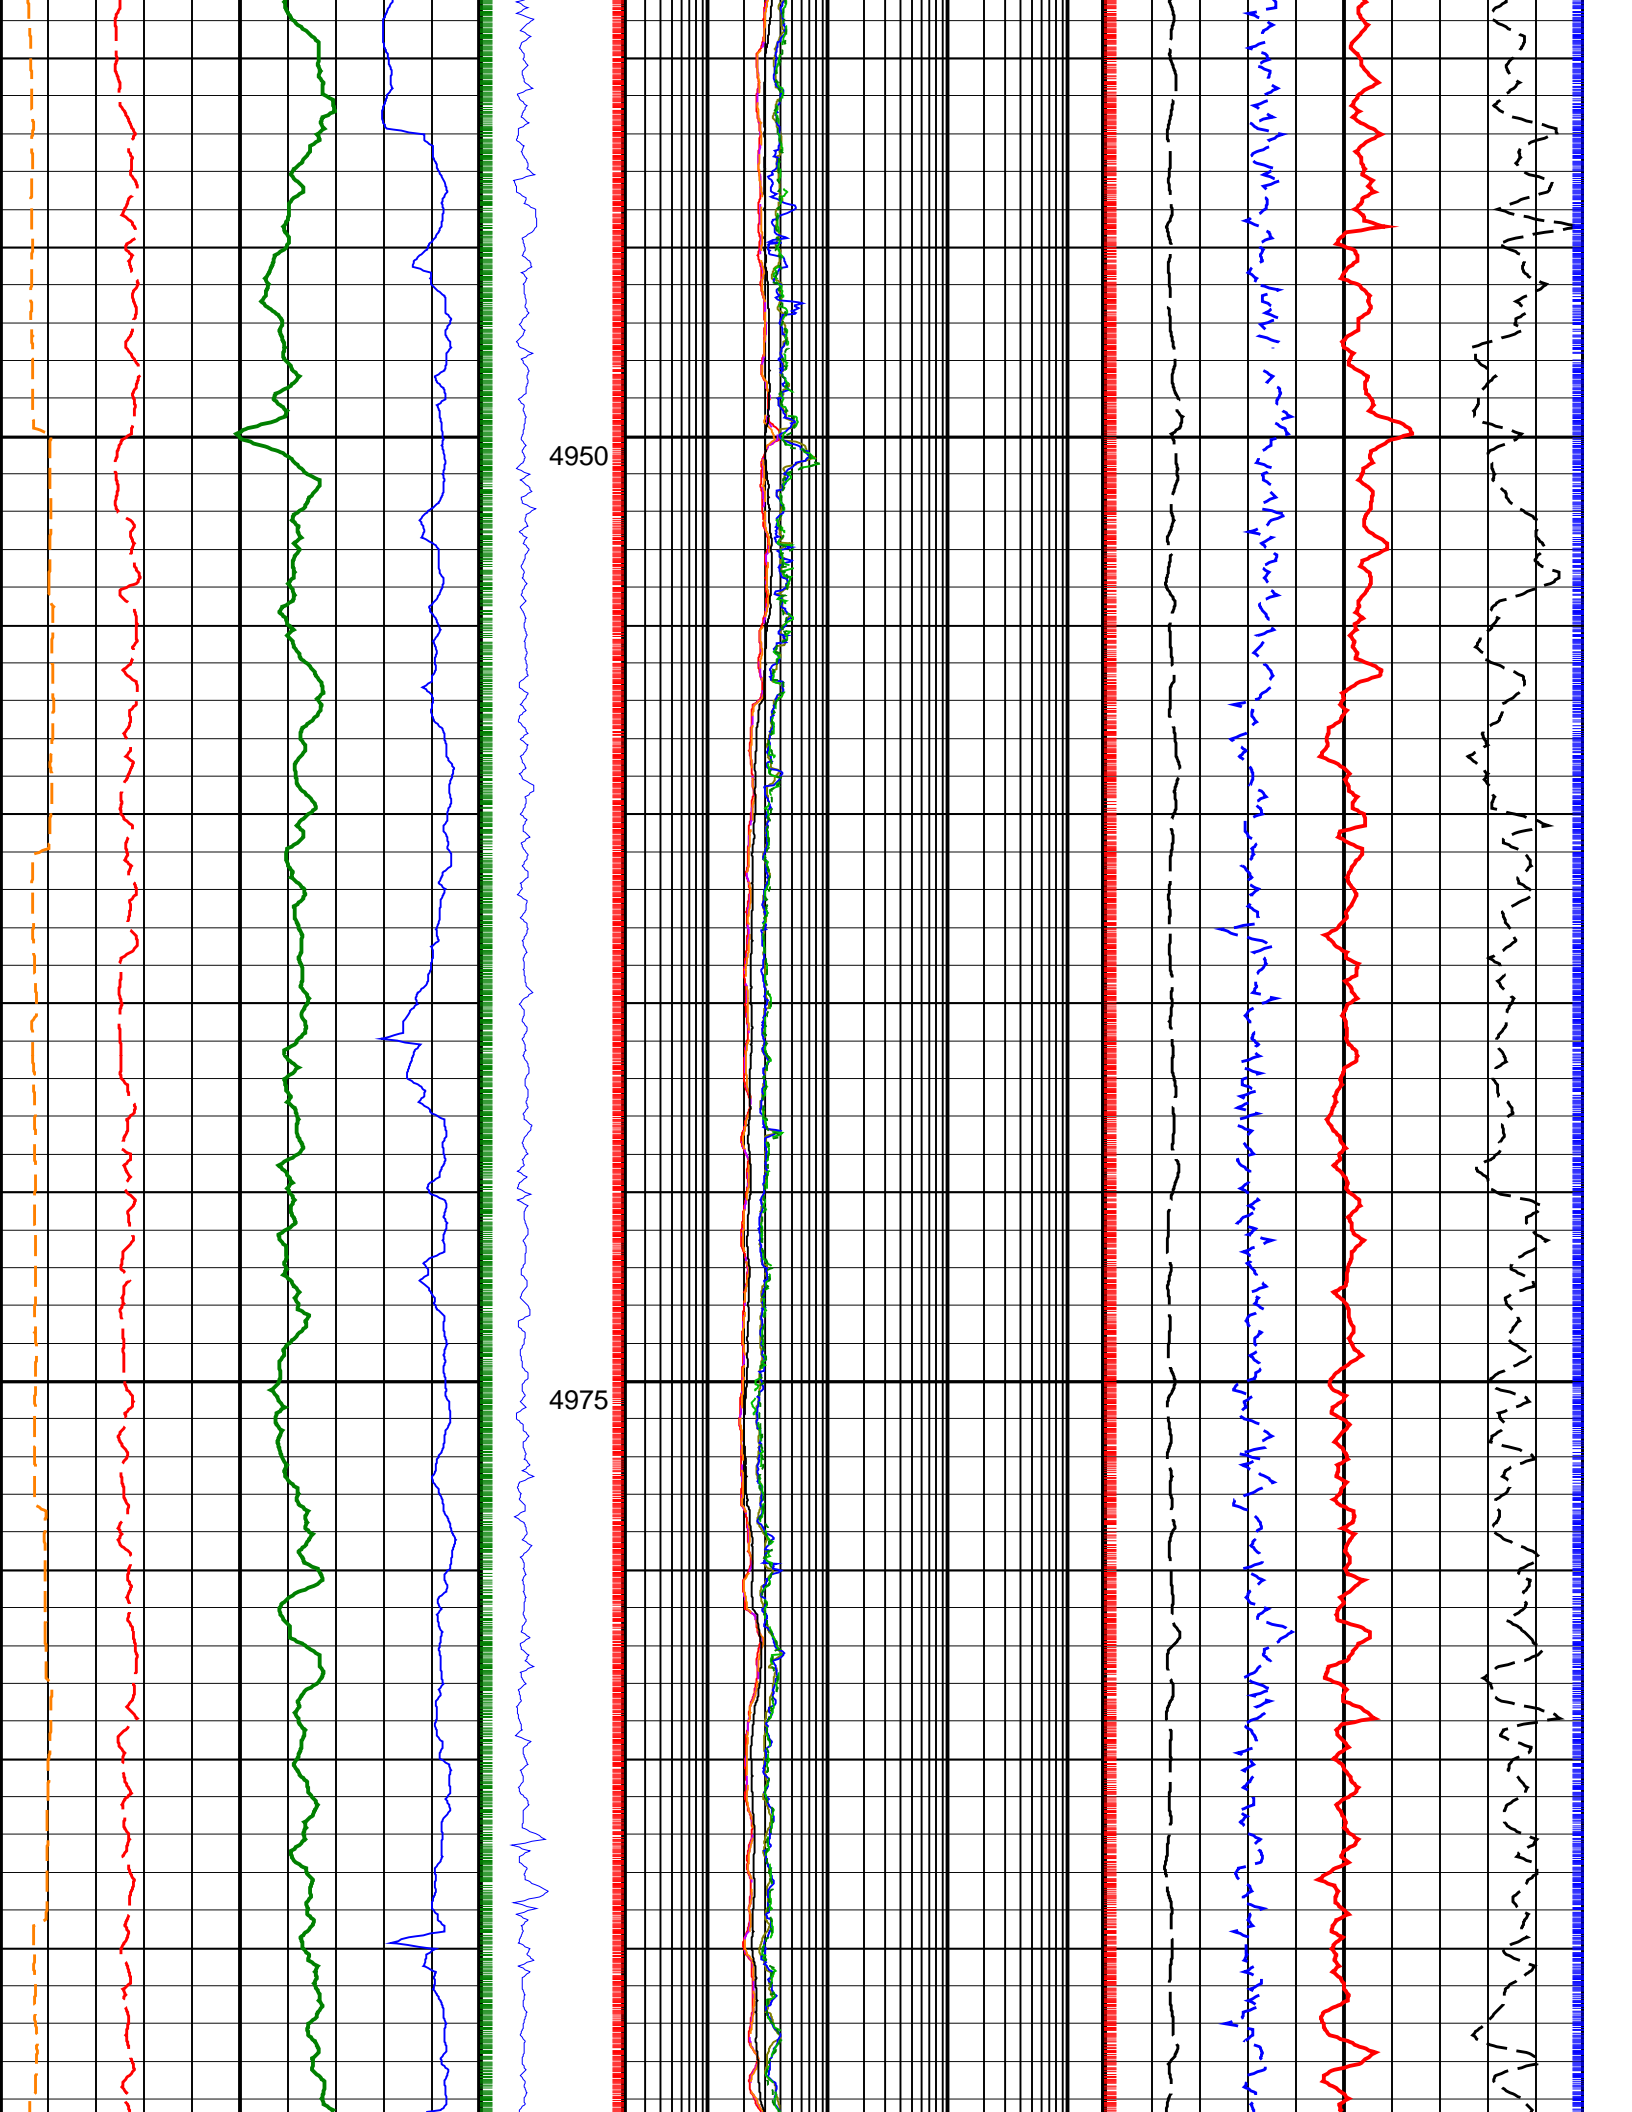





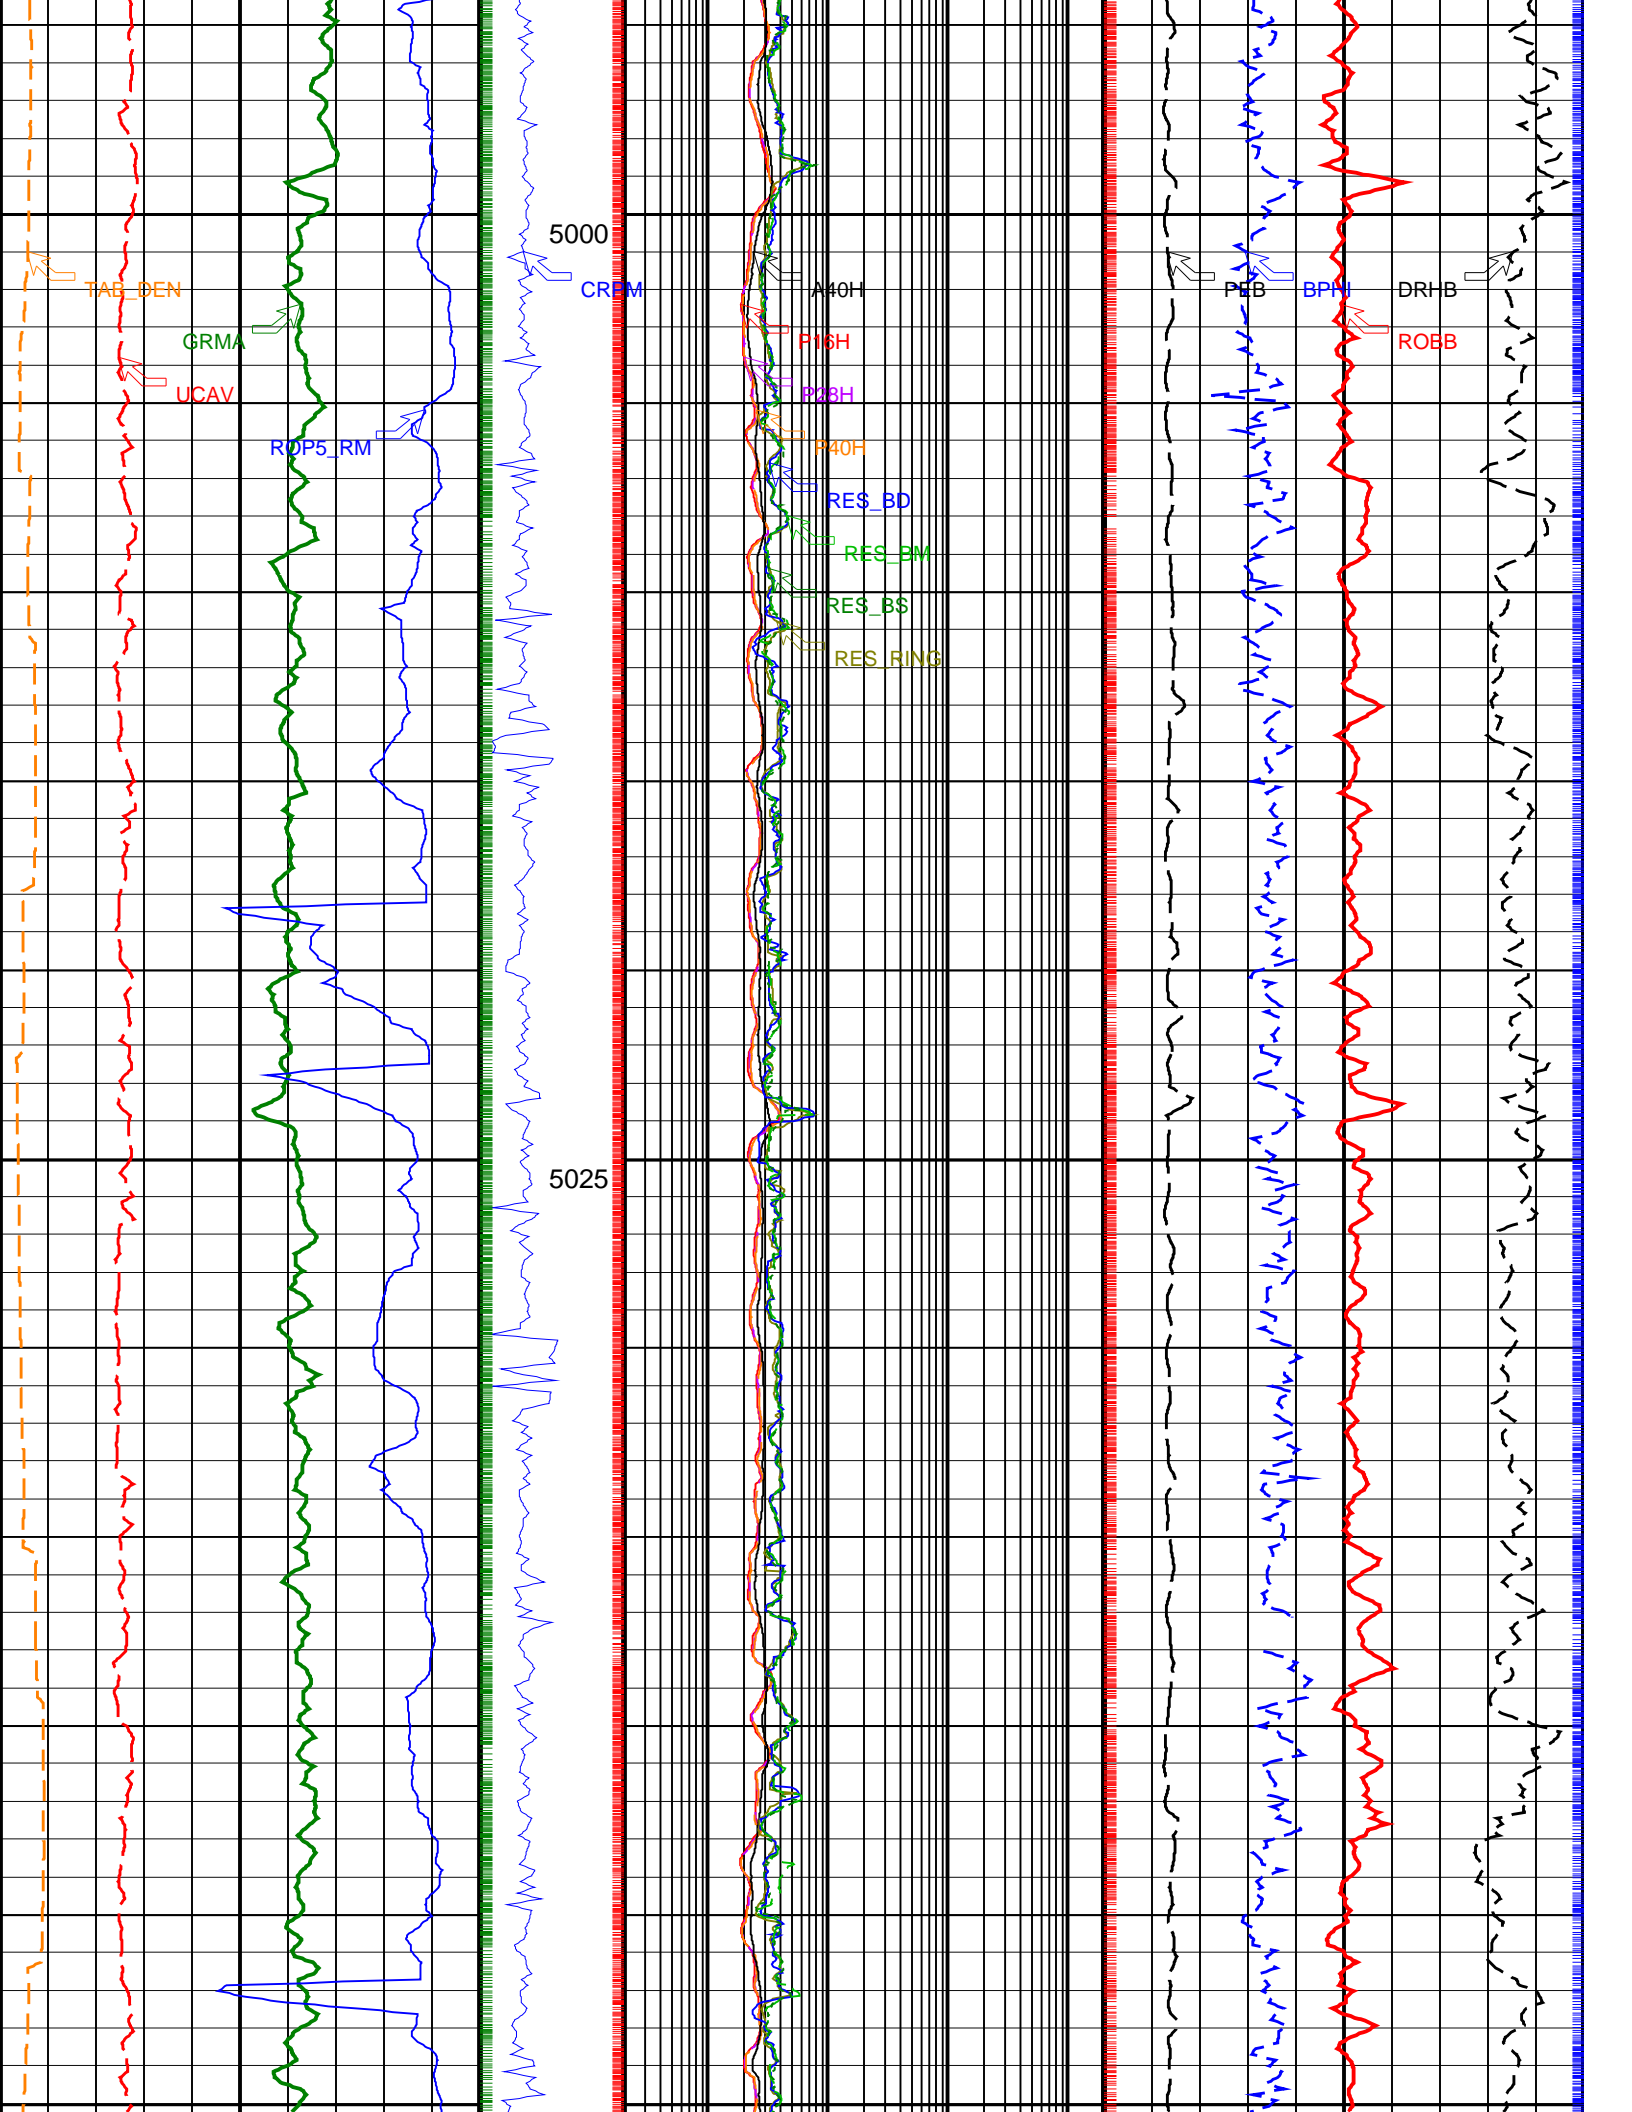

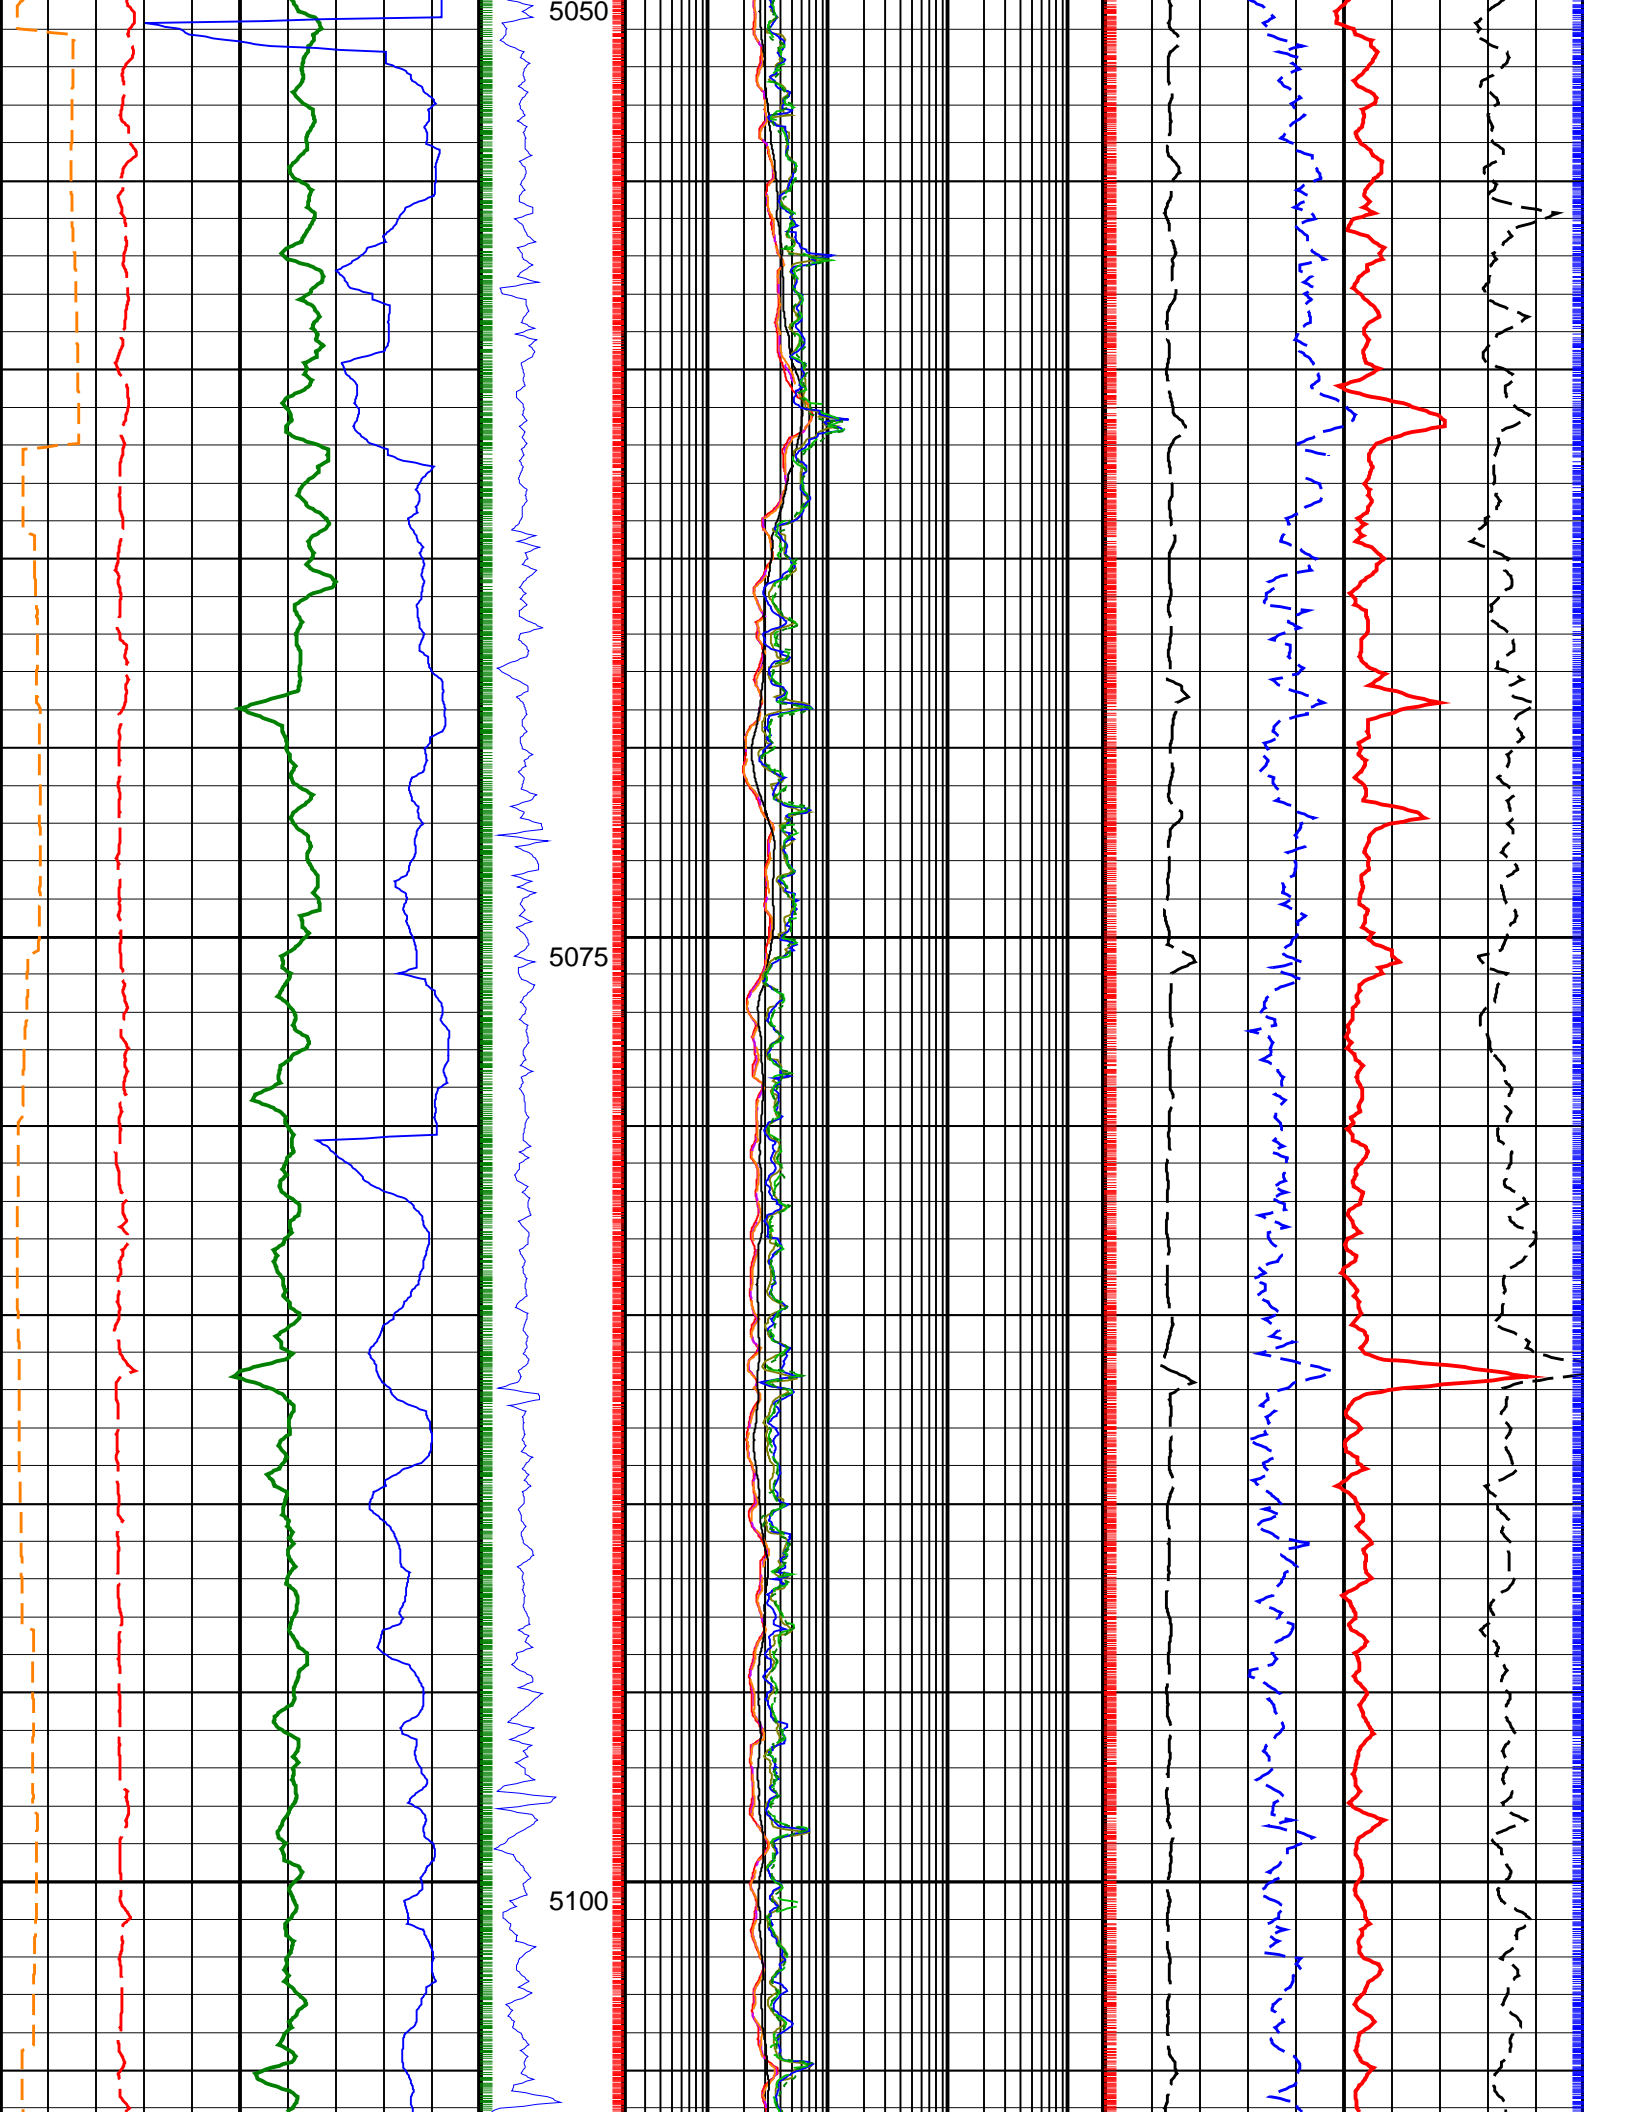

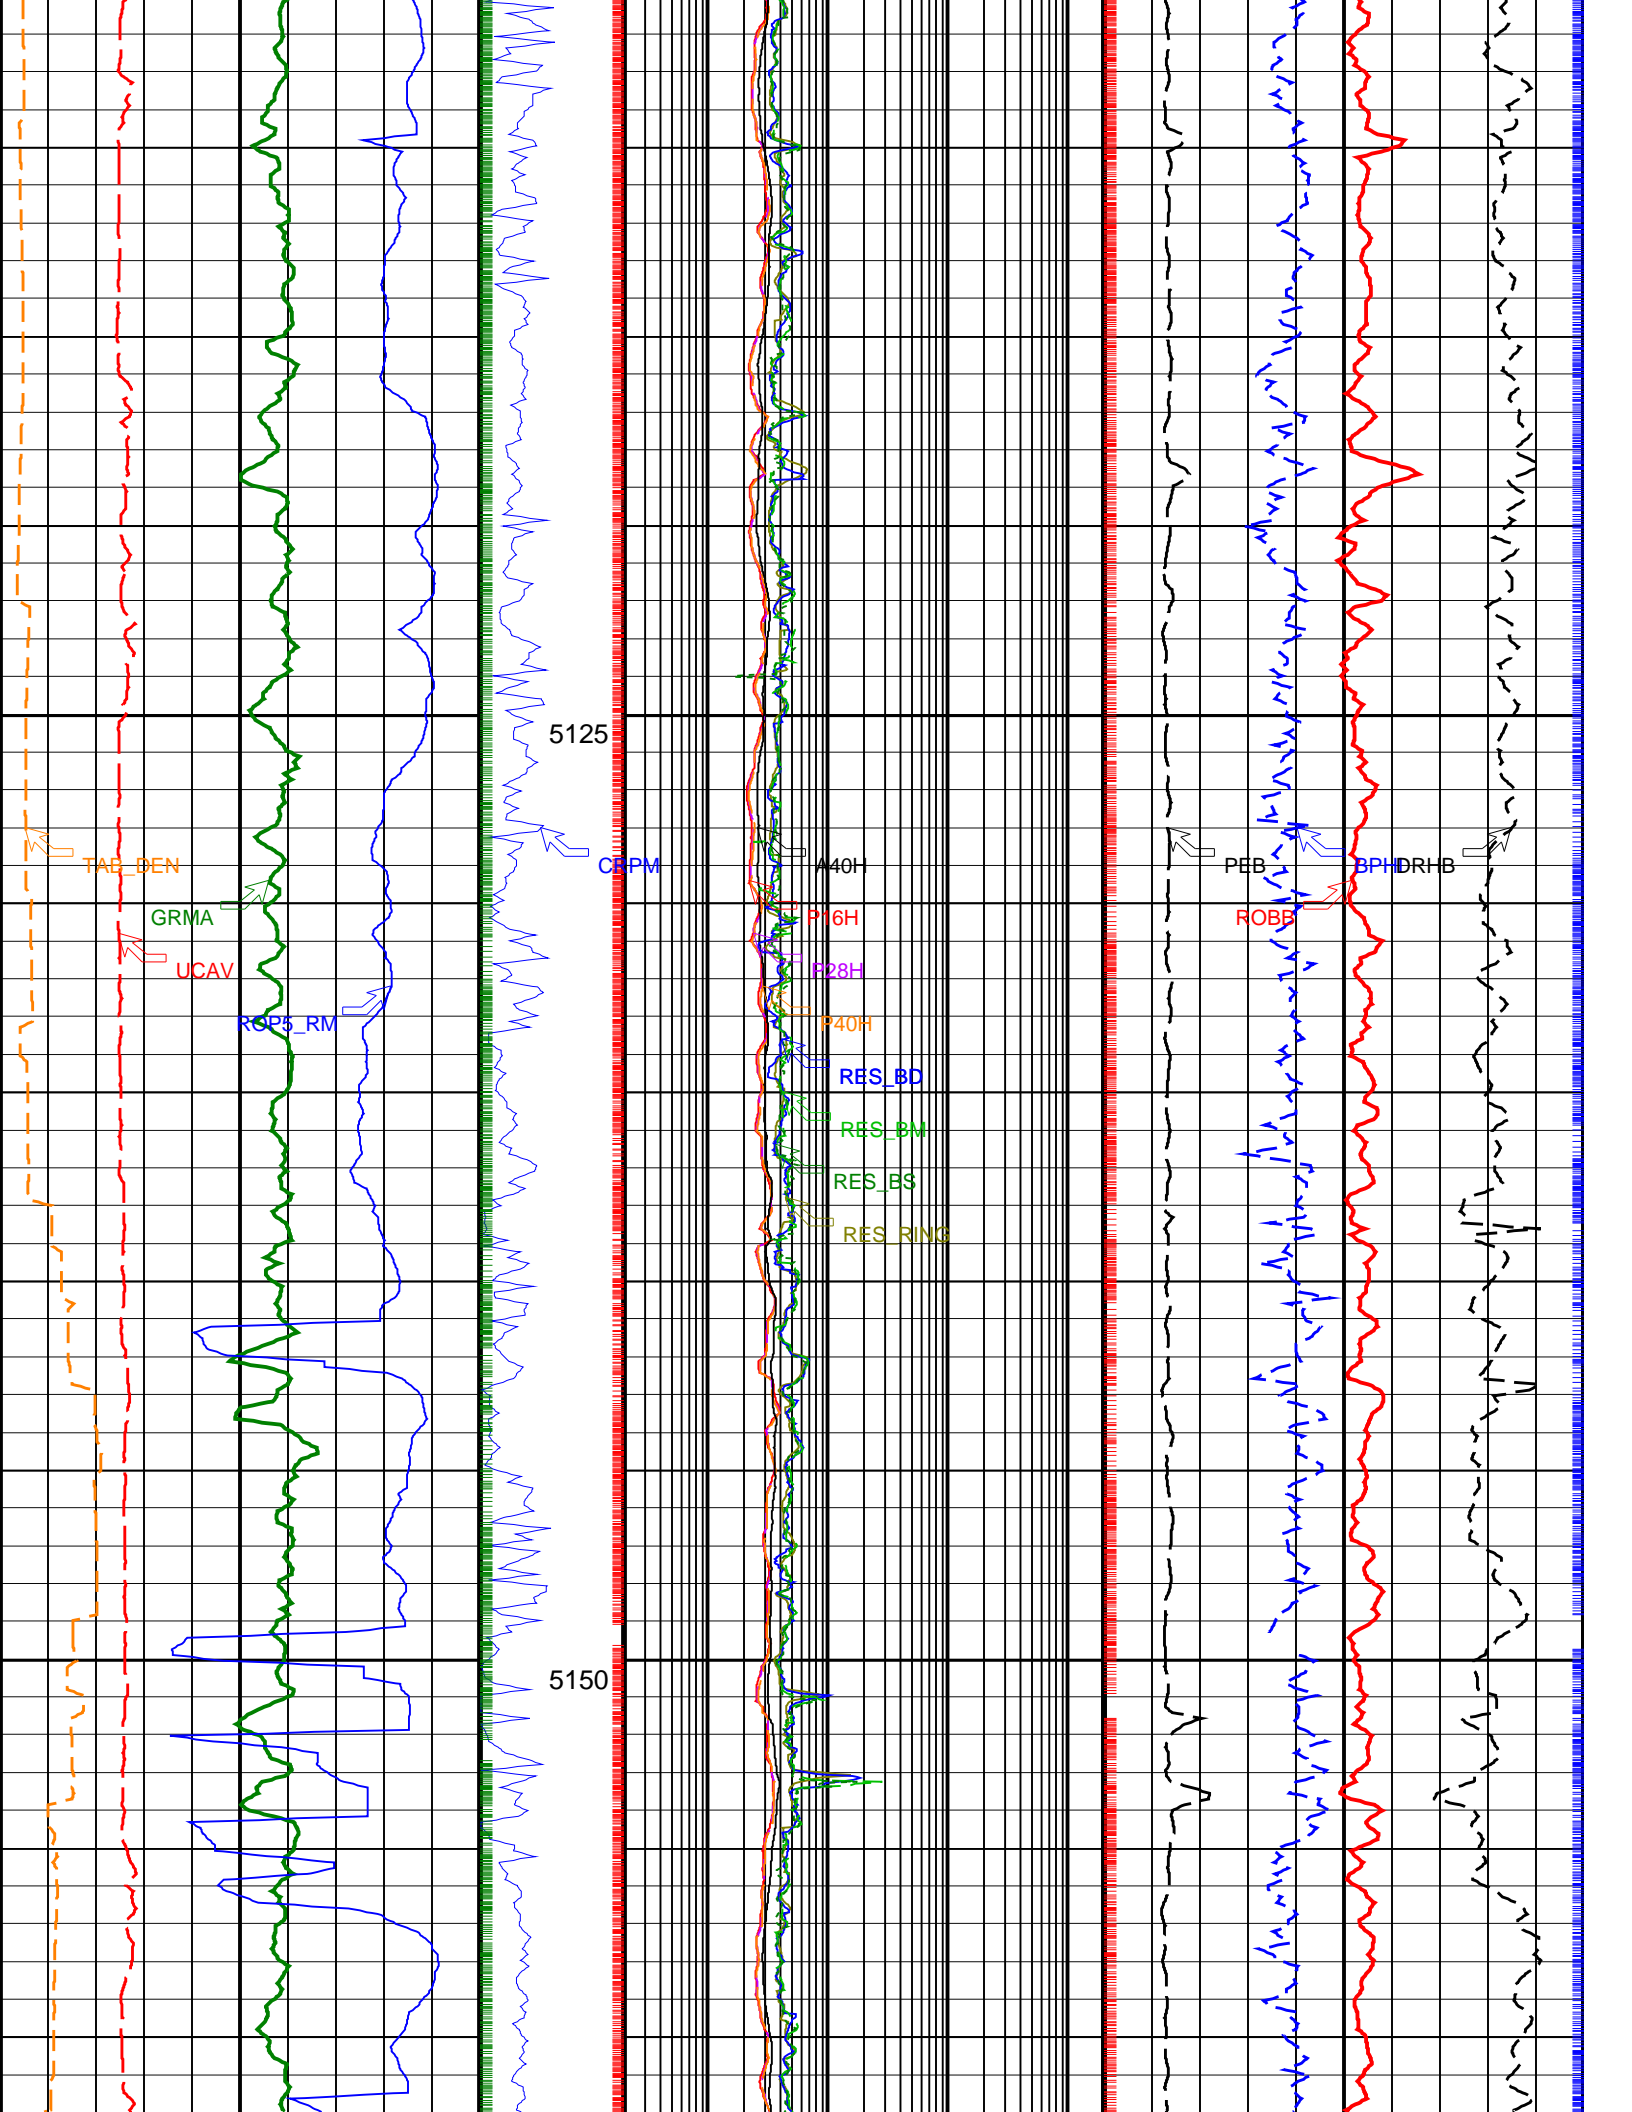

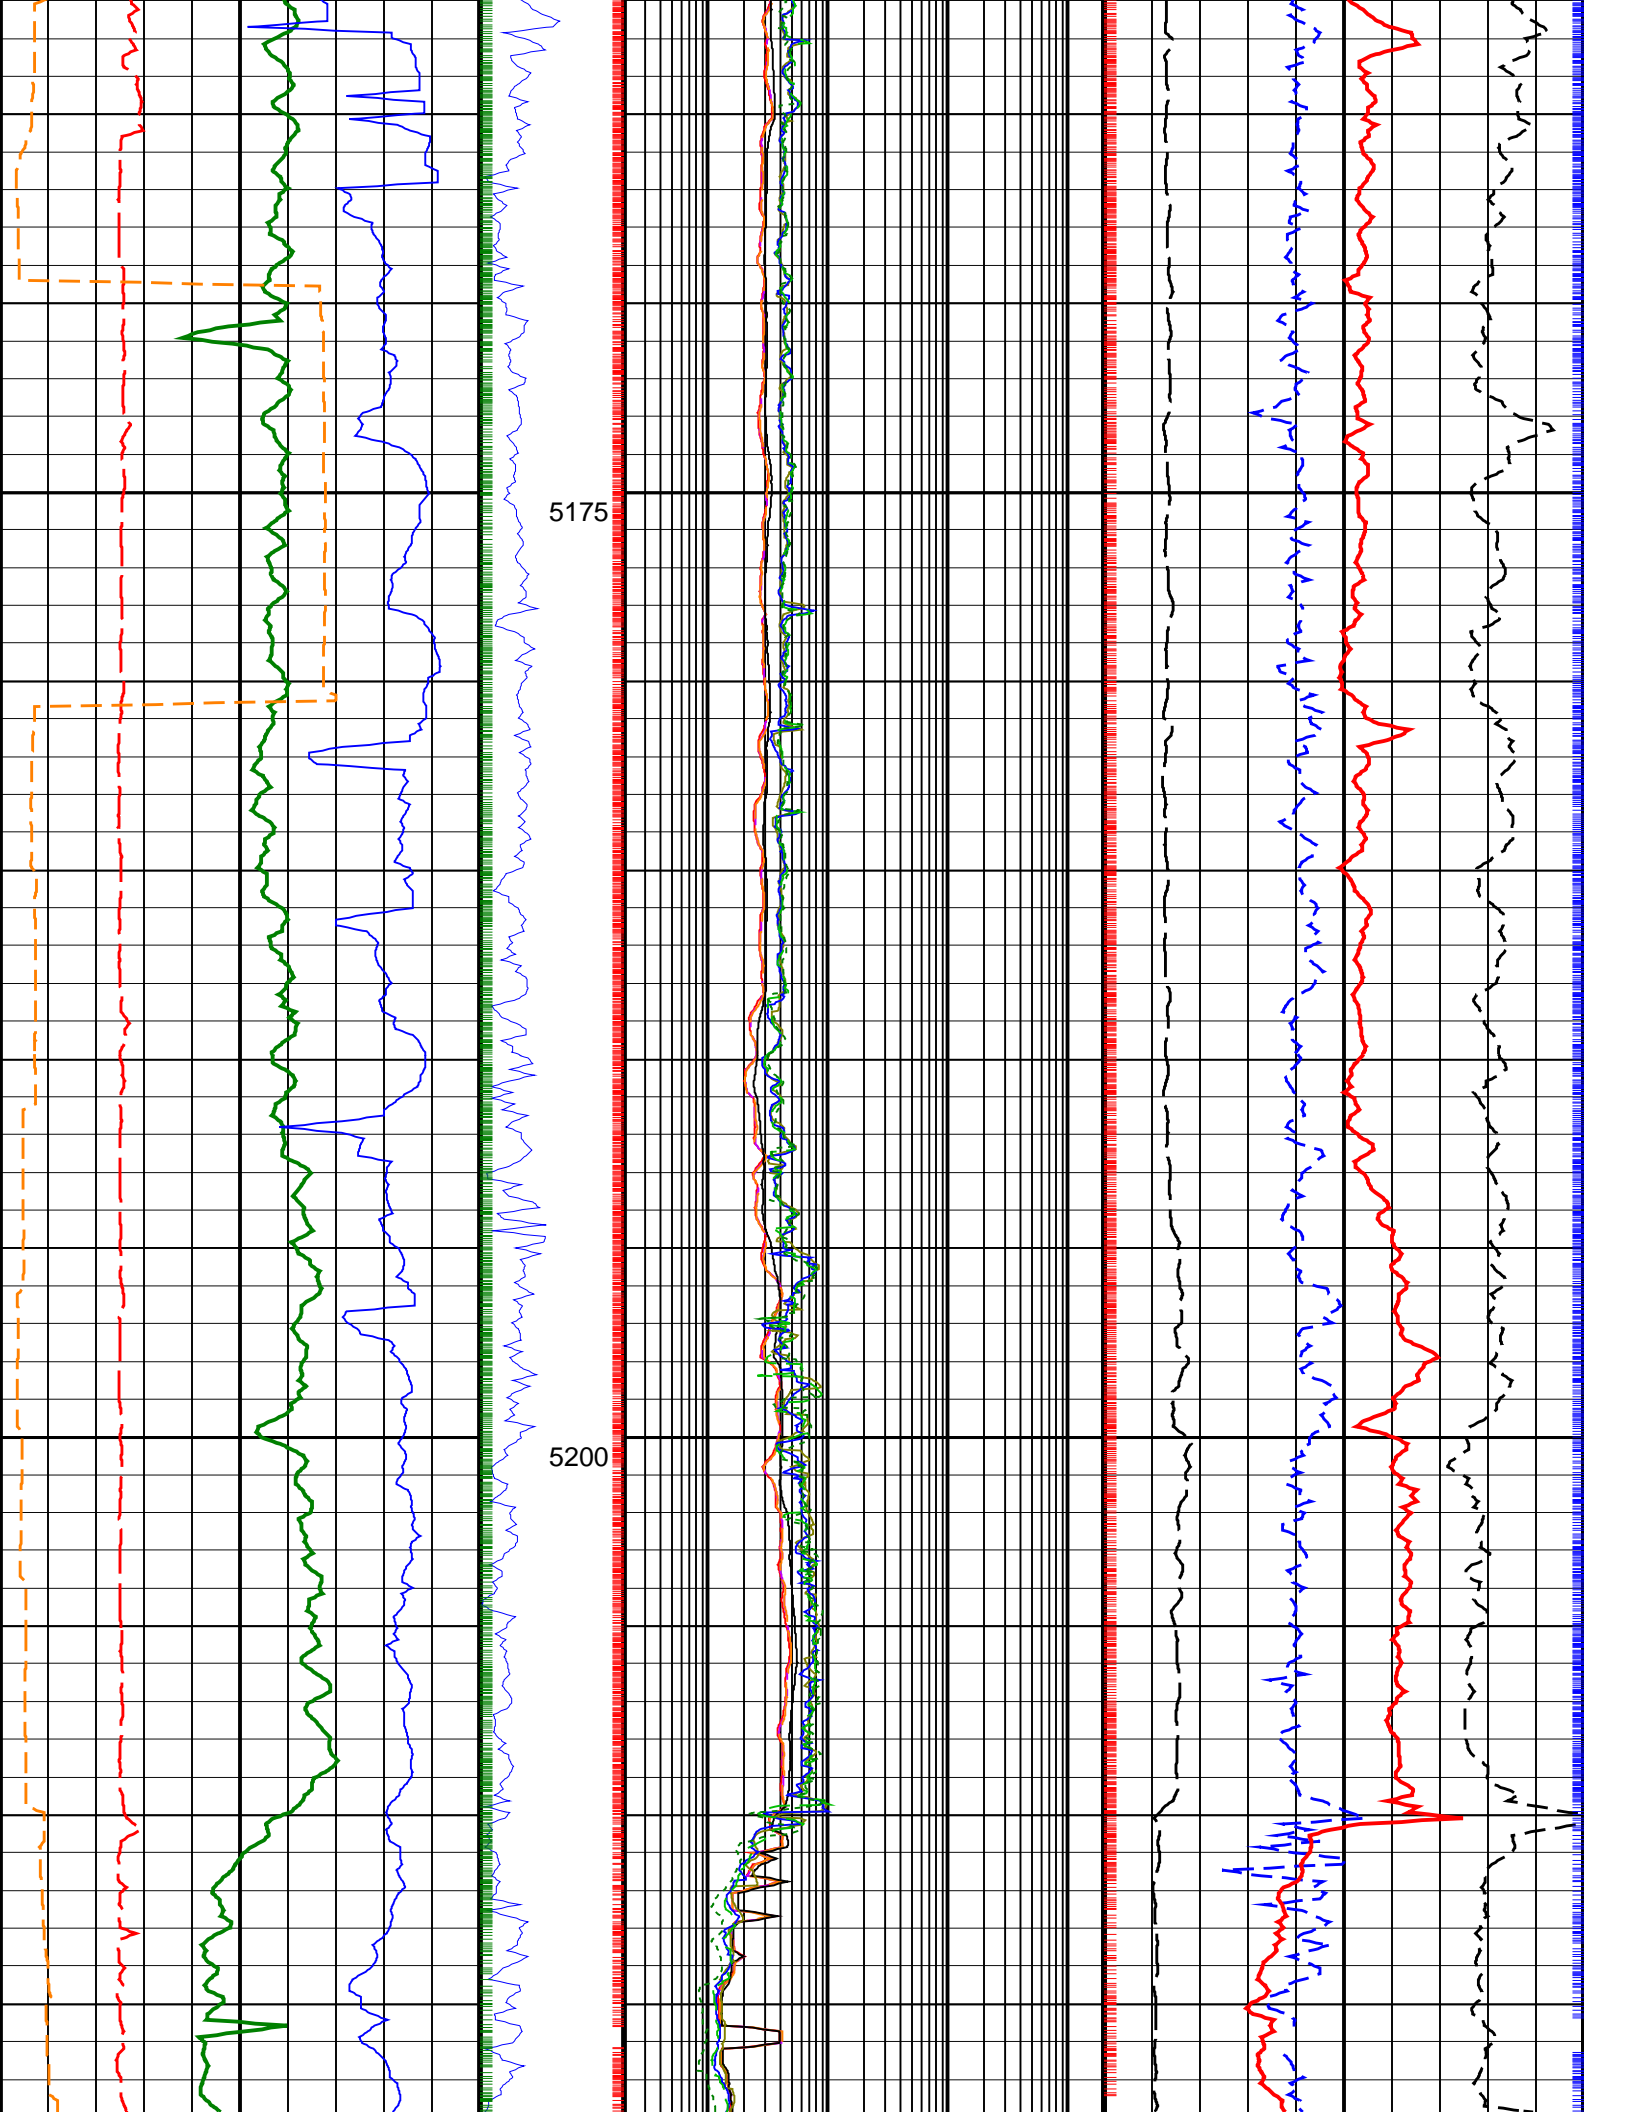

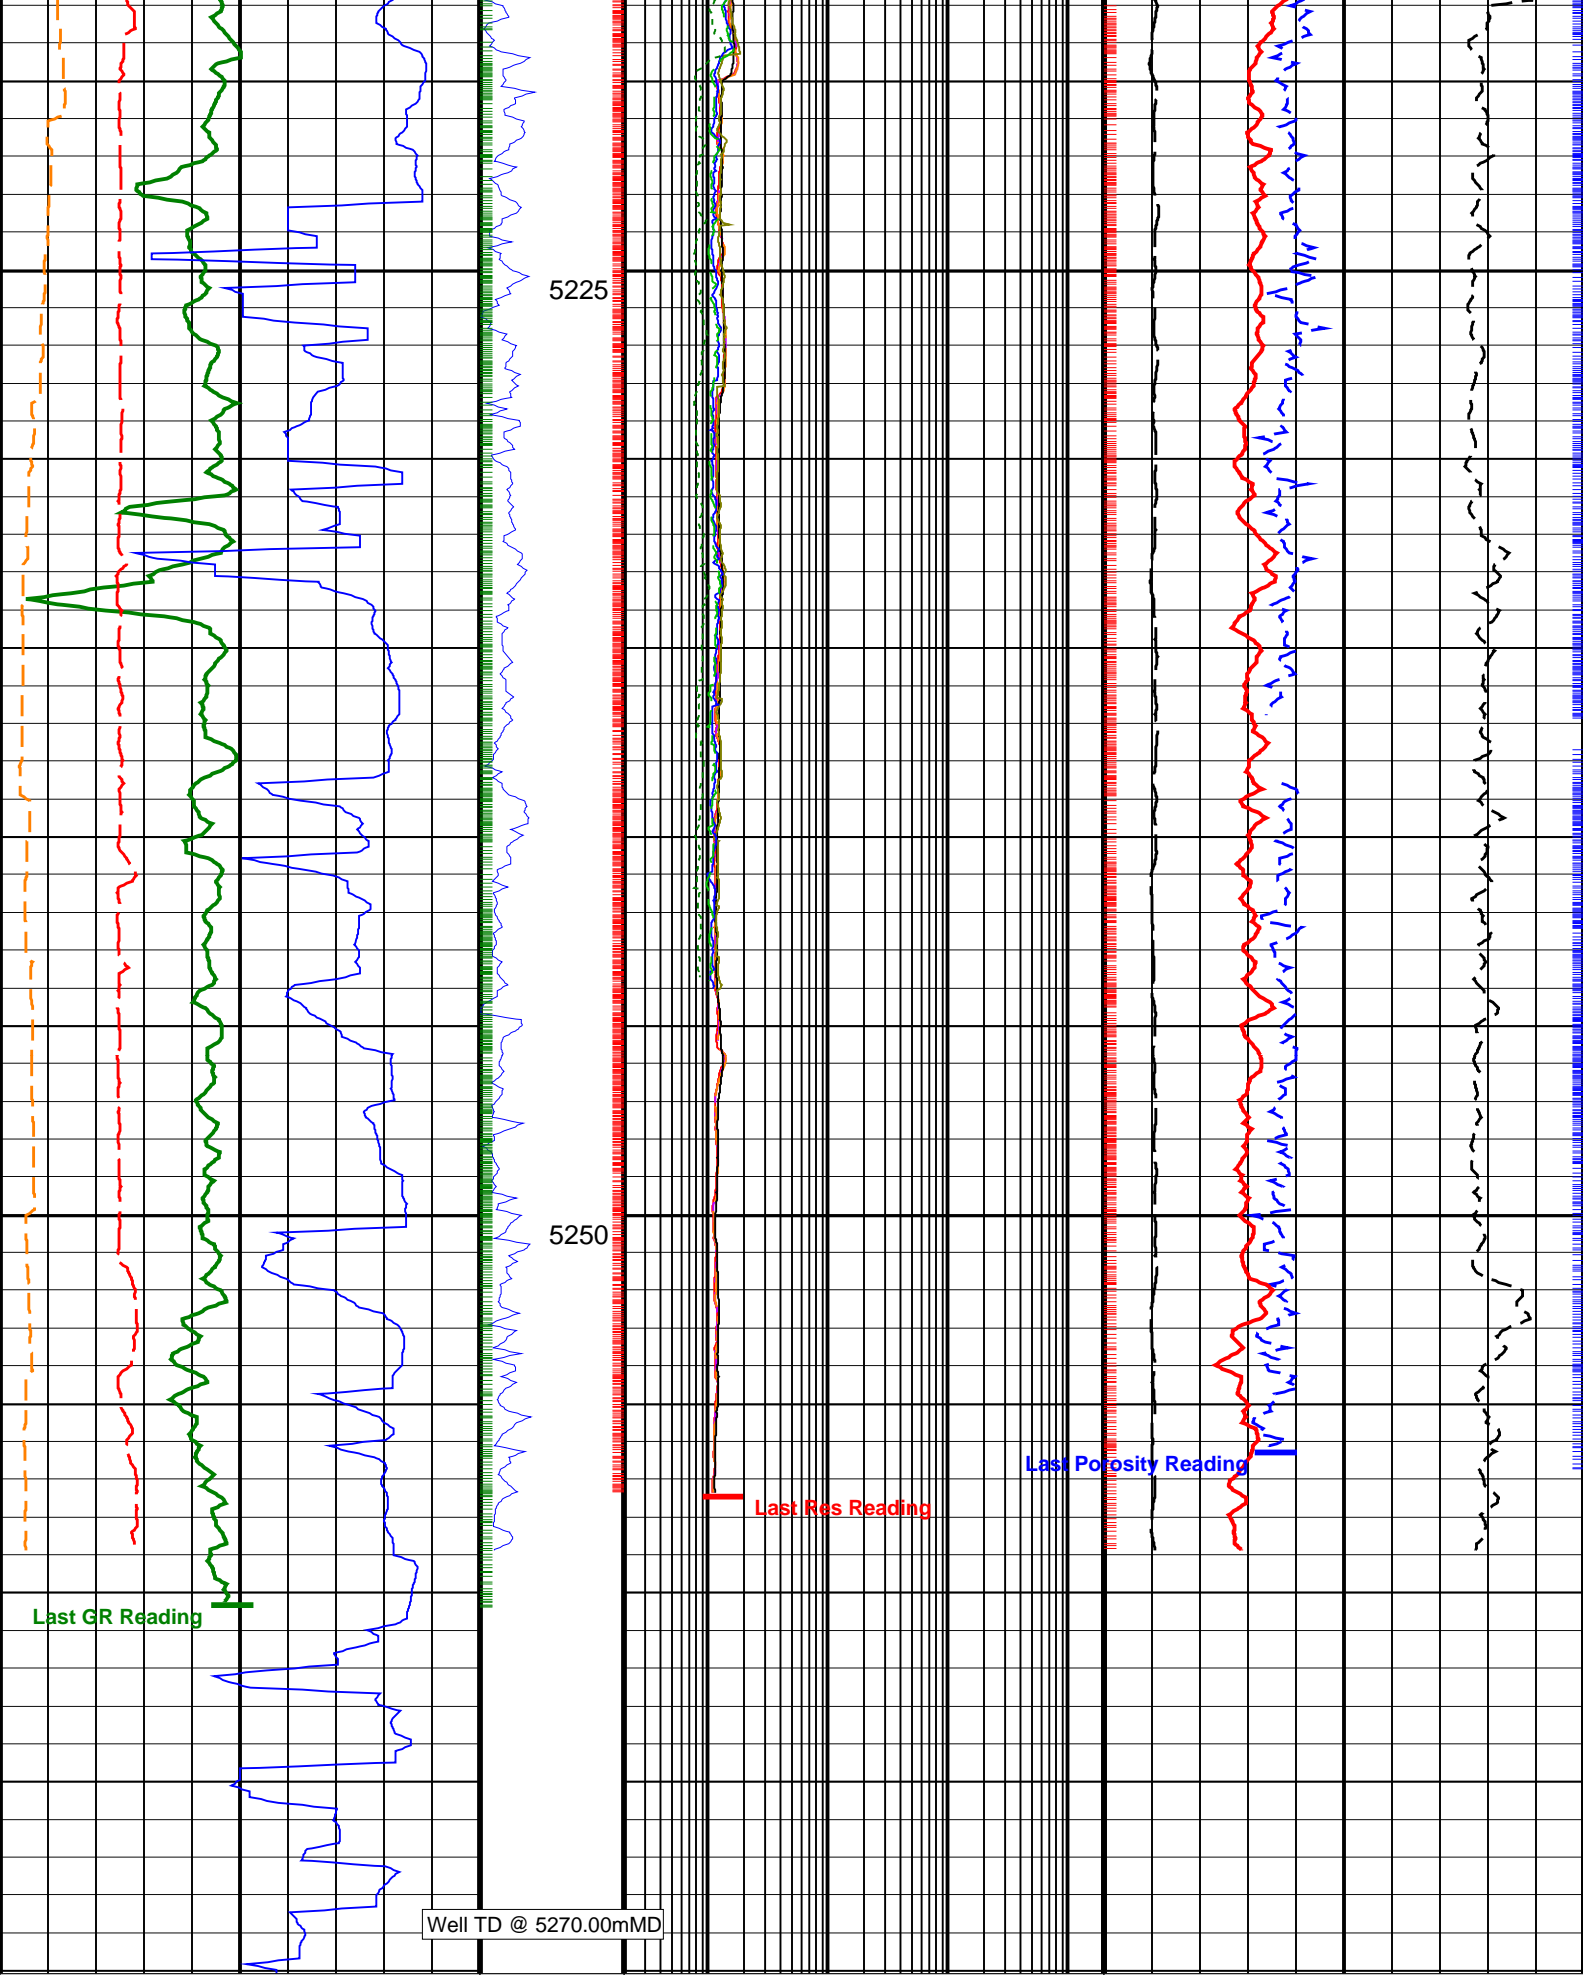

<p><b>Ultrasonic Caliper Average (UCAV)</b> (IN)</p> <p>6 16</p>	<p><b>Collar Rotational Speed (CRPM)</b> (RPM)</p>	<p><b>ARC Phase Shift Resistivity 16 inch at 2</b> MHz (P16H) (OHMM)</p> <p>0.2 2000</p>	<p><b>Best Thermal Neutron Porosity, Average</b> (BPHI) (V/V)</p> <p>0.45 -0.15</p>
--	--	--	---

	0	400			
<b>Gamma Ray, Average (GRMA)</b> (GAPI)	0	200	<b>ARC Phase Shift Resistivity 28 inch at 2</b> MHz (P28H)	<b>Bulk Density, Bottom (ROBB)</b>	
			0.2 (OHMM) 2000	1.95	2.95
<b>Rate of Penetration, Averaged over Last</b> 5ft (ROP5_RM)	200	0	<b>ARC Phase Shift Resistivity 40 inch at 2</b> MHz (P40H)	<b>Photoelectric</b> Factor, Bottom (PEB)	<b>Bulk Density</b> Correction, Bottom (DRHB)
			0.2 (OHMM) 2000	0	10
<b>Time after BIT (between drilling and</b> measurement) (TAB_DEN)	0	10	<b>ARC Attenuation Resistivity 40 inch at 2</b> MHz (A40H)		
			0.2 (OHMM) 2000		
			<b>Ring Resistivity (RES_RING)</b>		
			0.2 (OHMM) 2000		
			<b>Deep Button Resistivity (RES_BD)</b>		
			0.2 (OHMM) 2000		
			<b>Medium Button Resistivity (RES_BM)</b>		
			0.2 (OHMM) 2000		
			<b>Shallow Button Resistivity (RES_BS)</b>		
			0.2 (OHMM) 2000		

**PIP SUMMARY**

+ Gamma Ray Samples

+ Resistivity Samples

Density Ticks, 0.1 ft +

Neutron Ticks, 0.1 ft +