

Elver-1_VISION Resistivity RT 200MD


IDEAL Version: ID13_OC_08 <MD > Vertical Scale: 1:200



Graphics File Created: 27-Dec-2008 08:14

PIP SUMMARY

- ARC GRAPP PIP
- IMP RP16 PIP

		ARC BHCorr Attenuation Resistivity 40-in. at 2 MHz, Real-Time (A40H_RT)			
		0.2	(OHMM)	2000	
		ARC BHCorr Phase-Shift Resistivity 40-in. at 2 MHz, Real-Time (P40H_RT)			
		0.2	(OHMM)	2000	
ARC Gamma Ray, Real-Time (ARC_GR_RT) (GAPI)		ARC BHCorr Phase-Shift Resistivity 28-in. at 2 MHz, Real-Time (P28H_RT) (OHMM)		Delta-T Compressional, Real-Time (DTCO_RT) (US/F)	
0	200	0.2	2000	140	40
ROP*5 (ROP5) (M/HR)		ARC BHCorr Phase-Shift Resistivity 16-in. at 2 MHz, Real-Time (P16H_RT) (OHMM)		Coherence at Compressional Peak, Real-Time (CHCO_RT)	
200	0	0.2	2000	-4	1

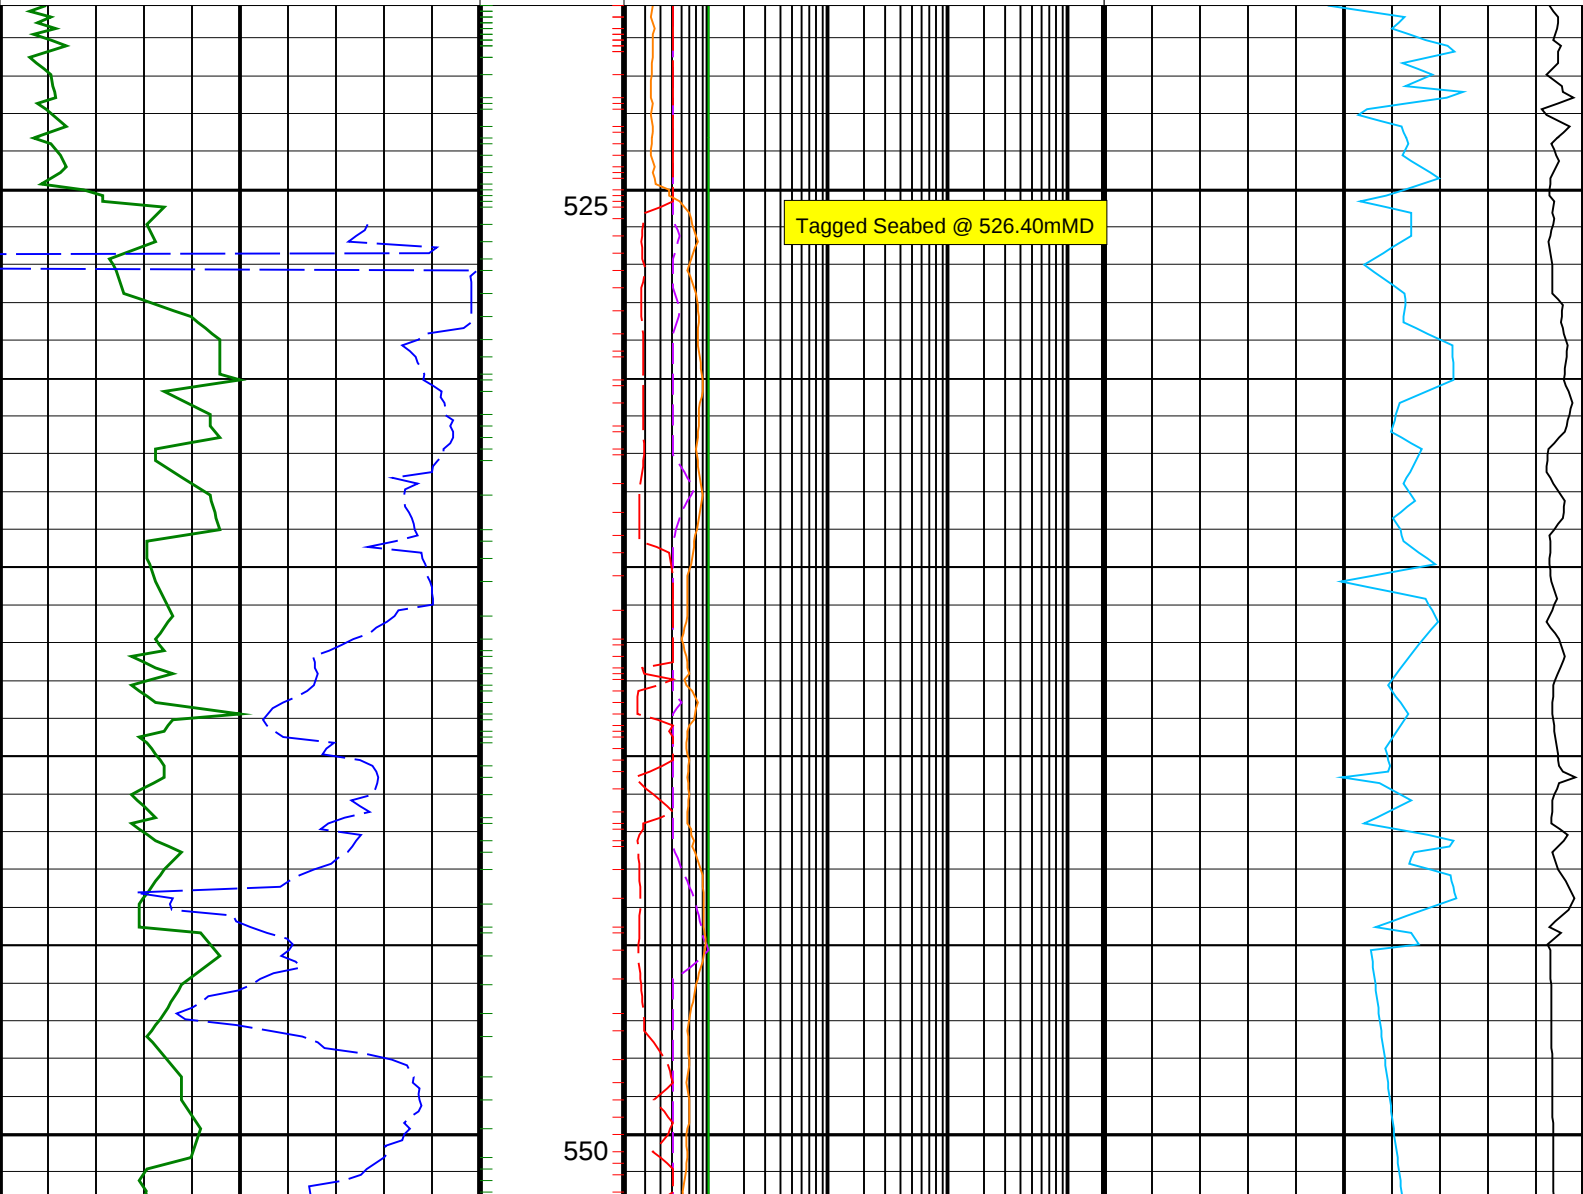

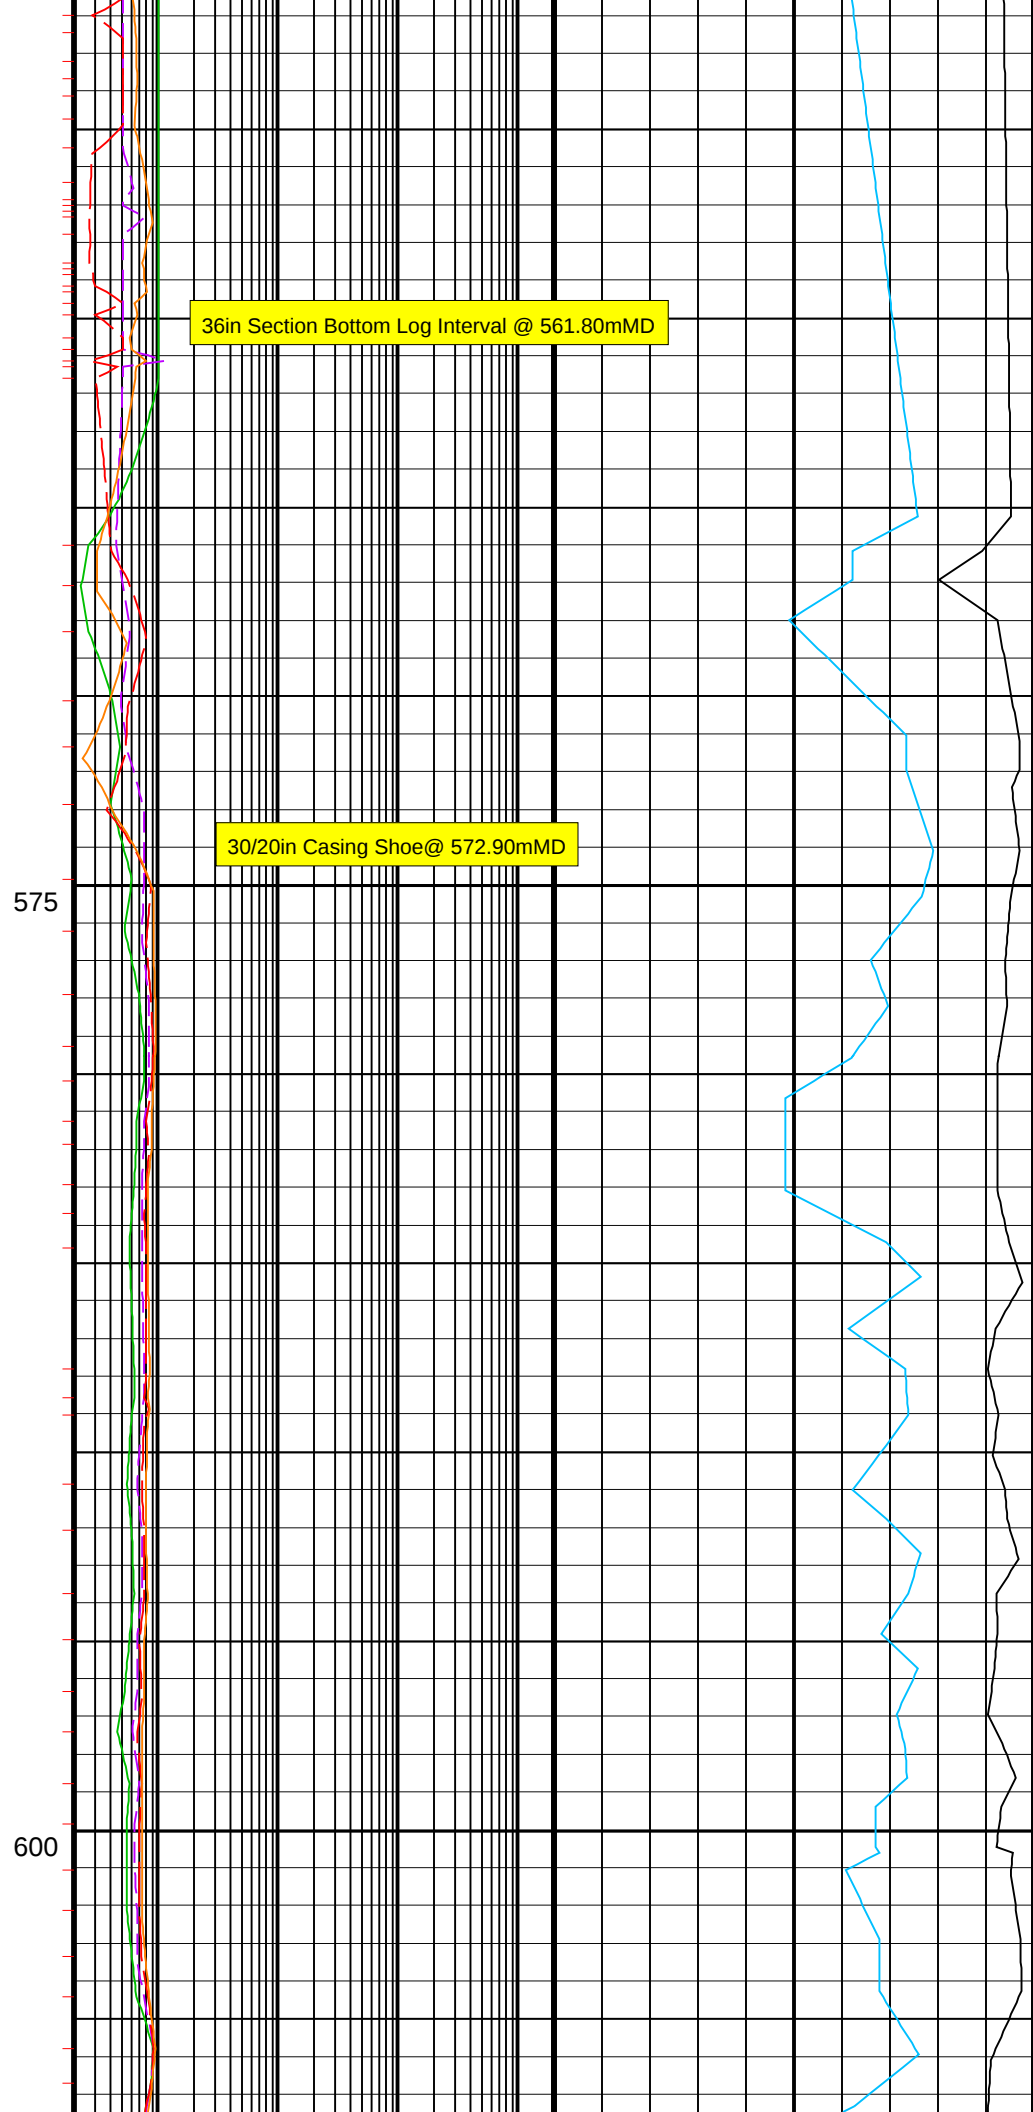
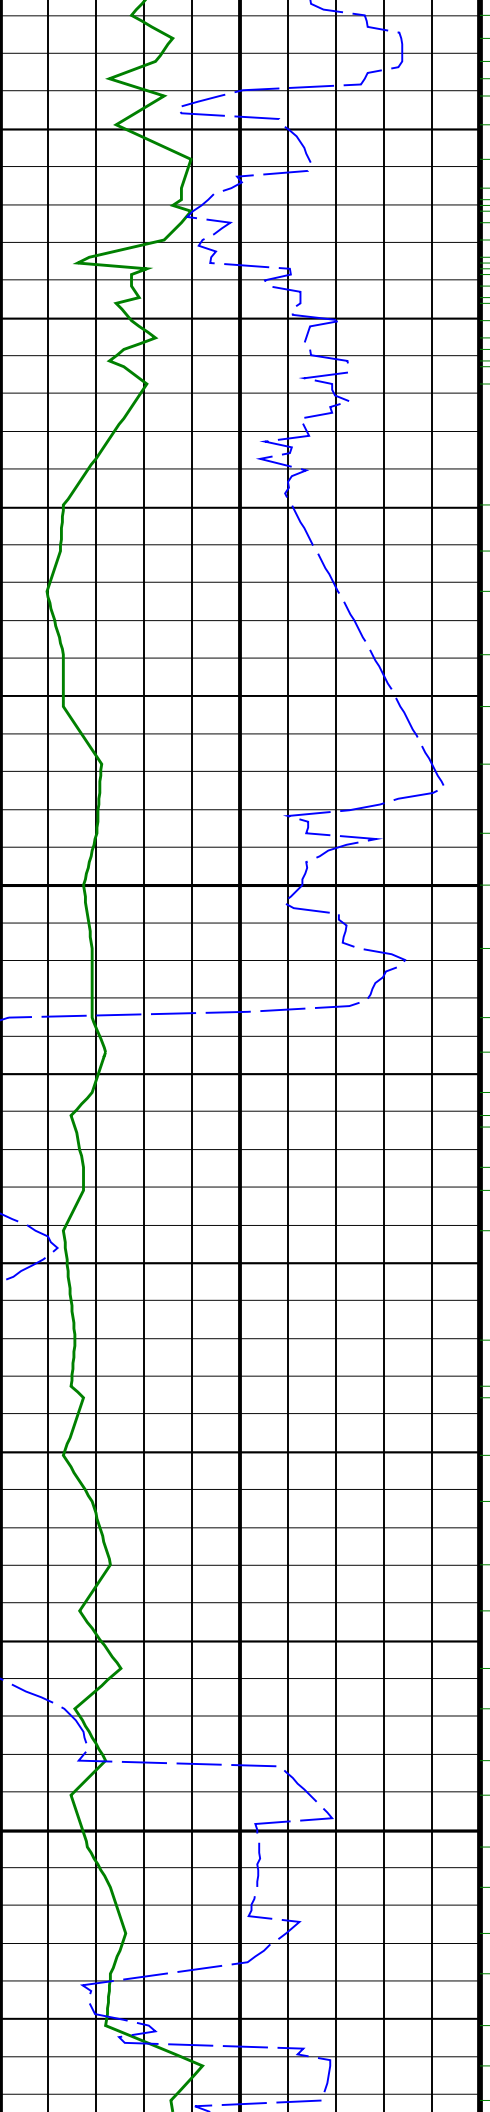




36in Section Bottom Log Interval @ 561.80mMD


30/20in Casing Shoe@ 572.90mMD

575

600

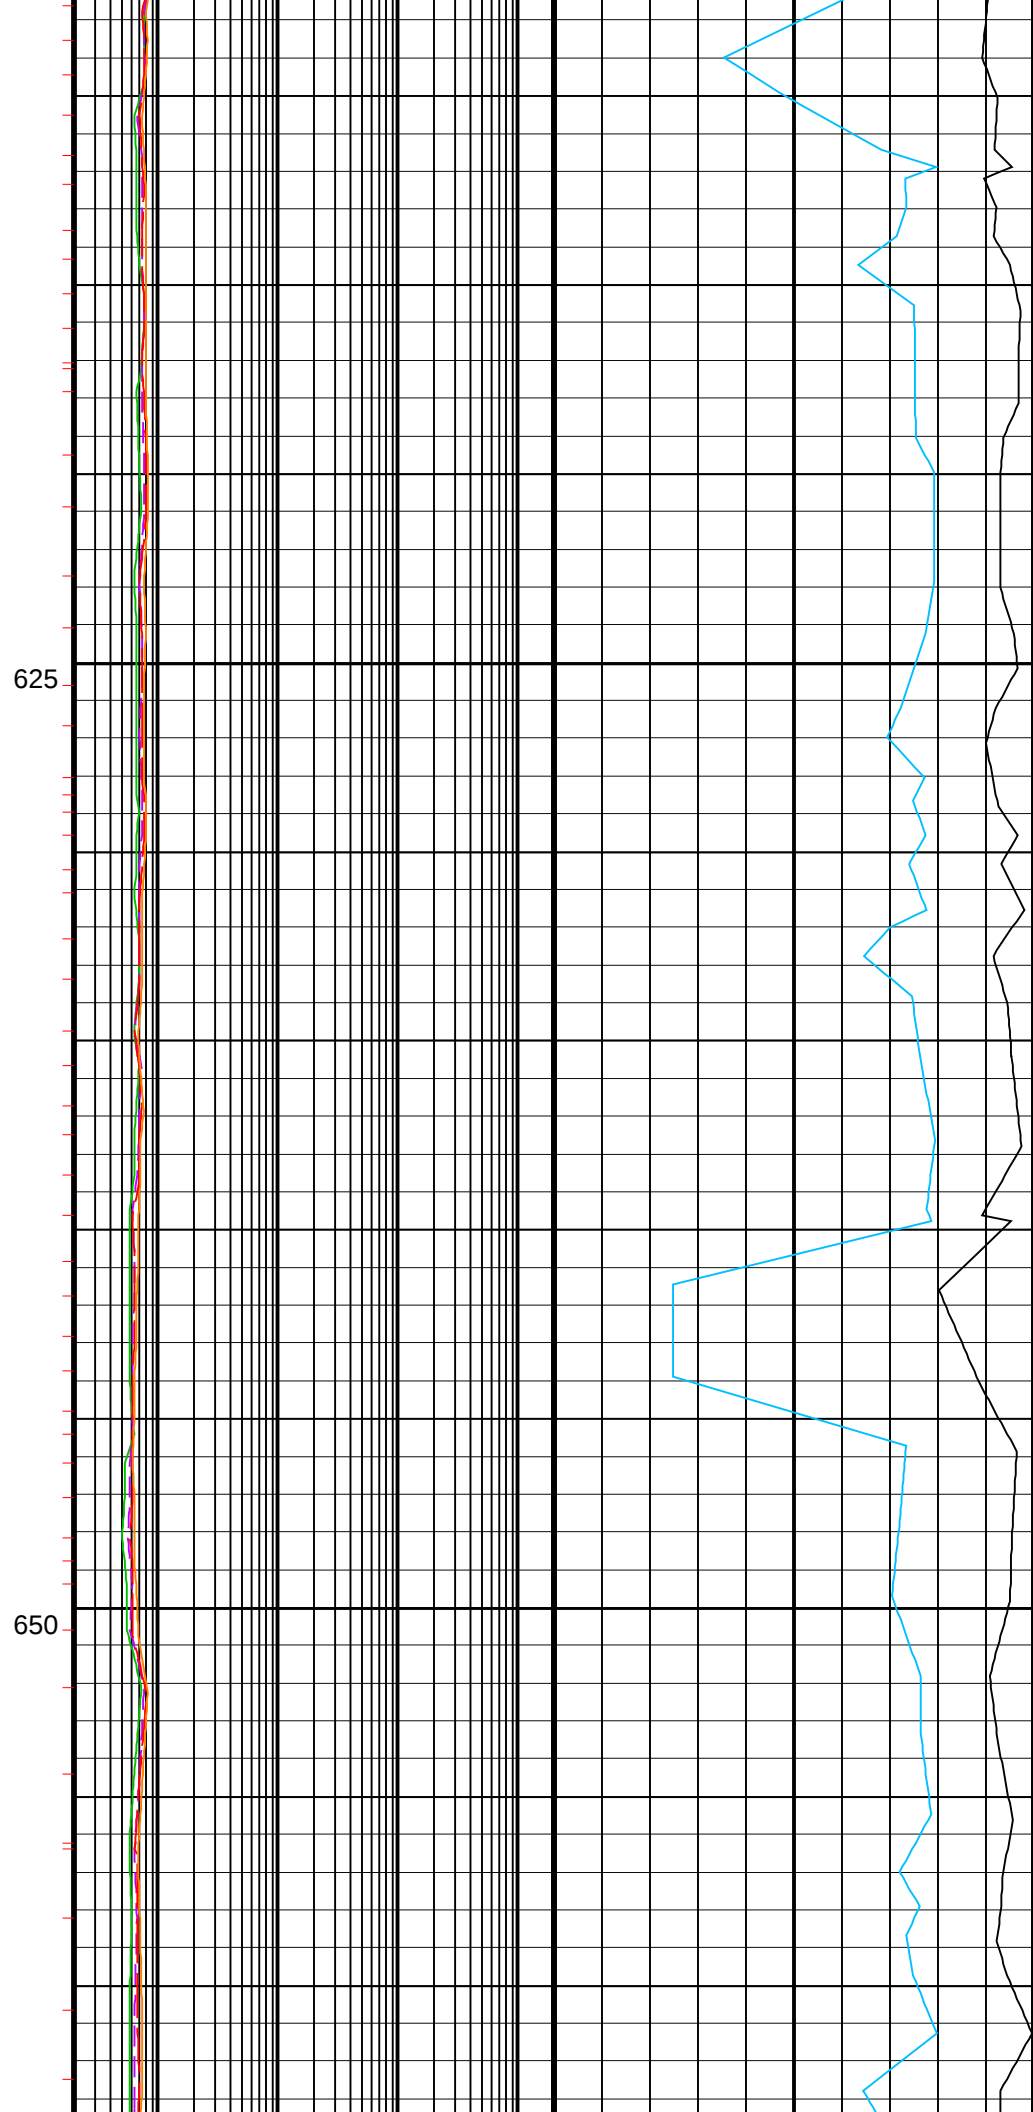
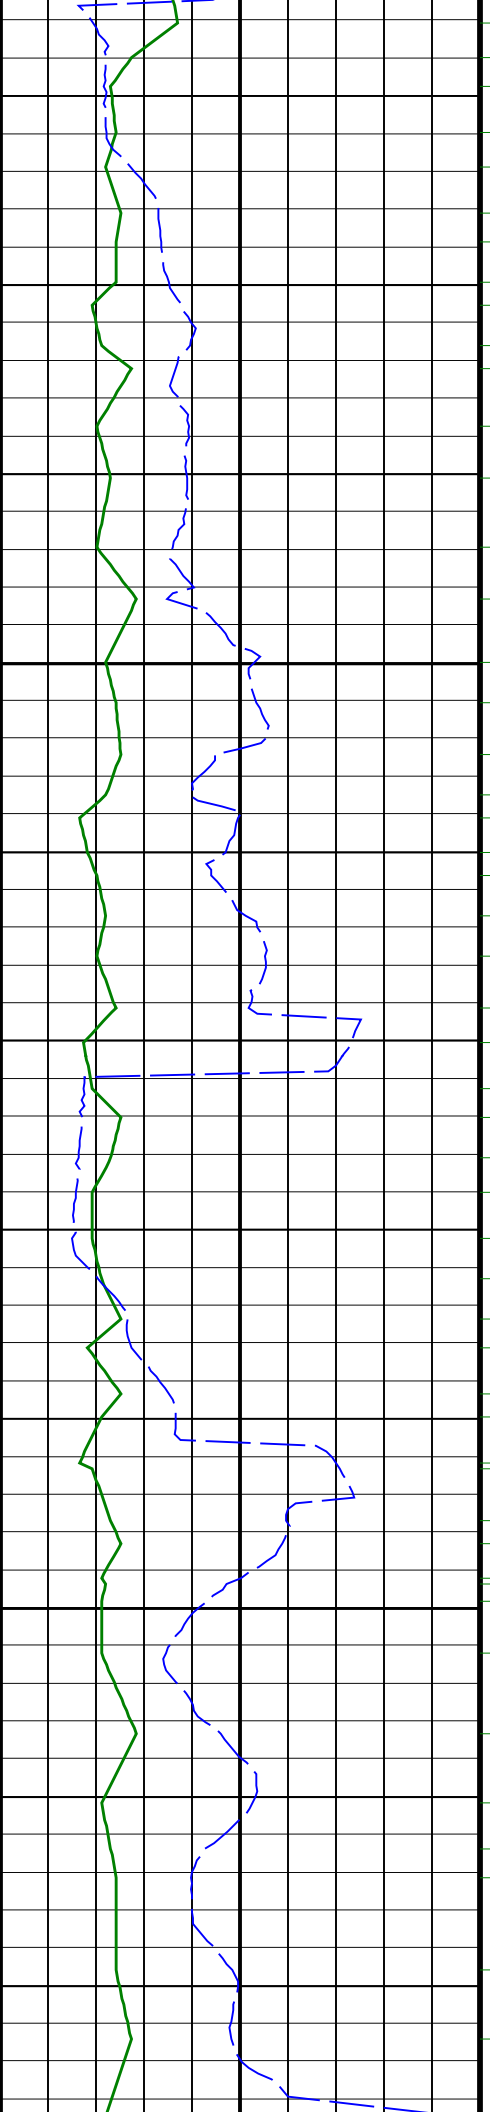


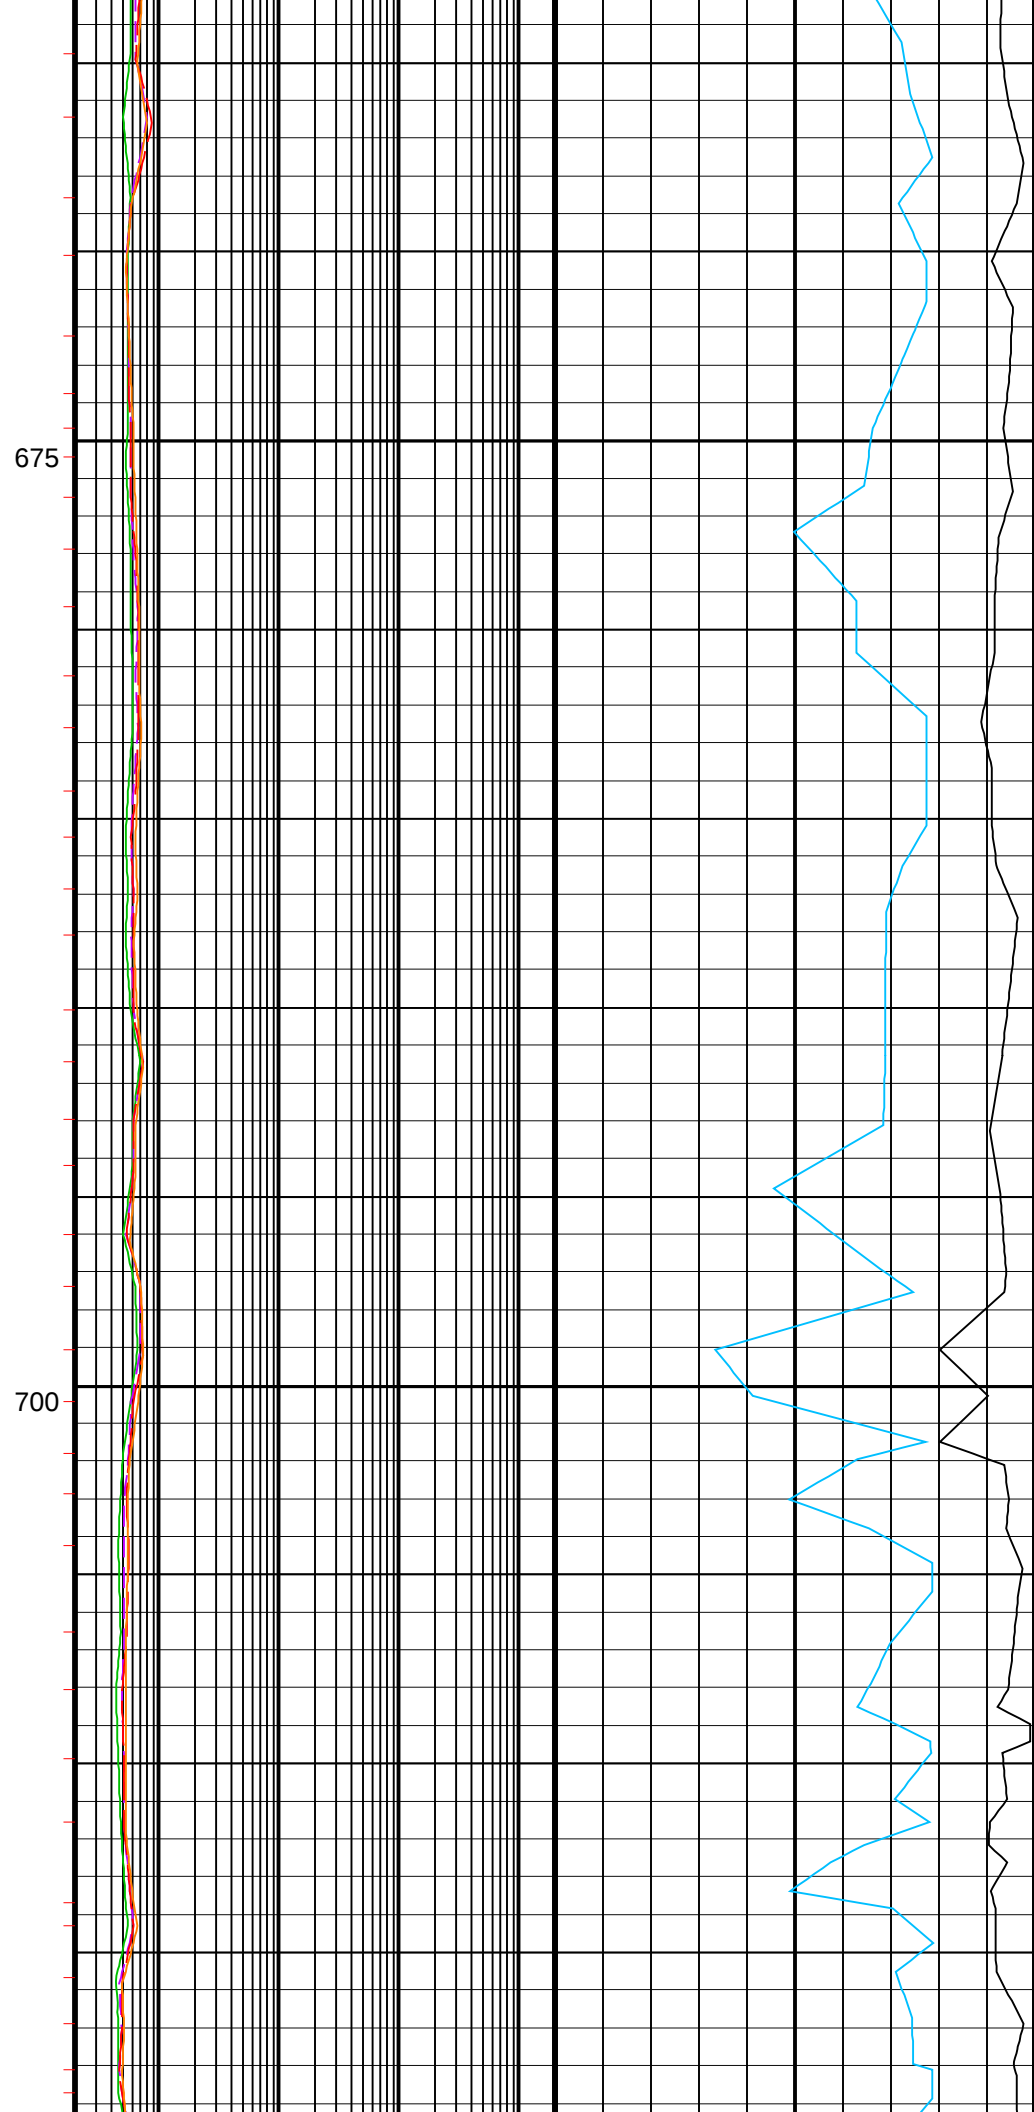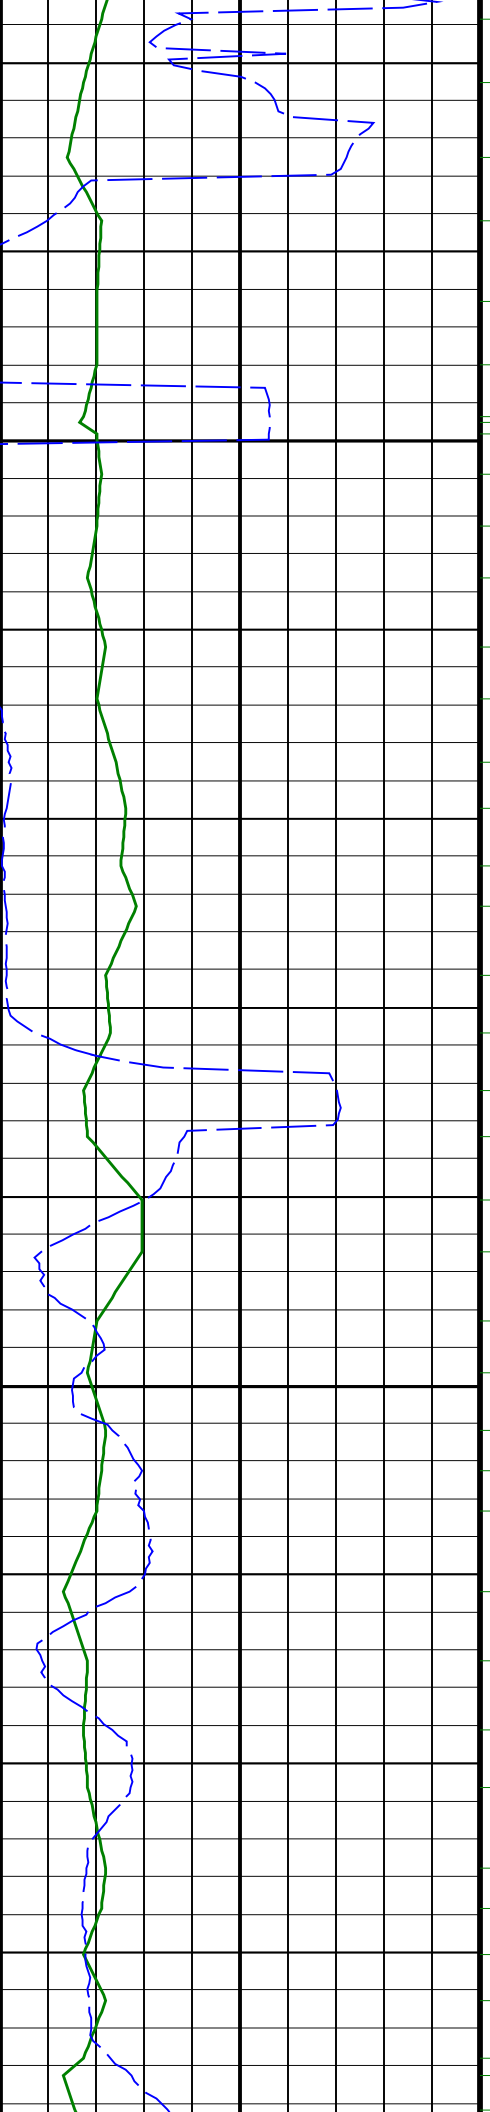


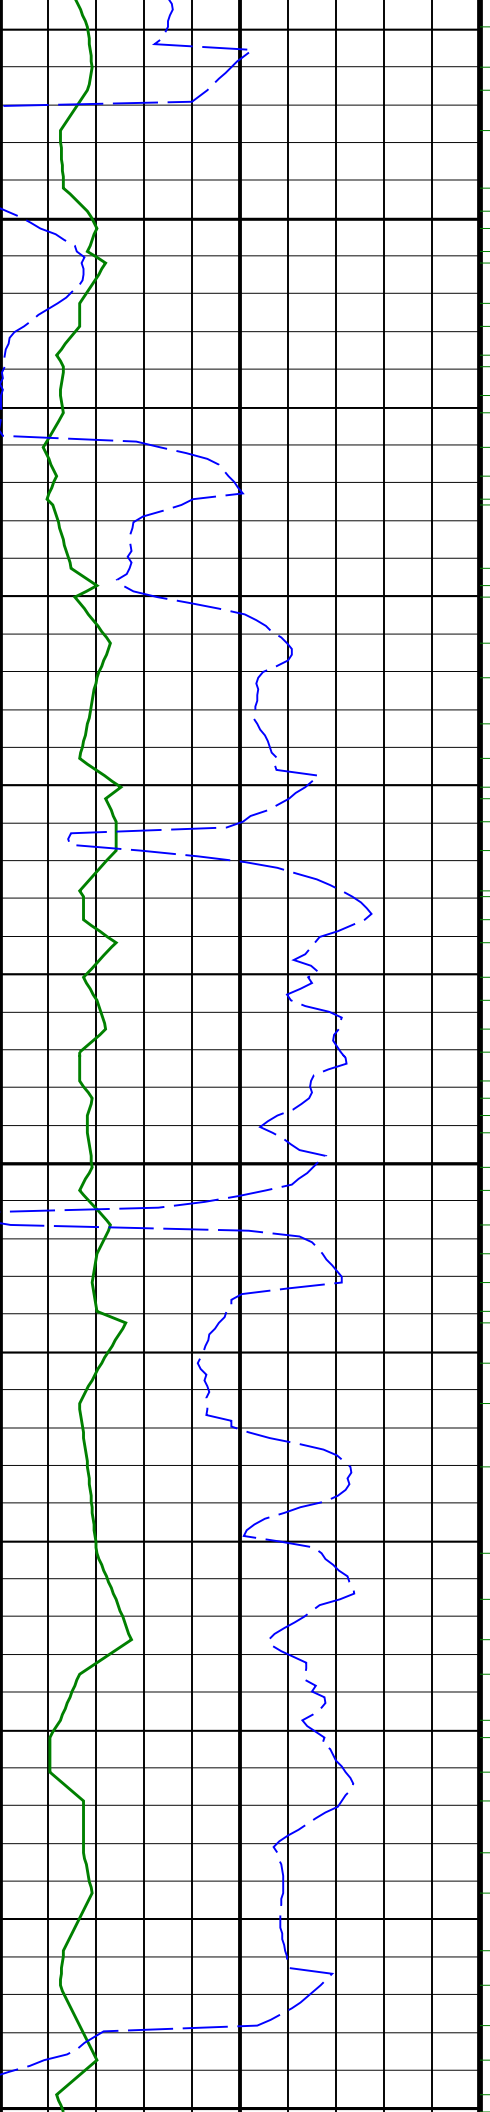

725

750

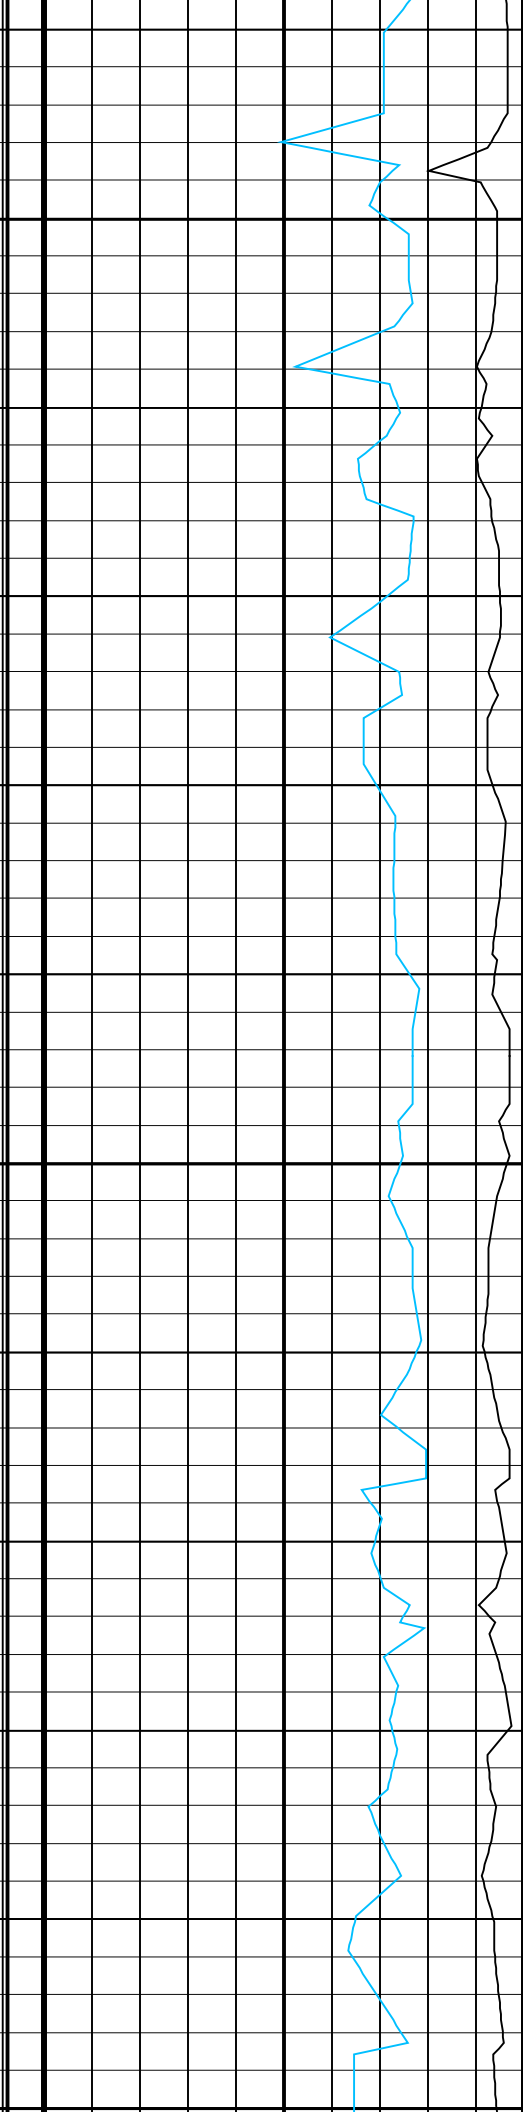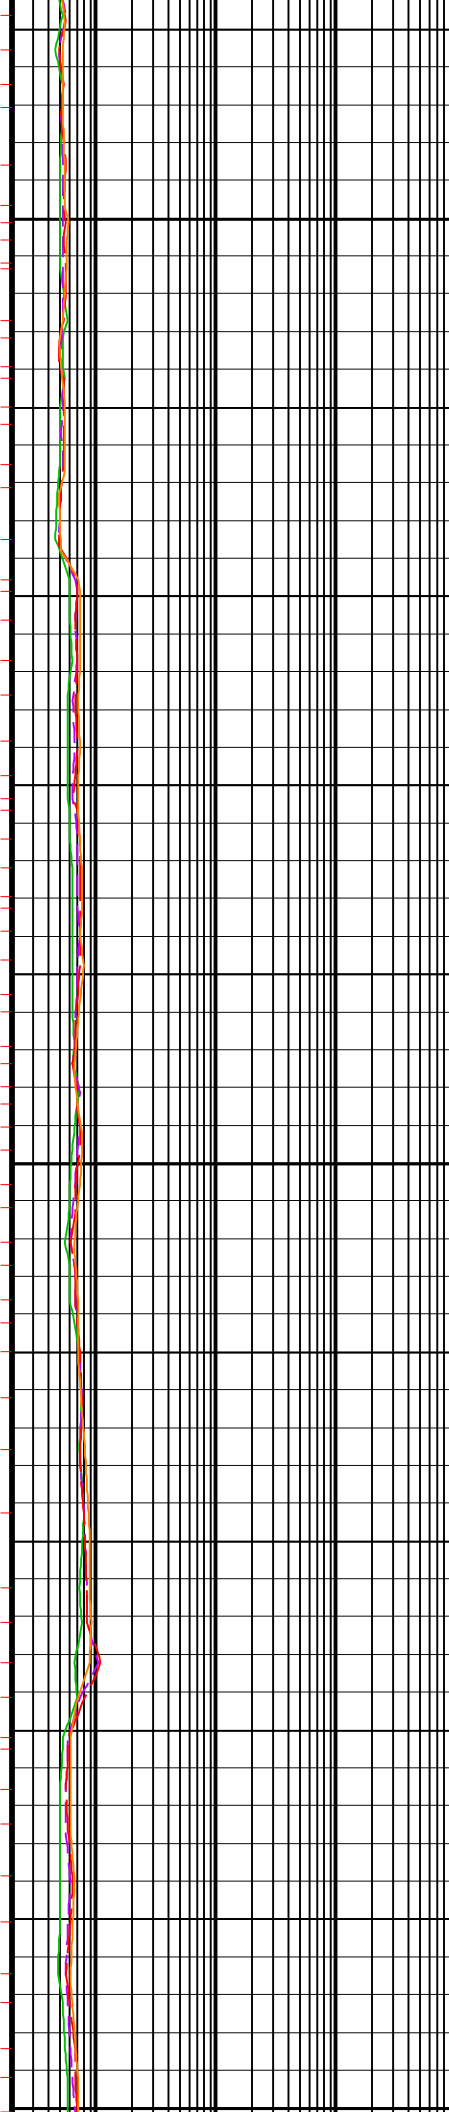

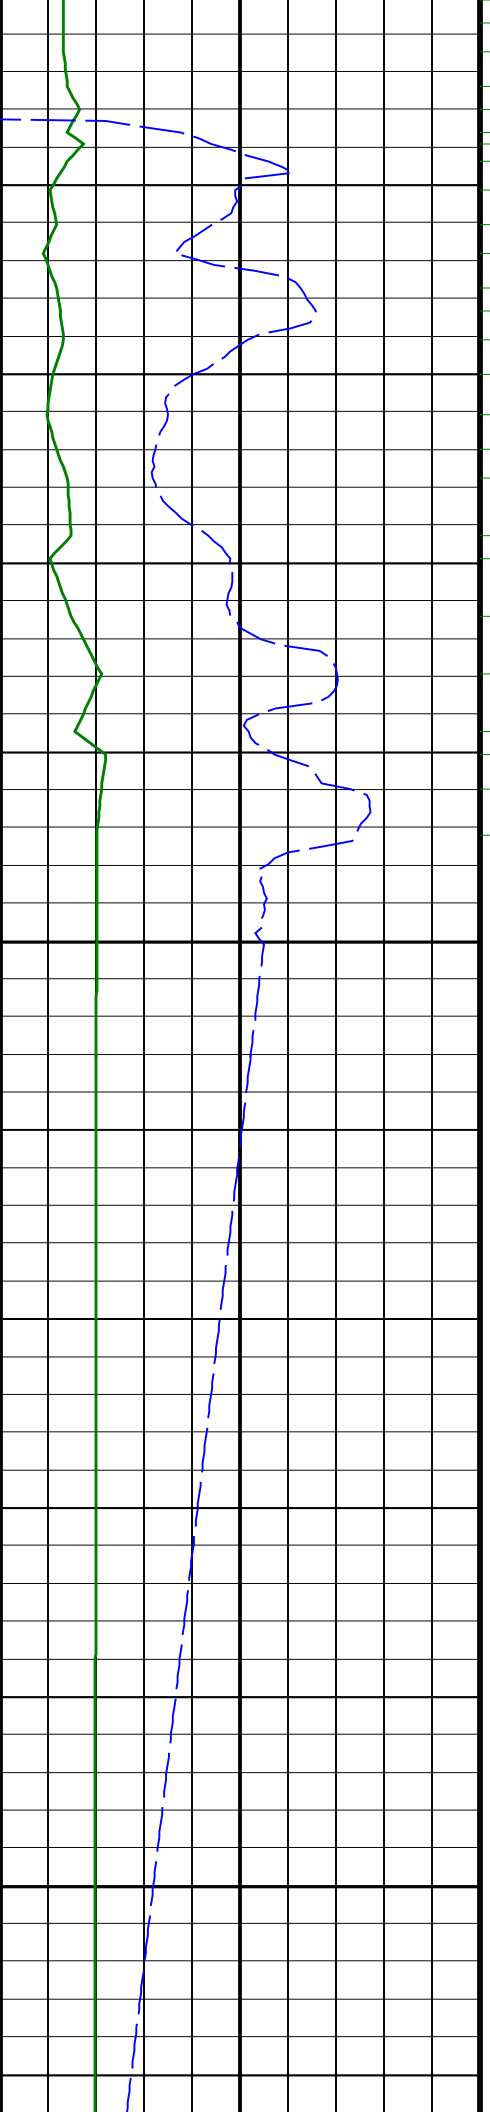



775


800


825

Baker Depth referencing used from 800–900mMD

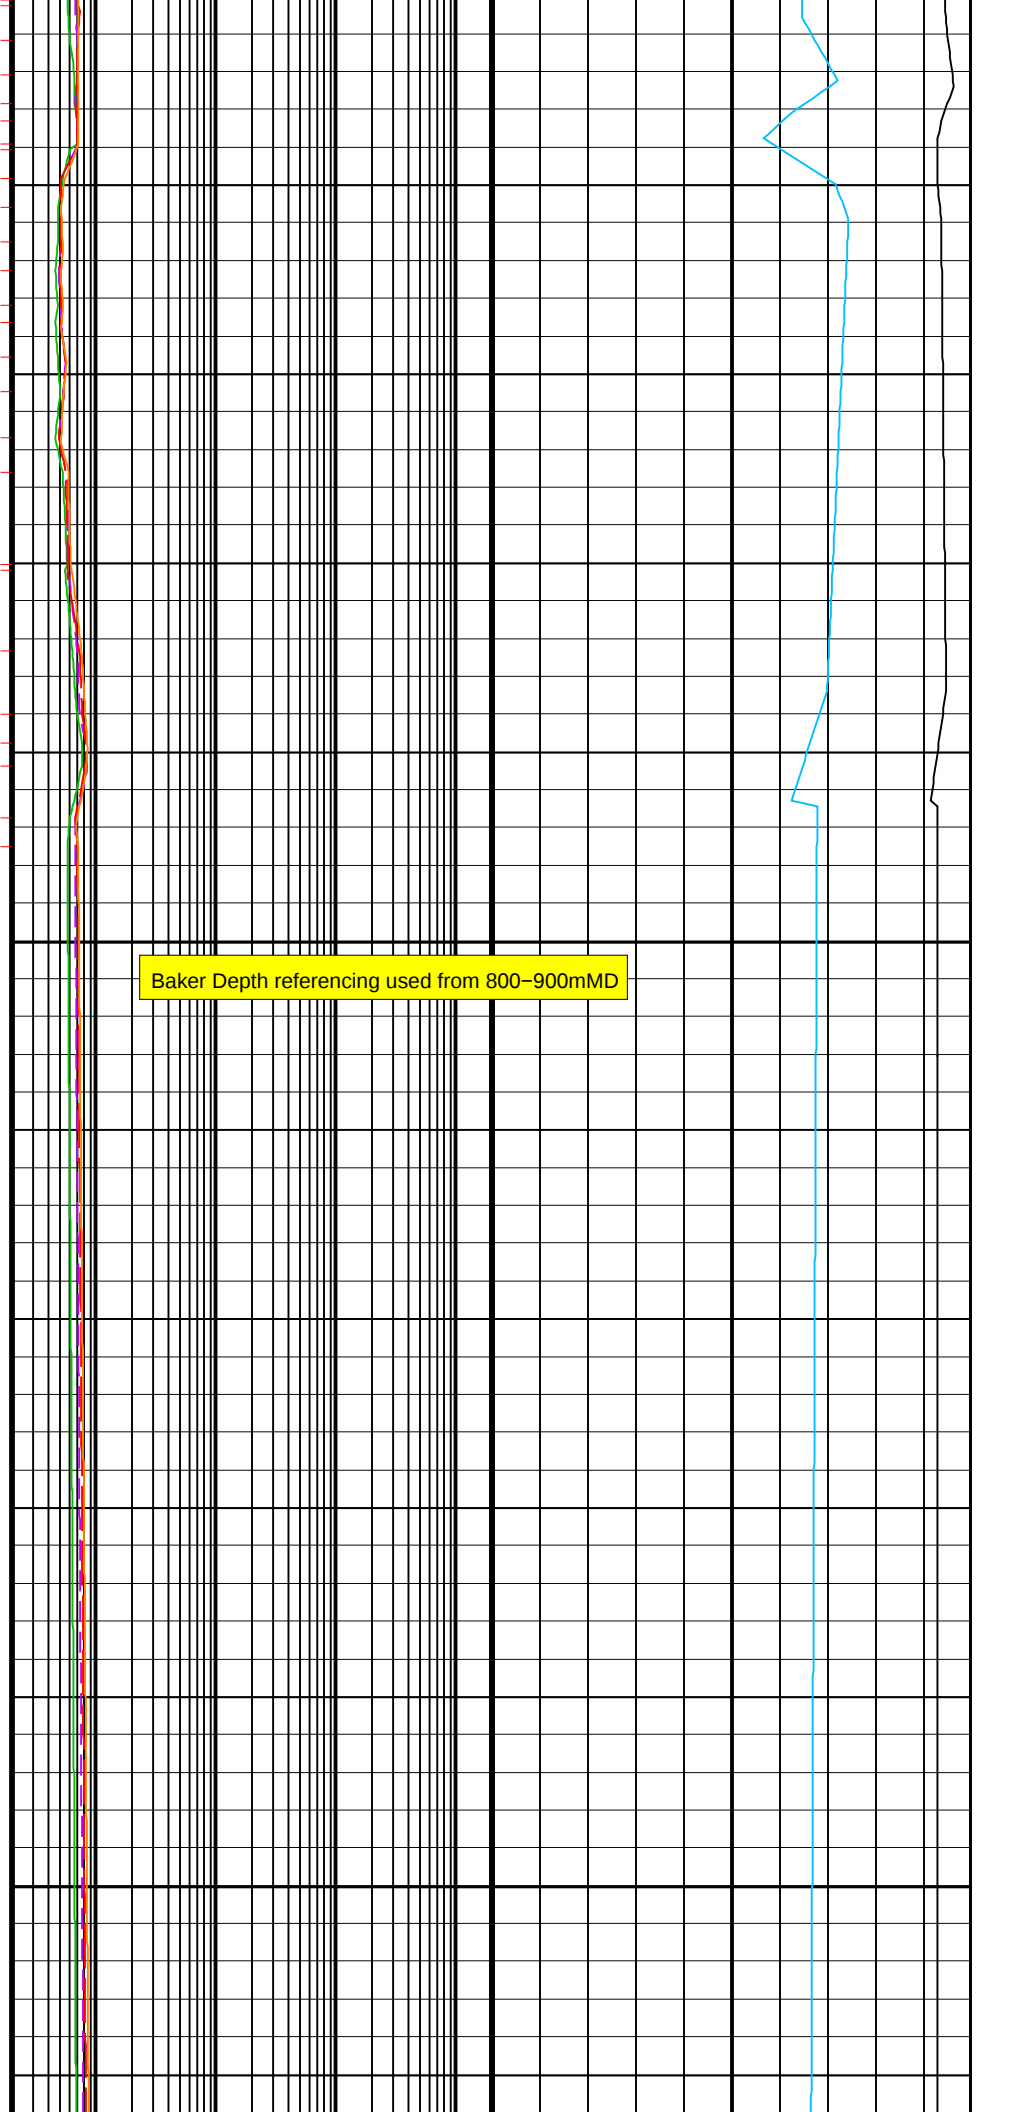

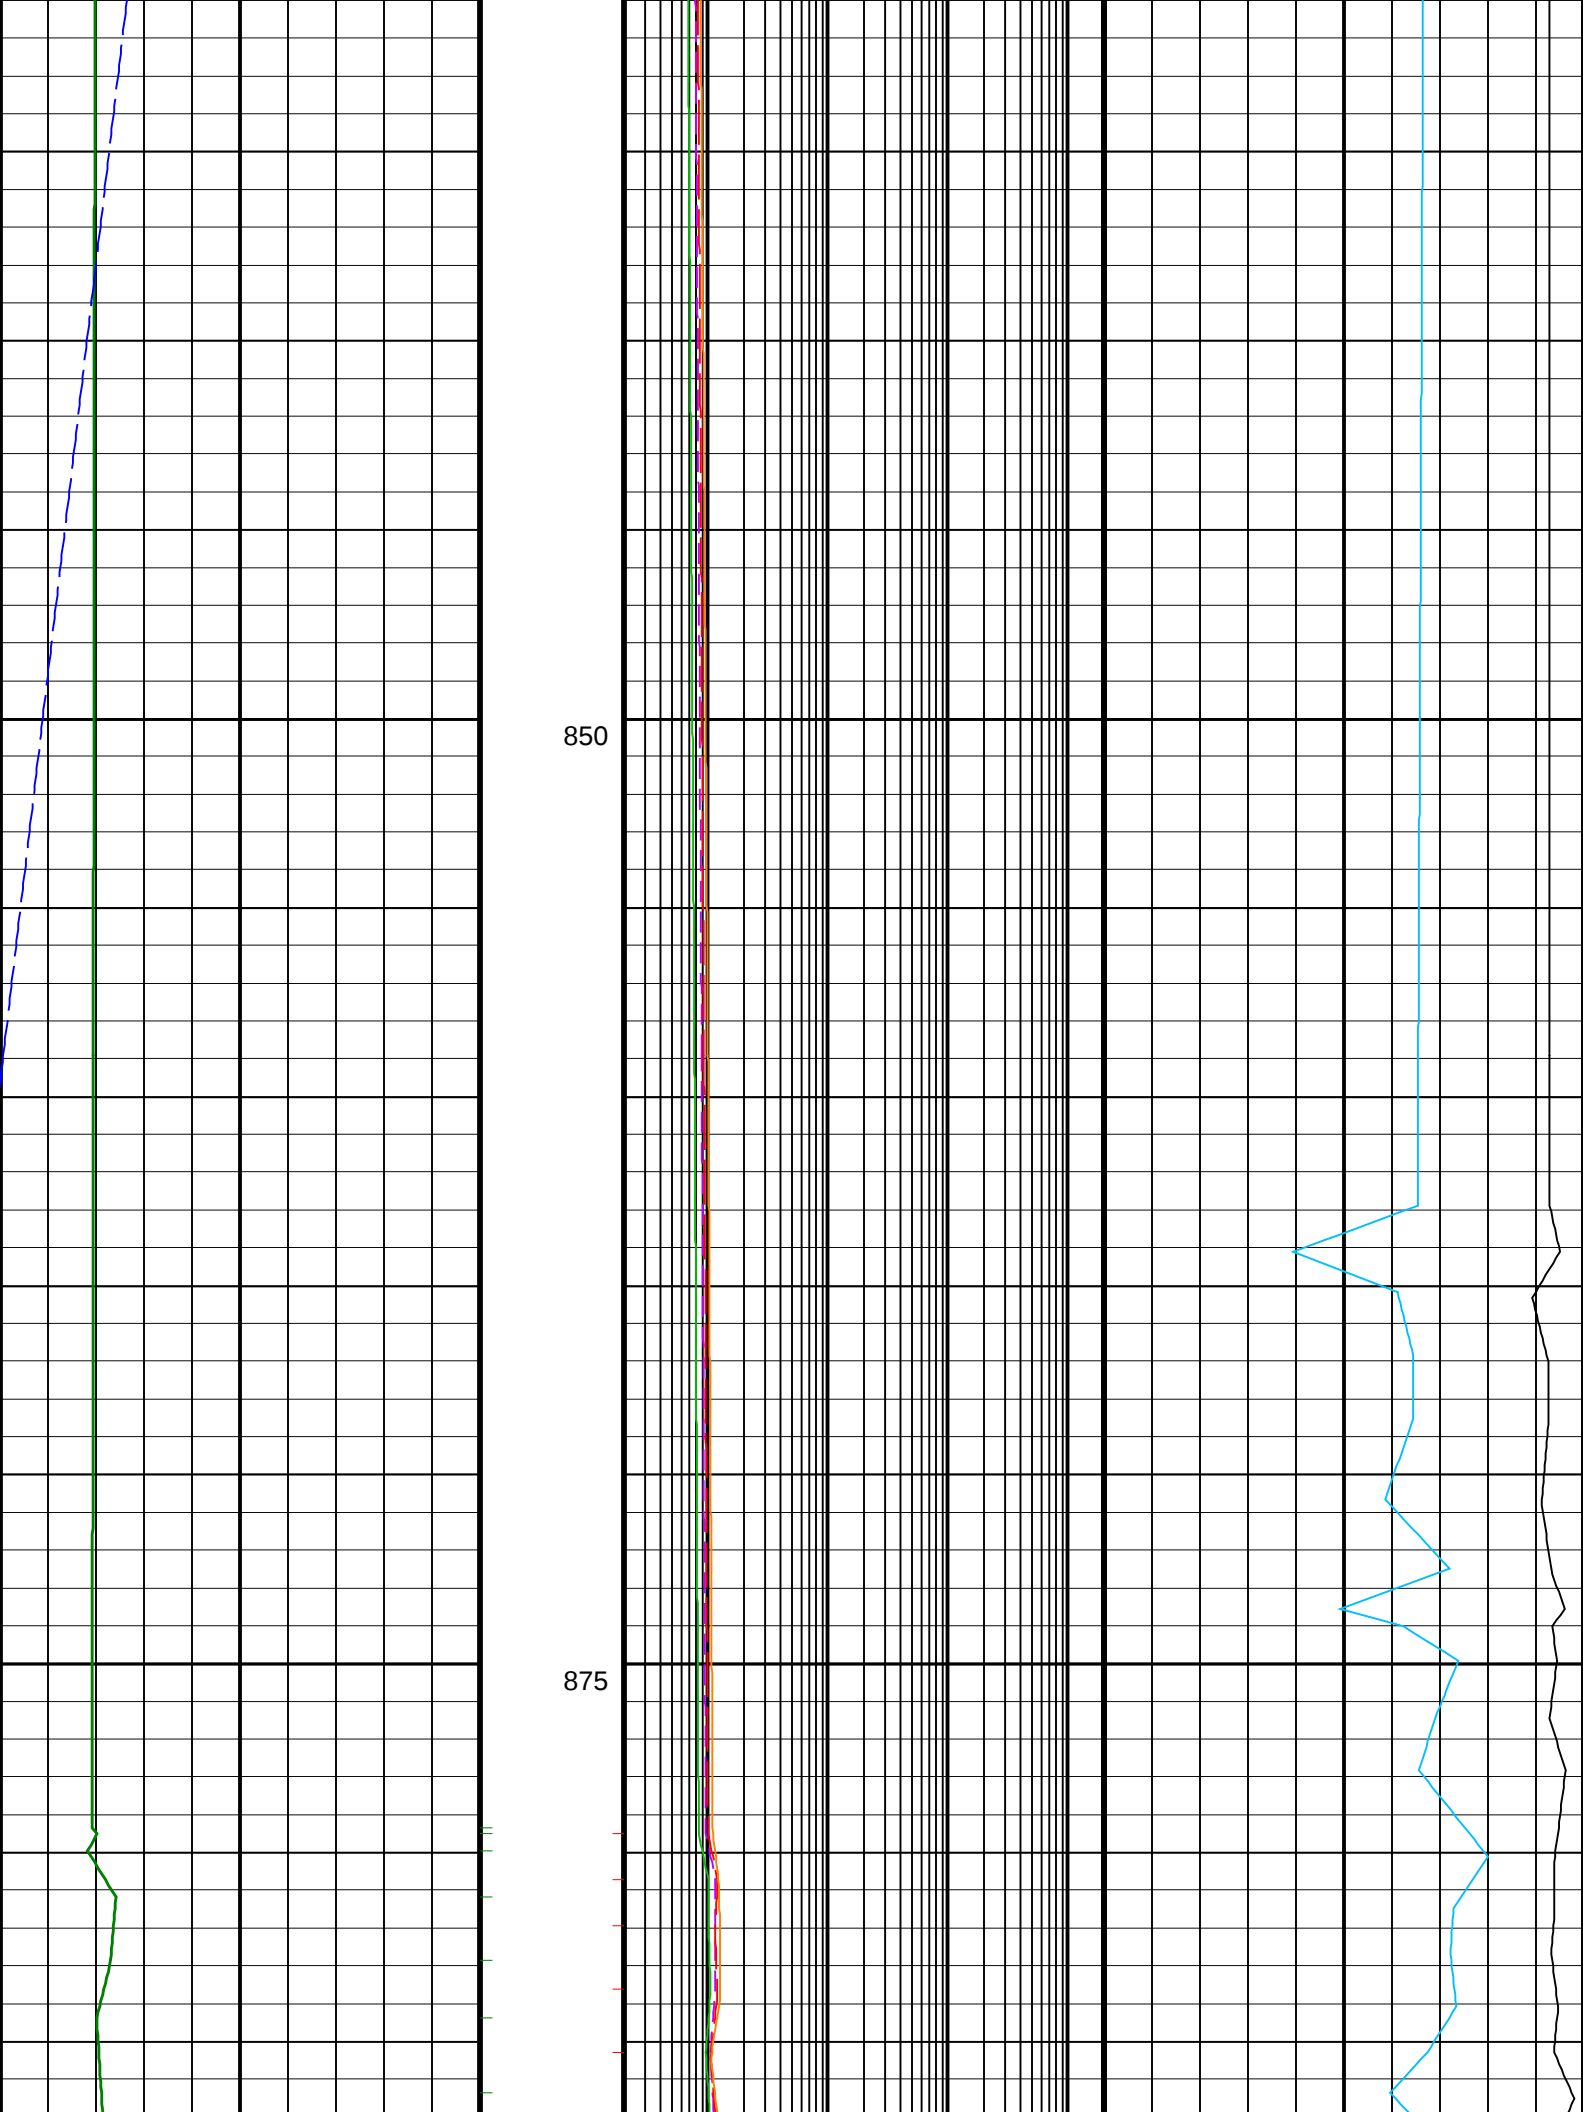



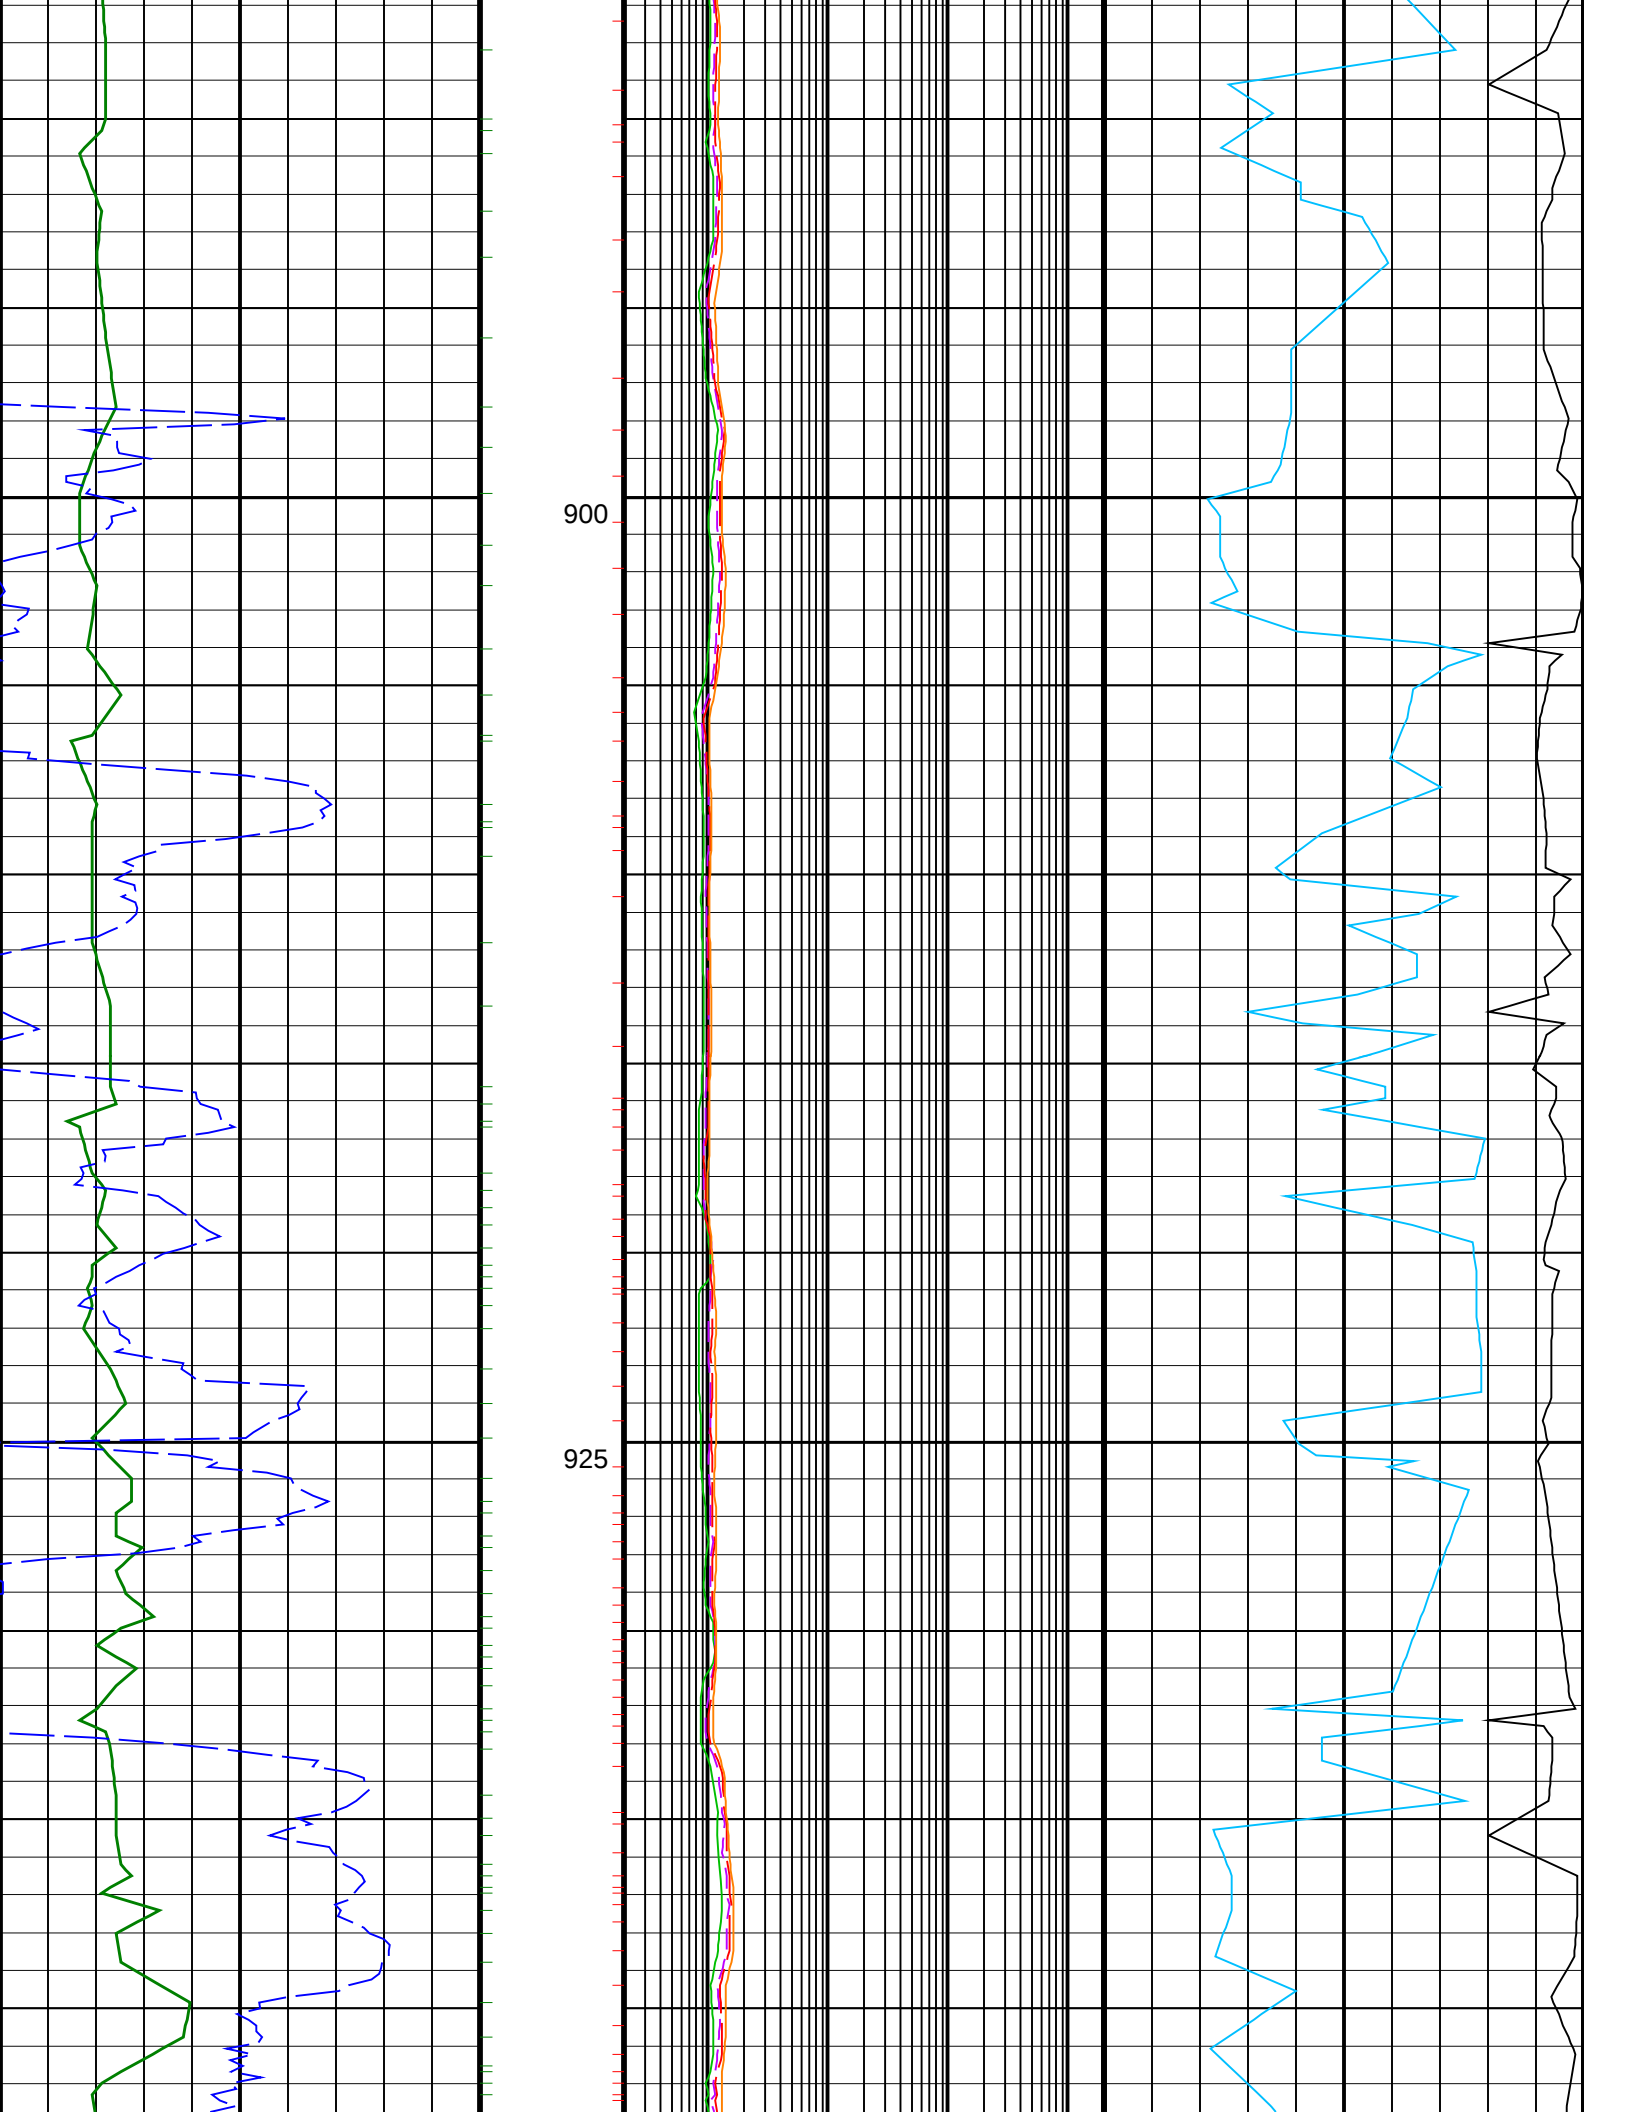



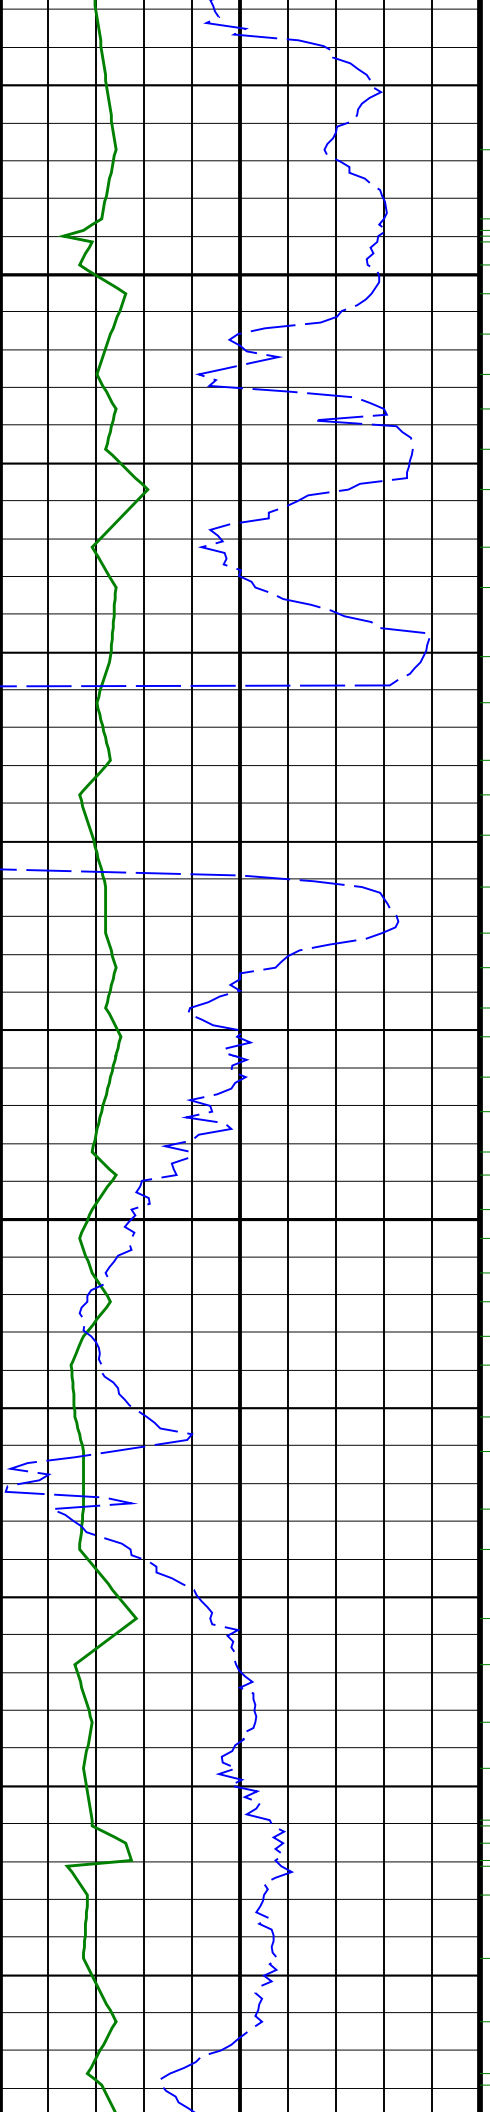


950



975

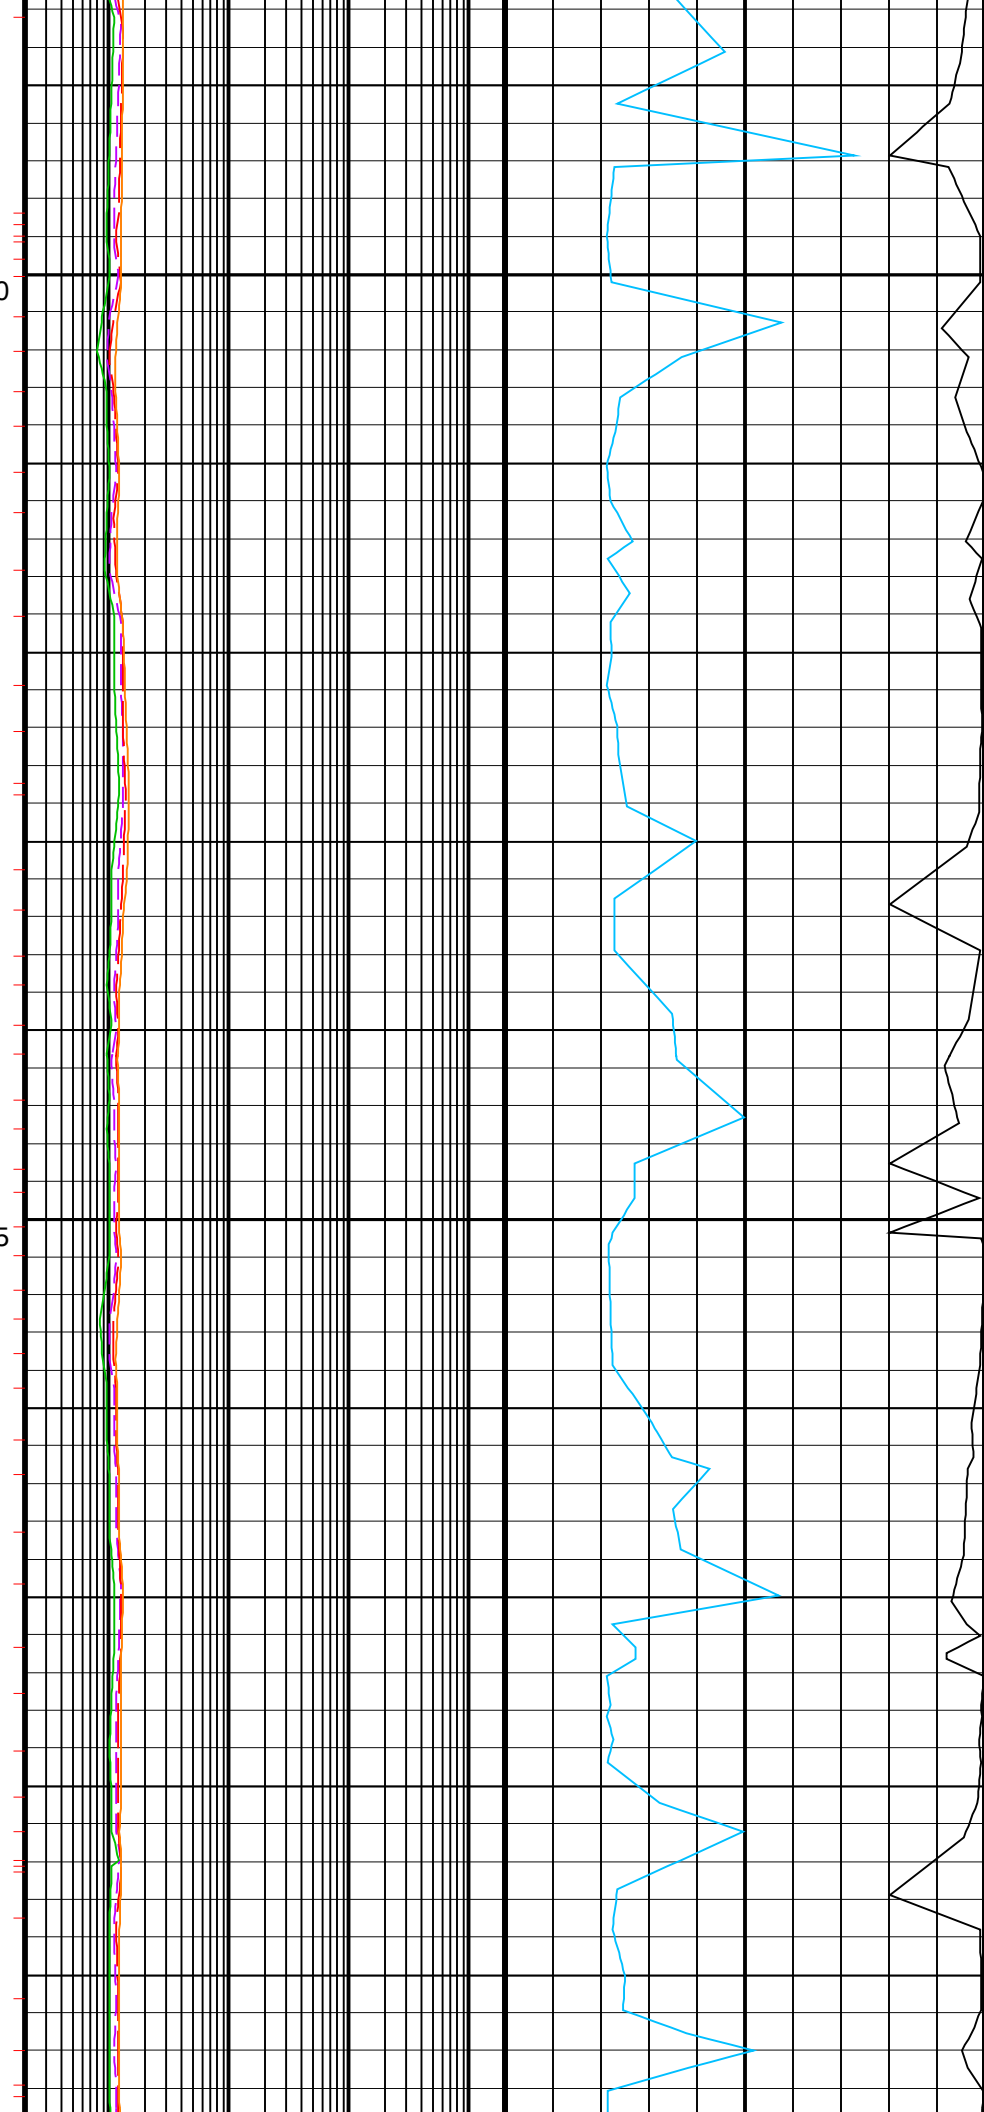


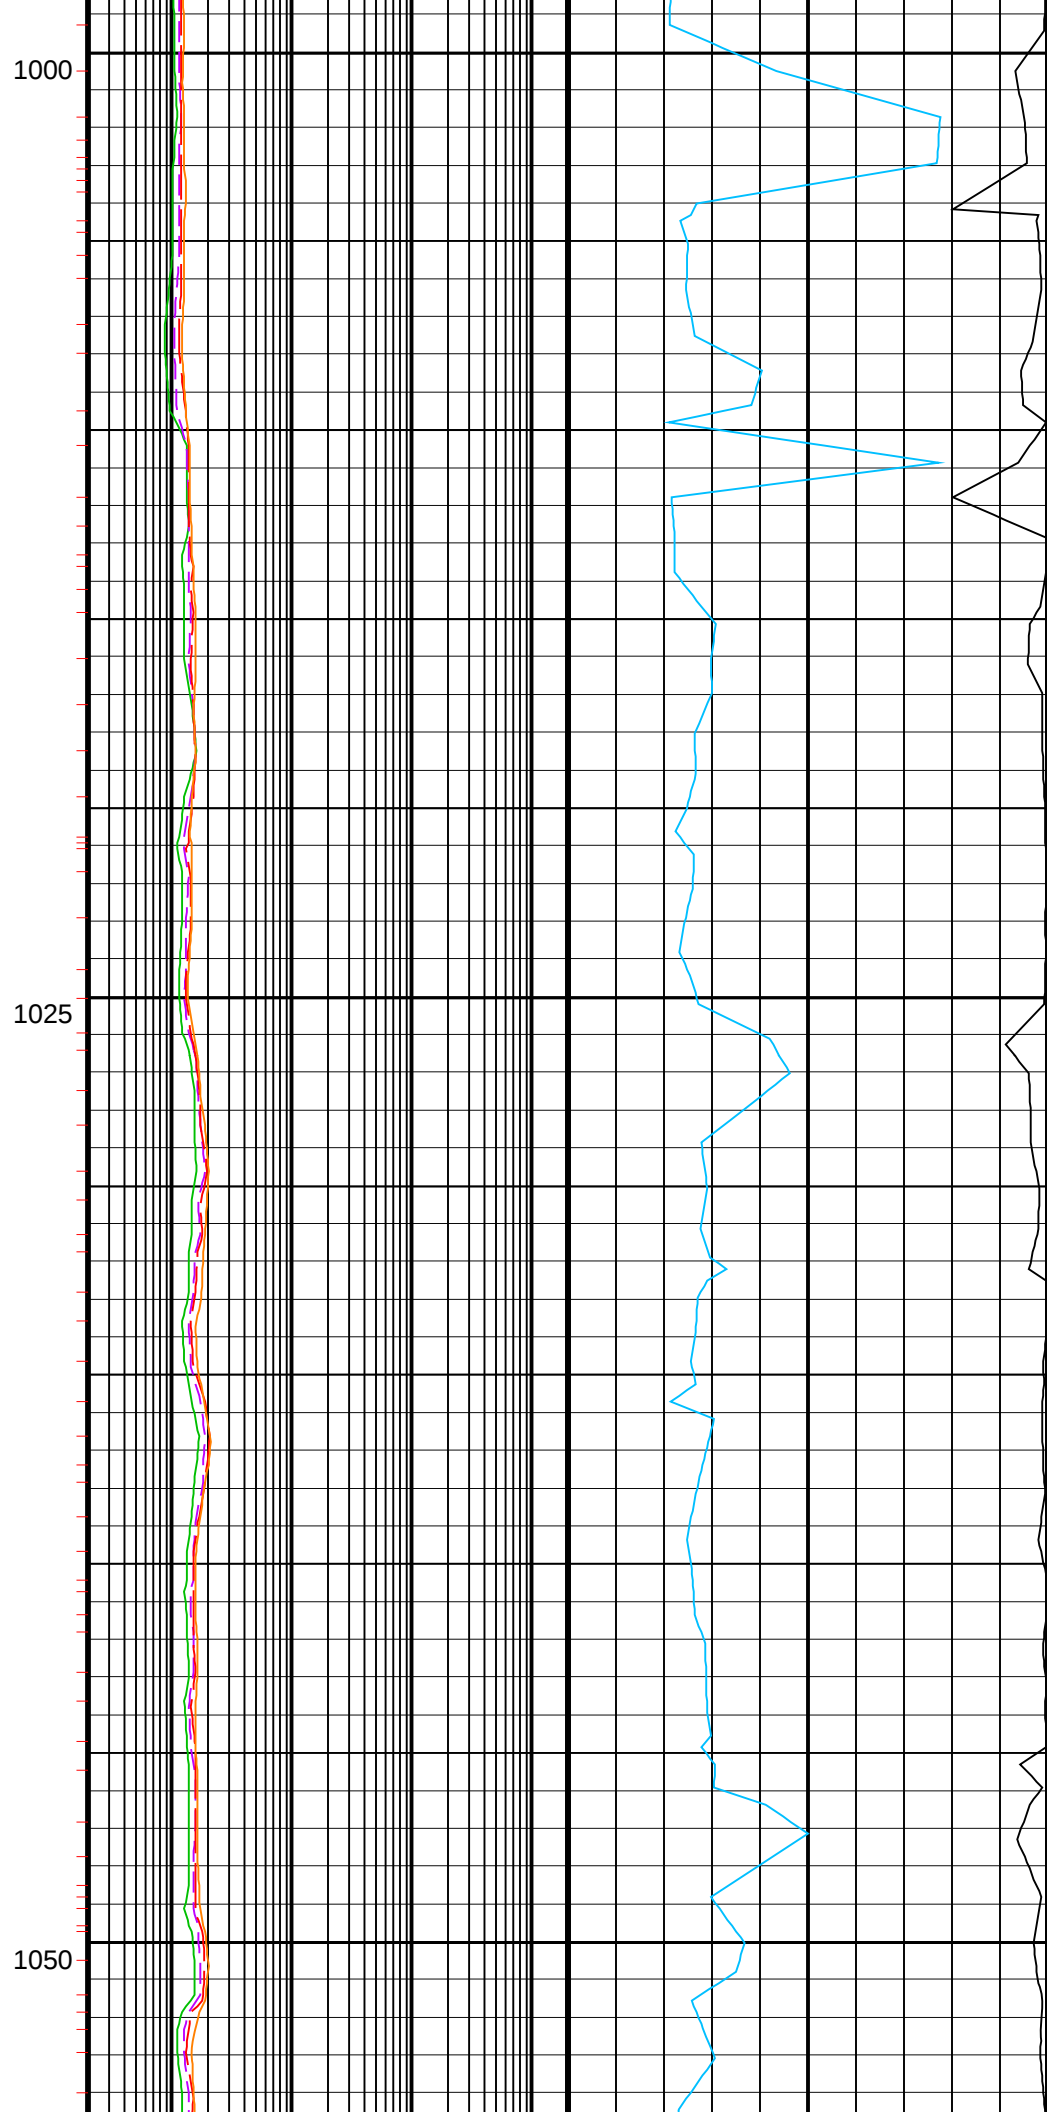
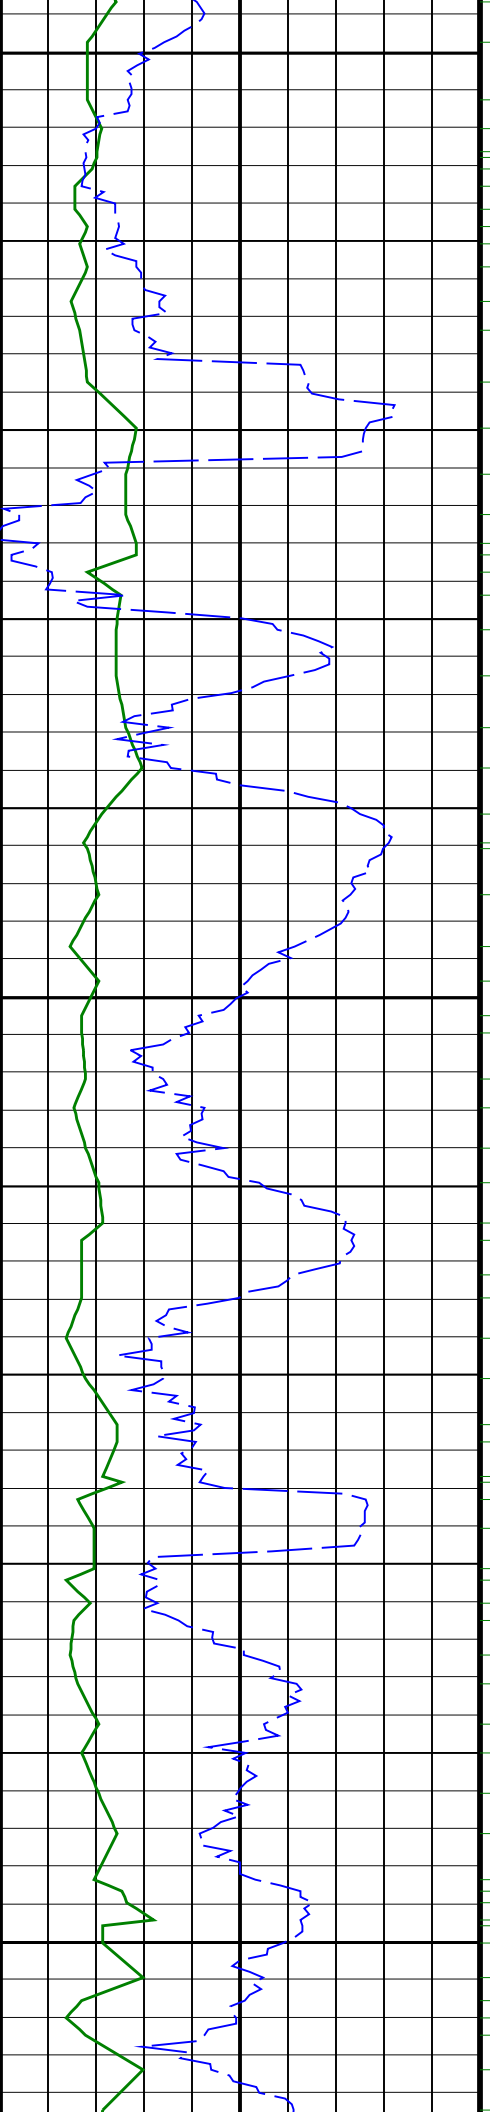


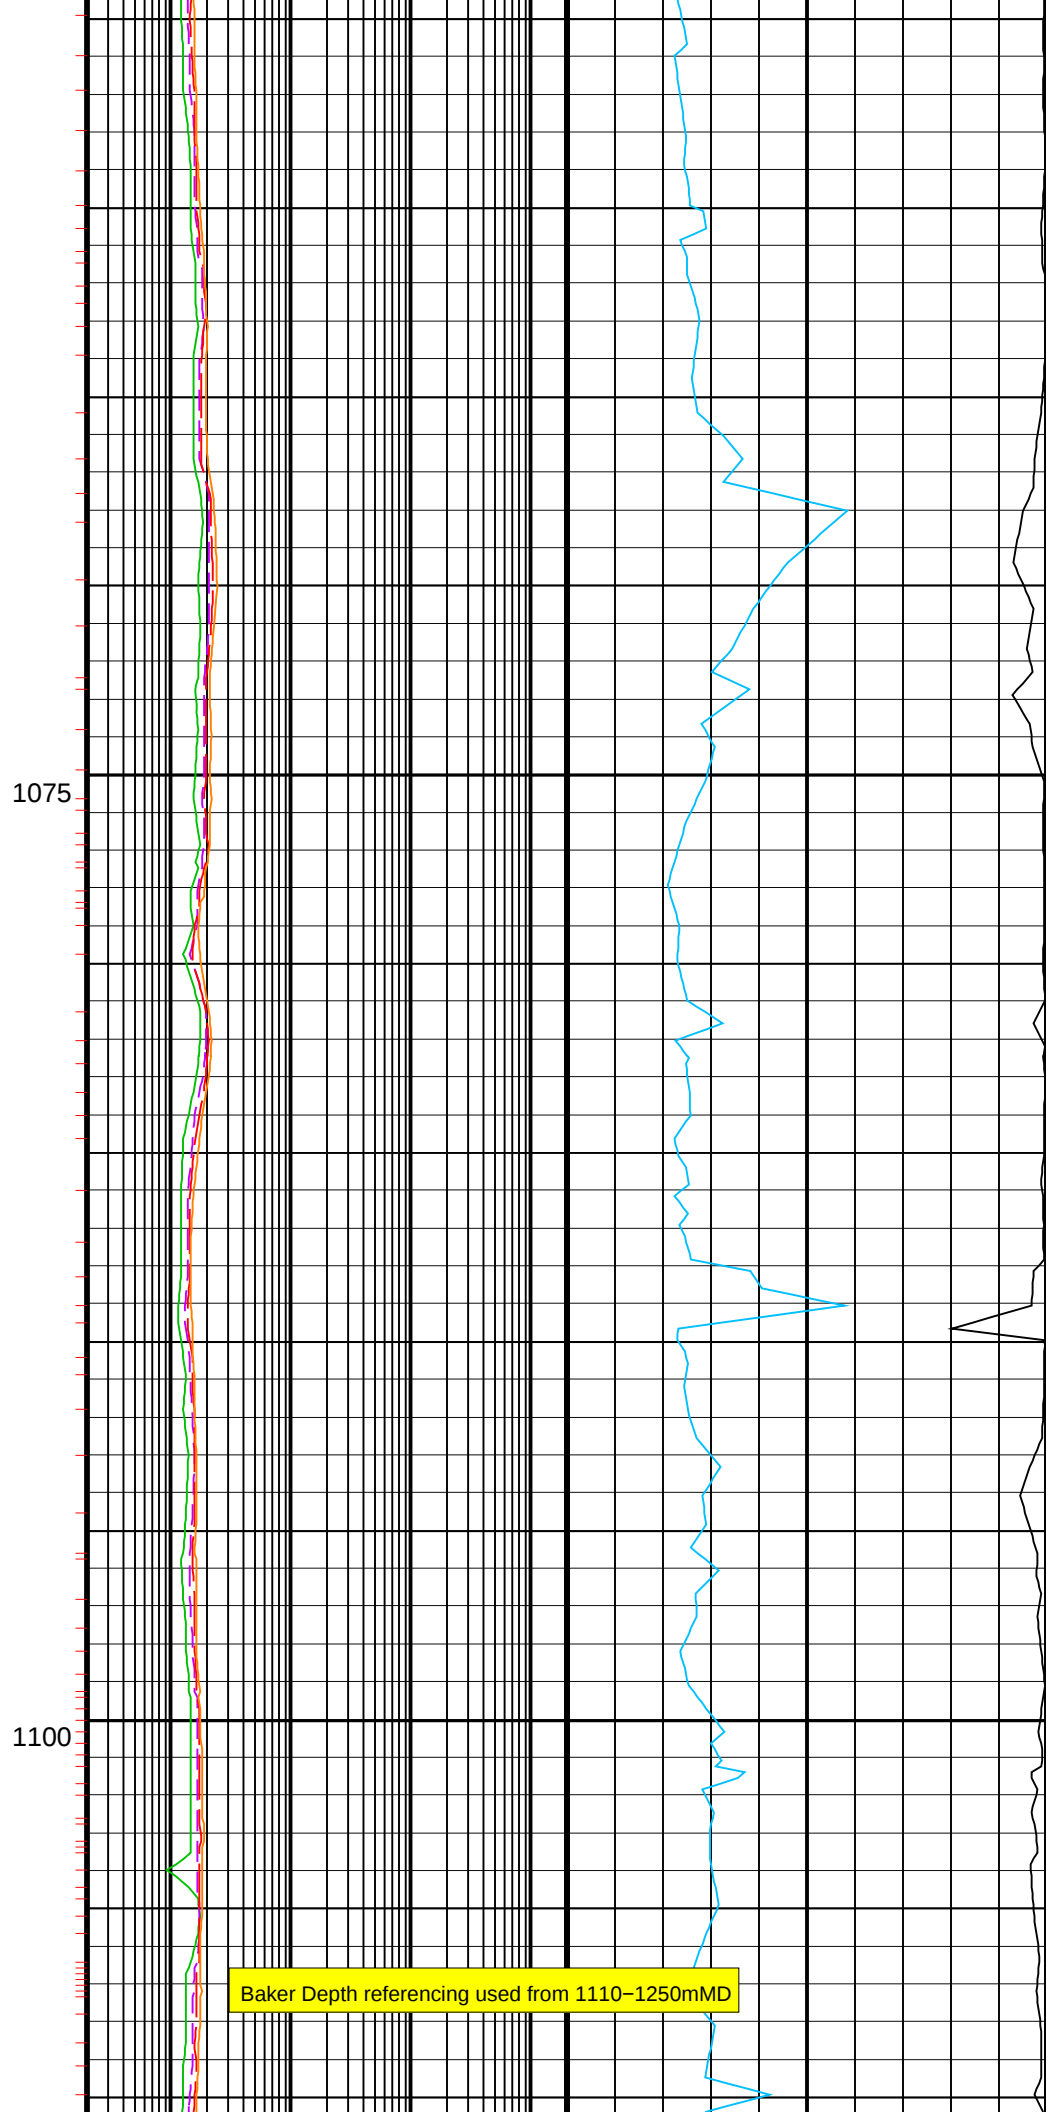
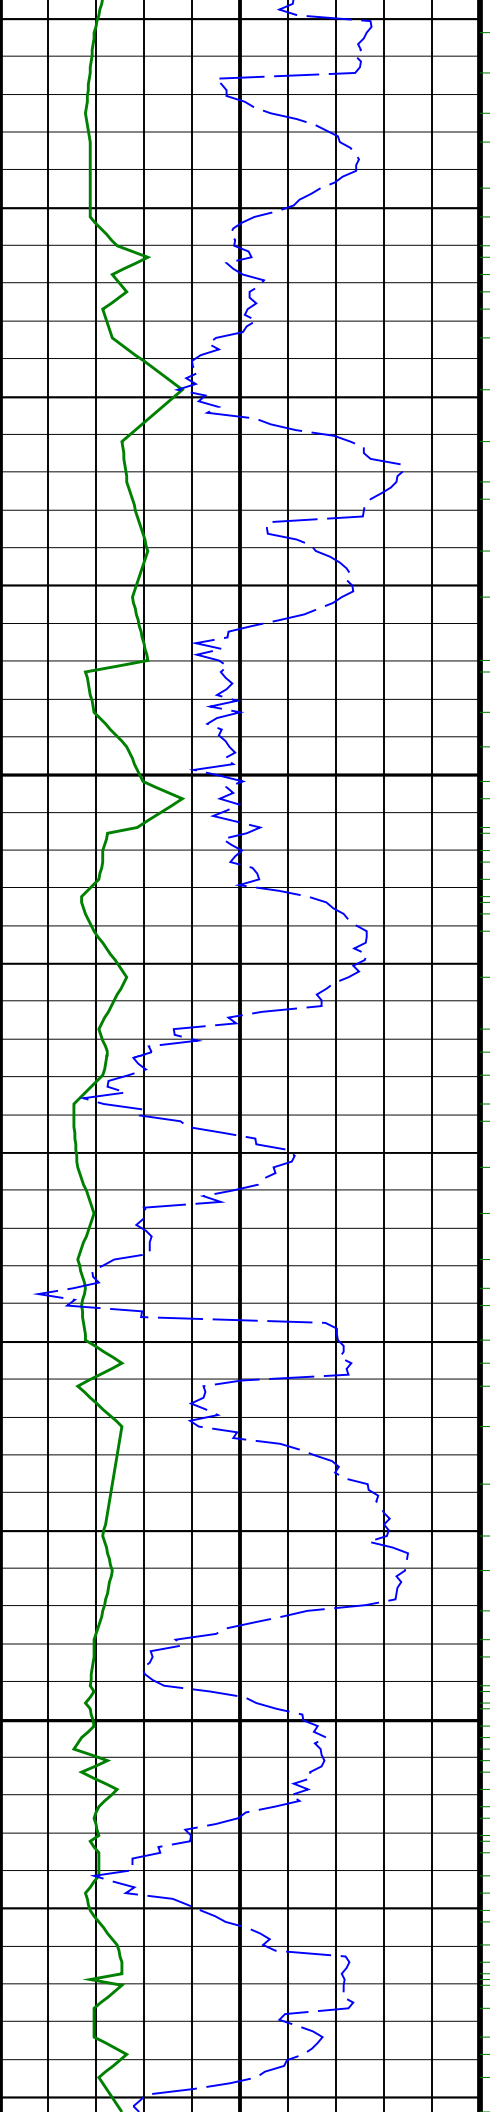



Baker Depth referencing used from 1110-1250mMD

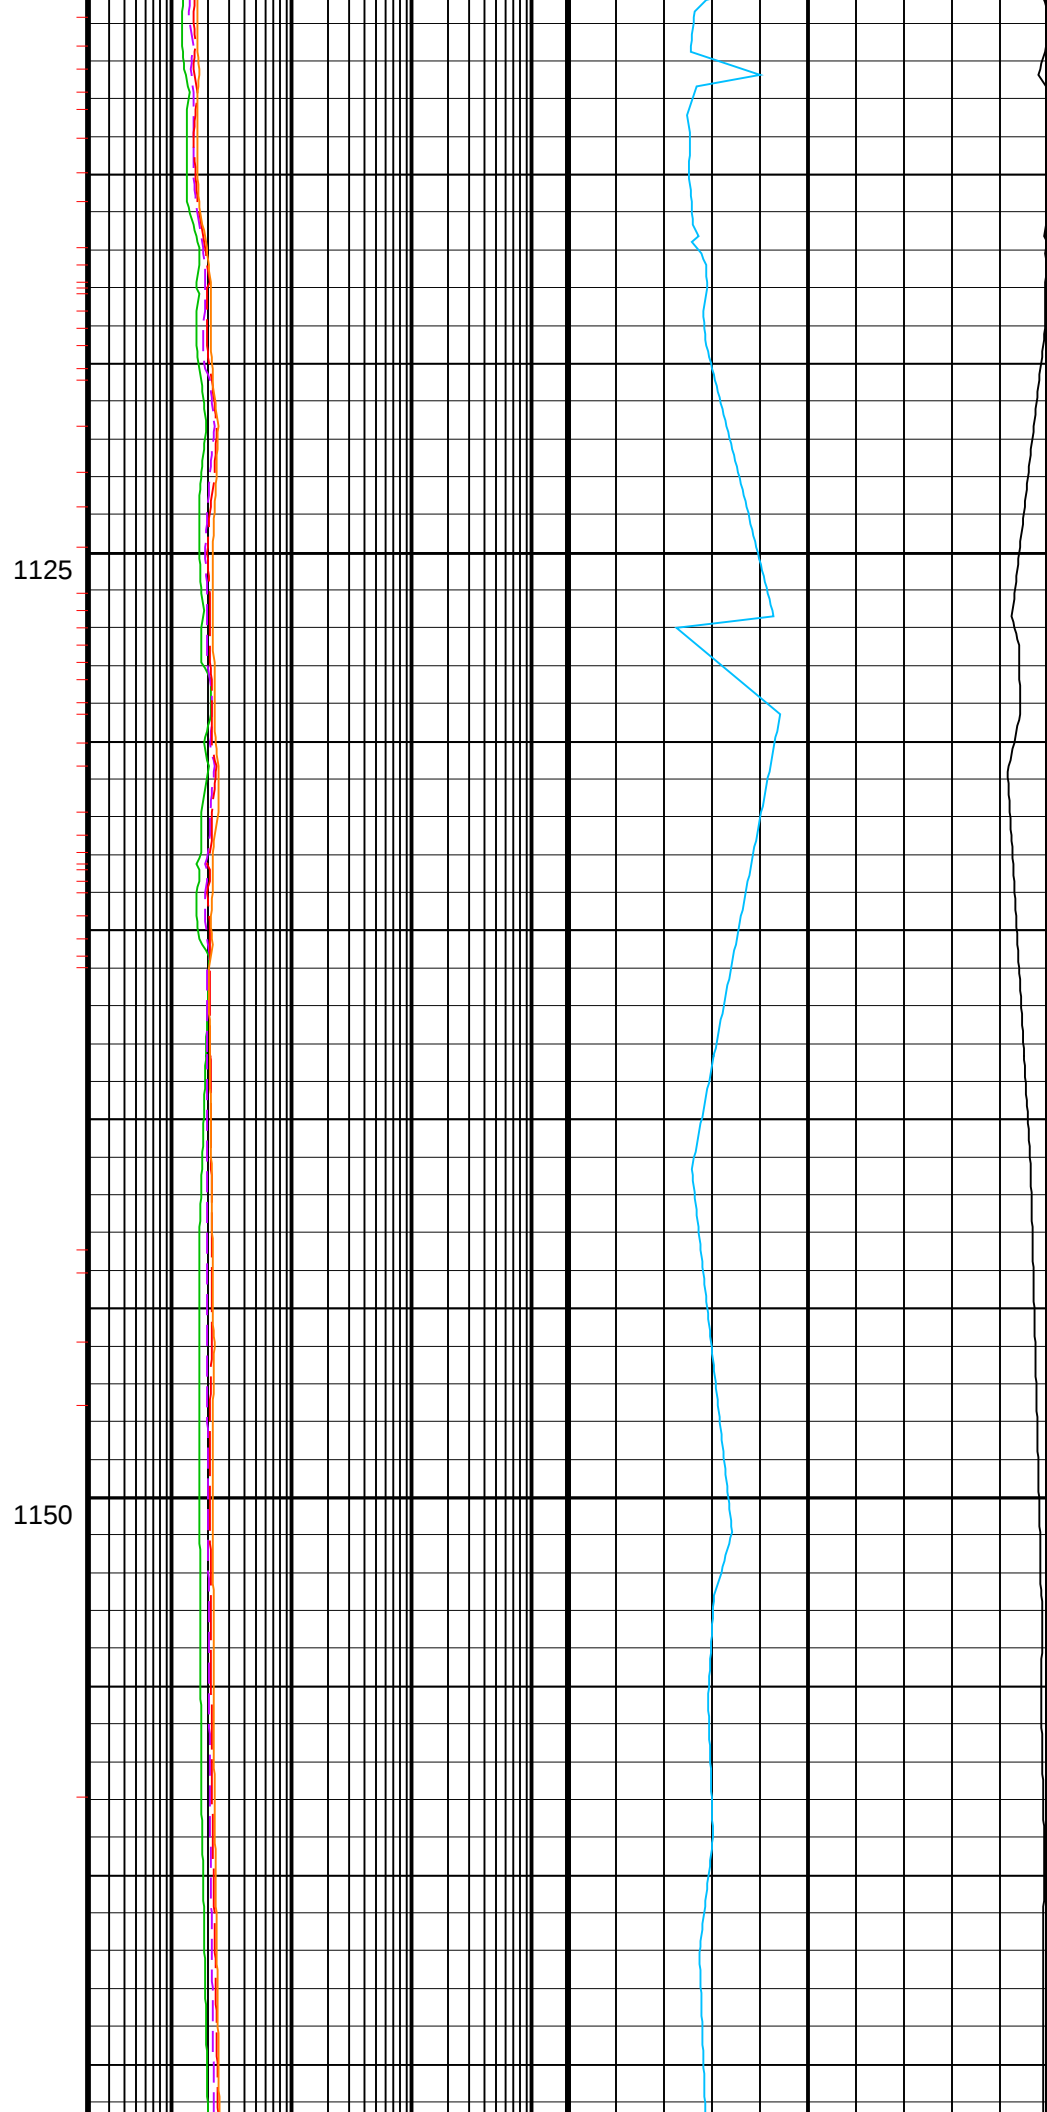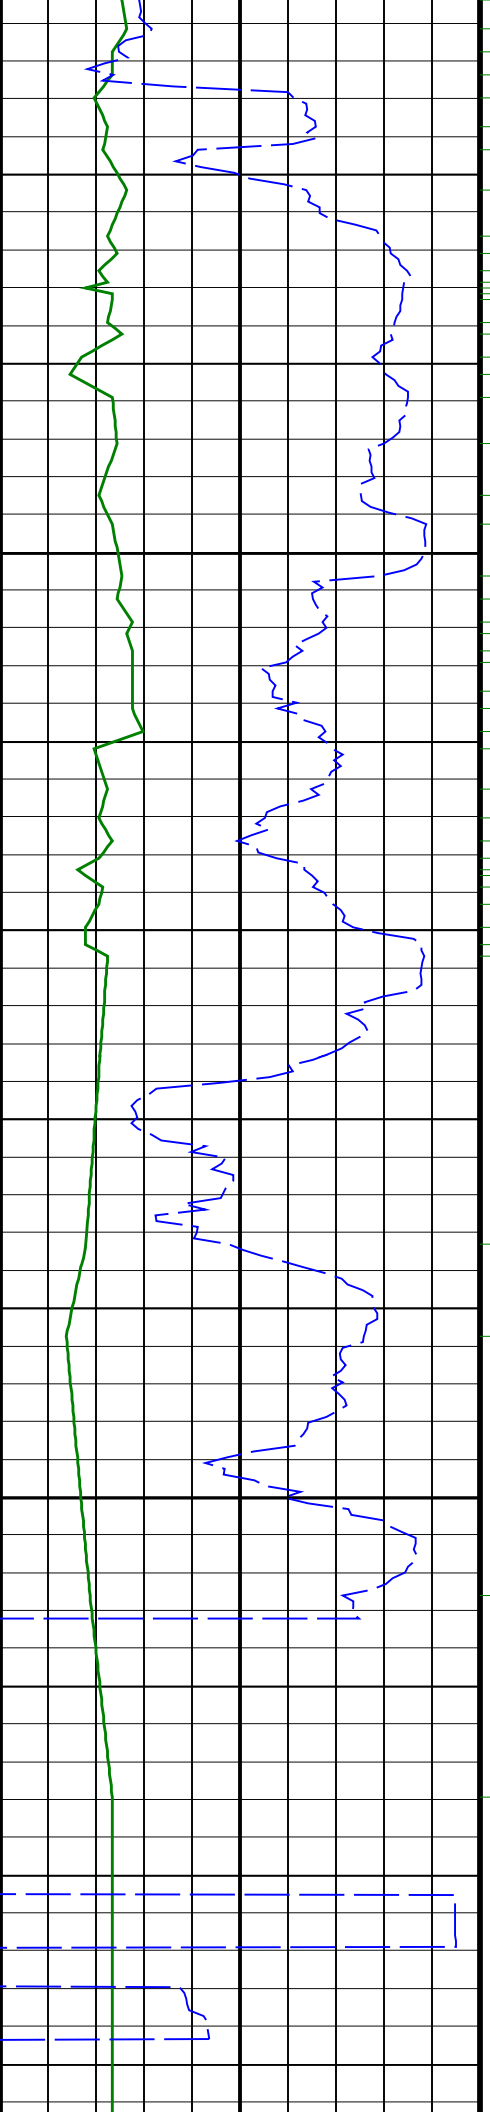

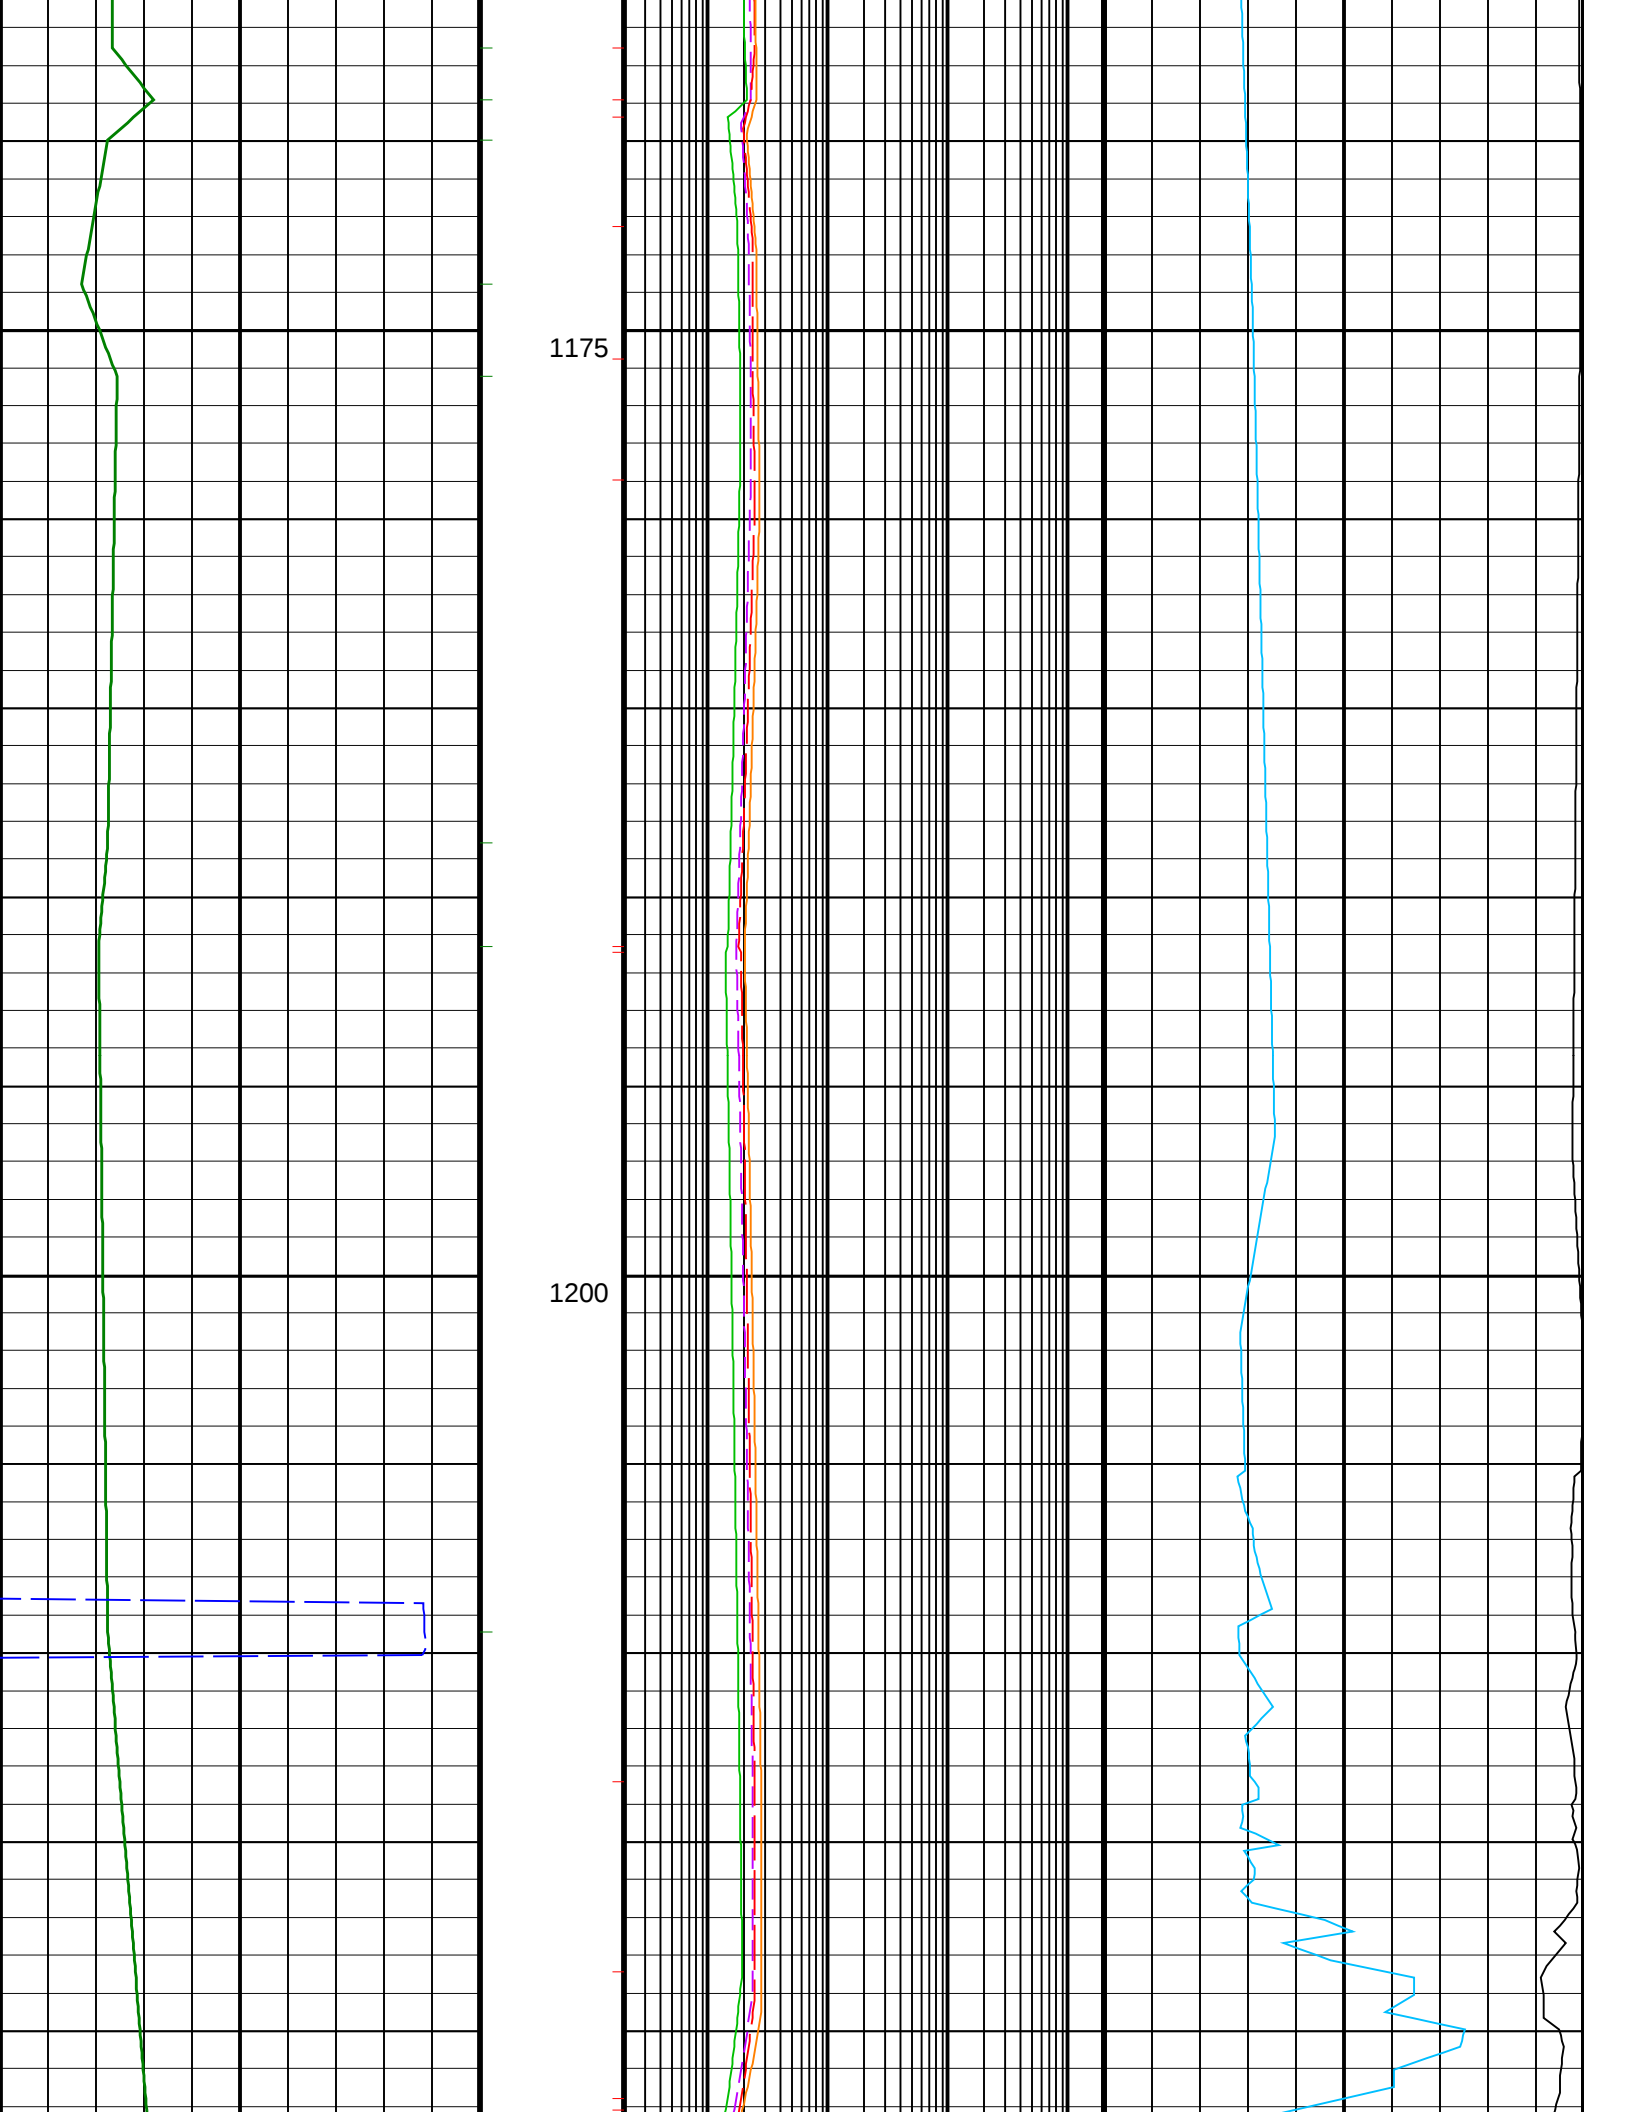

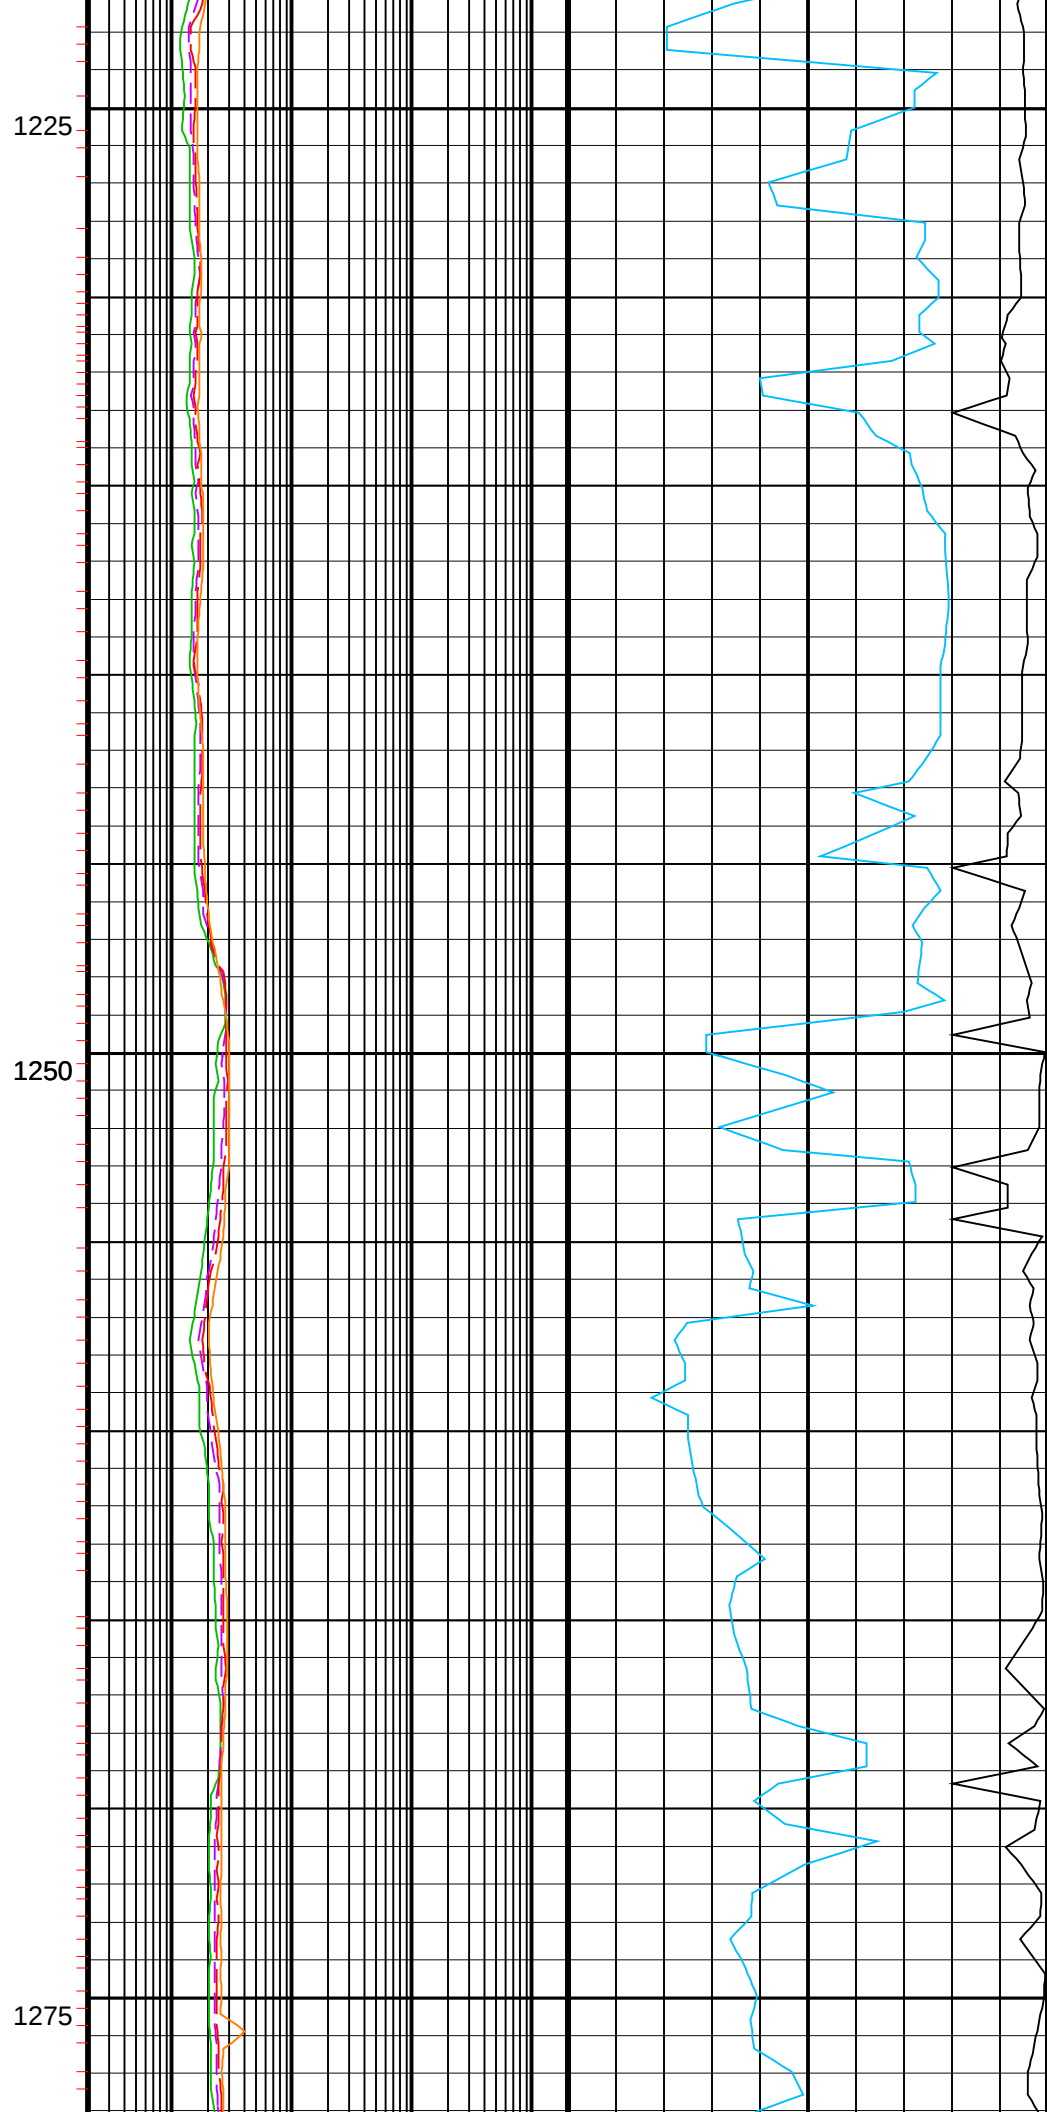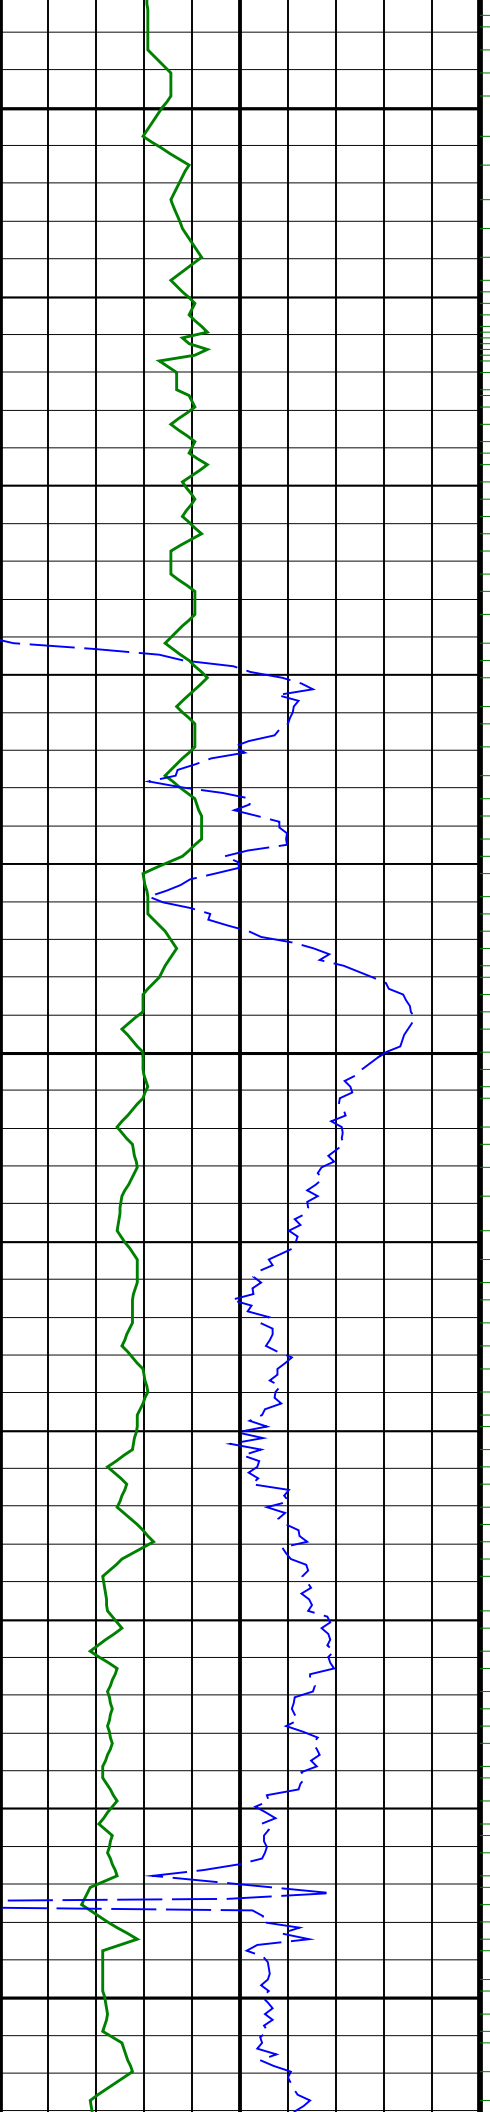






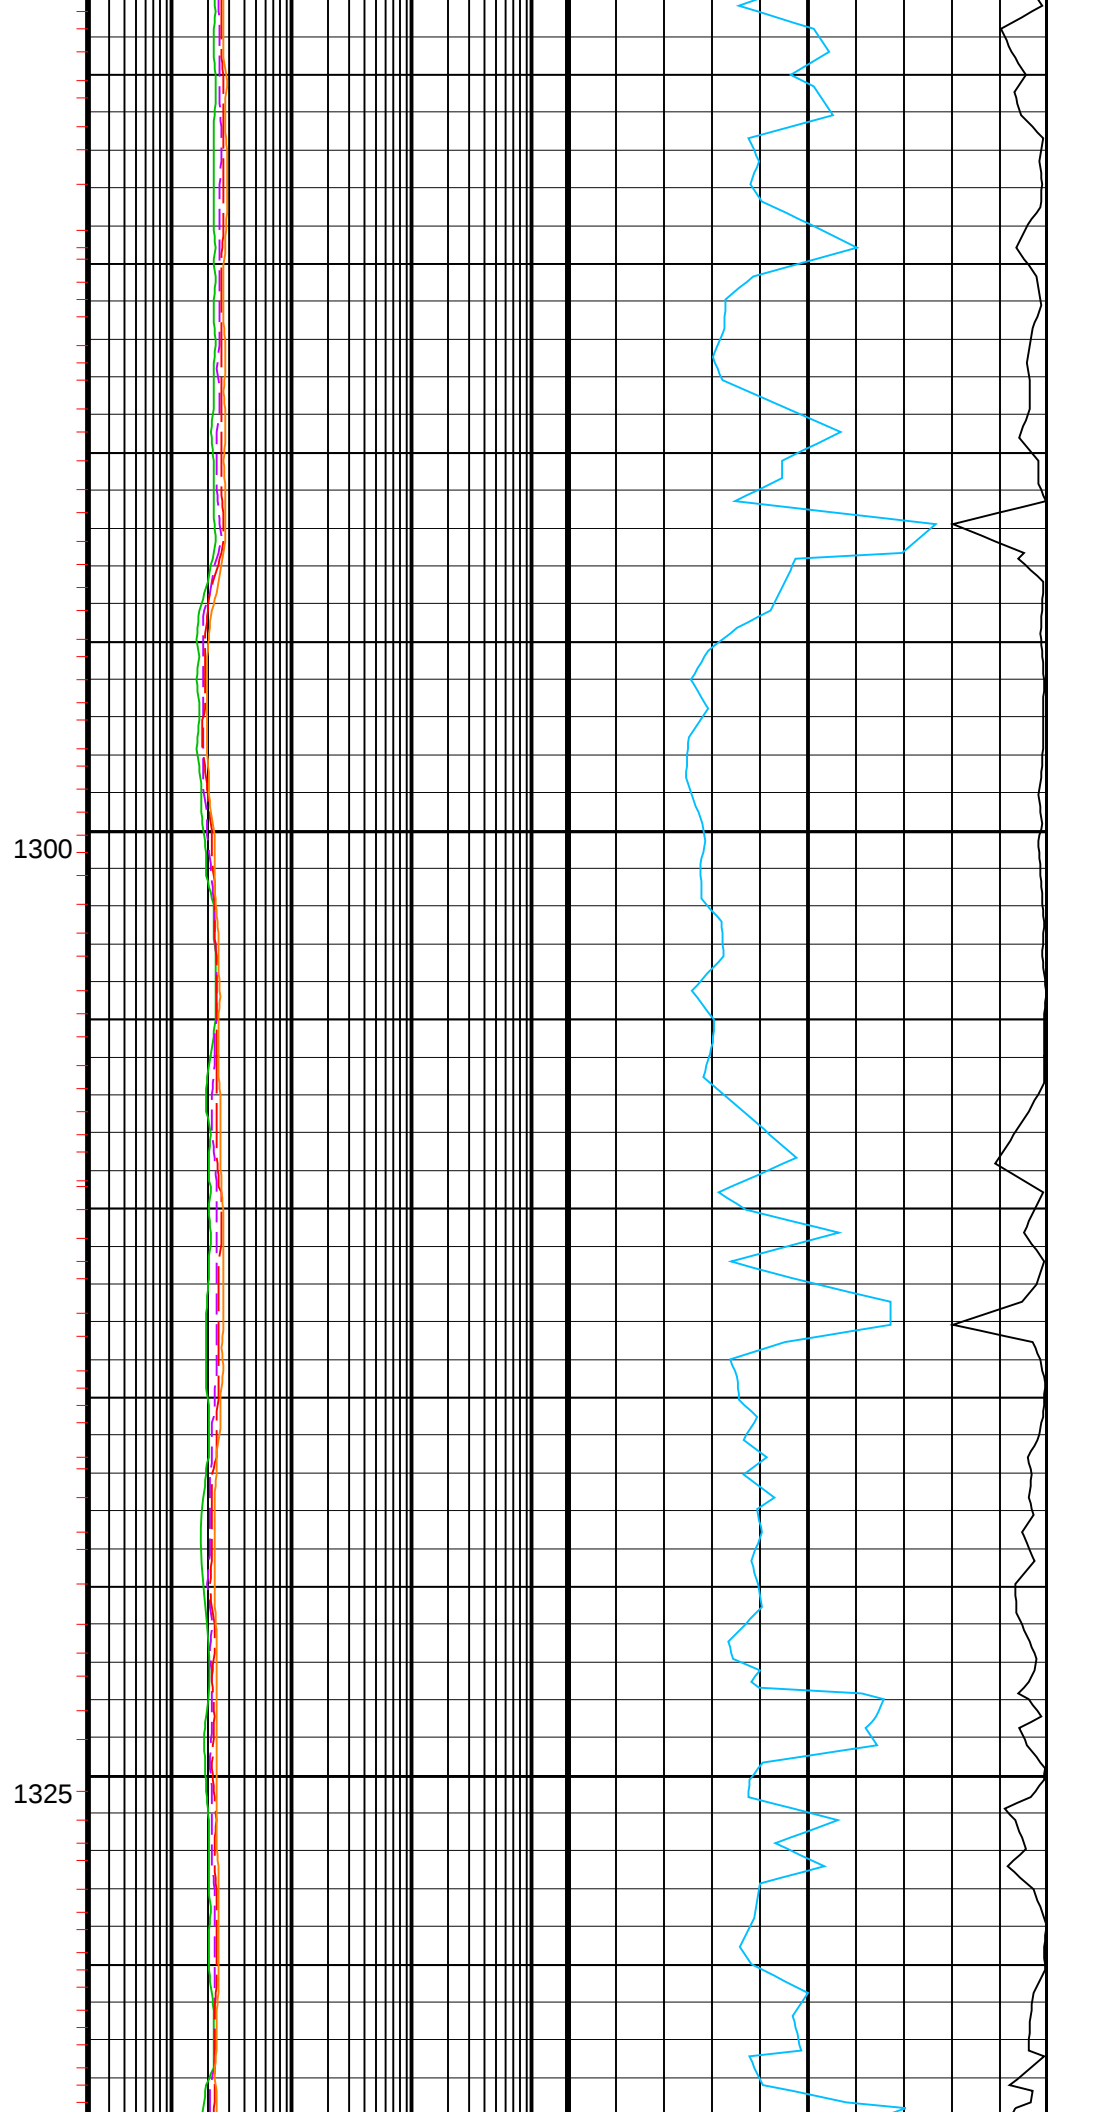
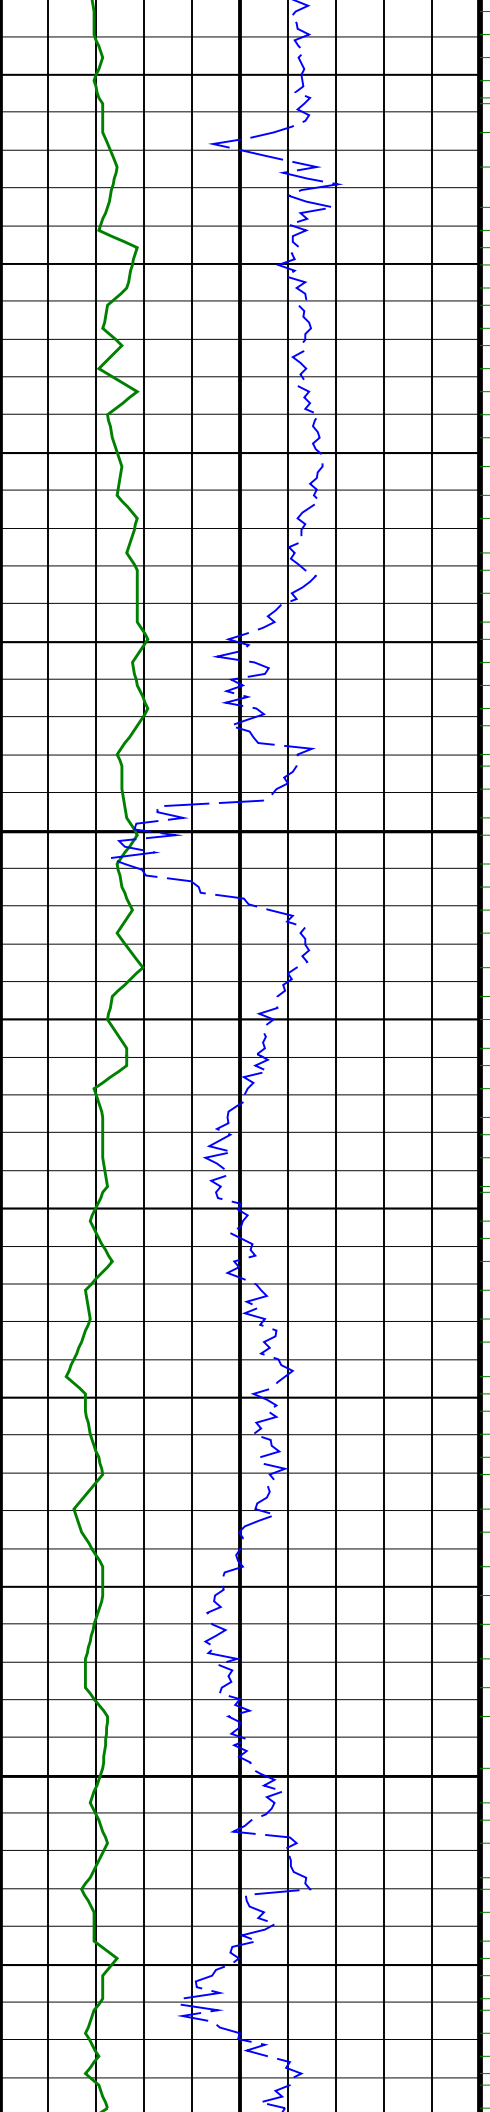



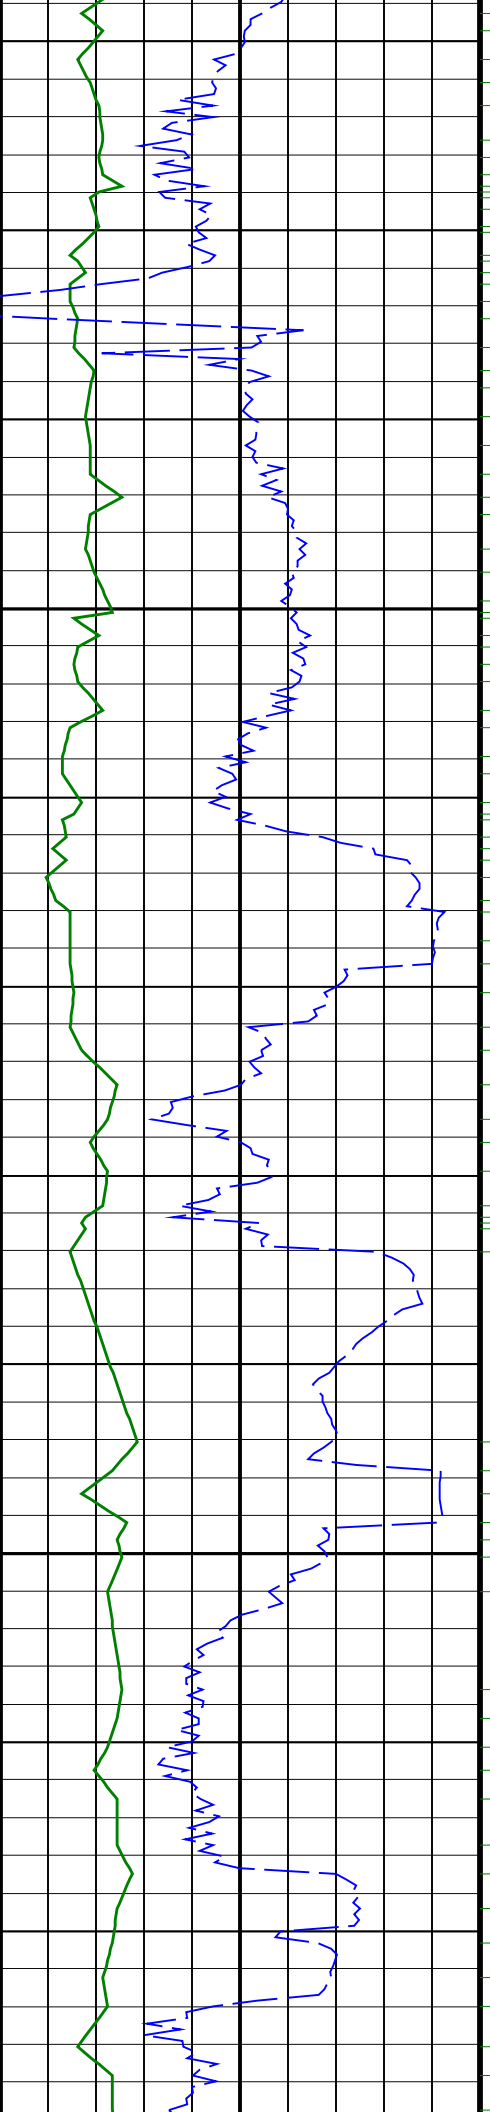




1350



1375


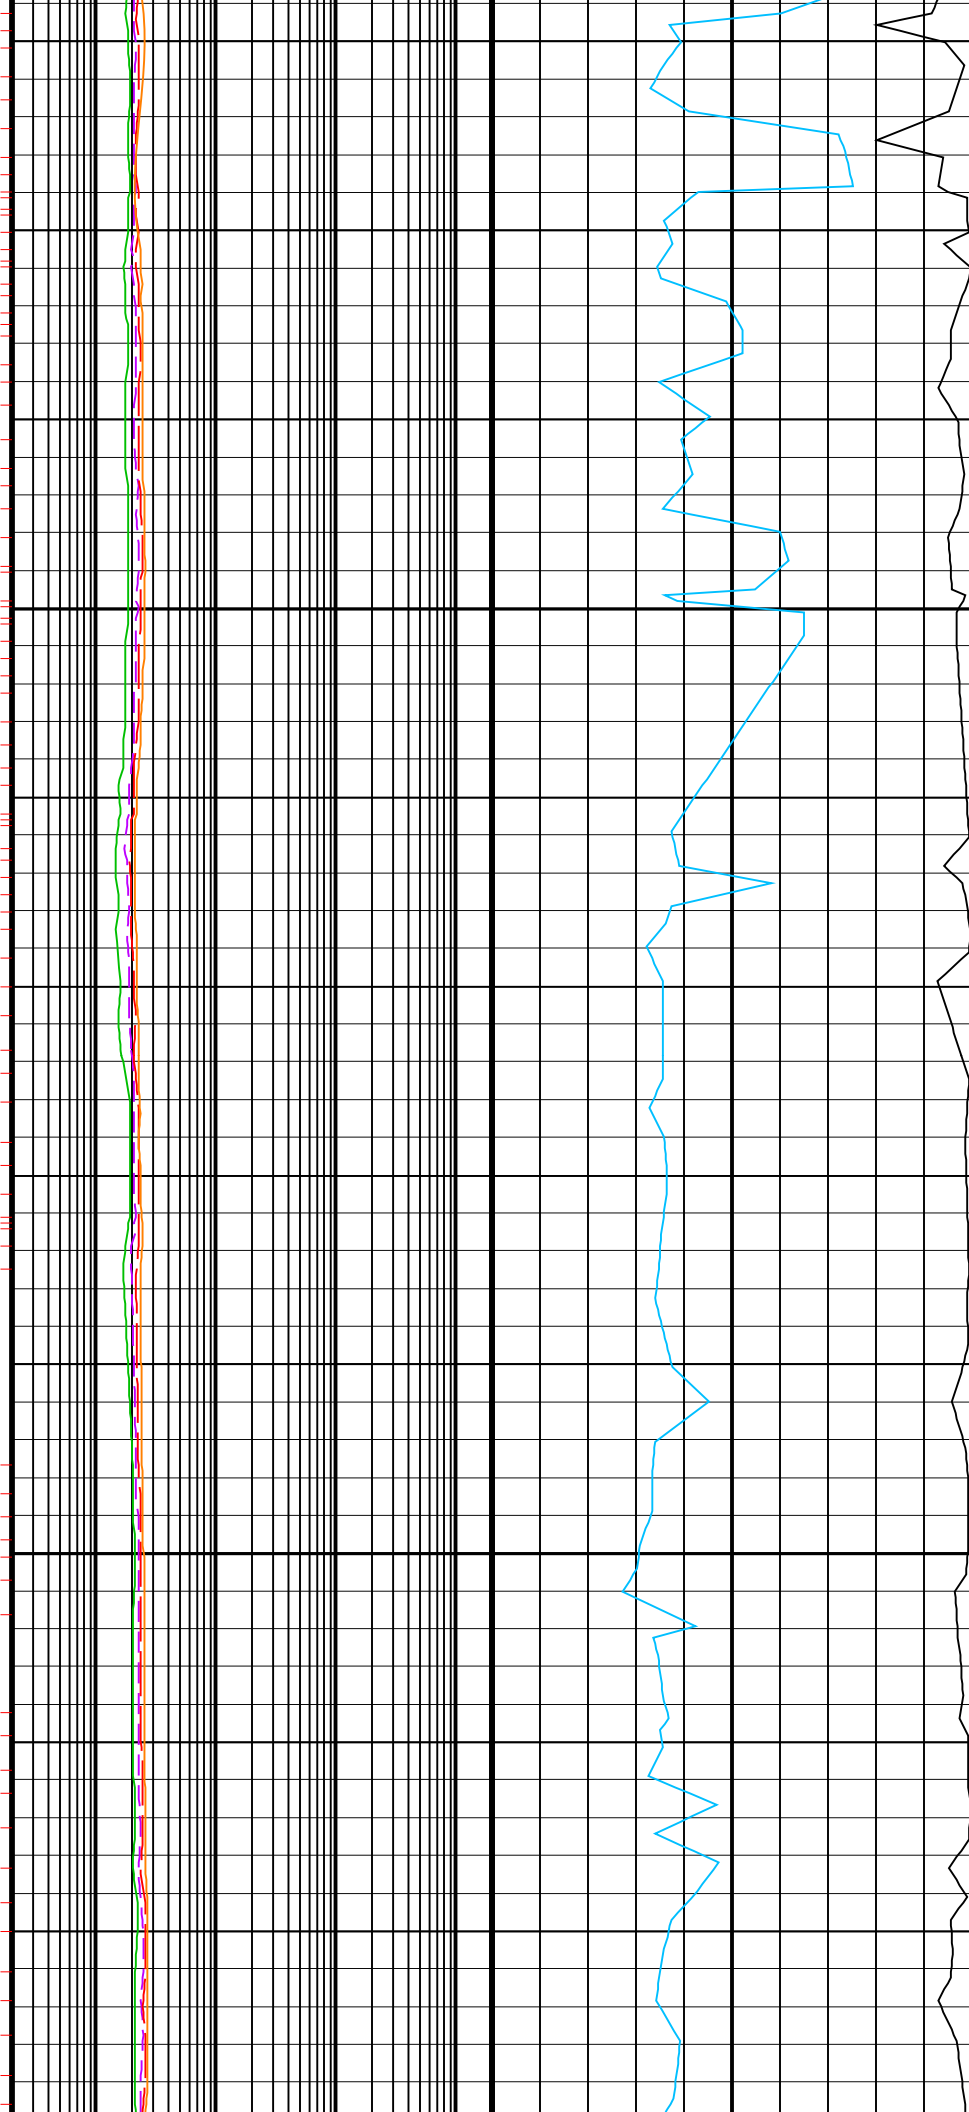


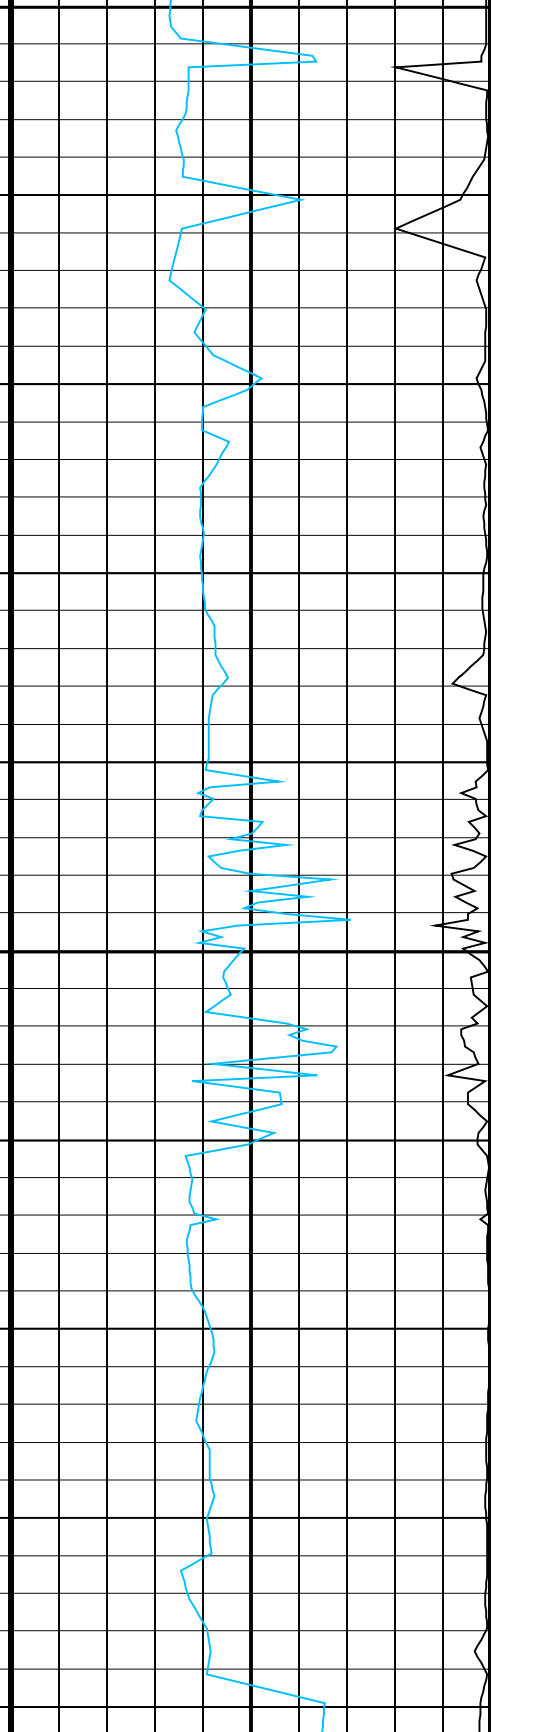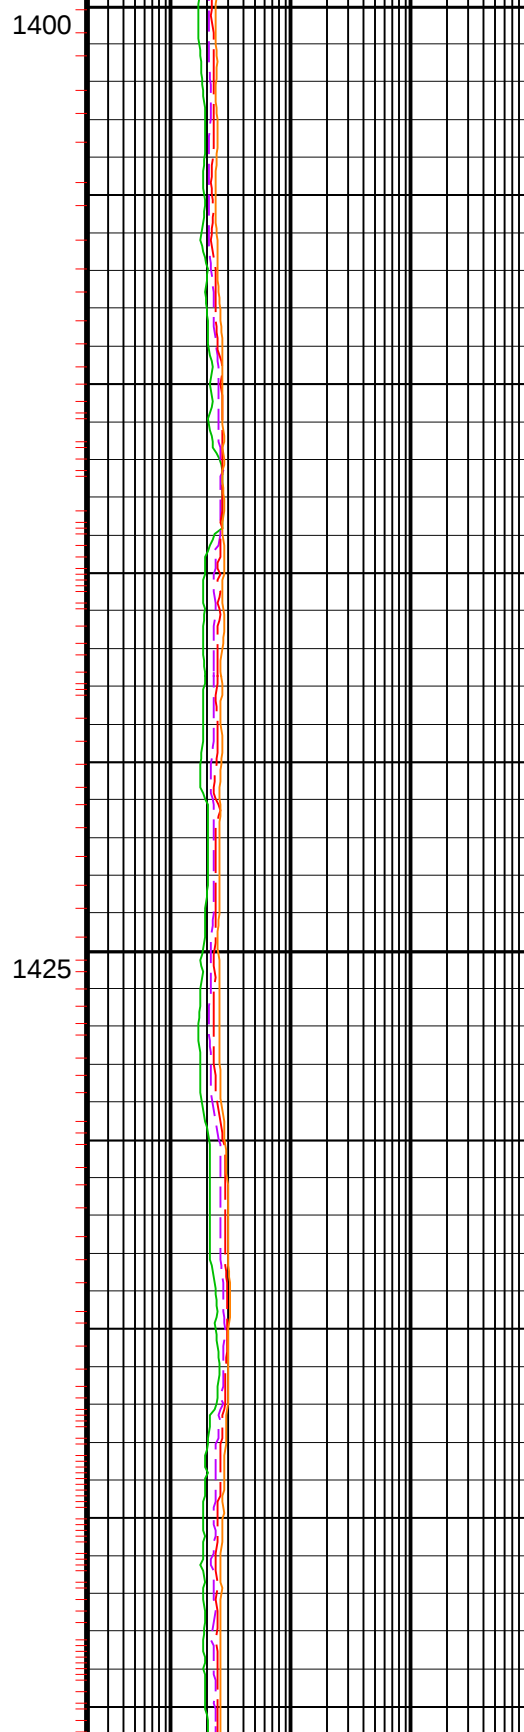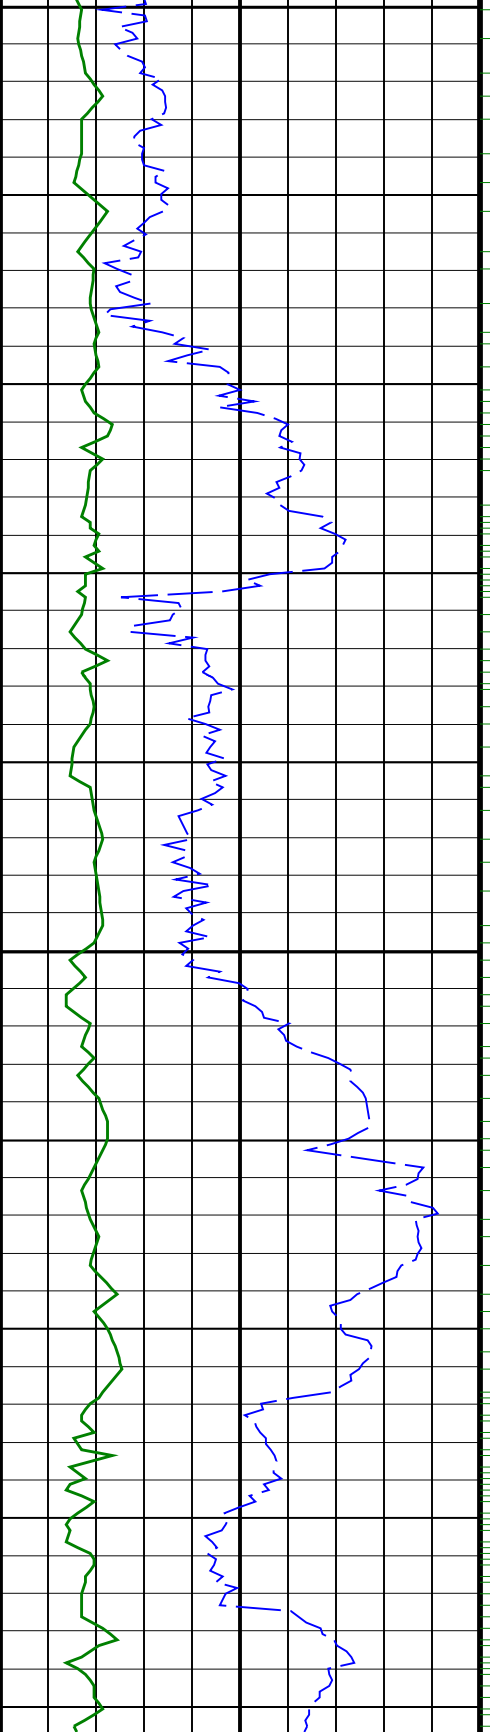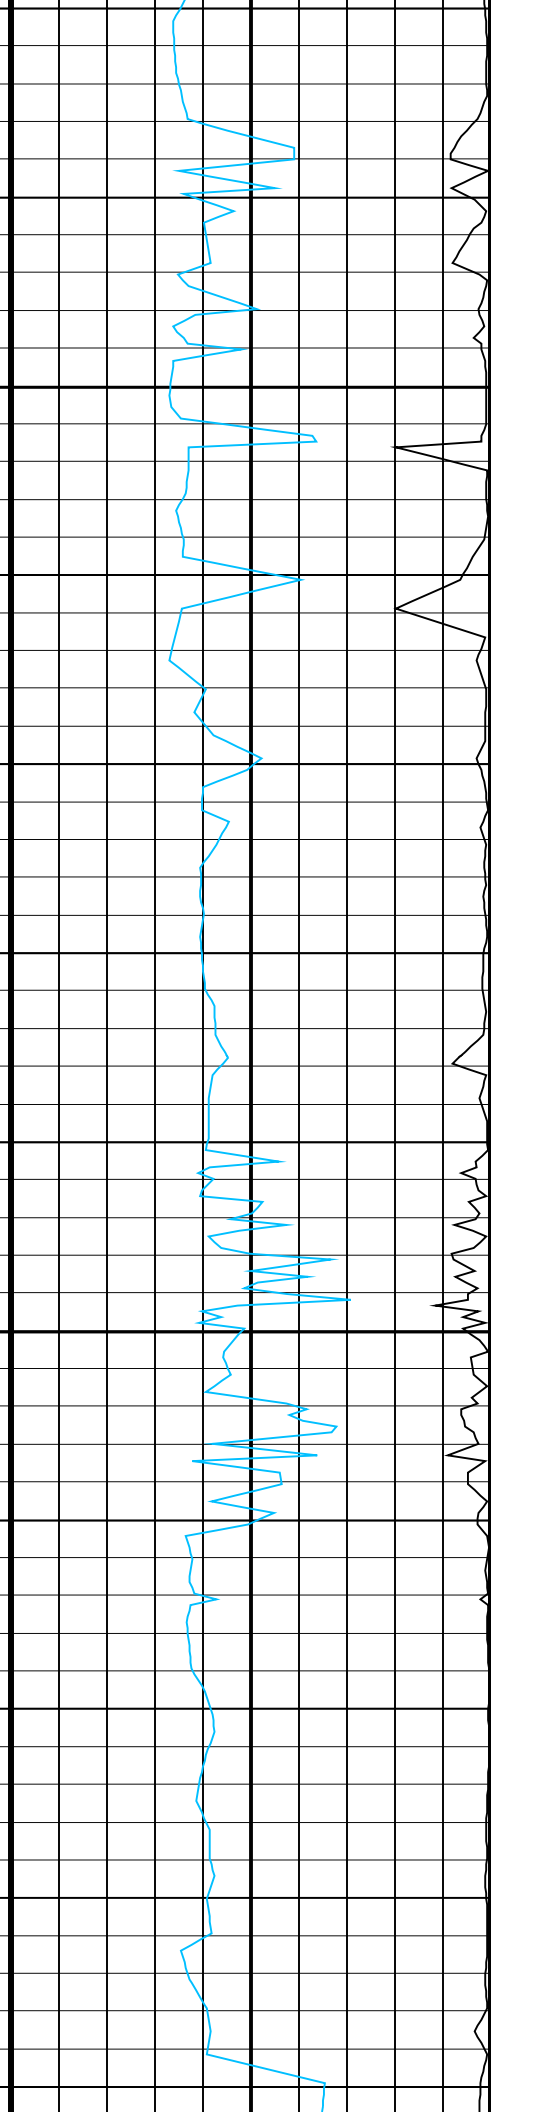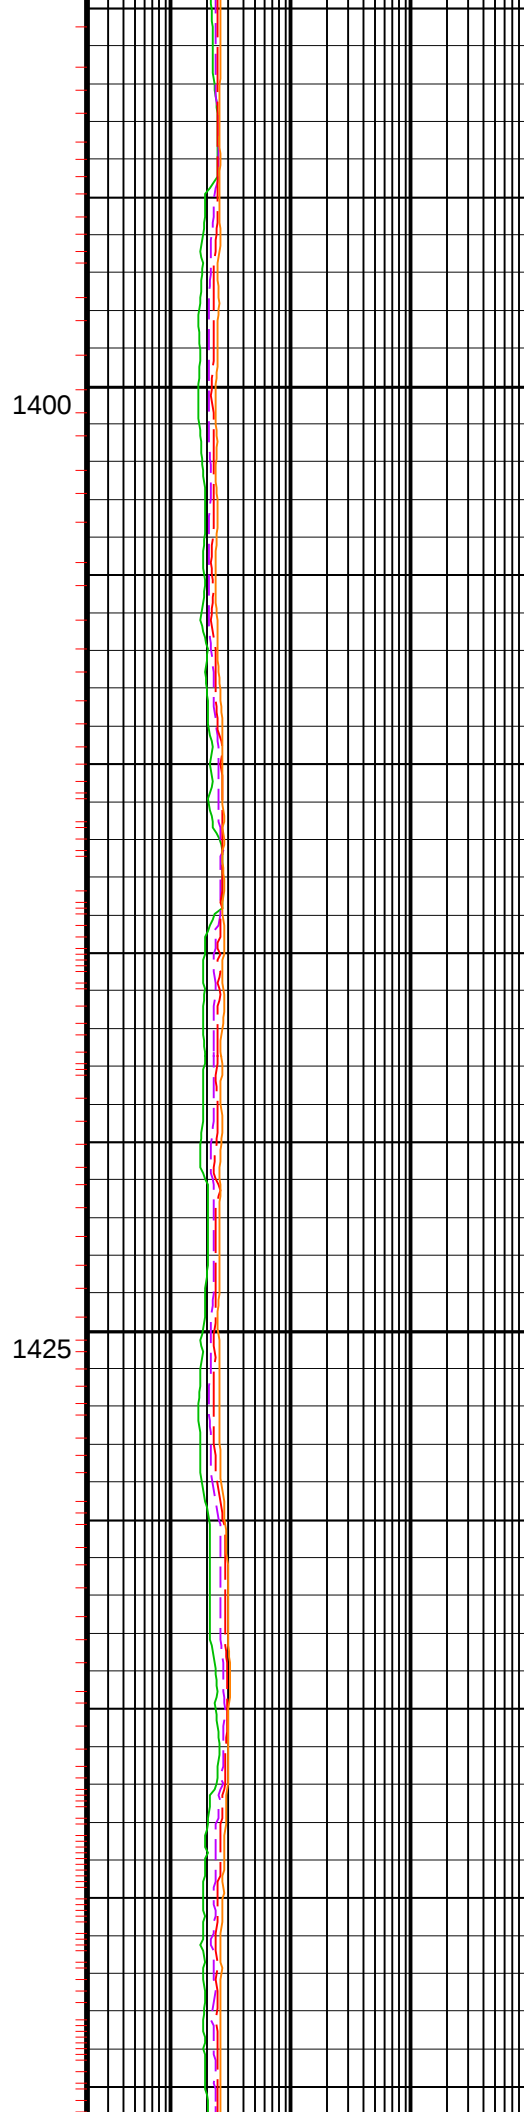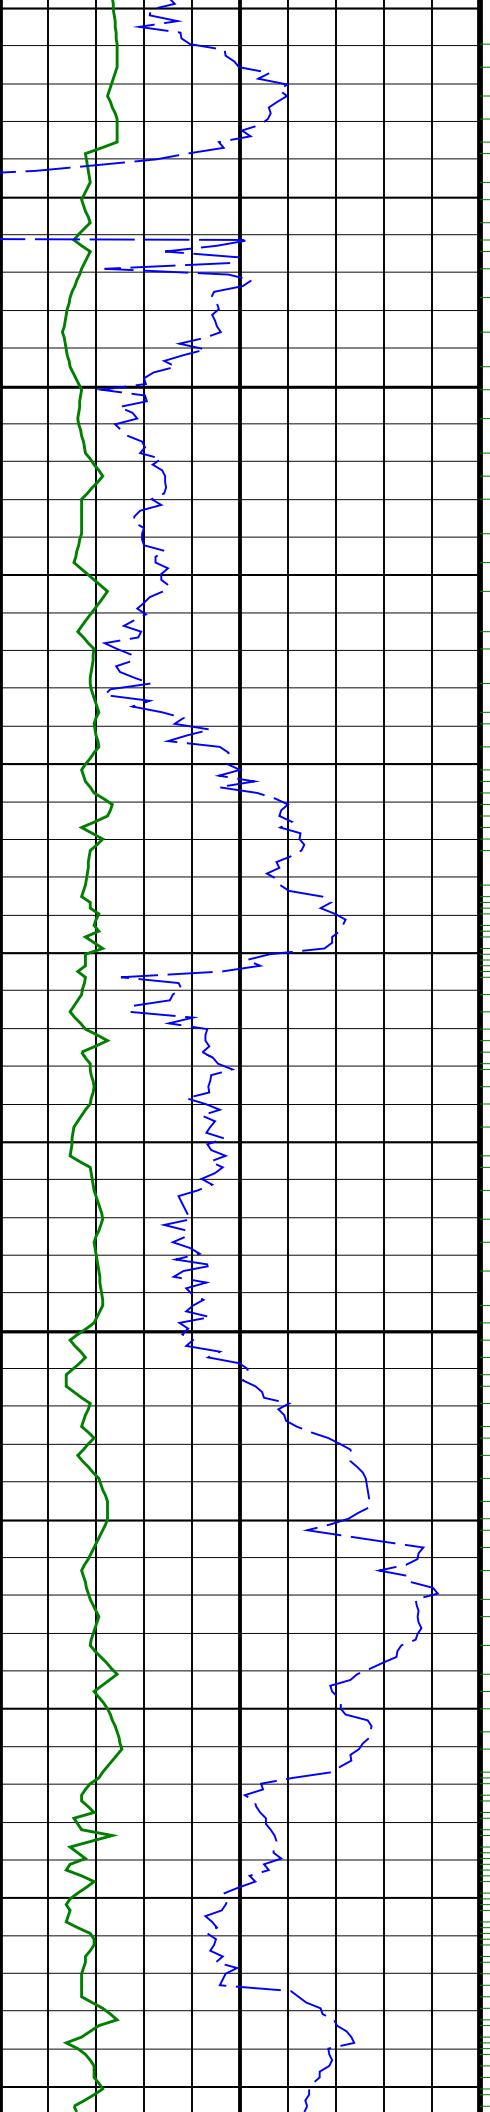


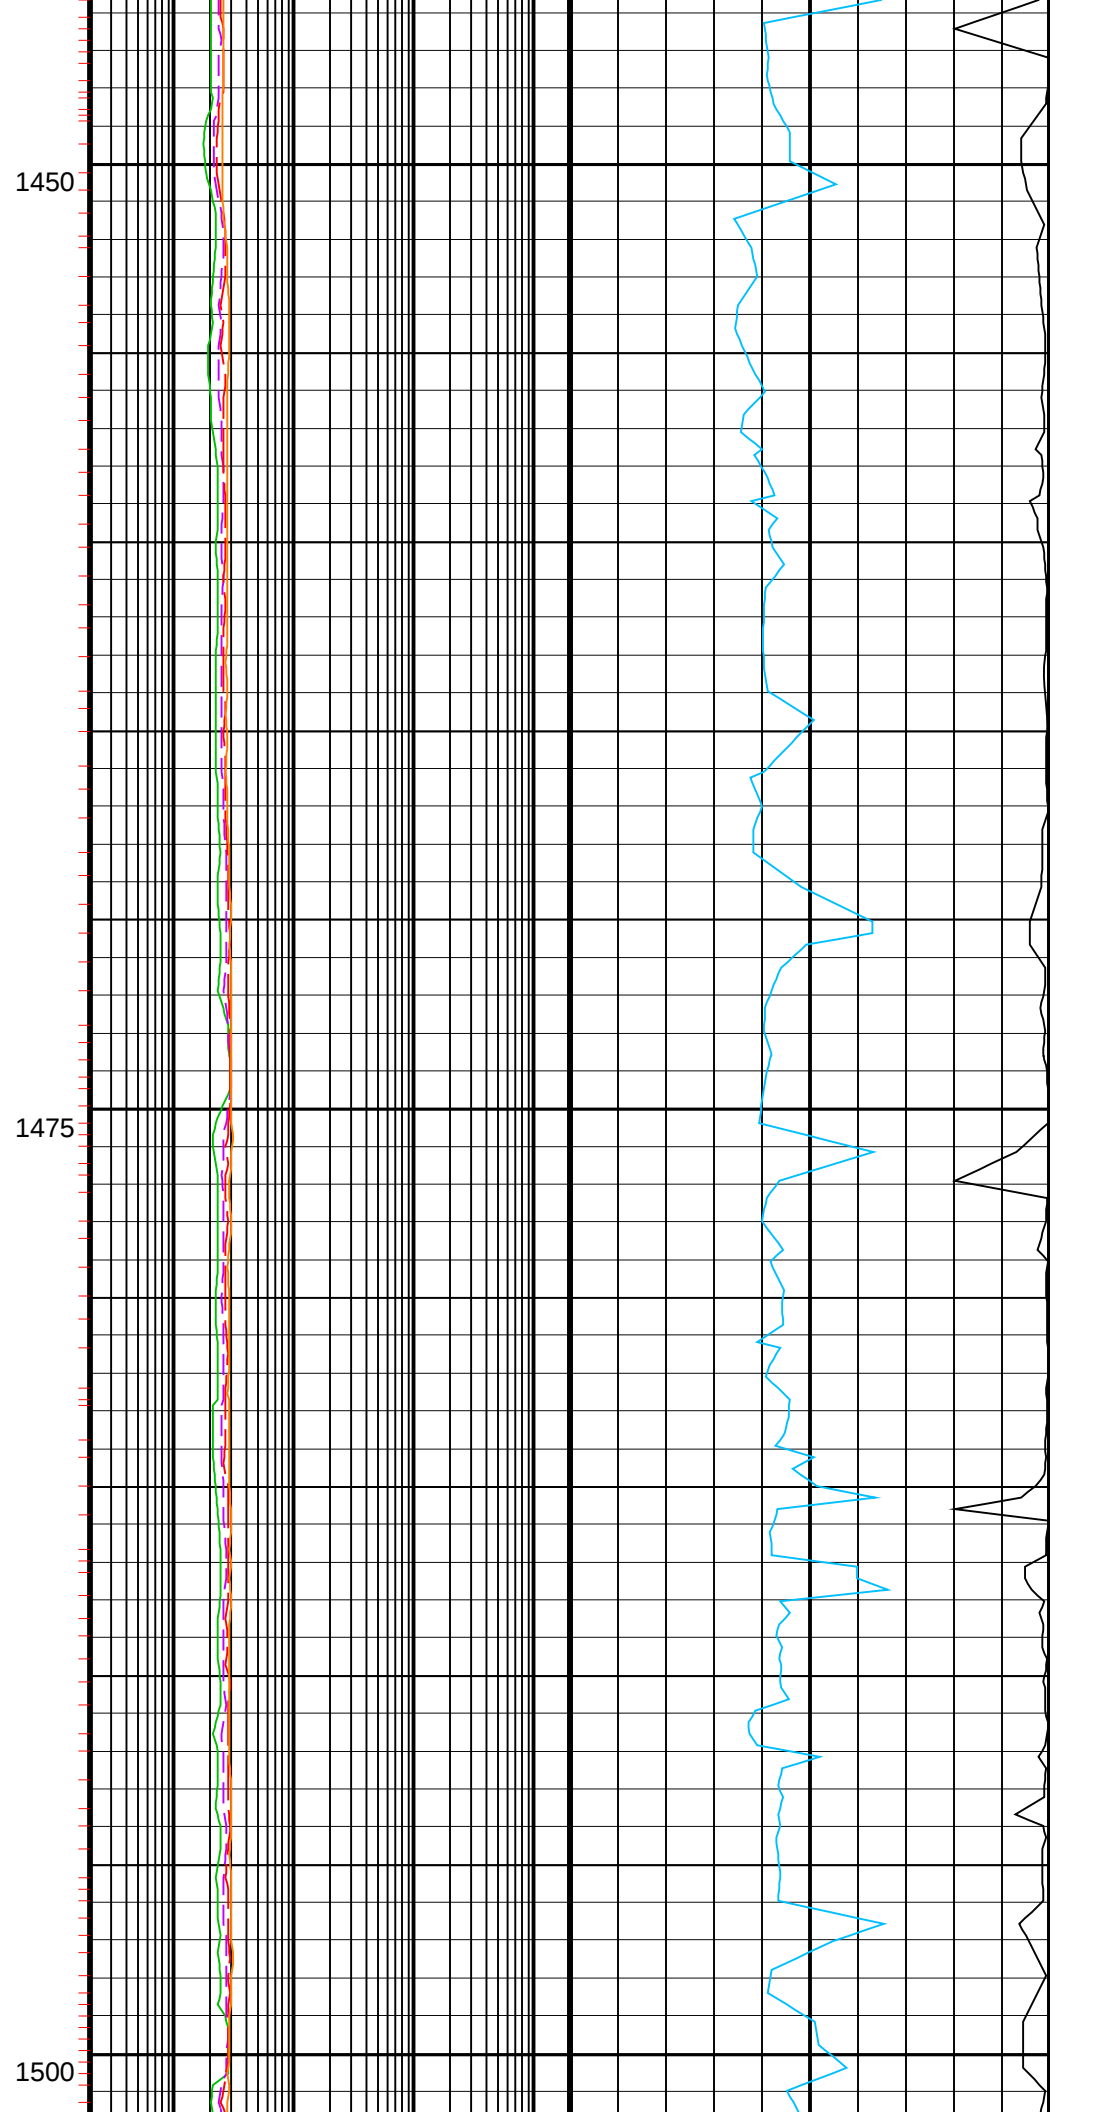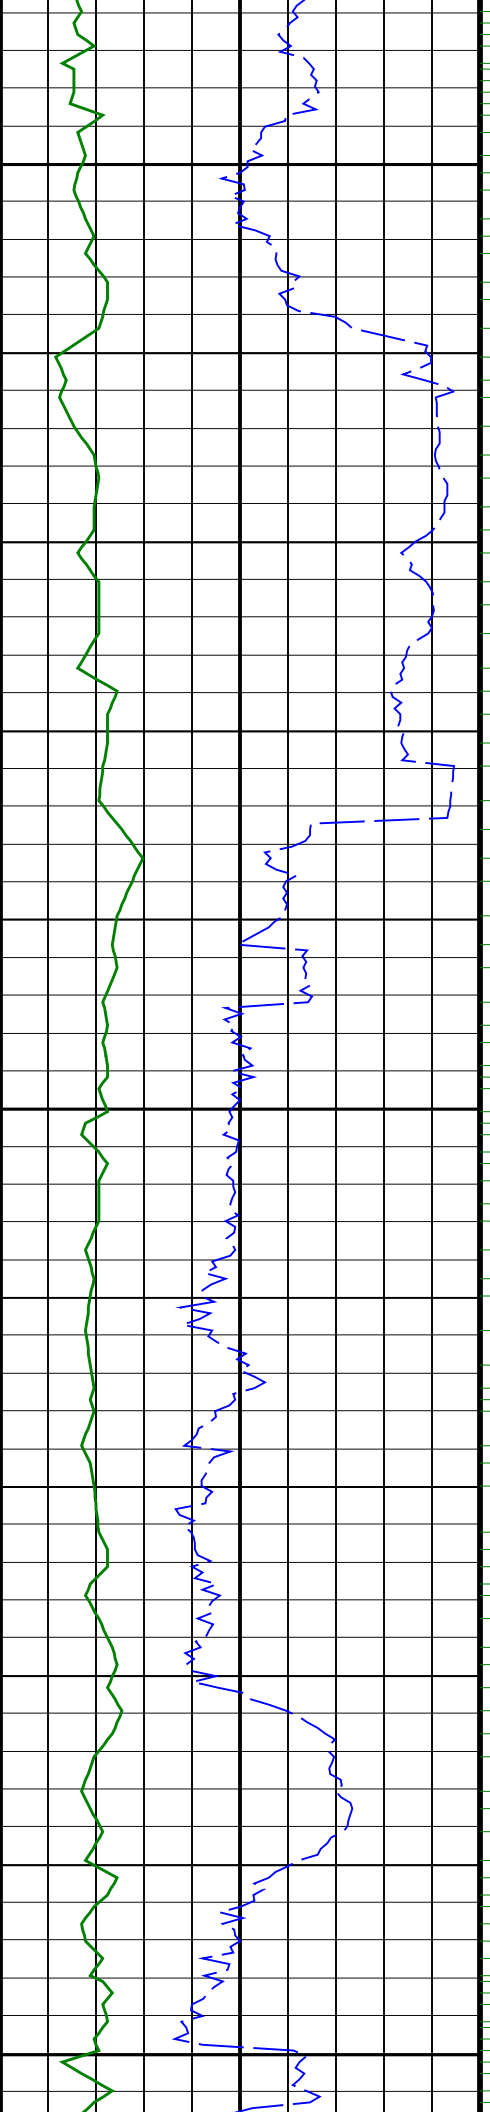

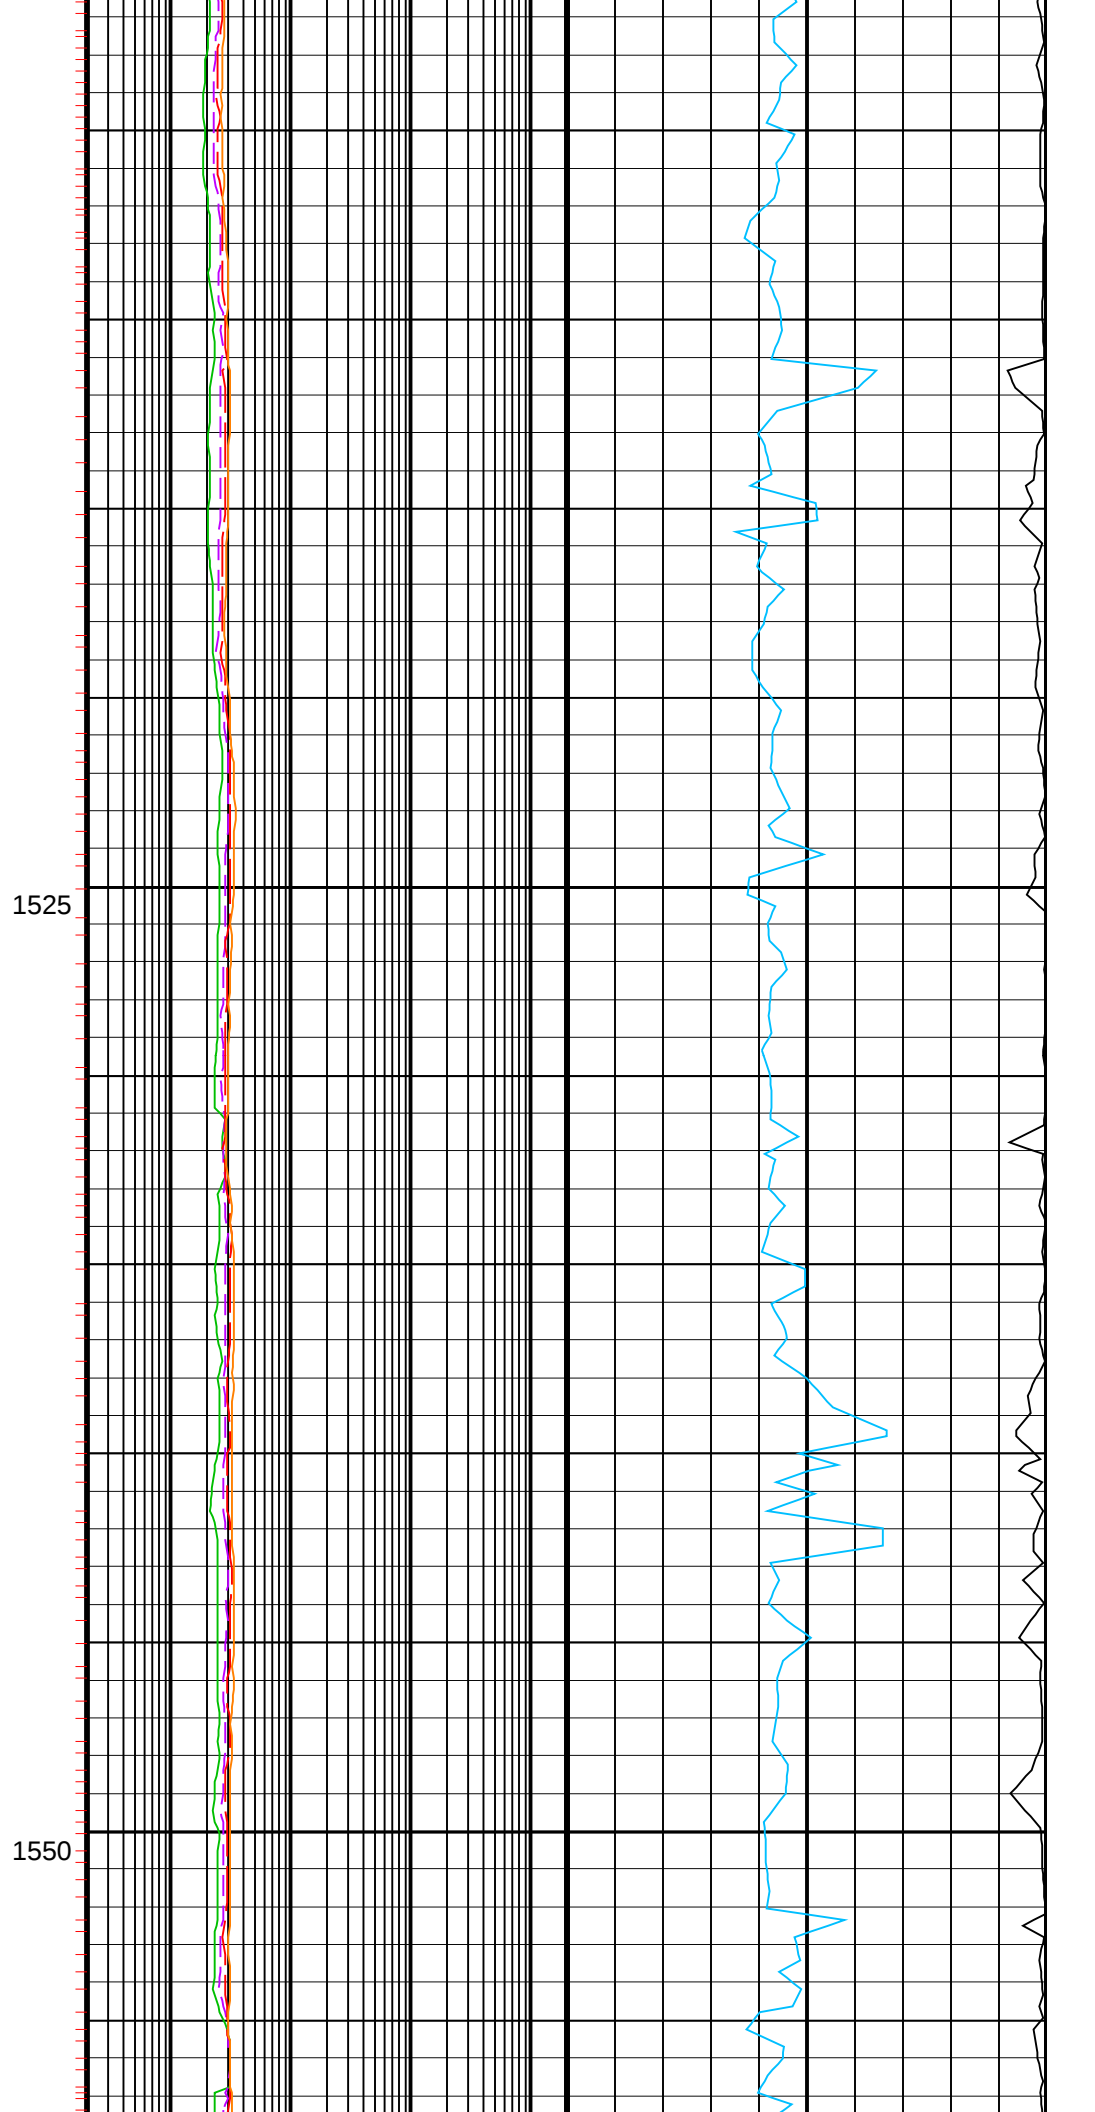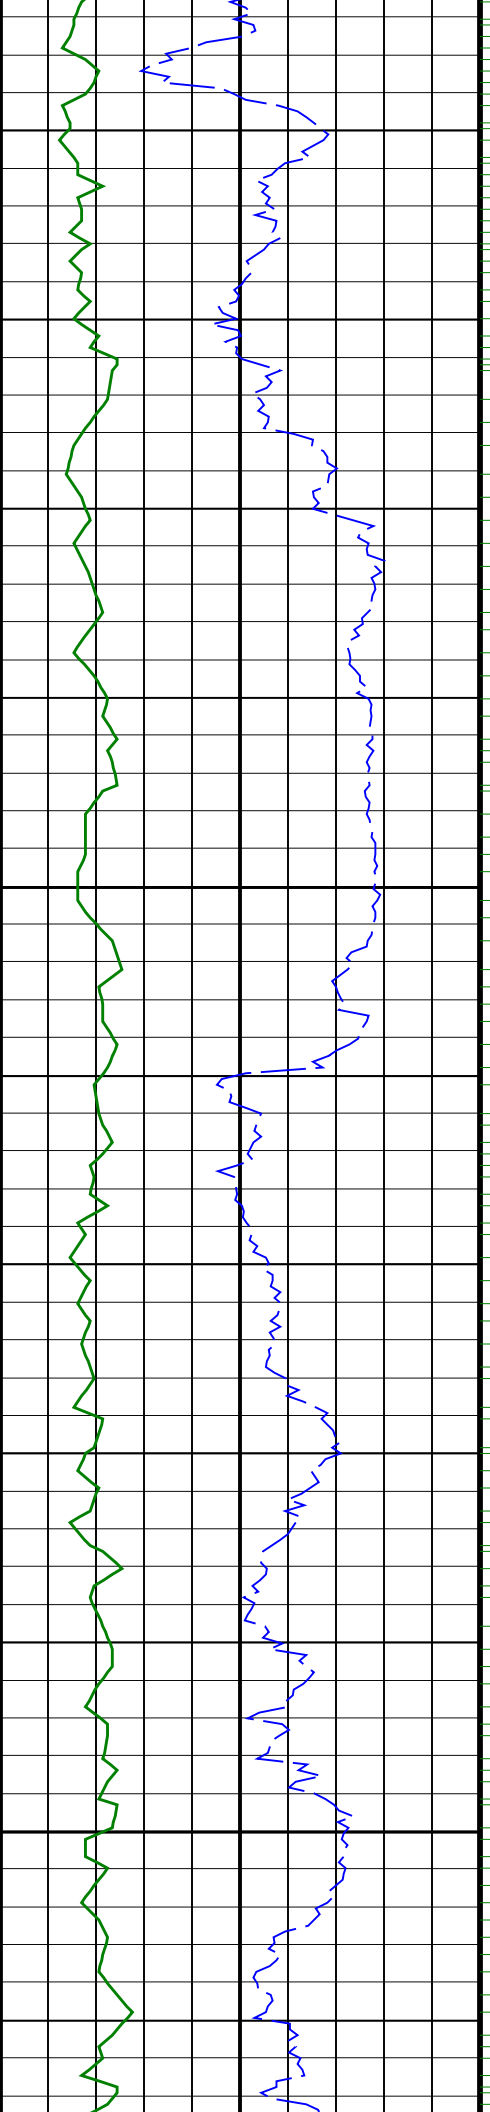

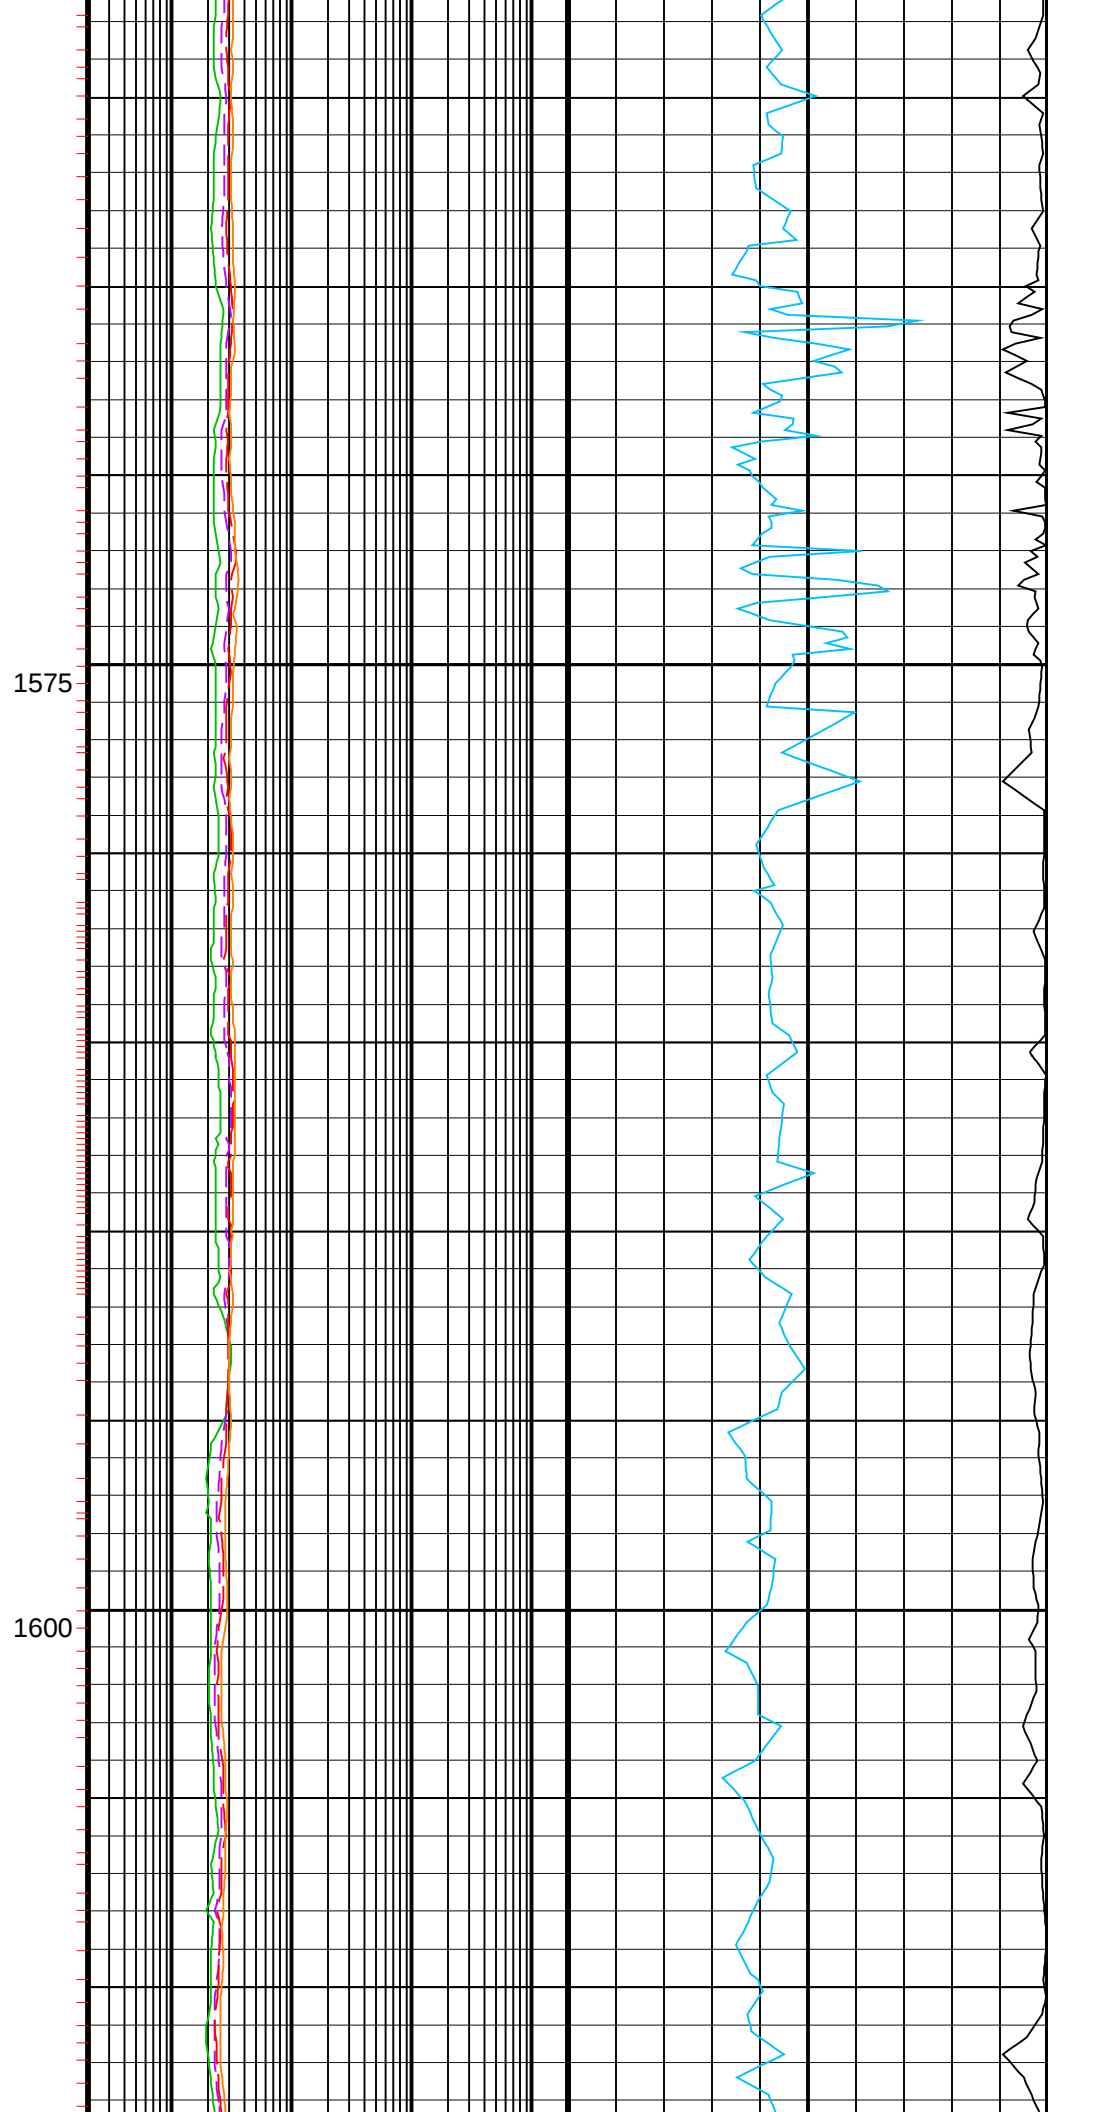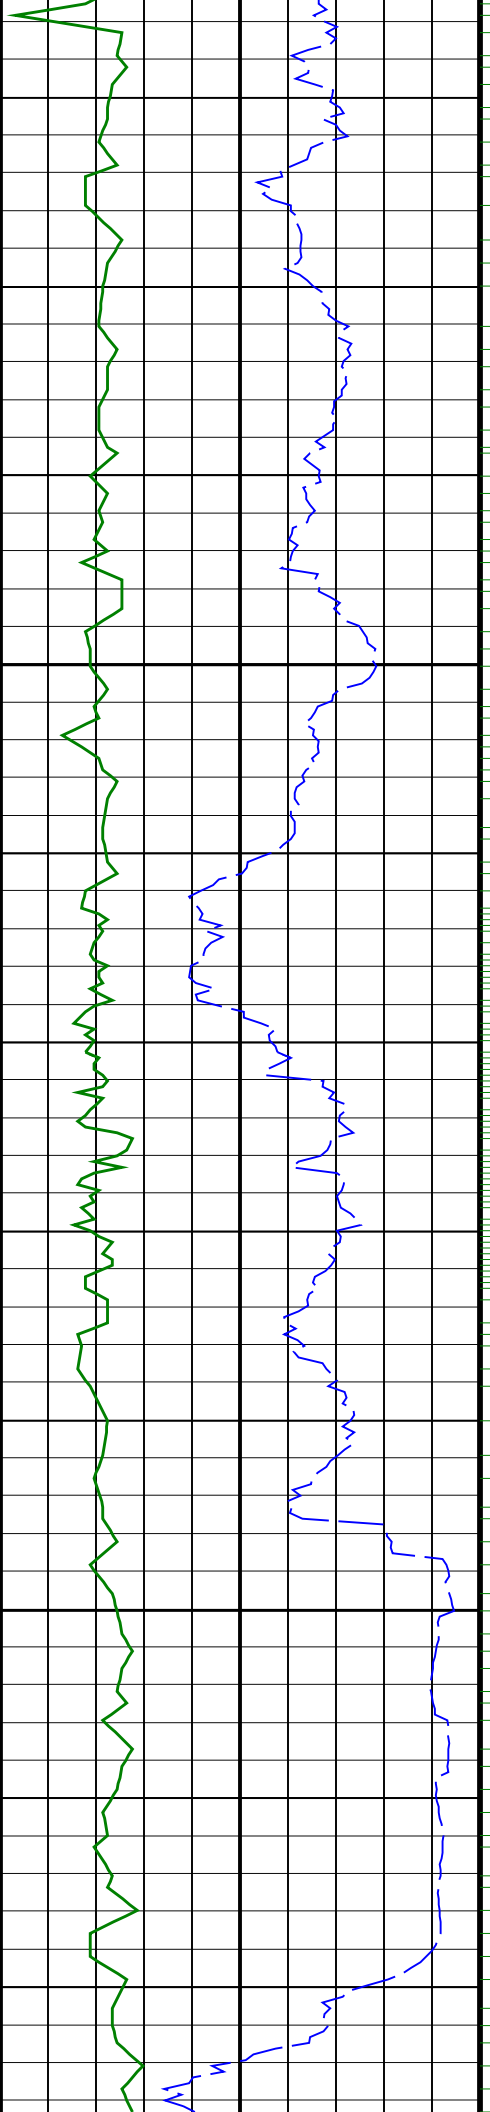


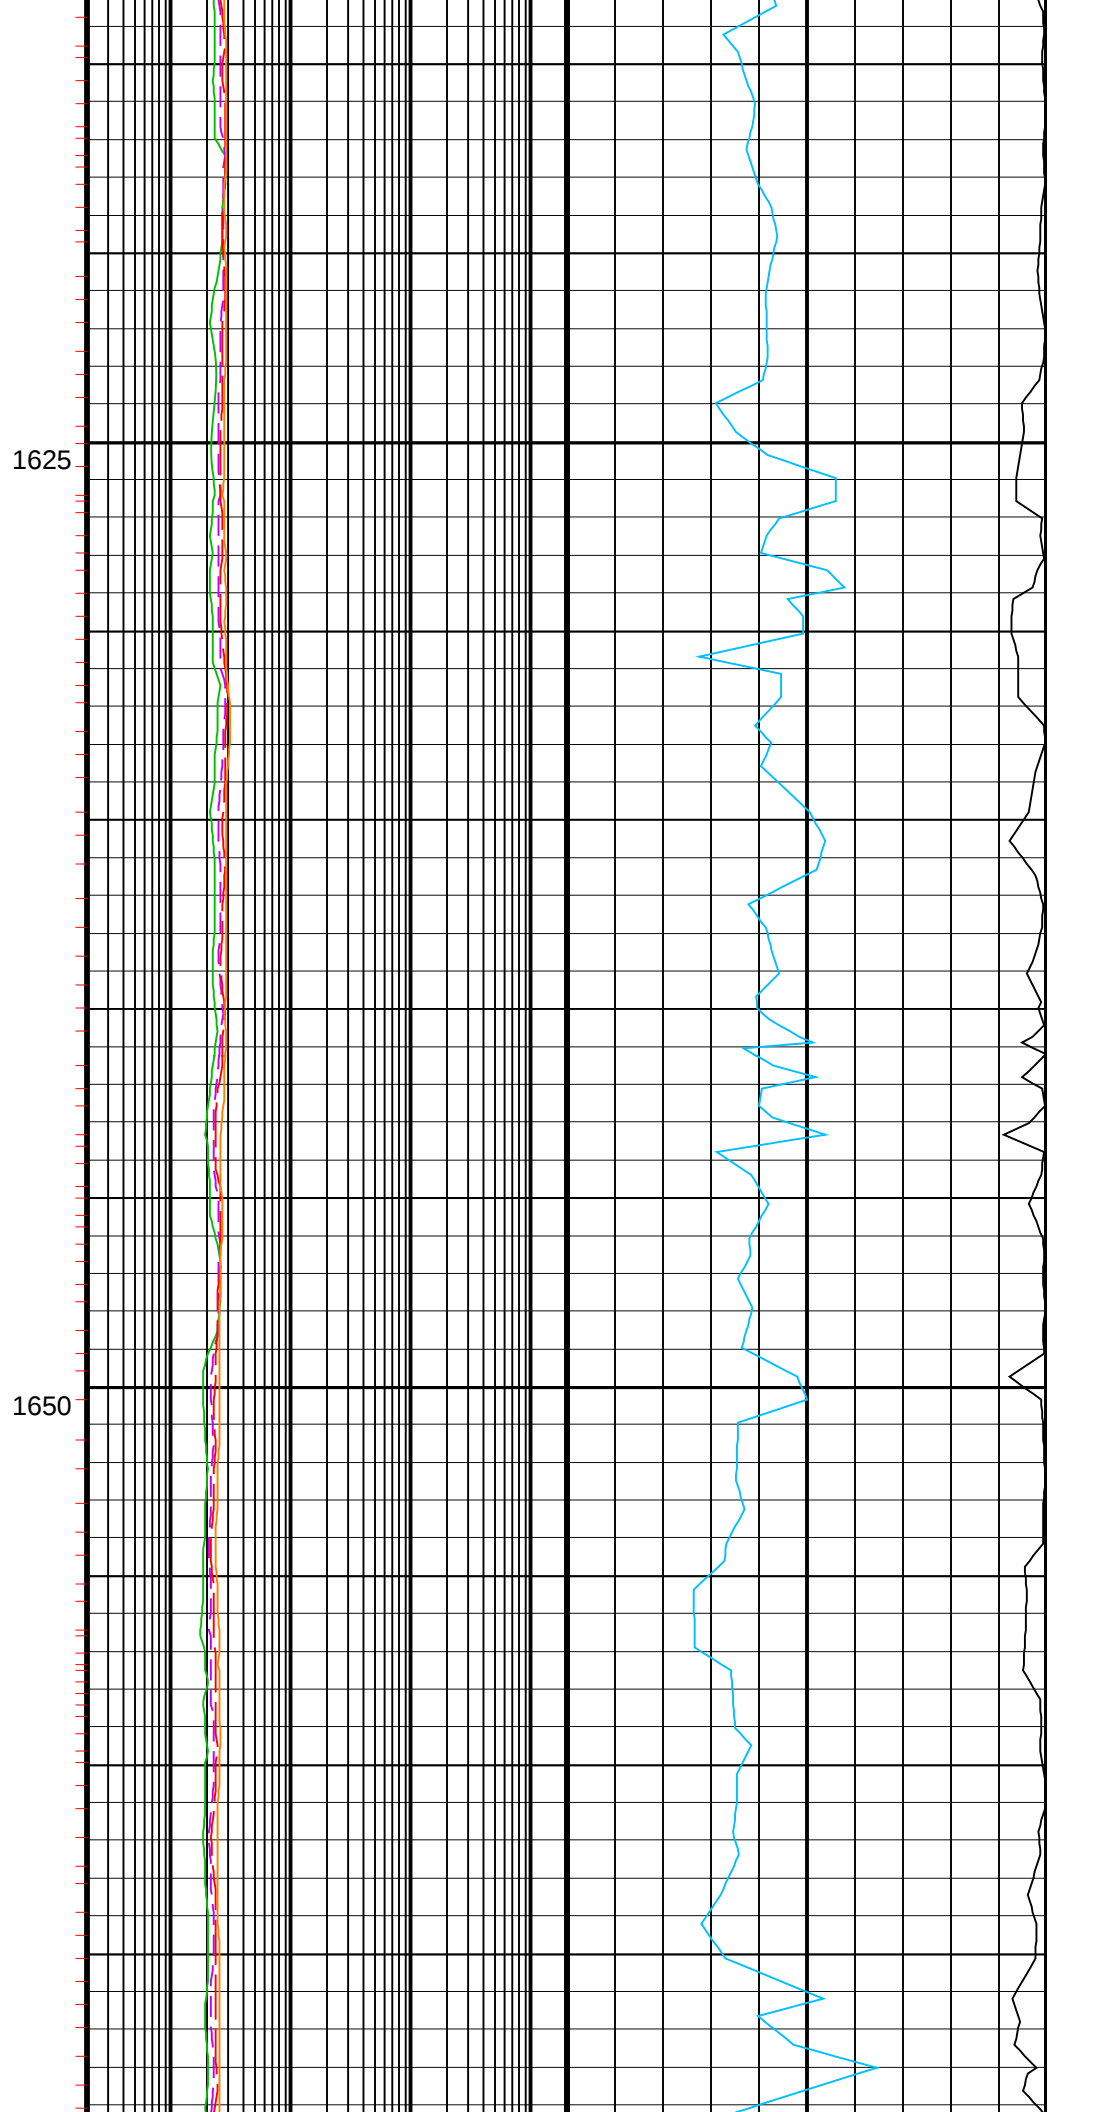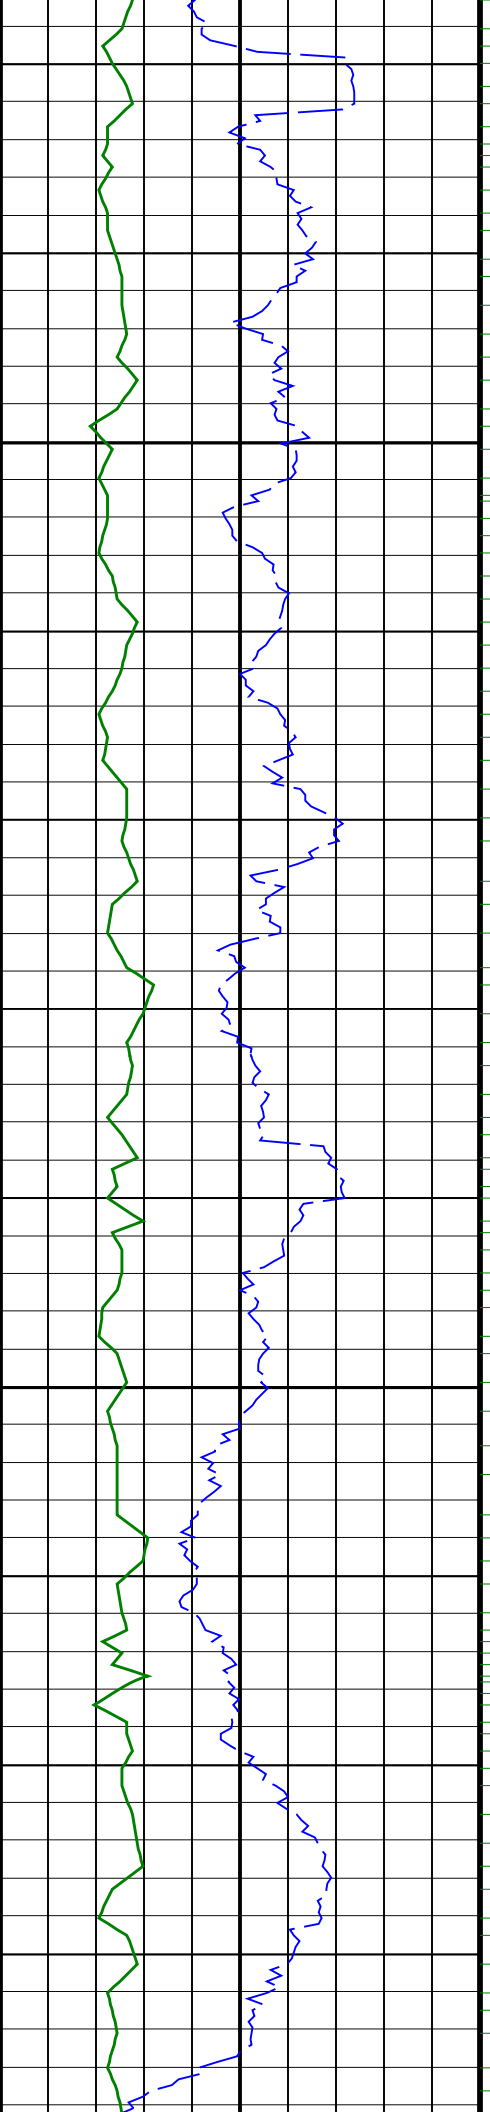


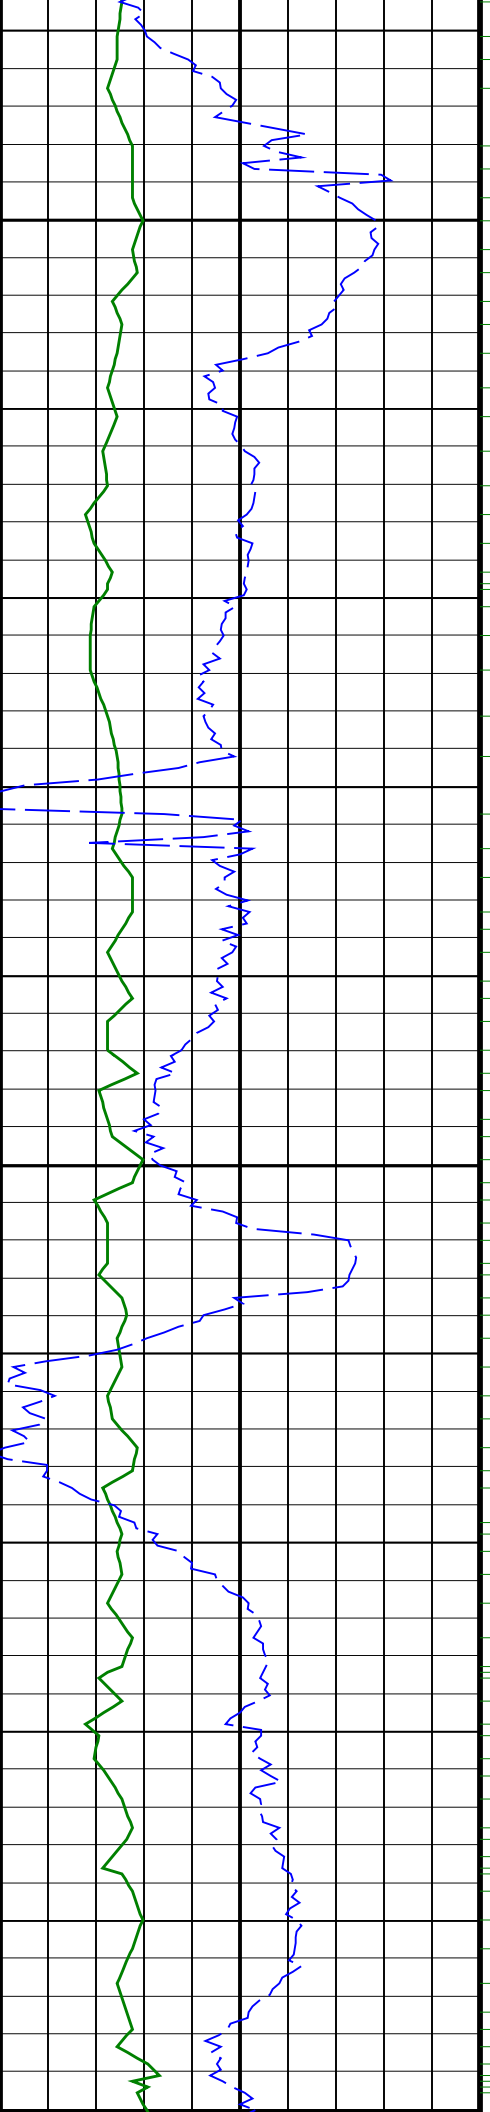

1675

1700

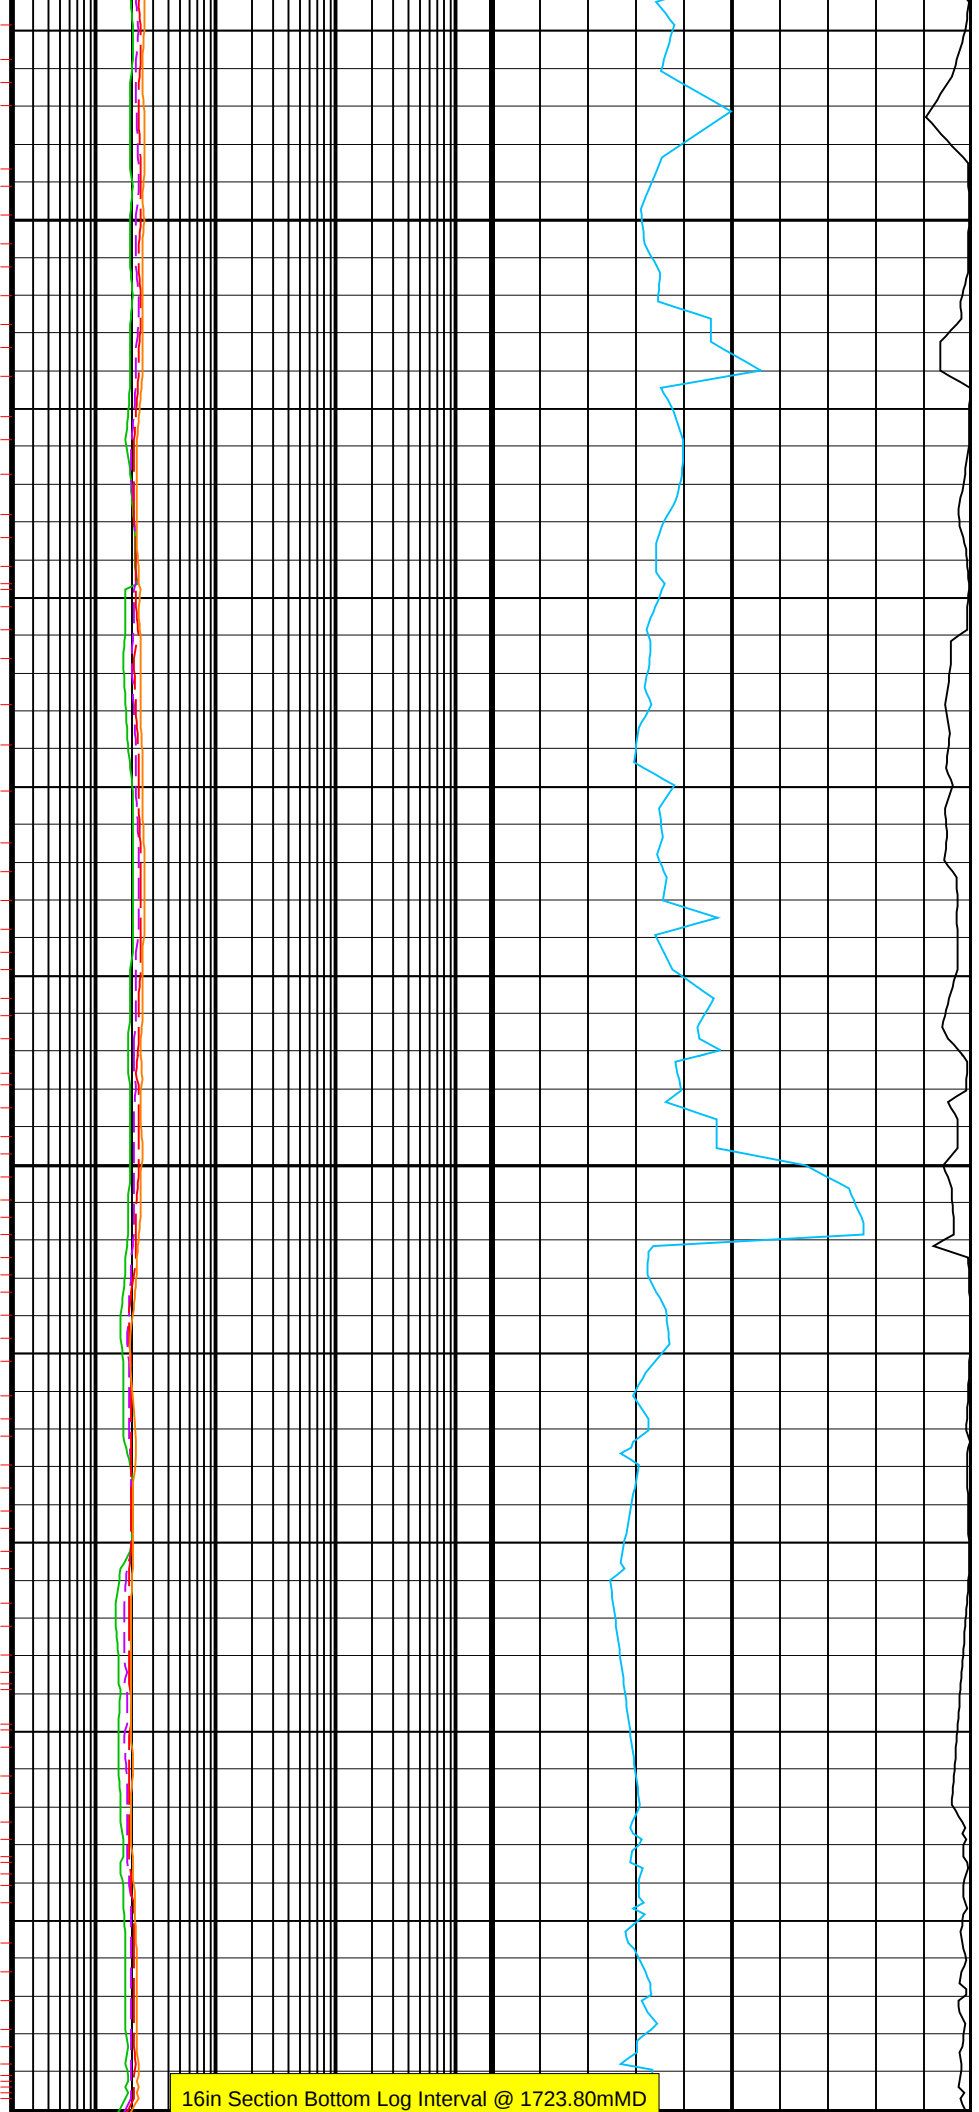


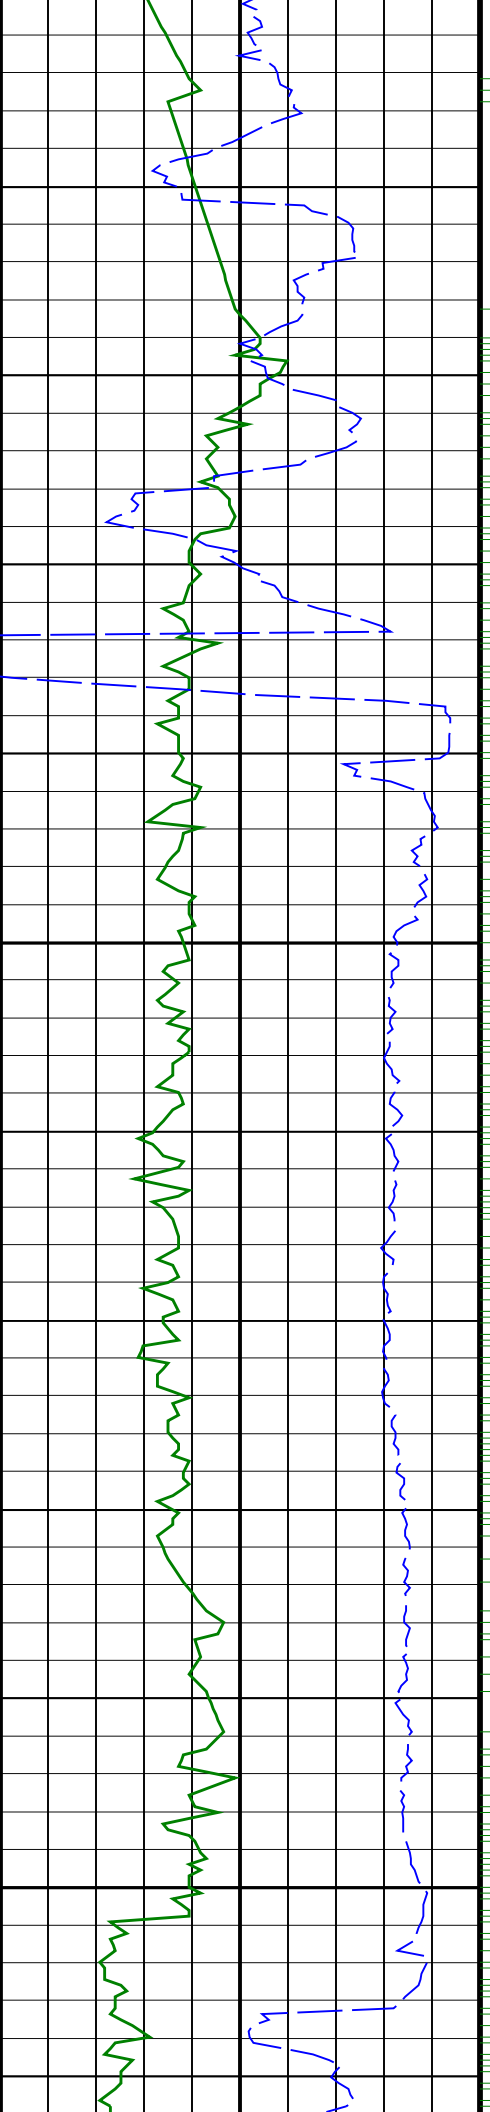

1725

1750

1775

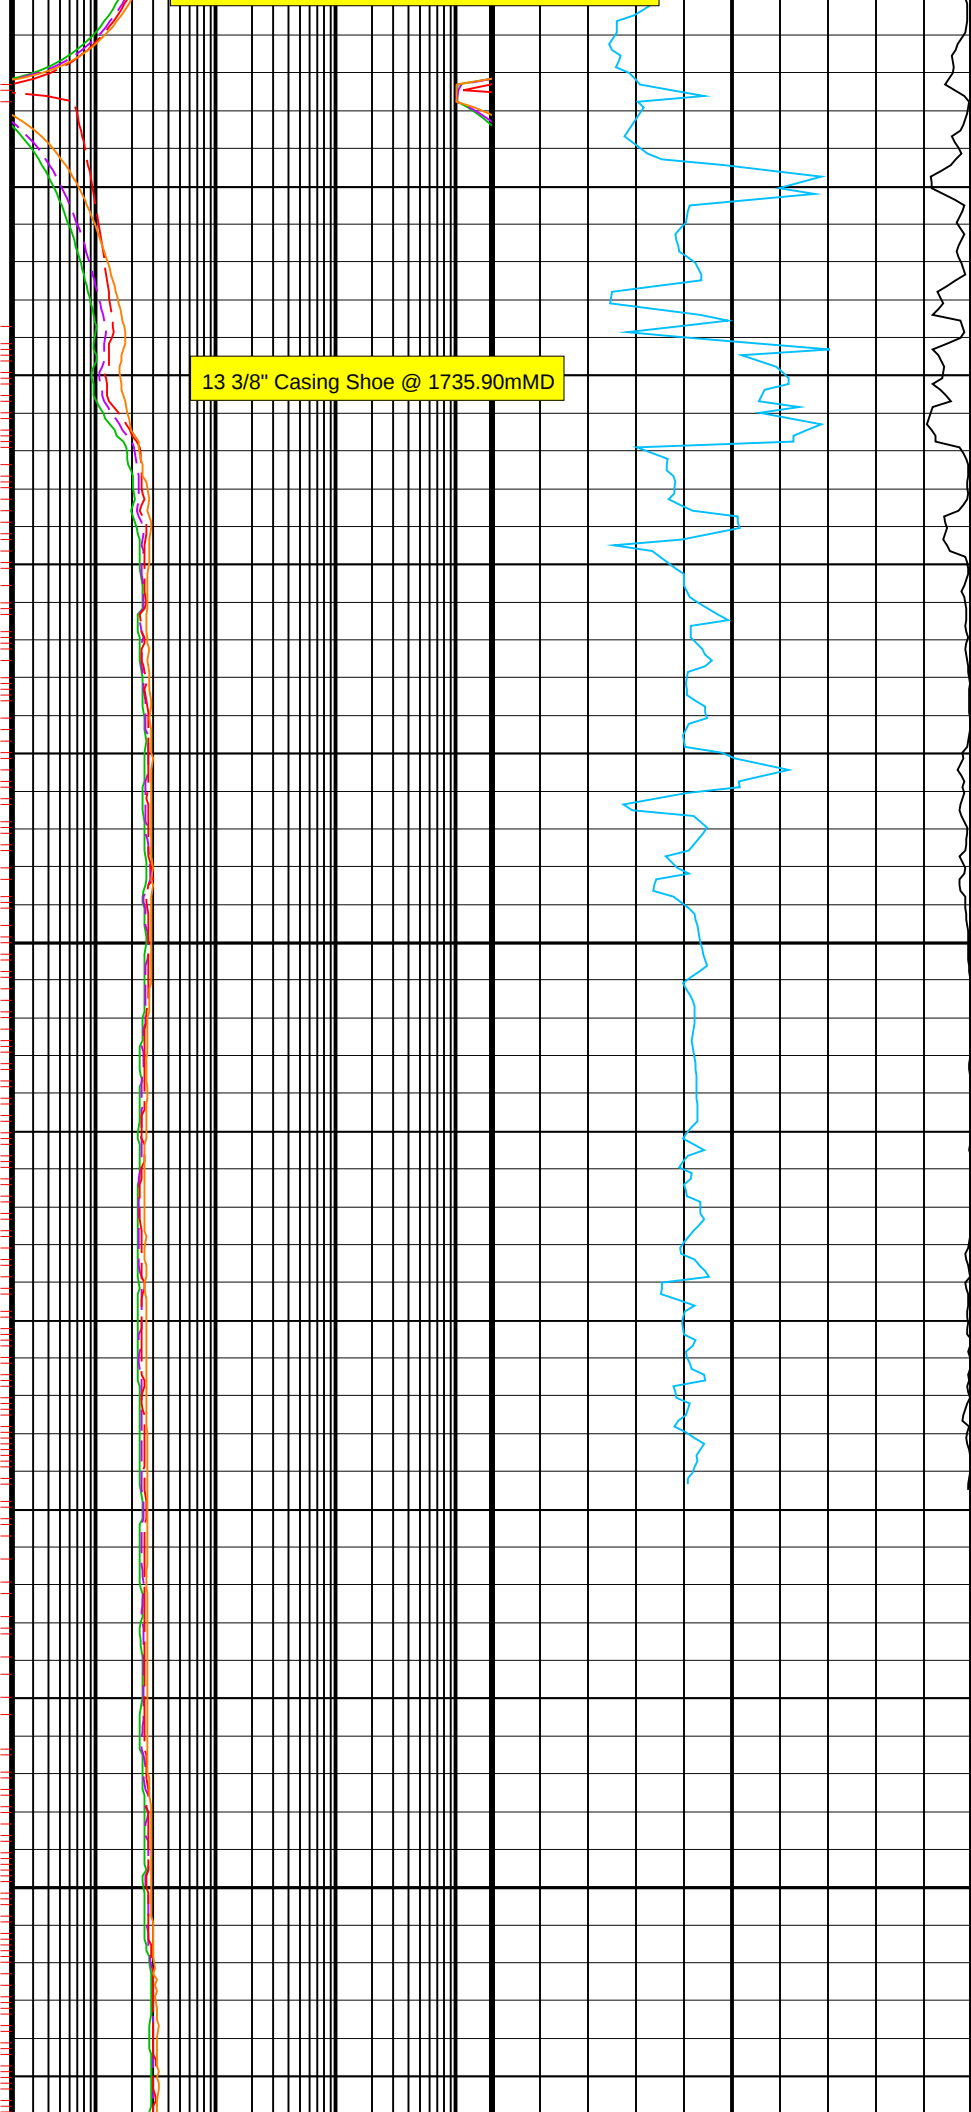

13 3/8" Casing Shoe @ 1735.90mMD

