WOODSIDE (LAKES ENTRANCE) OIL COMPANY N.L.

# PROGRESS WELL LOG — LITHOLOGIC DESCRIPTION

WELL: DUTSON DOWNS #1
SHEET No.: EIGHT 8
INTERVAL FROM 2540
TO 2900

ELEV. K. B. + 16 FT. DATE 17-3-66 LOGGED BY A.A.M. D.G.L.

DEPT. NAT. RES & ENV
PE604398

BIT CHANGES | DIP DATA | TESTS | CASINGS-PERFS PLUGS | SW CORES CORES | GRAPHIC LOG DEPTH SCALE 1 : 600 | DESCRIPTION OF SHOWS AND MUD LOSSES: OIL SHOW RATING, GAS SHOW, FLUORESCENCE, CUT, STAIN, EST. POROSITY | % LITHOLOGY: LIMESTONE, DOLOMITE, SANDSTONE, SHALE, CLAY, ANHYDRITE | LITHOLOGIC DESCRIPTION | FORMATION | AGE

0 DRILLING RATE (MIN/FT) 10 7

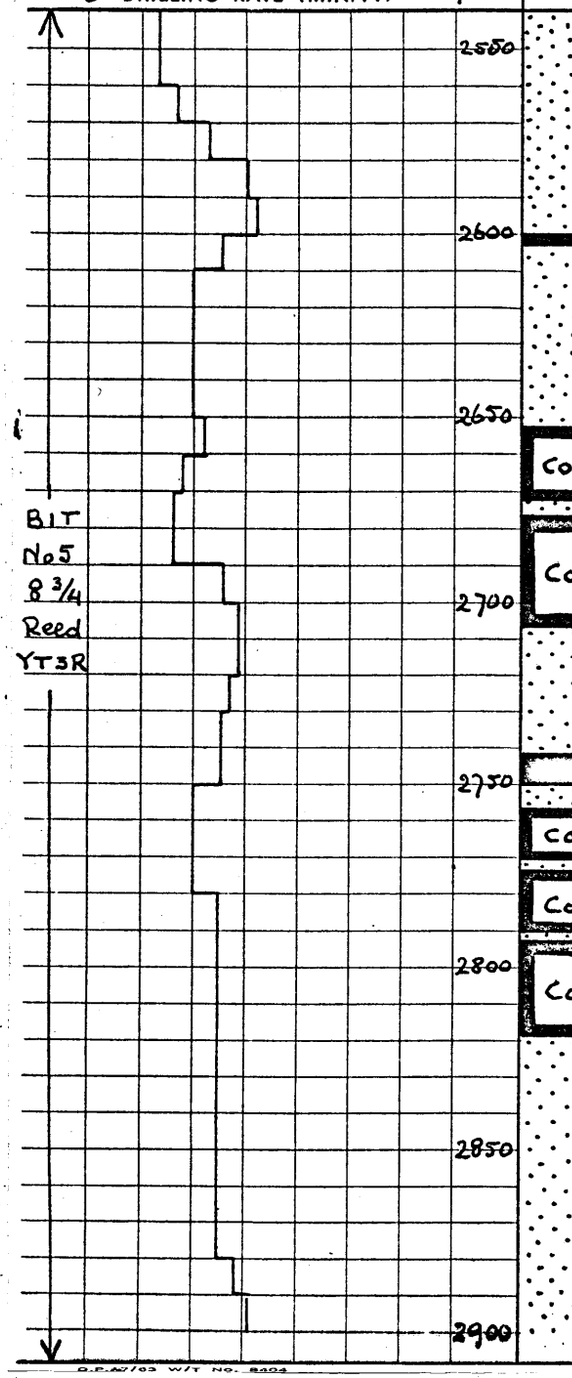


| | SANDSTONE | ANHYDRITE |
|---|---|---|
| 2550 | 90 | 10 |
| | 100 | |
| | 100 | |
| | 100 | |
| | 100 | |
| 2600 | 100 | |
| | 80 | |
| | 100 | |
| | 100 | |
| | 100 | |
| 2650 | 100 | |
| | 20 | 80 |
| | | 100 |
| | 20 | 80 |
| | | 100 |
| 2700 | | 100 |
| | 20 | 80 |
| | 100 | |
| | 100 | |
| | 100 | |
| 2750 | 30 | 70 |
| | | 100 |
| | 30 | 70 |
| | 50 | 50 |
| | 70 | 30 |
| 2800 | 70 | 30 |
| | 80 | 20 |
| | 80 | 20 |
| | 100 | |
| | 100 | |
| 2850 | 100 | |
| | 100 | |
| | 100 | |
| | 100 | |
| | 100 | |
| 2900 | 100 | |

2395 – 2900
SANDSTONE WITH INTERBEDDED BROWN COAL AND CLAY

as described on previous page.

LA TROBE VALLEY COAL MEASURES

EOCENE

D.P.W/103 W/T No. 8404