# WOODSIDE (LAKES ENTRANCE) OIL COMPANY N.L.

# PROGRESS WELL LOG — LITHOLOGIC DESCRIPTION

WELL: Dutson Downs No 1
SHEET No.: Seventeen
INTERVAL FROM 5378
TO 5740

ELEV. K. B. +16 FT. DATE 4/4/66 LOGGED BY AAM RGCJ DGL

DEPT. NAT. RES & ENV
PE604407

BIT CHANGES | Deviation | DIP DATA | TESTS | CASINGS-PERFS PLUGS | SW CORES CORES | GRAPHIC LOG DEPTH SCALE 1:600 | DESCRIPTION OF SHOWS AND MUD LOSSES: OIL SHOW RATING | GAS SHOW | FLUORESCENCE | CUT | STAIN | EST. POROSITY | % LITHOLOGY: LIMESTONE | DOLOMITE | SANDSTONE | SHALE | CLAY & MUDSTONE | ANHYDRITE SILTSTONE | COAL | LITHOLOGIC DESCRIPTION | FORMATION | AGE

DRILLING RATE (MIN/FT) 0 – 14

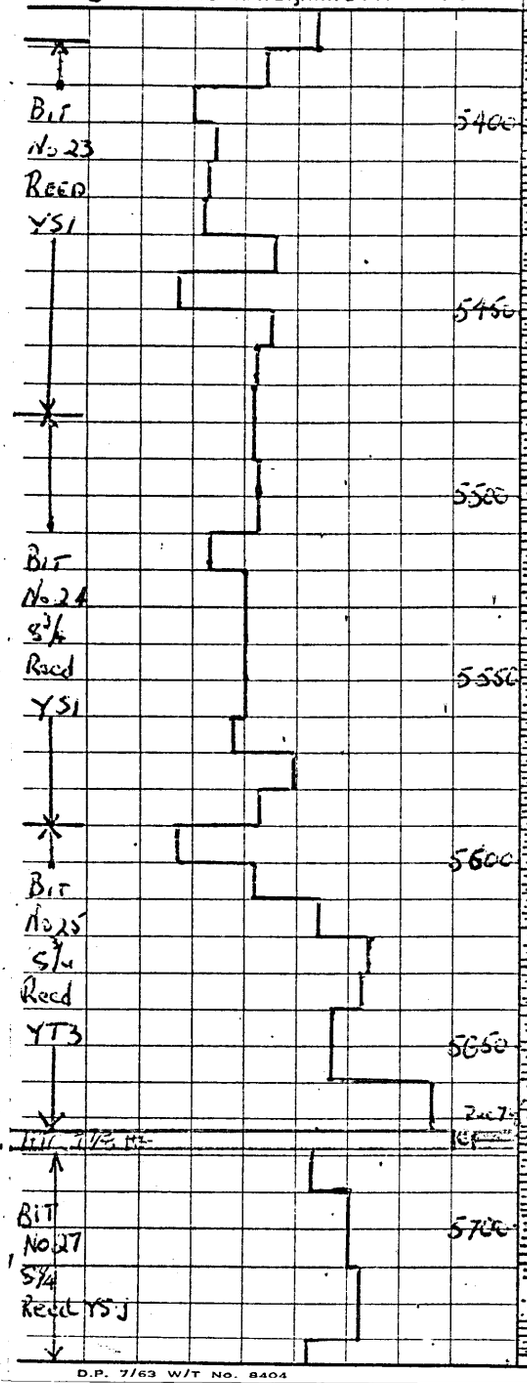


| Sandstone | Clay & Mudstone | Anhydrite Siltstone | Coal |
|---|---|---|---|
| 30 | 50 | 10 | 10 |
| 10 | 80 | 10 | |
| | 90 | 10 | |
| 20 | | 80 | |
| 10 | | 90 | |
| 20 | | 80 | |
| 20 | | 80 | |
| 20 | | 80 | |
| 10 | 50 | 40 | |
| | 80 | 20 | |
| | 90 | 10 | |
| 30 | 60 | 10 | |
| | 90 | 10 | |
| 20 | 80 | | |
| 30 | 60 | 10 | |
| 20 | 80 | | |
| 30 | 70 | | |
| 20 | 80 | | |
| 30 | 50 | 20 | |
| 25 | 60 | 15 | |
| 30 | 60 | | 10 |
| 20 | 30 | 30 | 20 |
| 30 | 20 | 20 | 30 |
| 40 | 20 | 20 | 20 |
| 40 | 25 | 25 | 10 |
| 30 | 30 | 30 | 10 |
| 40 | 25 | 25 | 10 |
| 40 | 20 | 30 | 10 |
| 50 | | 40 | 10 |
| 10 | | 40 | 50 |
| 30 | 20 | 30 | 10 |
| 30 | 30 | 30 | 10 |
| 10 | 10 | 80 | |
| 60 | 20 | 20 | |
| 30 | 50 | 20 | |
| 10 | 40 | 20 | 30 |

5378 – 5810
Interbedded Mudstone and Sandstone & Siltstone
As previously described.

FORMATION: UNNAMED
AGE: UPPER CRETACEOUS