

*Electrical Log*

DEPT. NAT. RES. & ENV.  
PE602664

COUNTRY \_\_\_\_\_  
 FIELD \_\_\_\_\_  
 WELL \_\_\_\_\_  
 COMPANY \_\_\_\_\_  
 LOCATION: \_\_\_\_\_  
 STATE: Victoria


Permanent datum \_\_\_\_\_  
 Log Measured From \_\_\_\_\_  
 Drilling Measured From \_\_\_\_\_  
 RUN No. | Depth Scale  
 Date: June, 6th 1967  
 First Reading: 2.289'  
 Last Reading: 390'  
 Interval Measured: 1.929'  
 Casing Schlumberger: \_\_\_\_\_  
 Casing Driller: \_\_\_\_\_  
 Depth Reached: 2.296'  
 Bottom Driller: Jonathan  
 Mud Nature: \_\_\_\_\_  
 Density Viscosity: 10.7 44  
 Mud Resistivity: 6.3 @ 68  
 Mud Resist. BHT: 5 @ 78  
 pH Fluid Loss: 5 @ 6.1 CC 30 min.  
 Origin of Sample: \_\_\_\_\_  
 Ref: \_\_\_\_\_  
 Rmc: 6.5 @ 78  
 Bit Size: 10 1/4 to 2 3/8  
 Casing Size: 8 1/4 to 3 3/8  
 Op. Rig Time: 2.37 hrs  
 Track No.: 1-2520  
 Recorded By: J. J. Brown  
 Witness: \_\_\_\_\_

COMPANY: Oil Development  
 WELL: ANZS 1 No 1  
 FIELD: \_\_\_\_\_  
 LOCATION: \_\_\_\_\_  
 STATE: Victoria  
 Other Services: \_\_\_\_\_  
 Ref. No.: \_\_\_\_\_  
 Elev.: K.B. \_\_\_\_\_  
 D.F. \_\_\_\_\_  
 G.L. \_\_\_\_\_

REMARKS:

RUN No.	1	EQUIPMENT - Type and No.	Sonde	57
Spacing AM1	16"	Pulsaton	57-0	
Spacing AM2	64"	Panel	57-0	
Spacing AO	18*8"			
Weight used				

SPONTANEOUS POTENTIAL millivolts	DEPTHS	RESISTIVITY ohms - m <sup>2</sup> /m	RESISTIVITY ohms - m <sup>2</sup> /m
	1" / 100'	0	50
		AM <sub>1</sub> = 16"	50
		500	AO = 18*8"
		500	500
		50	
		500	

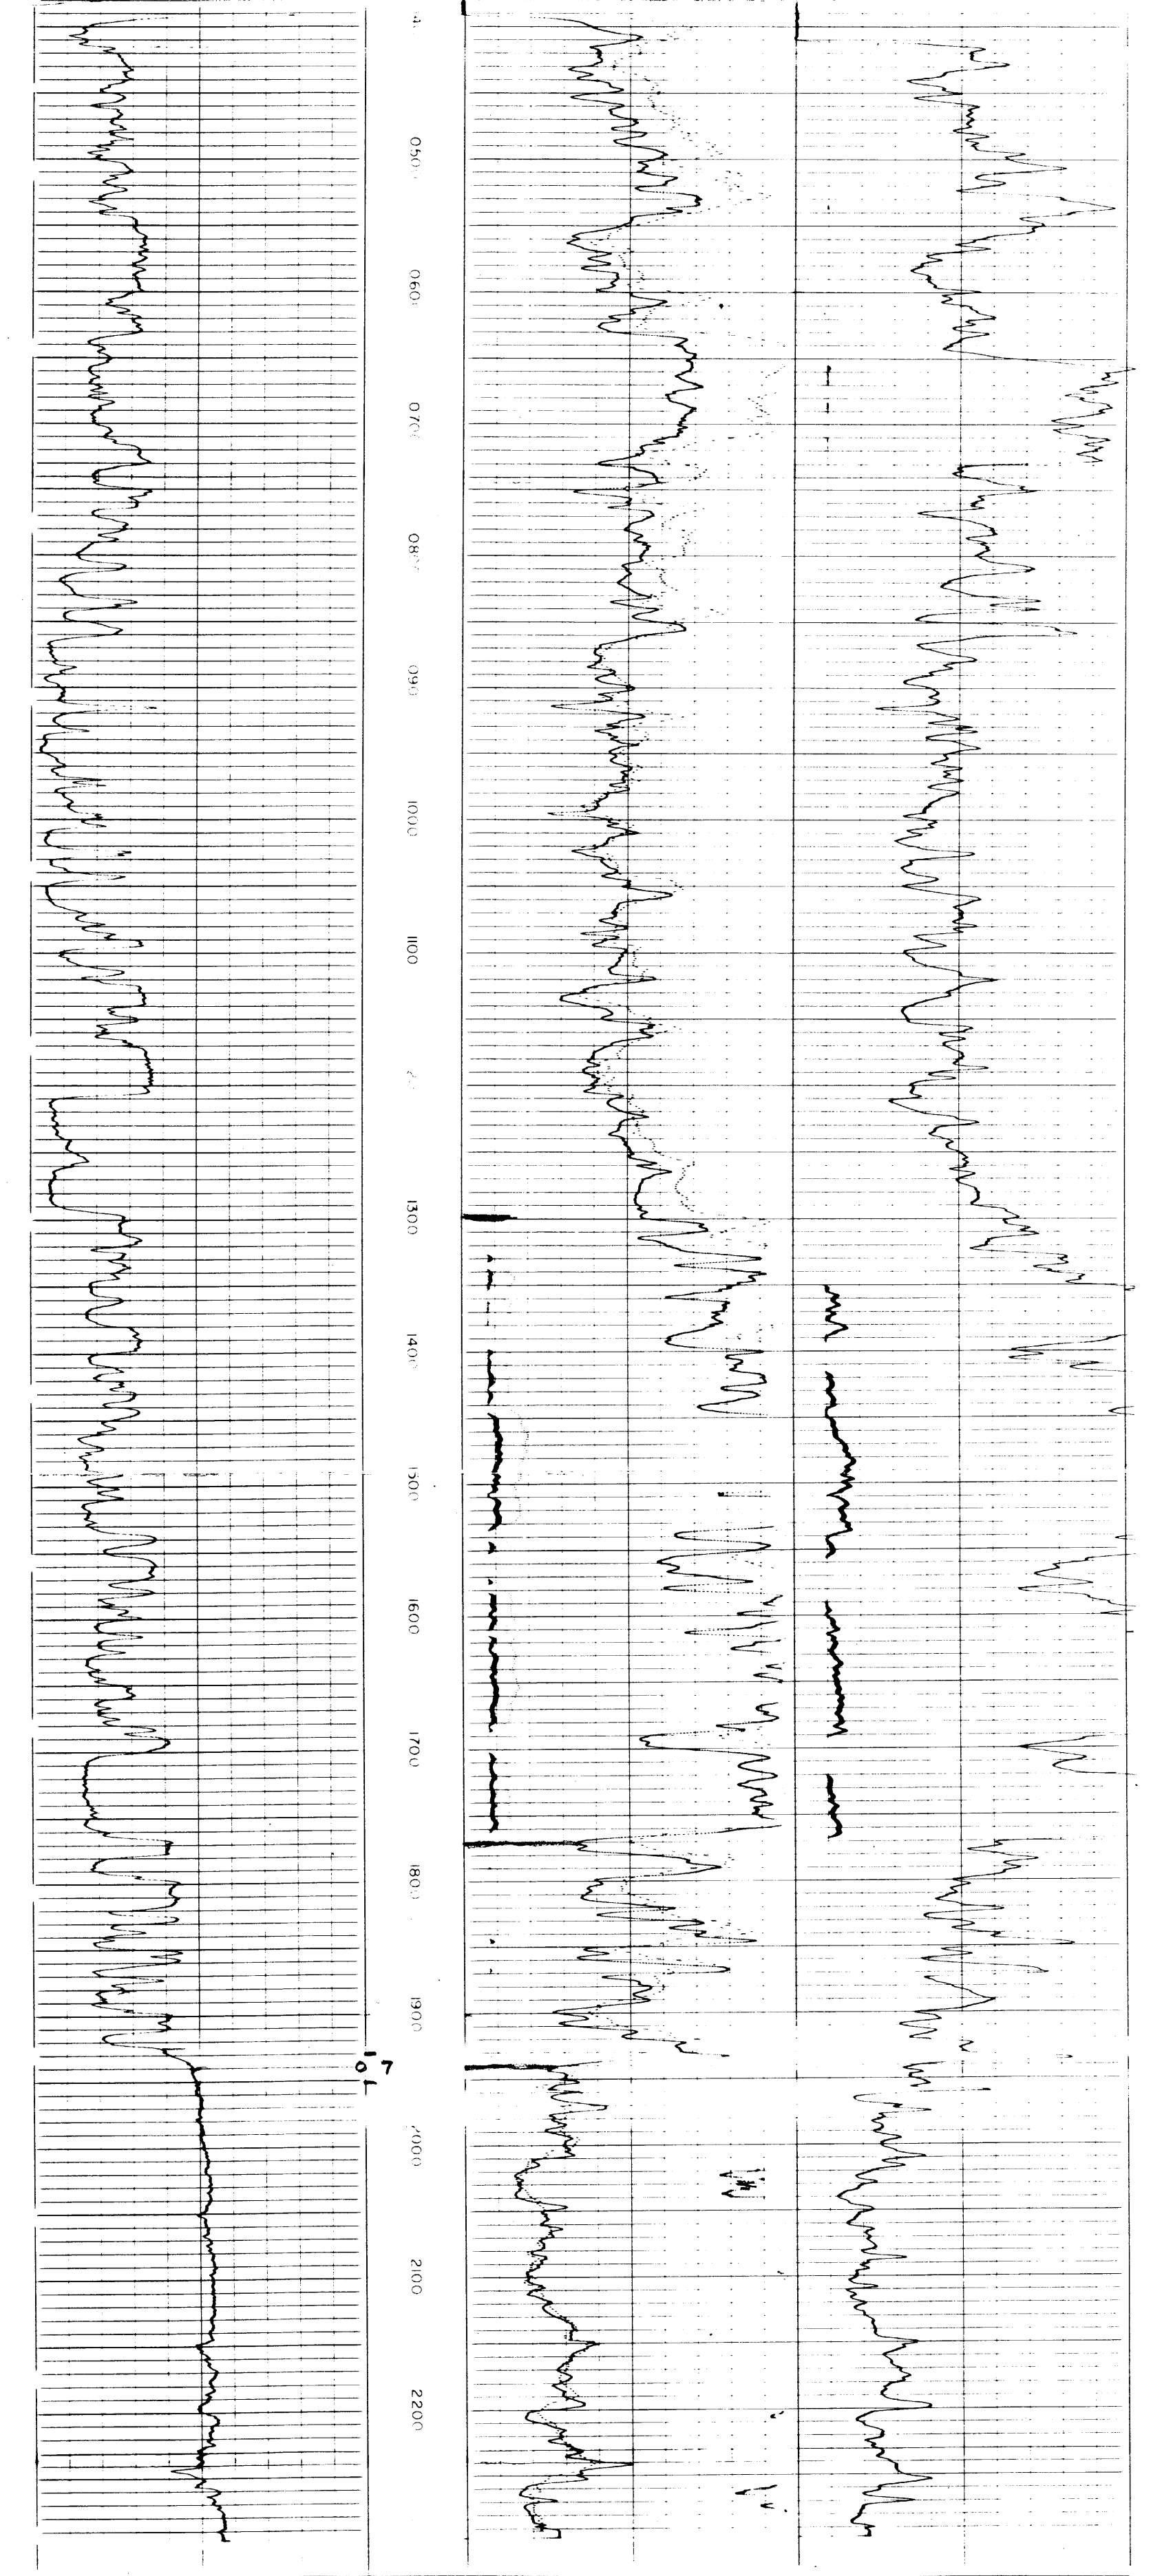

SPONTANEOUS POTENTIAL millivolts	DEPTHS	RESISTIVITY ohms - m <sup>2</sup> /m	RESISTIVITY ohms - m <sup>2</sup> /m
		0	50
		AM <sub>1</sub> = 16"	50
		500	AO = 18*8"
		500	500
		50	
		500	

COMPANY: Oil Development Rm: 6.3 @ 68 °F SCHL. F.R.: 2.289'  
 WELL: ANZS 1 No 1 Rmf: 6.5 @ 78 °F SCHL. T.D.: 2.295'  
 FIELD: \_\_\_\_\_ Rmc: \_\_\_\_\_ °F DRLR. T.D.: 2.296'  
 COUNTRY: Victoria STATE: Victoria Elev.: K.B. \_\_\_\_\_  
 D.F. \_\_\_\_\_  
 G.L. \_\_\_\_\_