




APPENDIX 5.

CORE DESCRIPTION

PINE LODGE-1

W1034



13 September 1990

Gas & Fuel Exploration NL
151 Flinders Street
MELBOURNE VIC 3000

Attention: Mr J Foster


REPORT: 008/056

CLIENT REFERENCE: Order No 00307

MATERIAL: Core Samples

LOCALITY: Pine Lodge #1

WORK REQUIRED: Core Analysis

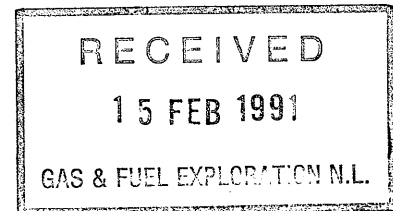

Please direct technical enquiries regarding this work to the signatory below under whose supervision the work was carried out.

RUSSELL R MARTIN
Laboratory Supervisor
Core Analysis/Special Core Analysis
on behalf of Amdel Core Services Pty Ltd

Amdel Core Services Pty Limited shall not be liable or responsible for any loss, cost, damages or expenses incurred by the client, or any other person or company, resulting from any information or interpretation given in this report. In no case shall Amdel Core Services Pty Ltd be responsible for consequential damages including, but not limited to, lost profits, damages for failure to meet deadlines and lost production arising from this report.

Please Reply To:

P.O. Box 109 Eastwood SA 5063 Australia
Telephone: 61-8-372 2834 Facsimile: 61-8-372 2861

Amdel Core Services Pty Ltd
(Incorporated in South Australia)

13 September 1990

Gas & Fuel Exploration NL
151 Flinders Street
MELBOURNE VIC 3000

Attention: Mr J Foster

FINAL DATA REPORT - CONVENTIONAL CORE ANALYSIS

REPORT: 008/056 - PINE LODGE NO 1

Core No 1, 1975.00-1984.24m (9.24m) was collected from the wellsite by Amdel Core Services personnel on 24th August 1990.

The following report includes tabular data of permeability to air, helium injection porosity, and density determinations. Data presented graphically includes a continuous core gamma log, a core log plot and a porosity versus permeability to air plot.

The data contained in this report has been derived by the following methods:

1. CONTINUOUS CORE GAMMA

The core is laid out according to the depths marked on it and a continuous core gamma trace produced by passing the core beneath a gamma radiation detector which is protected from extraneous radiation by a lead tunnel. The speed at which the core is passed beneath the detector is adjusted so as to reproduce the required vertical scale; electronic amplification and digitization are used to produce a gamma trace similar to that of the downhole log.

2. PLUG CUTTING & DRYING

1½" diameter plugs were taken in the sandstone sections of the core at 25 cm intervals. Tap water is used as the bit lubricant. Samples were examined under ultra violet light for the presence of hydrocarbons, none was found to be evident.

The plugs are dried in a controlled humidity environment at temperatures not exceeding 100°C and are then stored in an airtight plastic container and allowed to cool to room temperature.

3. PERMEABILITY TO AIR

A plug sample is used for this measurement and is placed in a Hassler cell to which a confining pressure of 200 psig (1380 kpa) is applied; this pressure is used to prevent bypassing of air around the sides of the sample when the measurement is made. A known pressure is then applied to the upstream sample face and the differential pressure (between the upstream and downstream faces) is monitored at the downstream face. Permeability is then calculated using Darcy's Law.

4. HELIUM INJECTION POROSITY

The porosity of a clean dry core plug is determined as follows: it is first placed in a matrix cup where the grain volume is measured by helium injection: a known volume of helium at a known pressure is expanded into the matrix cup which contains the core plug; the resulting pressure is recorded and the unknown volume (that is, the volume of the grains) is determined using Boyle's Law. The bulk volume is determined by mercury immersion. The difference between the grain volume and the bulk volume is the pore volume and from this the porosity is calculated as the volume percentage of pores with respect to the bulk volume.

5. APPARENT GRAIN DENSITY

The apparent grain density is derived from the measurements described in Section 4, above, and is the ratio of the weight of the core plug divided by the grain volume determined as in paragraph 5.

CONVENTIONAL CORE ANALYSIS

Company: GAS & FUEL EXPLORATION N.L. Report: 008/056
 Well: PINE LODGE No. 1 Date: 25/08/90
 Field: WILDCAT Core Intervals: Core #1 1975.00 - 1984.24m
 Location: VICTORIA
 Country: AUSTRALIA

Sample Number	Depth (m)	Porosity (%)		Density		Permeability (md)		Summation of Fluids			Remarks
		He Inj	Roll Av	Nat	Grain	Ka	Roll Av Ka	Por %	Oil %	Water %	
1	1975.45	7.6			2.63		0.36				
2	1975.70	9.2			2.67		0.35				
3	1975.95	6.6			2.64		0.30				
4	1976.21	4.9			2.64		0.15				
5	1976.45	6.2			2.66		0.03				
6	1976.85	2.9			2.63		0.77				
7	1977.10	4.5			2.67		0.23				
8	1977.35	2.6			2.73		0.01				
9	1978.70	4.6			2.67		<0.01				
10	1979.75	4.4			2.66		0.11				
11	1981.25	5.2			2.62		0.06				
12	1981.50	4.0			2.61		0.14				
13	1981.75	4.8			2.60		0.03				
14	1982.00	2.4			2.57		0.14				
15	1982.25	3.9			2.59		0.08				
16	1982.50	6.2			2.63		0.03				
17	1982.75	6.8			2.62		0.03				
18	1982.95	7.1			2.72		2.8				
19	1983.20	6.7			2.66		0.09				
20	1983.50	3.6			2.59		0.07				
21	1983.75	4.2			2.62		0.01				
22	1983.95	7.7			2.68		0.17				
23	1984.20	17.3			2.66		94				

VF = Vertical Fracture; HF = Horizontal Fracture; MP = Mounted Plug; SP = Short Plug;
 C# = Top of Core; B# = Bottom of Core; OWC = Probable Oil/Water Contact;
 Tr = Probable Transition Zone; GC = Probable Gas Cap;

CORE PLUG DESCRIPTION


Company: GAS & FUEL EXPLORATION NL Report: 008/056
 Well: PINE LODGE NO 1 Date: 25/08/90
 Field: WILDCAT Core Interval: Core #1 1975.00 - 1984.24m
 Location: VICTORIA
 Country: AUSTRALIA

Sample Number	Depth	Description
1		Sst: gry, m-f gr, mod srted, Qtz - Fspr w/ Mic, cl Cmt, sli-mod turb
2		As in 1 w/ carb Lam
3		As in 1
4		As in 1
5		Calcar: lt gry, f-vf gr, v wl srted, Qtz w/ mnr Mic & Py, r py Nod & carb clasts
6		Sst: m-dk gry, f-vf gr, wl srted Qtz w/ Mic mnr Fspr, cl Cmt, hi carb/mic Lam turb
7		Sst: gry, f-vf gr, wl srted, Qtz w/ Mic & Fspr, cl Cmt, py/carb Lam, v wl cmtd carb Len
8		Sst: gry, f-vf gr, v wl srted, Qtz w/ Fspr & mnr Mic, cl Cmt, carb Lam w/ mnr Py
9		Sst: lt gry, f gr, wl srted, Qtz w/ Fspr & mnr Mic, cl Cmt, slily carb Bnd, slily turb
10		Sst: gry, f gr, wl srted, Qtz w/ Mic & Fspr, cl Cmt, hi turb carb Lam w/ mnr Py r py Nod
11		Sst: m-lt gry, vf-f gr, wl srted, Qtz w/ Fspr & Mic, cl Cmt, turb carb Lam & Len
12		As in 11 w/ Py Nod & Len
13		Sst: gry, f-vf gr, wl srted, Qtz w/ Fspr & Mic, cl Cmt, turb carb Bnd, r Py Nod

Sample Number	Depth	Description
14		sdy Slstst: m-dk gry, carb w/ f-vf gr, Sd Len, slily turb Lam & Len
15		sdy Slstst: m-dk gry, carb w/ turb, f gr, mod-poorly srtd Sd Lam & Len
16		Sst: lt gry, v f gr, wl srtd Qtz w/ Fspr & Mic, cl Cmt, slty carb Len, poss Bur infilled w/ m gr Sd
17		Sst: gry, m-f gr, mod srtd, Qtz & Fspr w/ mnr Mic, cl Cmt, sli-mod turb
18		Sst: lt-m gry, m-vf gr, mod-wl srtd, Qtz w/ Fspr & mnr Mic, cl Cmt, slily carb Bnd, r py Nod
19		Sst: m gry, f gr, wl srtd, Qtz w/ Fspr & Mic & mnr Py, cl Cmt, sml carb Len, slily turb, mnr py Nod
20		sdy Slstst: m-dk gry, carb w/ f-vf gr, Sd Len, slily turb Lam & Len
21		slty Sst: gry, v f gr, v wl srtd Qtz, Fspr & Mic w/ carb Mat
22		Sst: m gry, f gr, wl srtd, Qtz w/ Fspr & Mic & mnr Py, cl Cmt, sml carb Len, slily turb, mnr py Nod
23		Sst: bu gry, f gr, wl srtd, Qtz w/ mnr Fspr, thn carb Lam, slily turb

POROSITY vs PERMEABILITY

Company: Gas and Fuel Exploration NL
Well : Pine Lodge No.1
Ambient: $Y=(0.480X)x0.007$

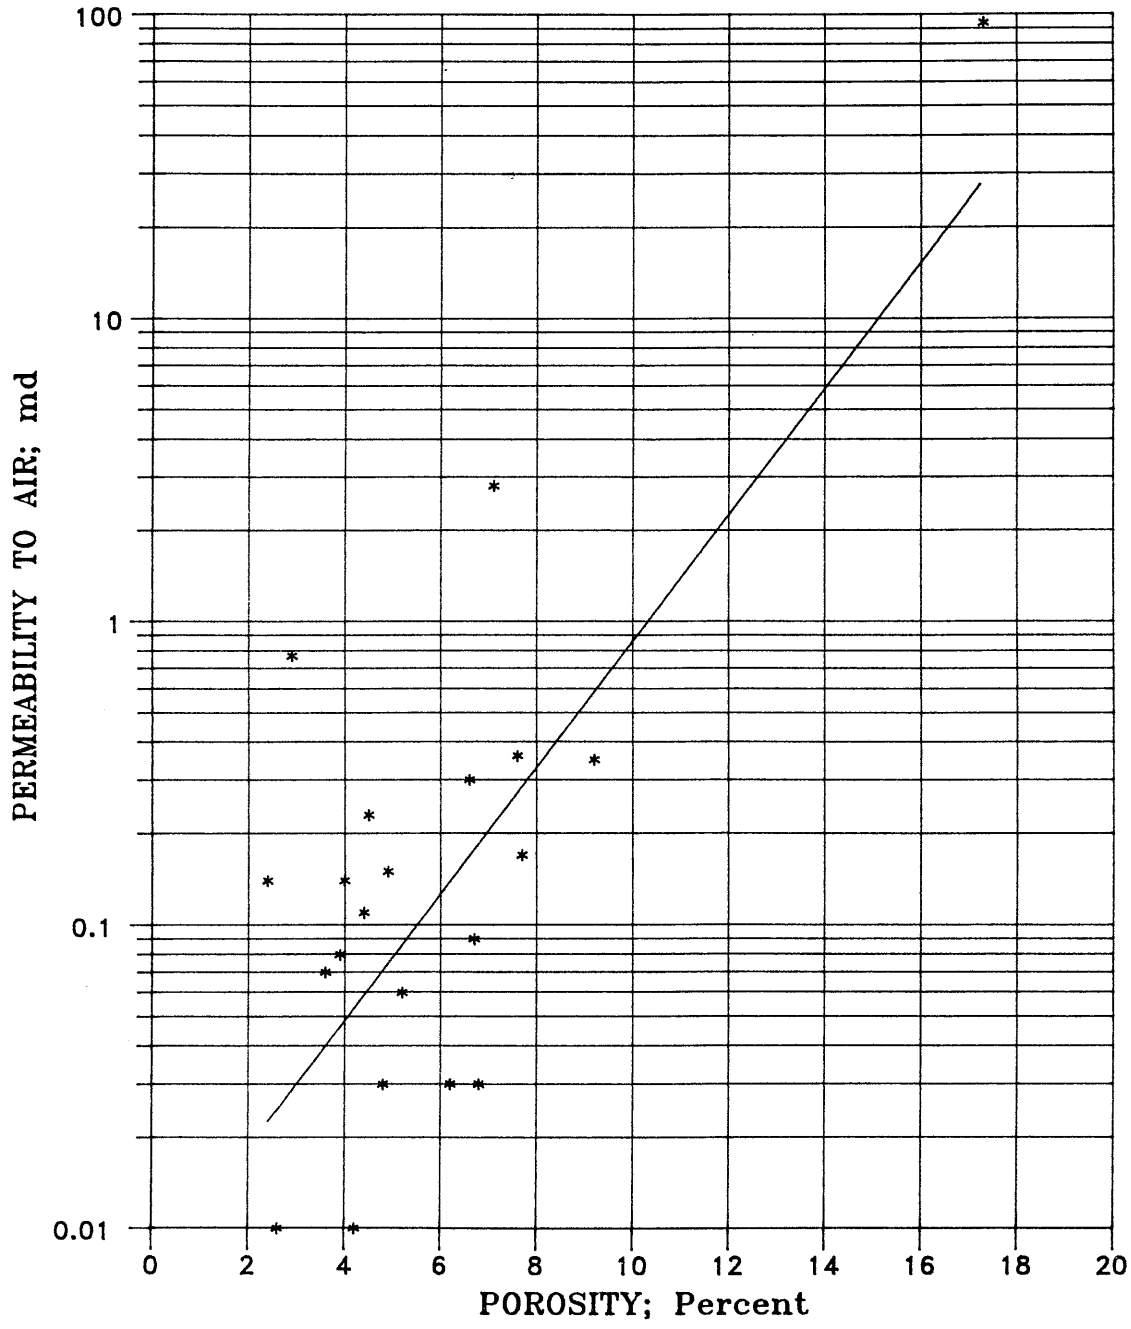


AMDEL CORE SERVICES PTY. LIMITED
Incorporated in South Australia

CORE PLOT

Scale 1 : 200

Company: Gas and Fuel Exploration NL
Well : Pine Lodge No.1
Field : Wildcat

Core Interval: 1975.00 - 1984.24 m
Location : Victoria
File : 008/056

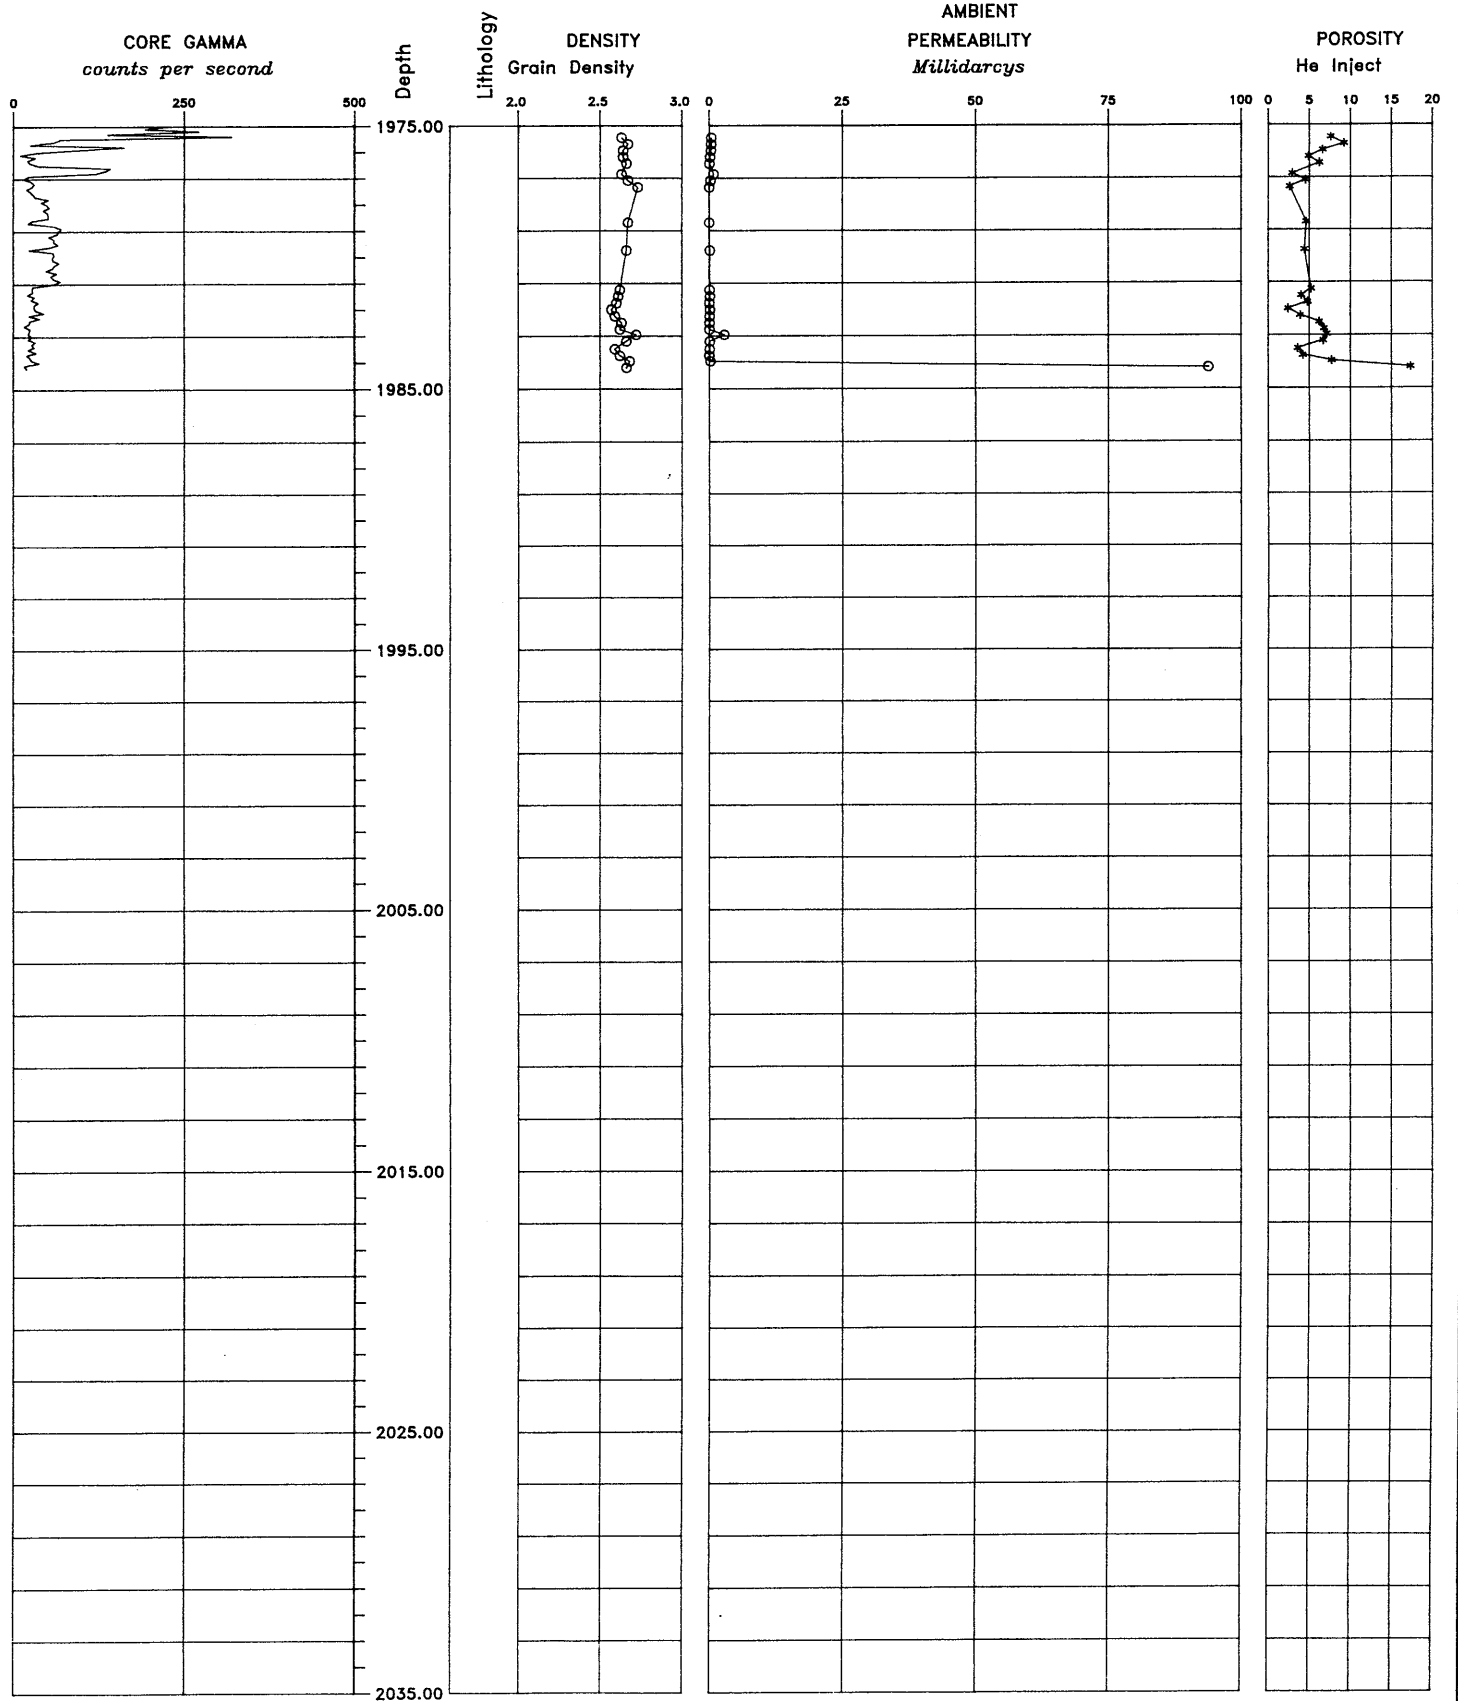

PE903696

This is an enclosure indicator page.
The enclosure PE903696 is enclosed within the
container PE903695 at this location in this
document.

The enclosure PE903696 has the following characteristics:

ITEM_BARCODE = PE903696
CONTAINER_BARCODE = PE903695
NAME = Pine Lodge 1 core photograph
BASIN = OTWAY
PERMIT = PEP105
TYPE = WELL
SUBTYPE = CORE_PHOTOS
DESCRIPTION = Pine Lodge 1 core photograph (1975m
-1980m)
REMARKS =
DATE_CREATED =
DATE_RECEIVED =
W_NO = W1034
WELL_NAME = Pine Lodge-1
CONTRACTOR = Amdel Core Services
CLIENT_OP_CO = Gas and Fuel Exploration N.L

(Inserted by DNRE - Vic Govt Mines Dept)

PE903697

This is an enclosure indicator page.
The enclosure PE903697 is enclosed within the
container PE903695 at this location in this
document.

The enclosure PE903697 has the following characteristics:

- ITEM_BARCODE = PE903697
- CONTAINER_BARCODE = PE903695
 - NAME = Pine Lodge 1 core photograph
 - BASIN = OTWAY
 - PERMIT = PEP105
 - TYPE = WELL
 - SUBTYPE = CORE_PHOTOS
- DESCRIPTION = Pine Lodge 1 core photograph (1980m
-1985m)
- REMARKS =
- DATE_CREATED =
- DATE_RECEIVED =
- W_NO = W1034
- WELL_NAME = Pine Lodge-1
- CONTRACTOR = Amdel Core Services
- CLIENT_OP_CO = Gas and Fuel Exploration N.L

(Inserted by DNRE - Vic Govt Mines Dept)

DEPT. NAT. RES & ENV
PE903696








GAS AND FUEL EXPL. PINE LODGE # 1. 1975 TO 1985.






BELFAST FM.

5 Y 6/1 5 Y 7/2 5 Y 6/1 10 YR 7/4 10 YR 4/2 5 YR 4/1 5 YR 3/4 10 R 2/2









CONE 1










1975








1976



1977



1978



1979



GAS AND FUEL EXPL. PINE LODGE 1. 1975 TO 1985.


DP 2

BEFAST FM


5 YR 1/1 5 YR 7/2 5 YR 1/1 10 YR 7/4 10 YR 4/2 5 YR 4/1 5 YR 3/4 10 R 3/2

CORE 1


1980

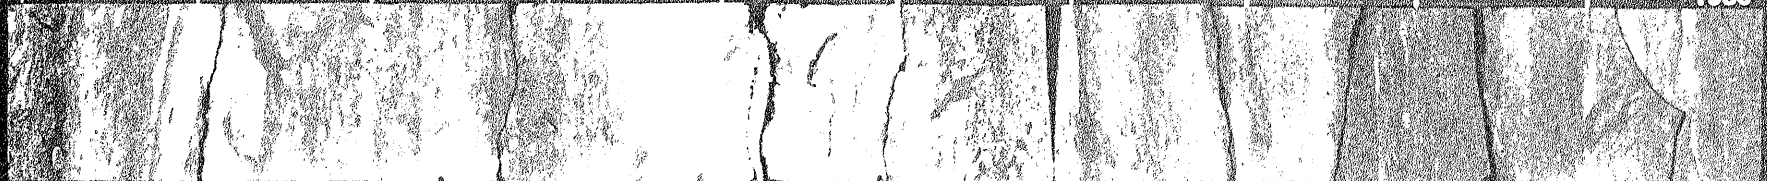

1981

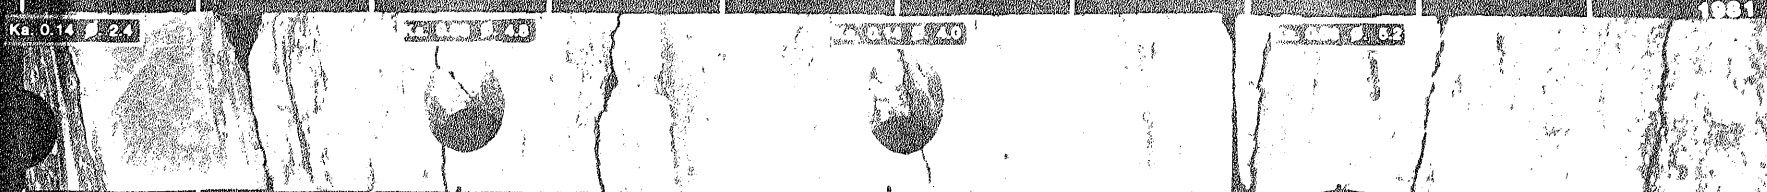

1982

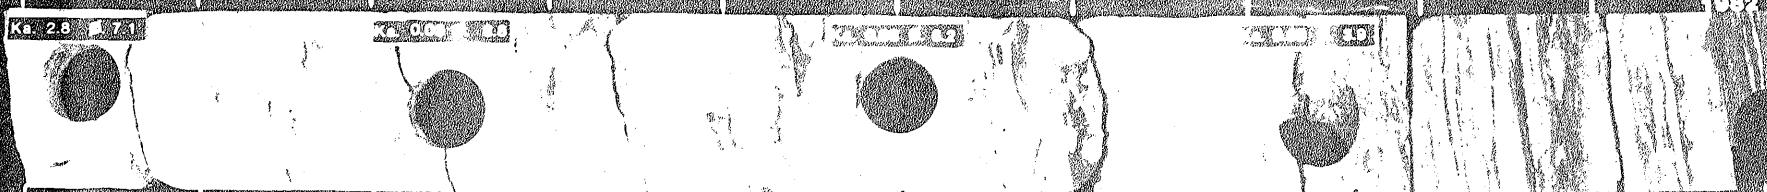

1983



1985

1984

