

CBA A28 LWD VISION RT 200TVD

IDF

ARC6A-AA id14_0c_16
SON675 id14_0c_16


MWD_10 id14_0c_16
ADN id14_0c_16


Format: VISION SERVICE RT 200TVD Vertical Scale: 1:200 Graphics File Created: 15-Jul-2009 06:51


PIP SUMMARY


TNPH (Thermal Neutron Porosity)  ROBB (Density Bottom) 


				Thermal Neutron Porosity, Real-Time (TNPH_ADN_RT) 0.45 (V/V) -0.15	
ARC Gamma Ray, Real-Time (ARC_GR_RT) 0 (GAPI) 200		ARC BHCorr Phase-Shift Resistivity 40-in. at 2 MHz, Real-Time (P40H_RT) 0.2 (OHMM) 2000		Bulk Density, Bottom, Real-Time Computed Downhole (ROBB_DH_RT) 1.85 (G/C3) 2.85	
Average Borehole Diameter, Real-Time (ADIA_ADN_RT) 6 (IN) 16		ARC BHCorr Phase-Shift Resistivity 28-in. at 2 MHz, Real-Time (P28H_RT) 0.2 (OHMM) 2000		Photoelectric Factor, Bottom, Real-Time (PEB_RT) 0 (----) 10	
		MWD Collar RPM (CRPM_RT) (RPM) 0 250			
ROP*5 (ROP5) (M/HR) 200 0		ARC BHCorr Phase-Shift Resistivity 16-in. at 2 MHz, Real-Time (P16H_RT) 0.2 (OHMM) 2000		Bulk Density Correction, Bottom, Real-Time Computed Downhole (DRHB_DH_RT) -0.75 (G/C3) 0.25	
PKPK_RPM (Stick_RT) (RPM) 0 250				Delta-T Compressional, Real-Time (DTCO_RT) 600 (US/M) 100	

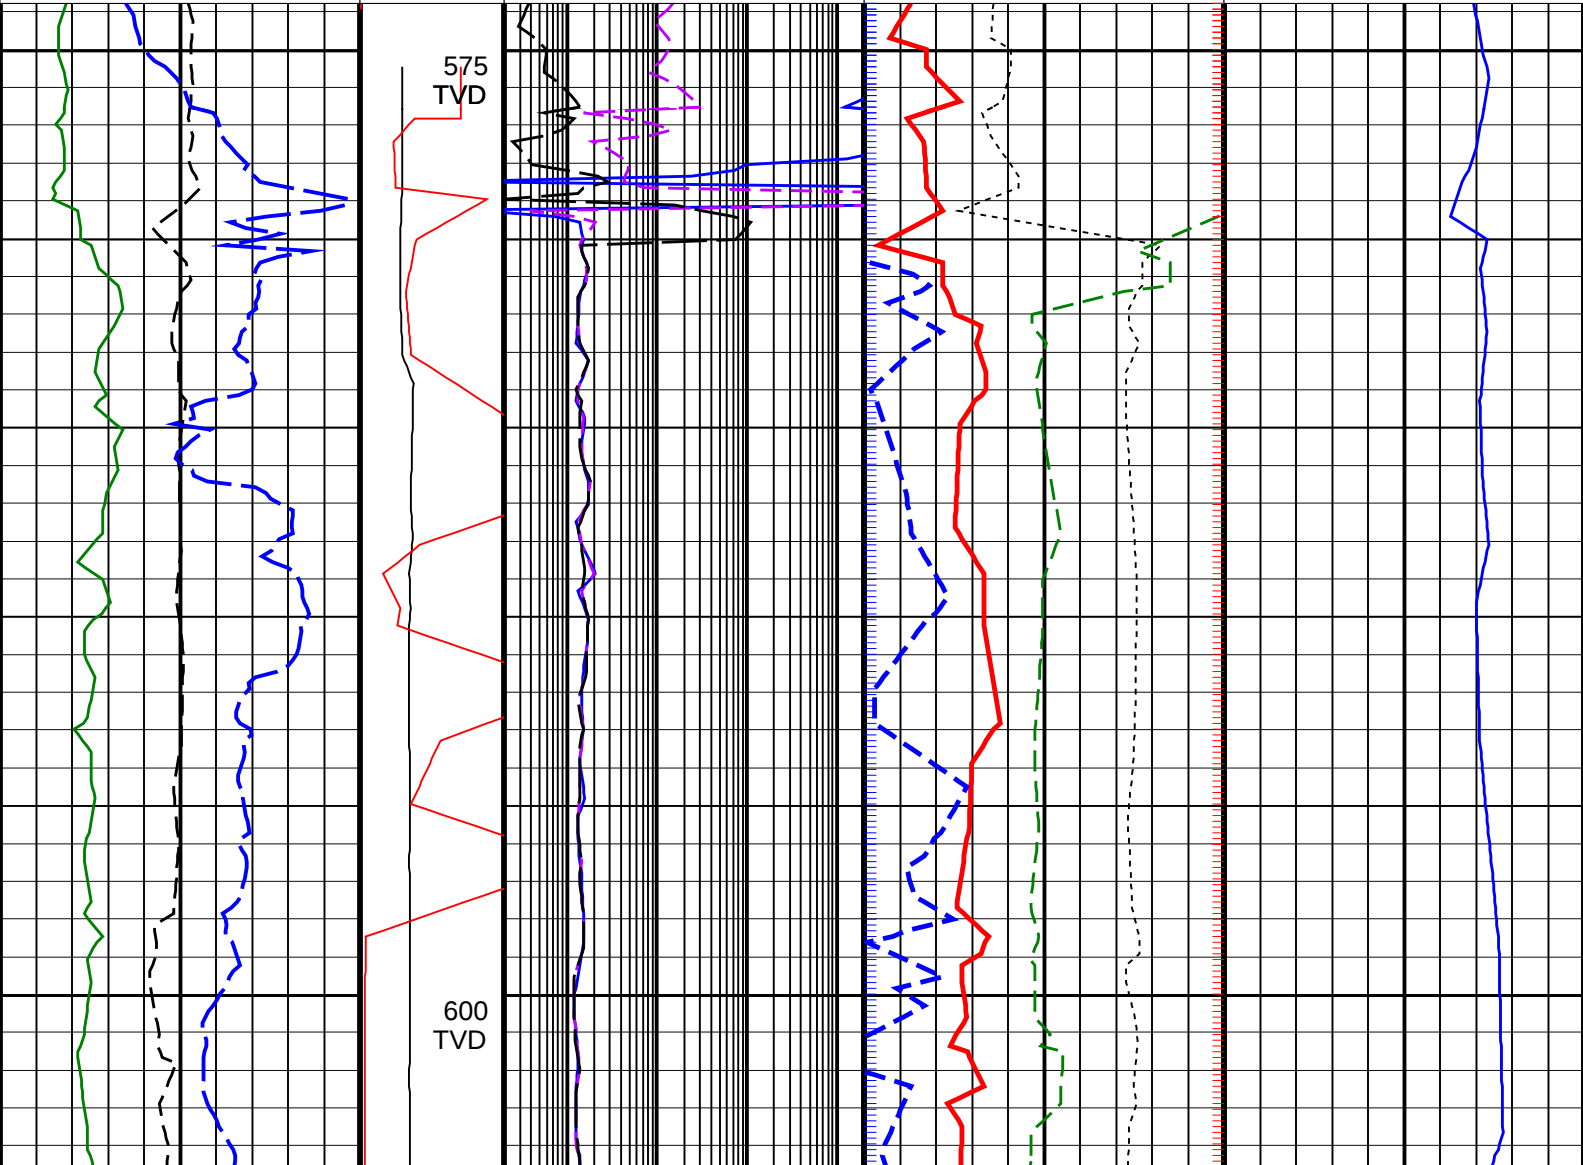


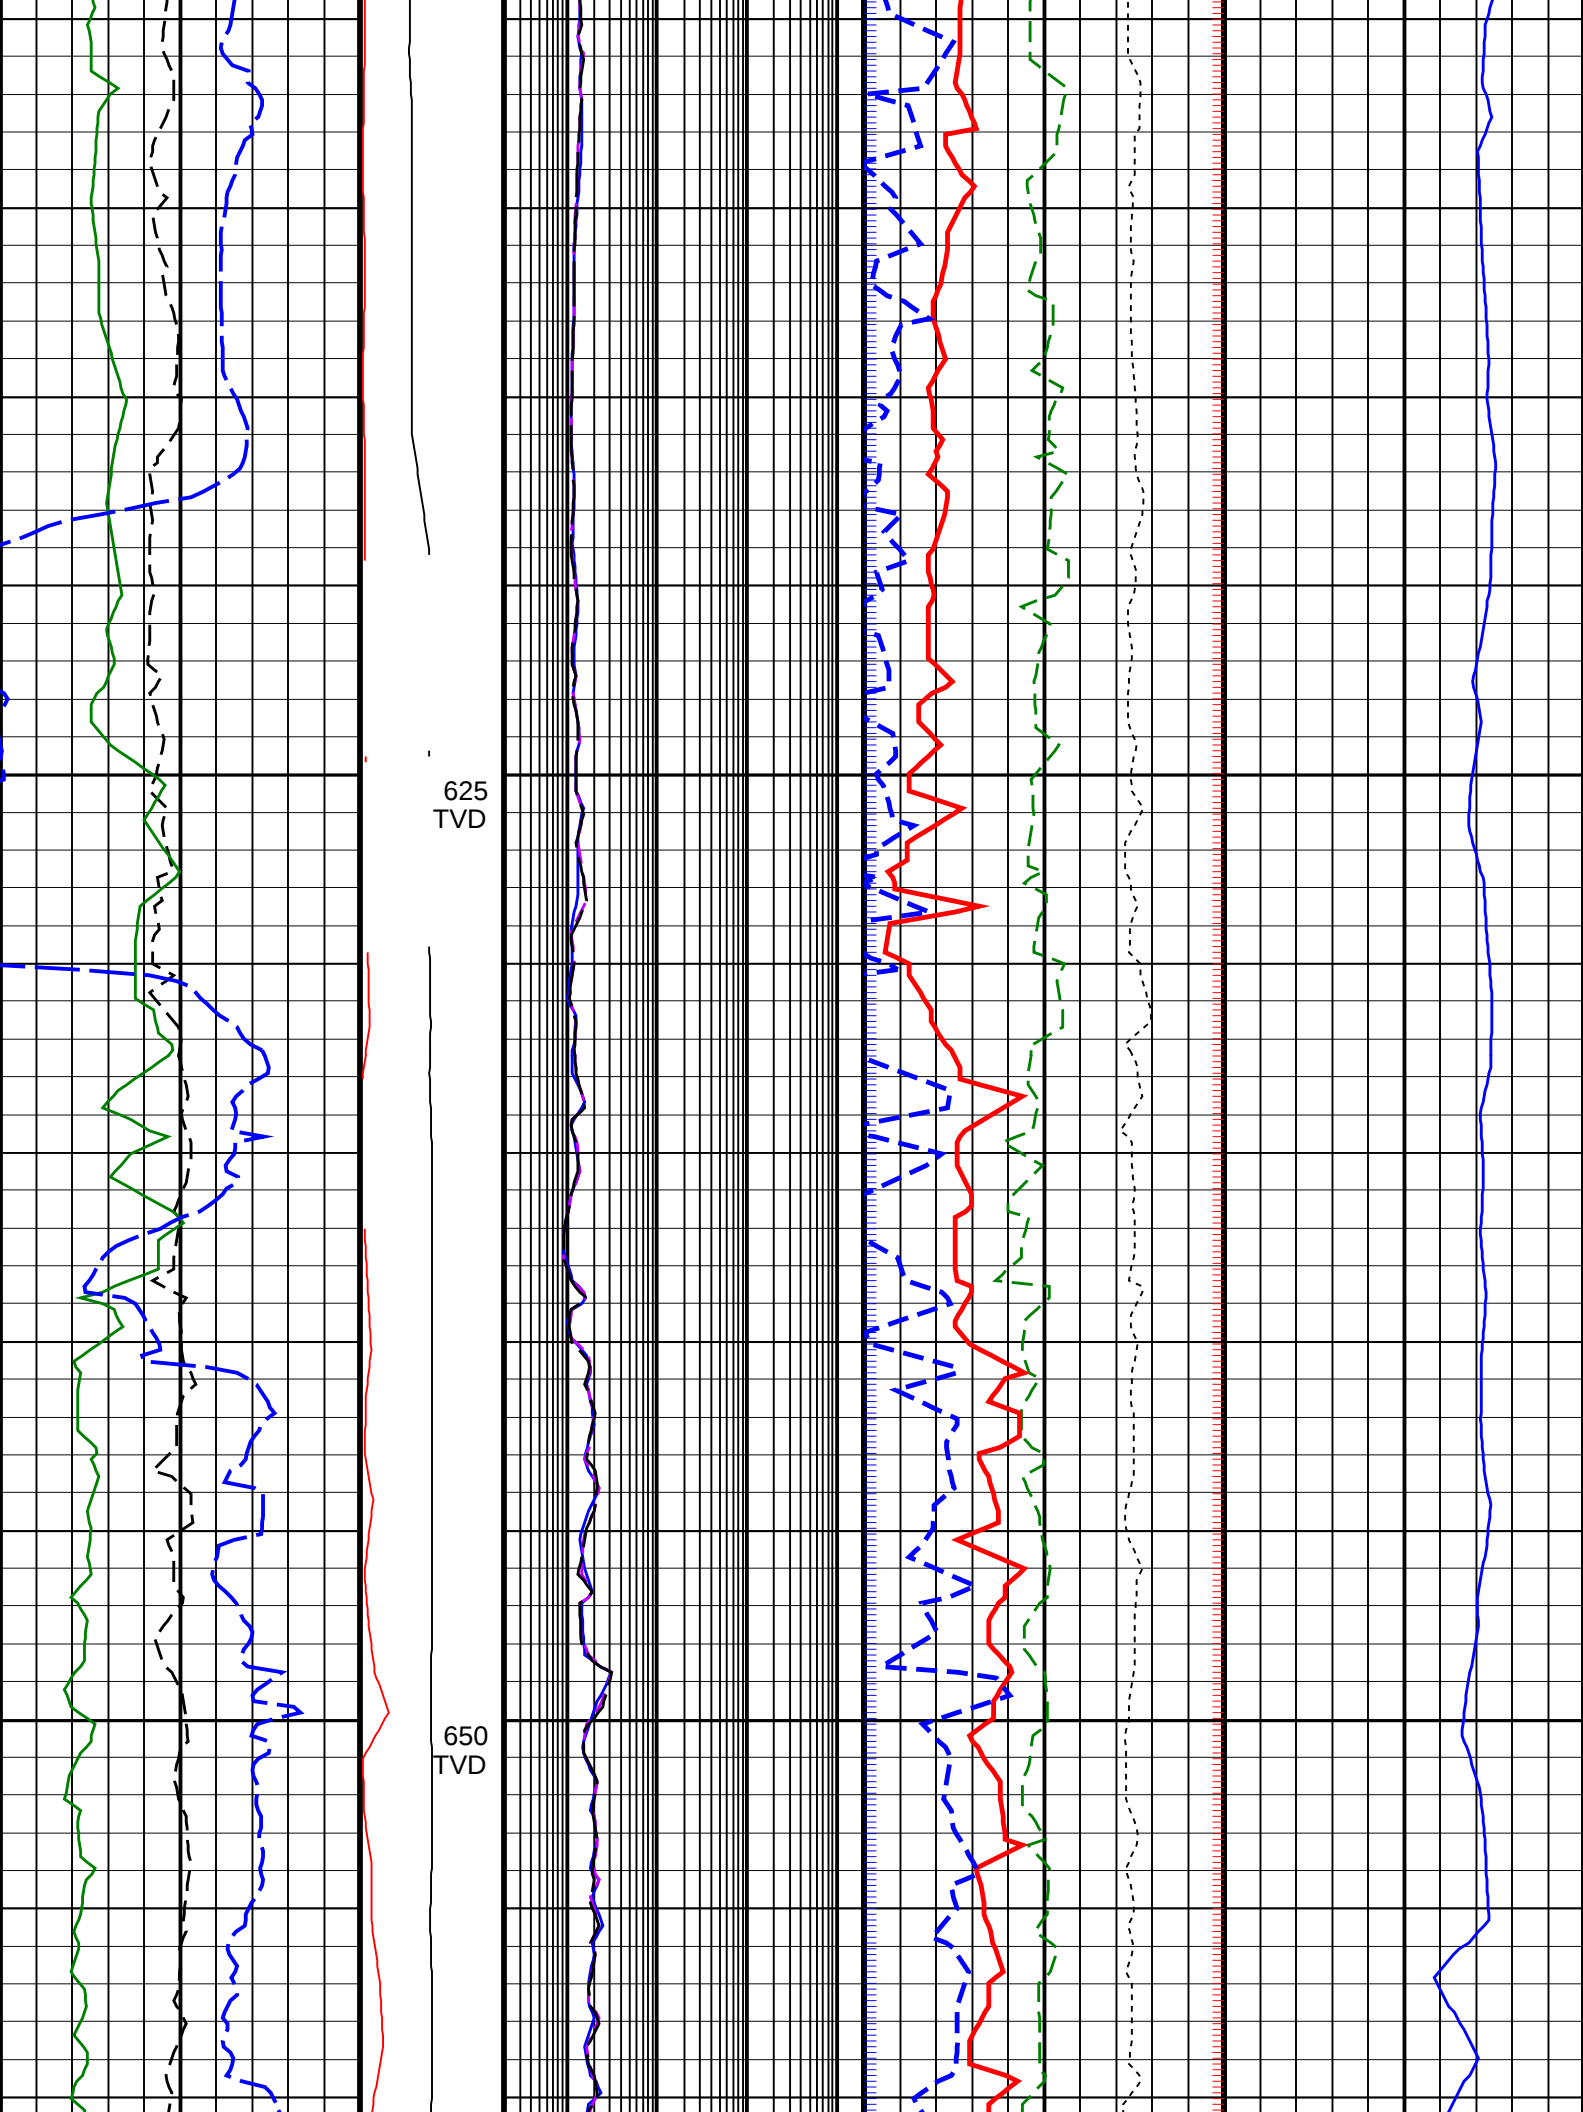


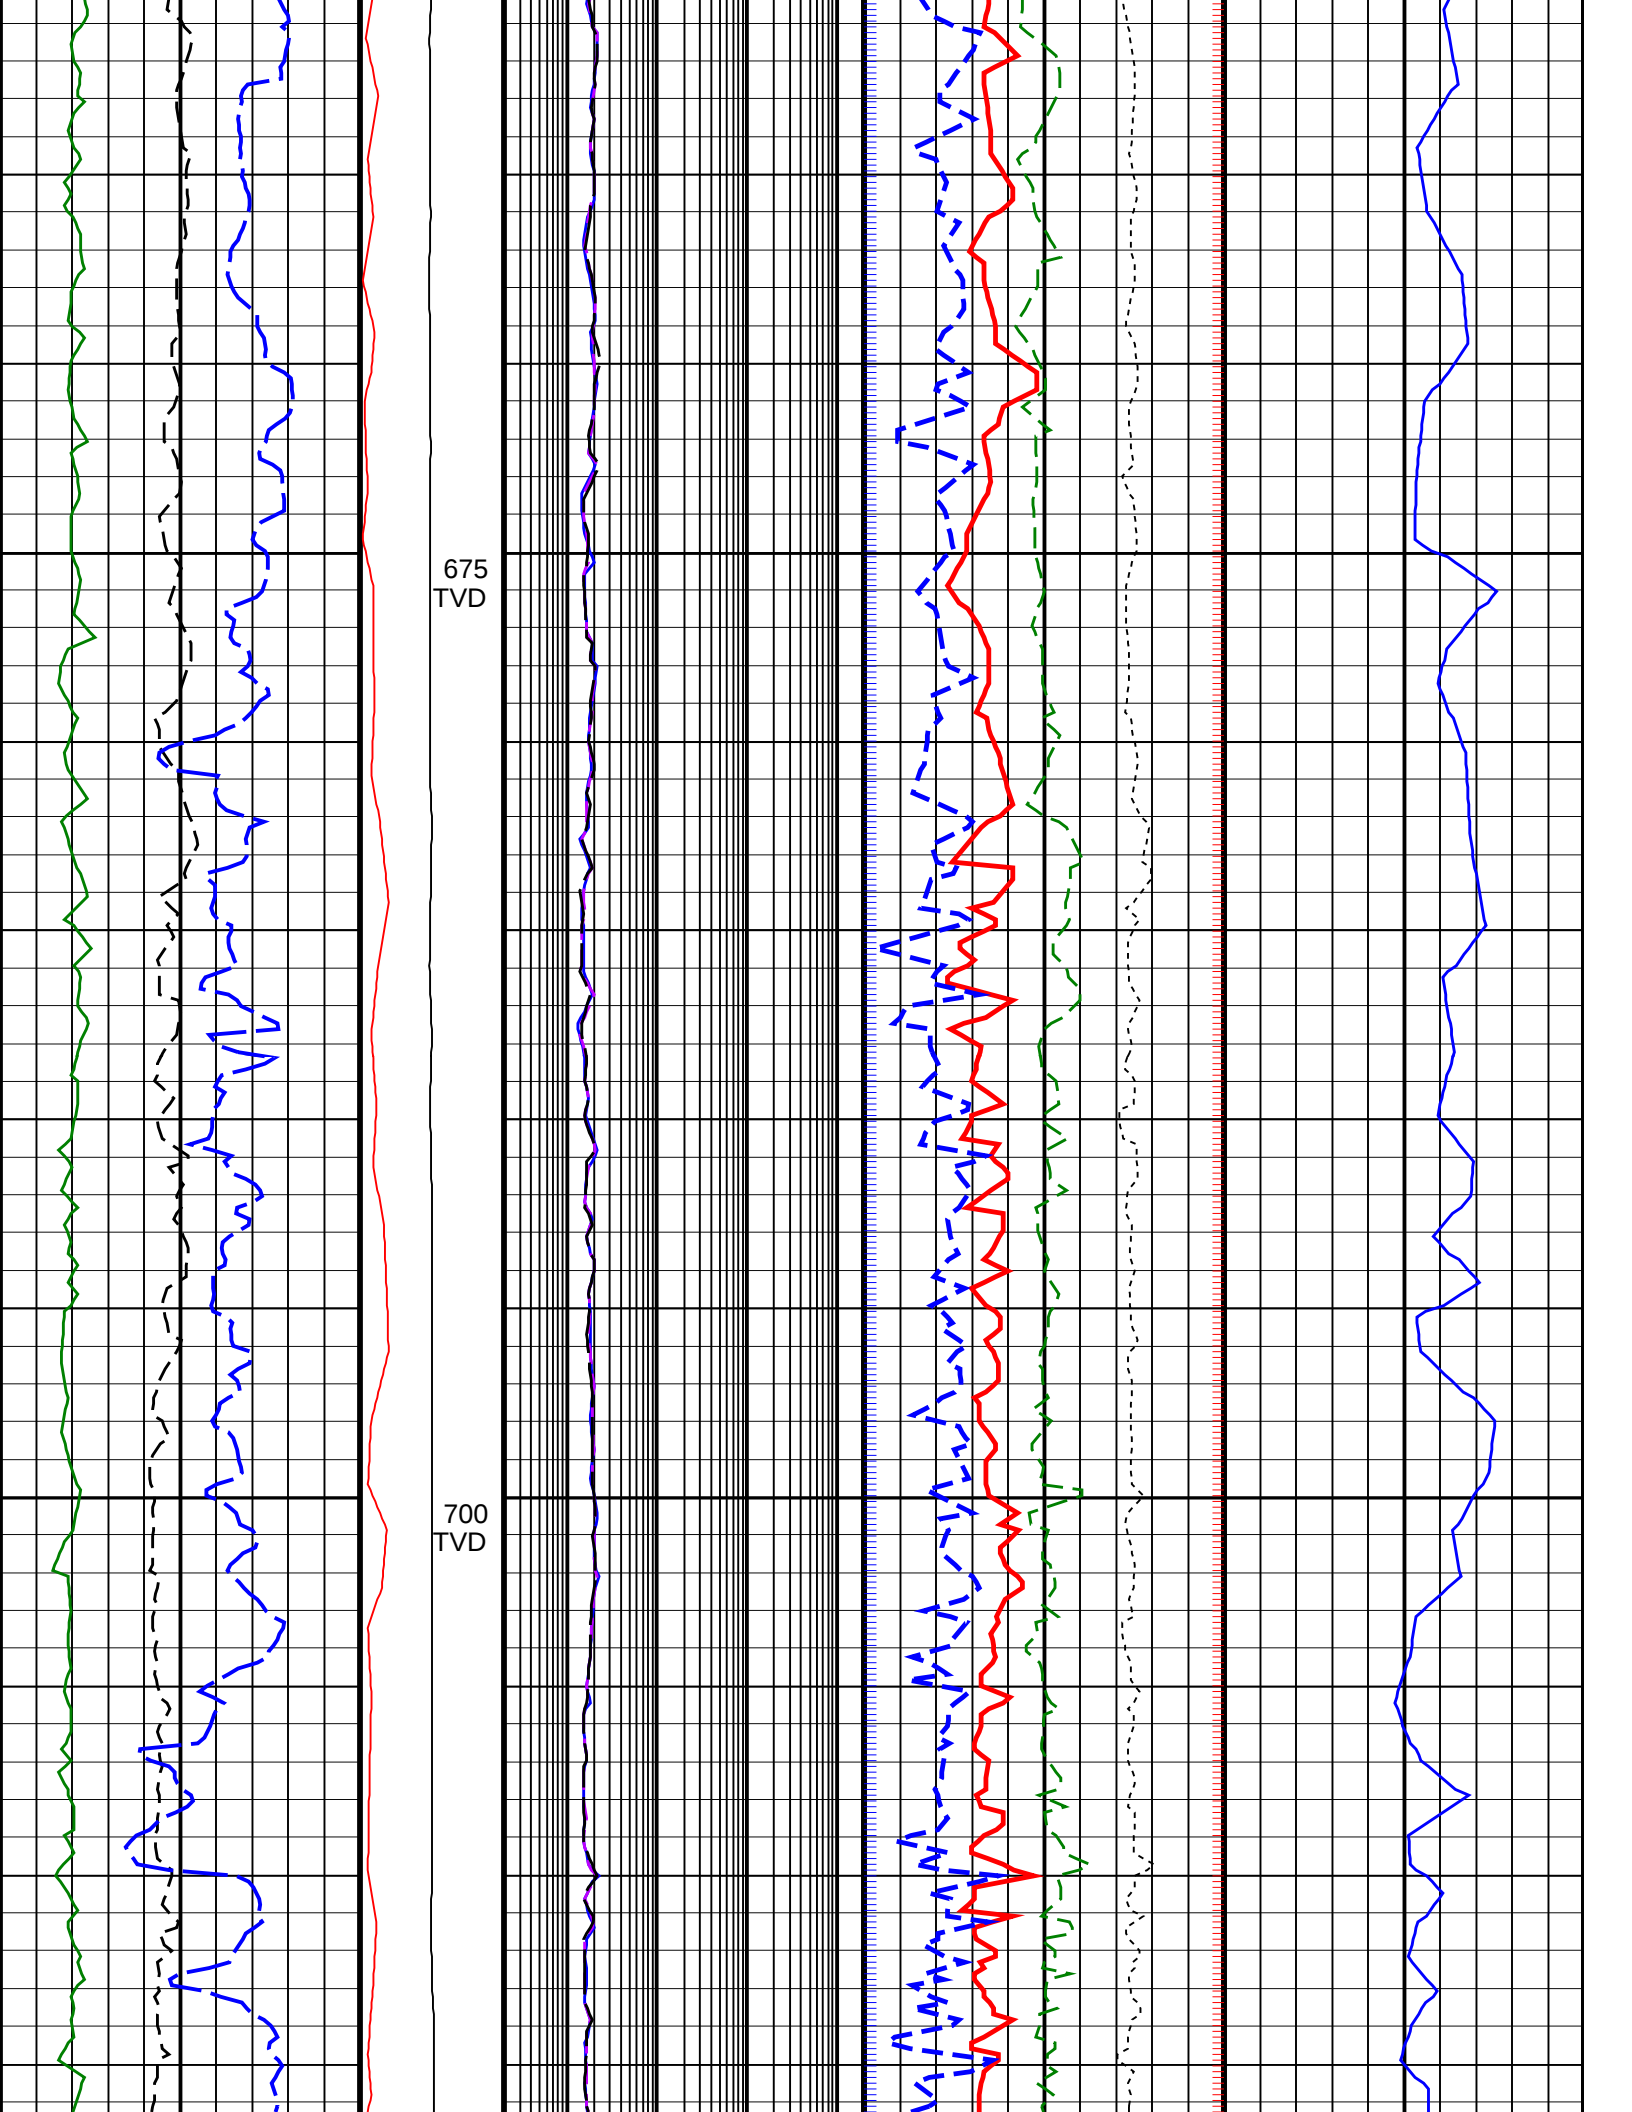


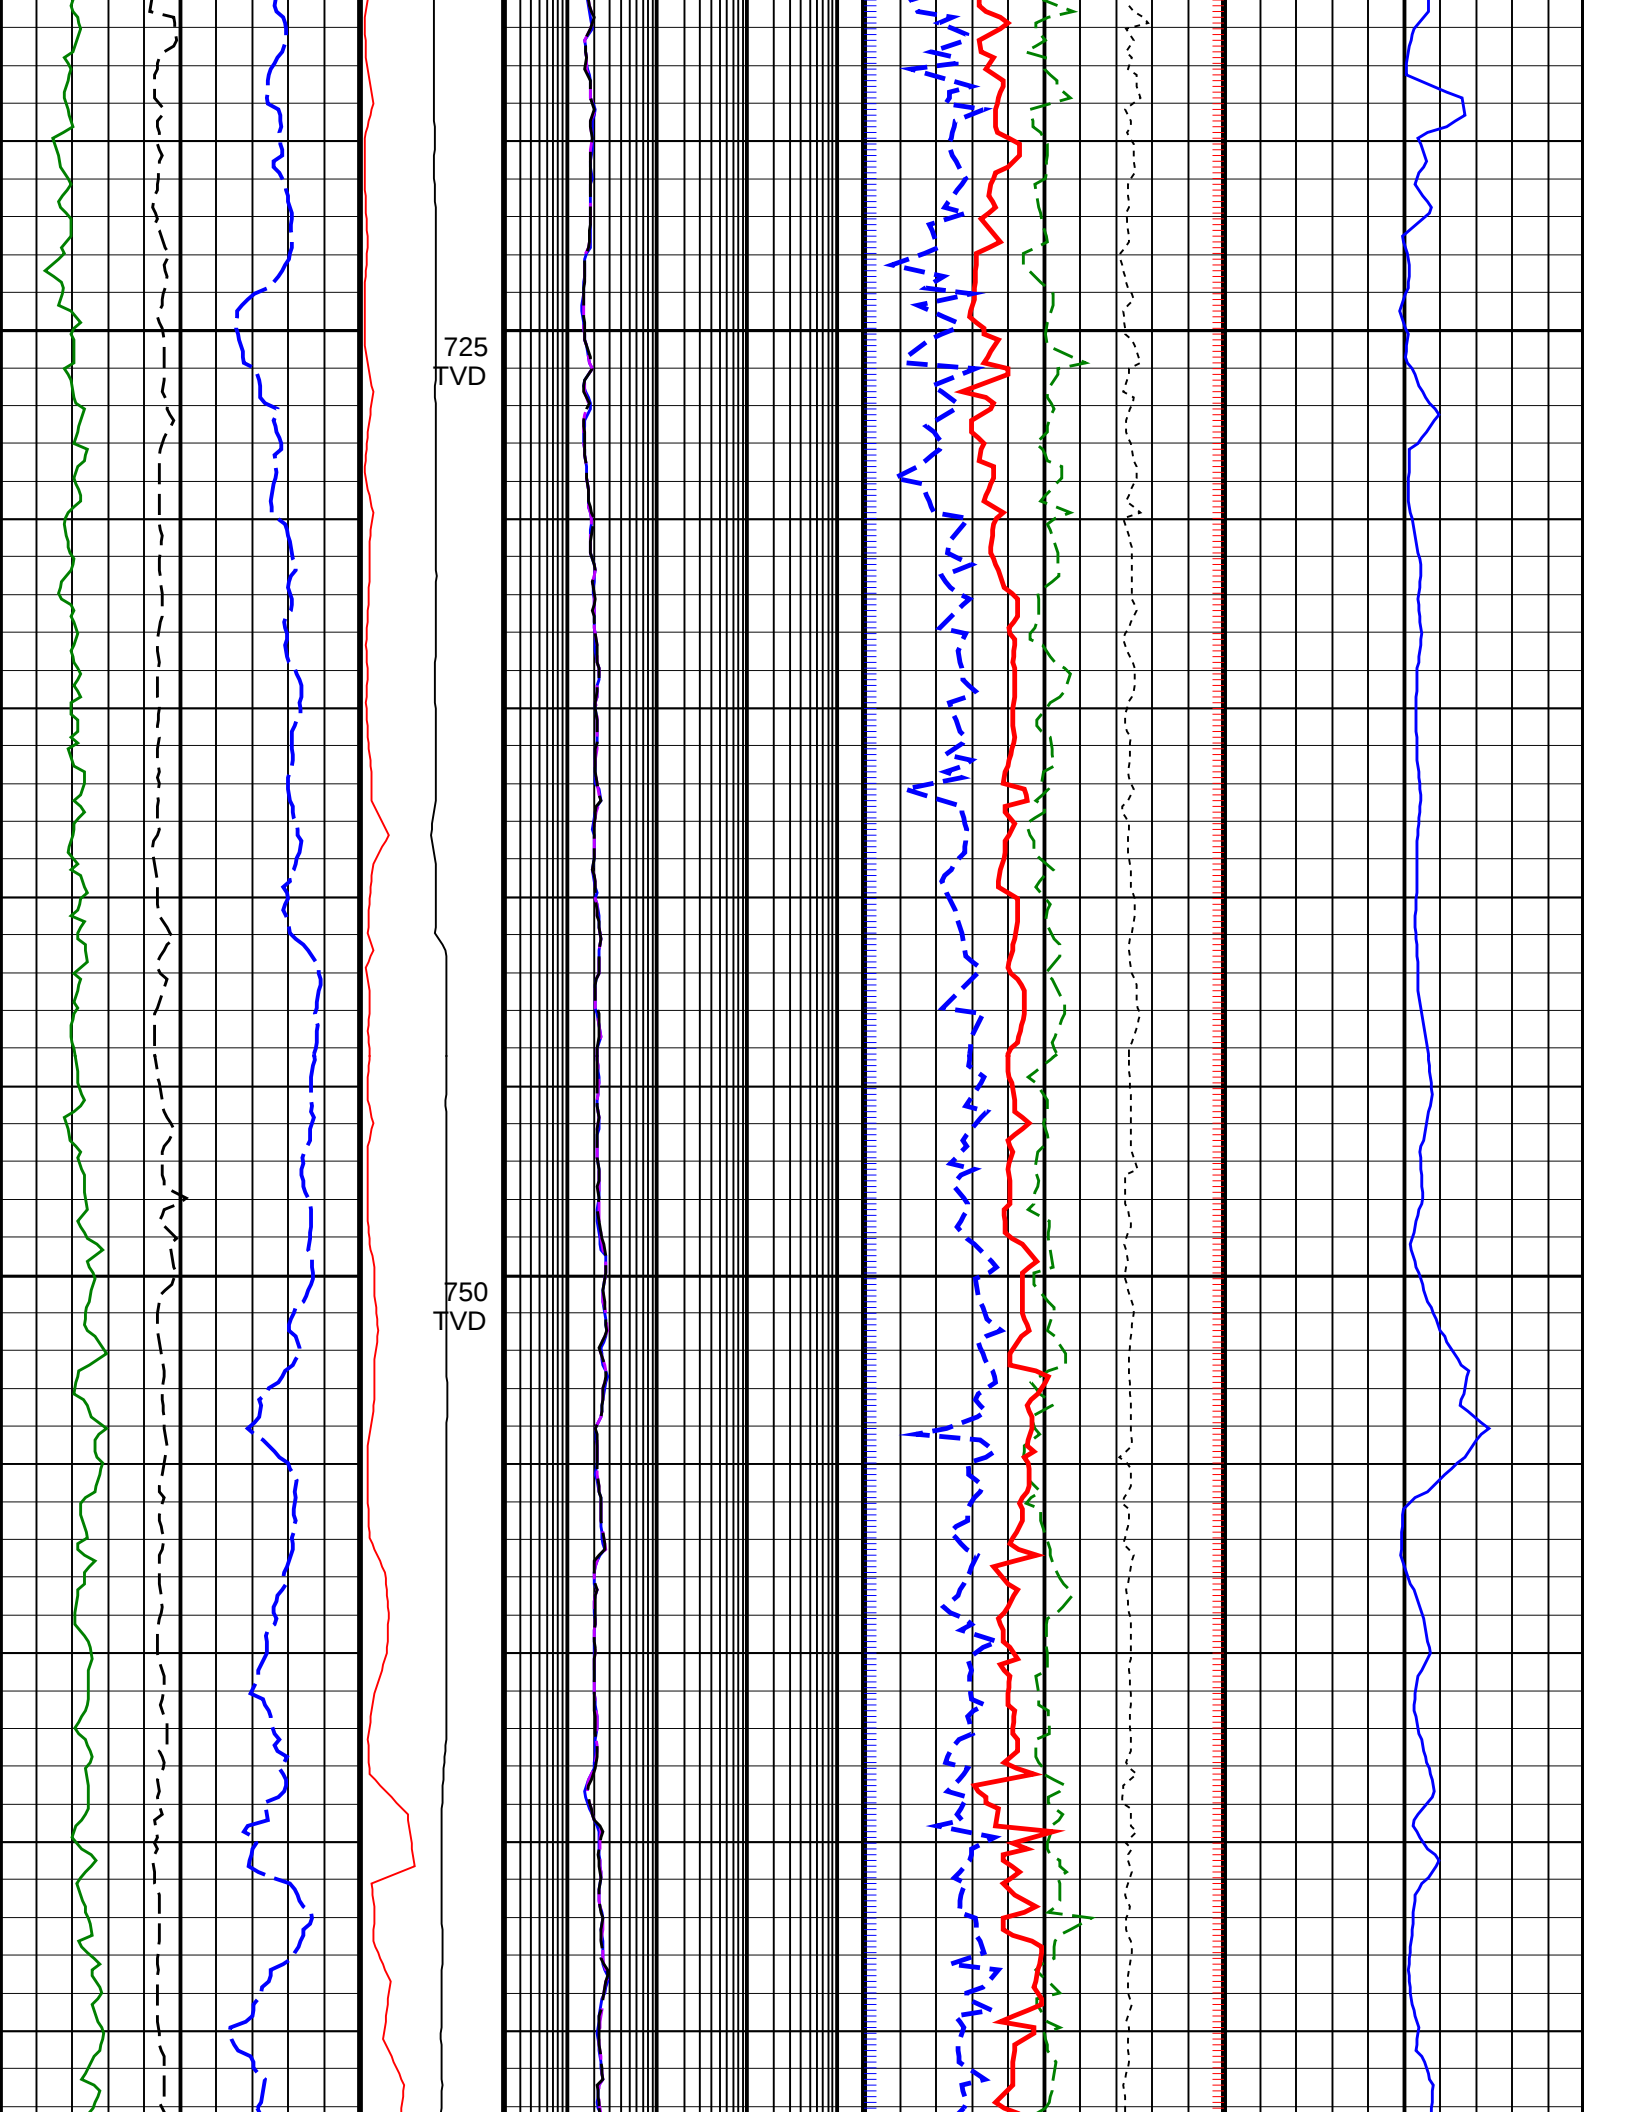


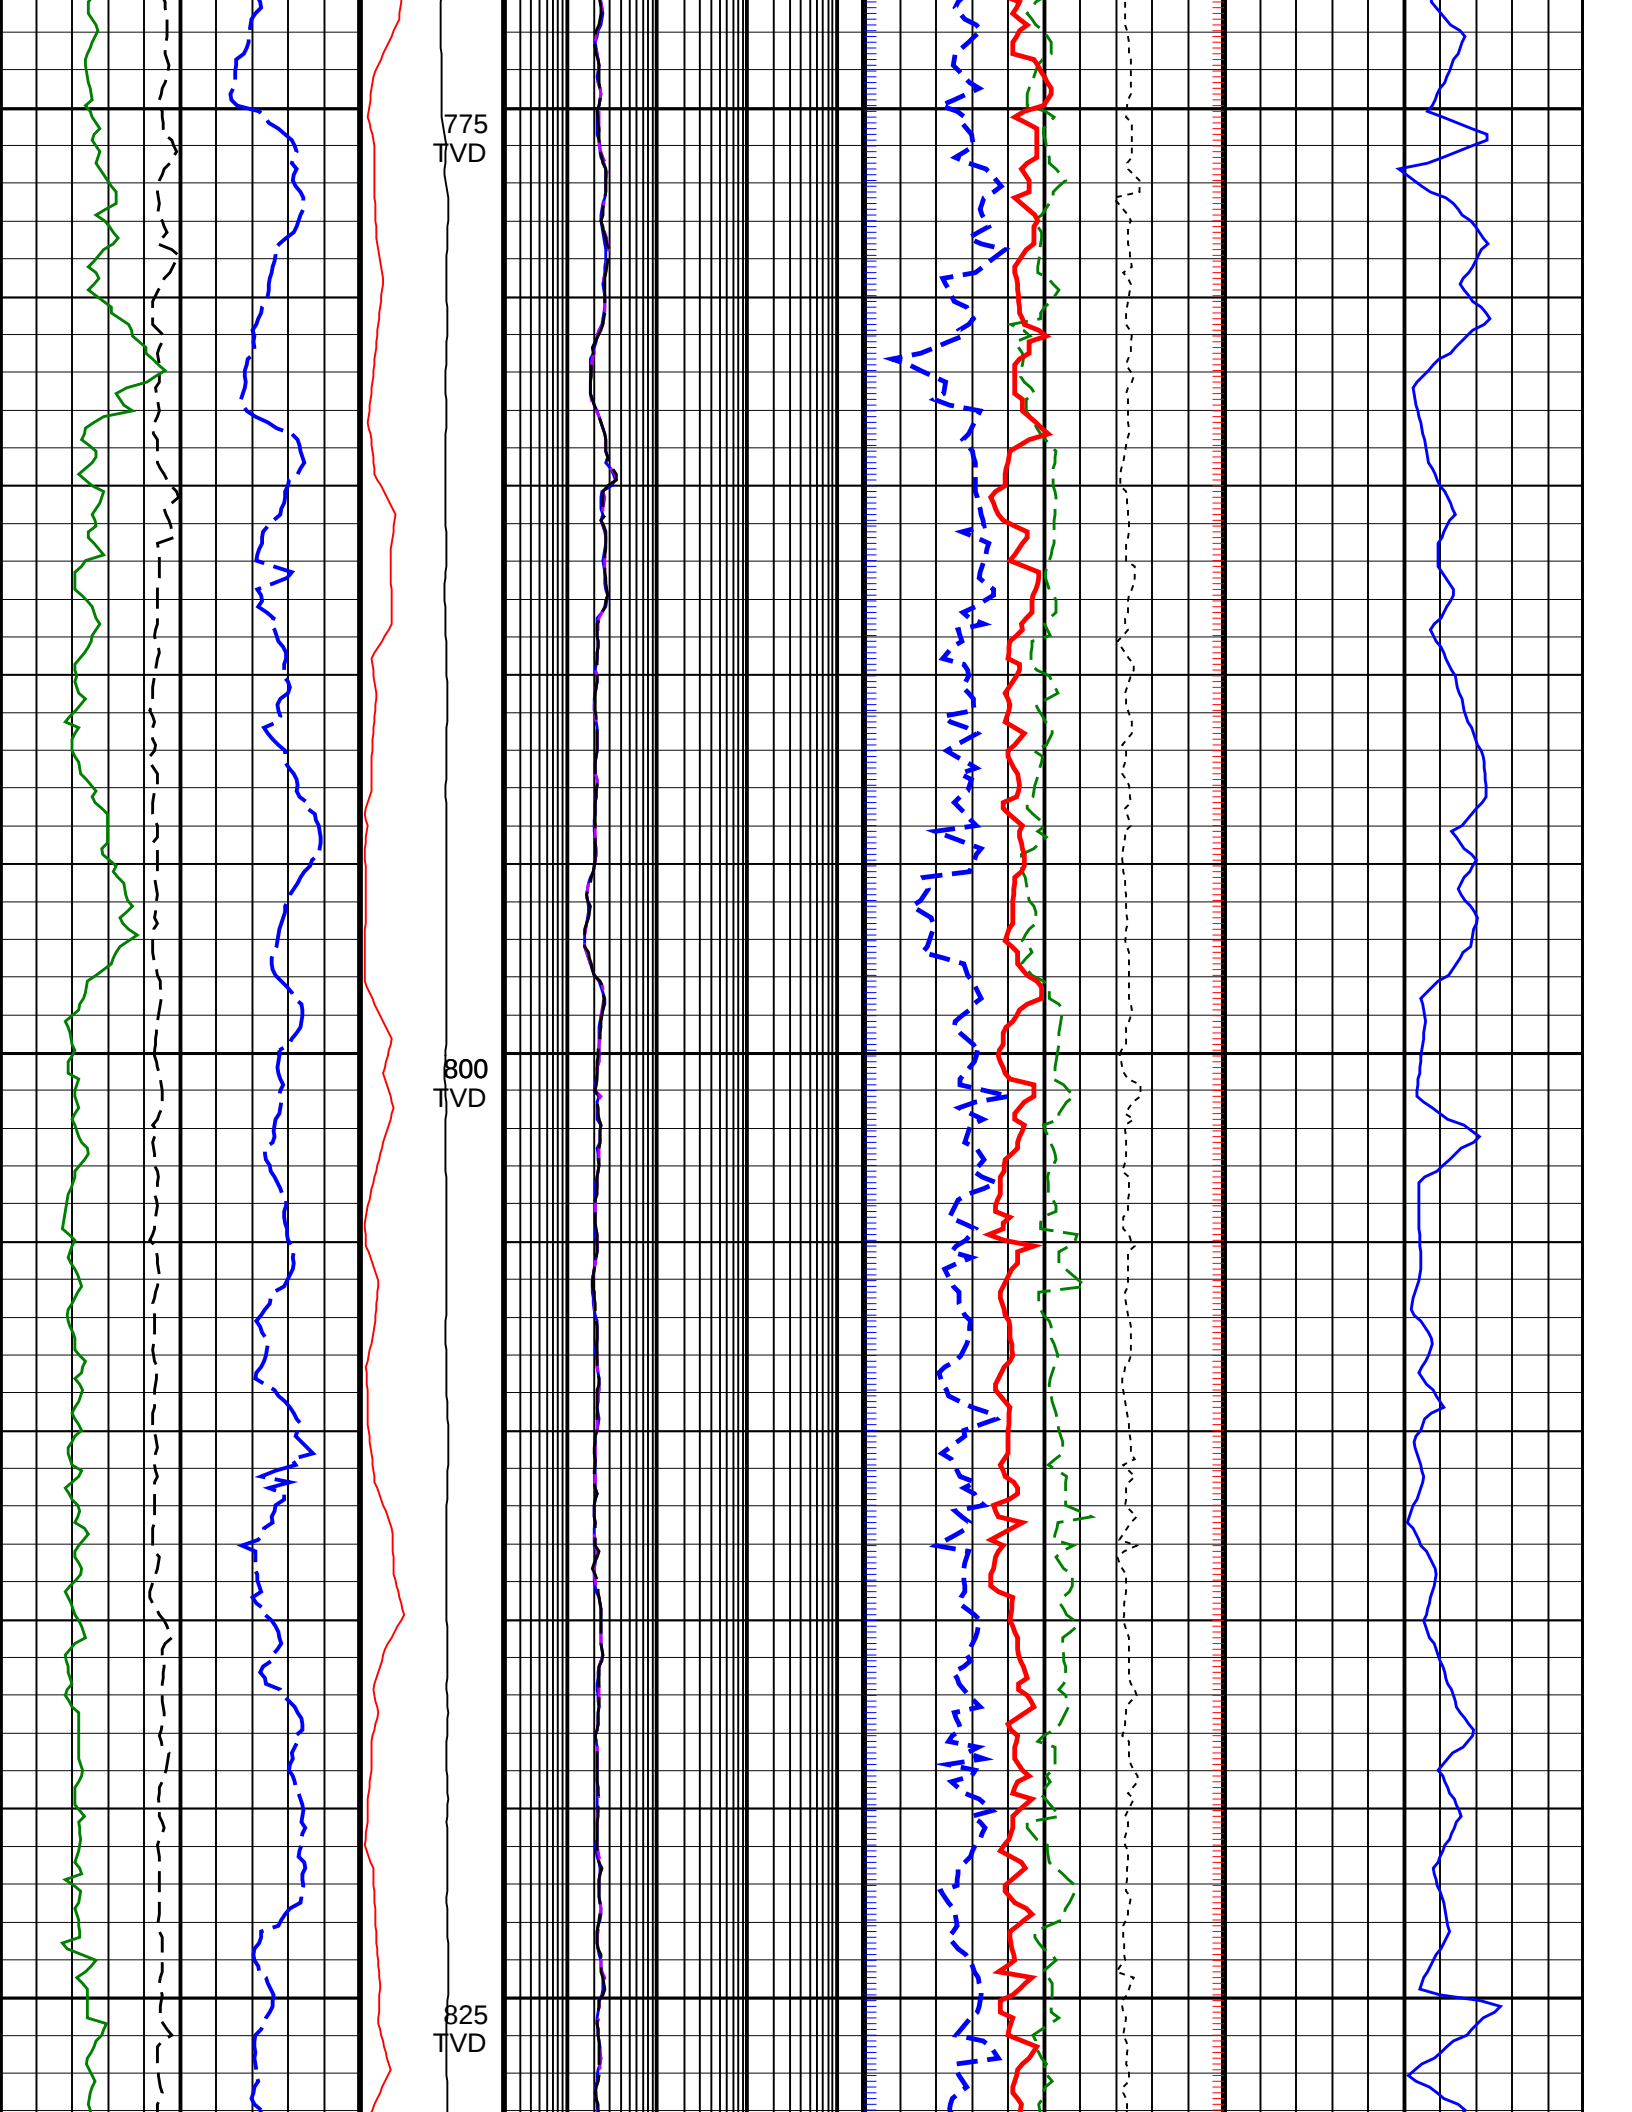


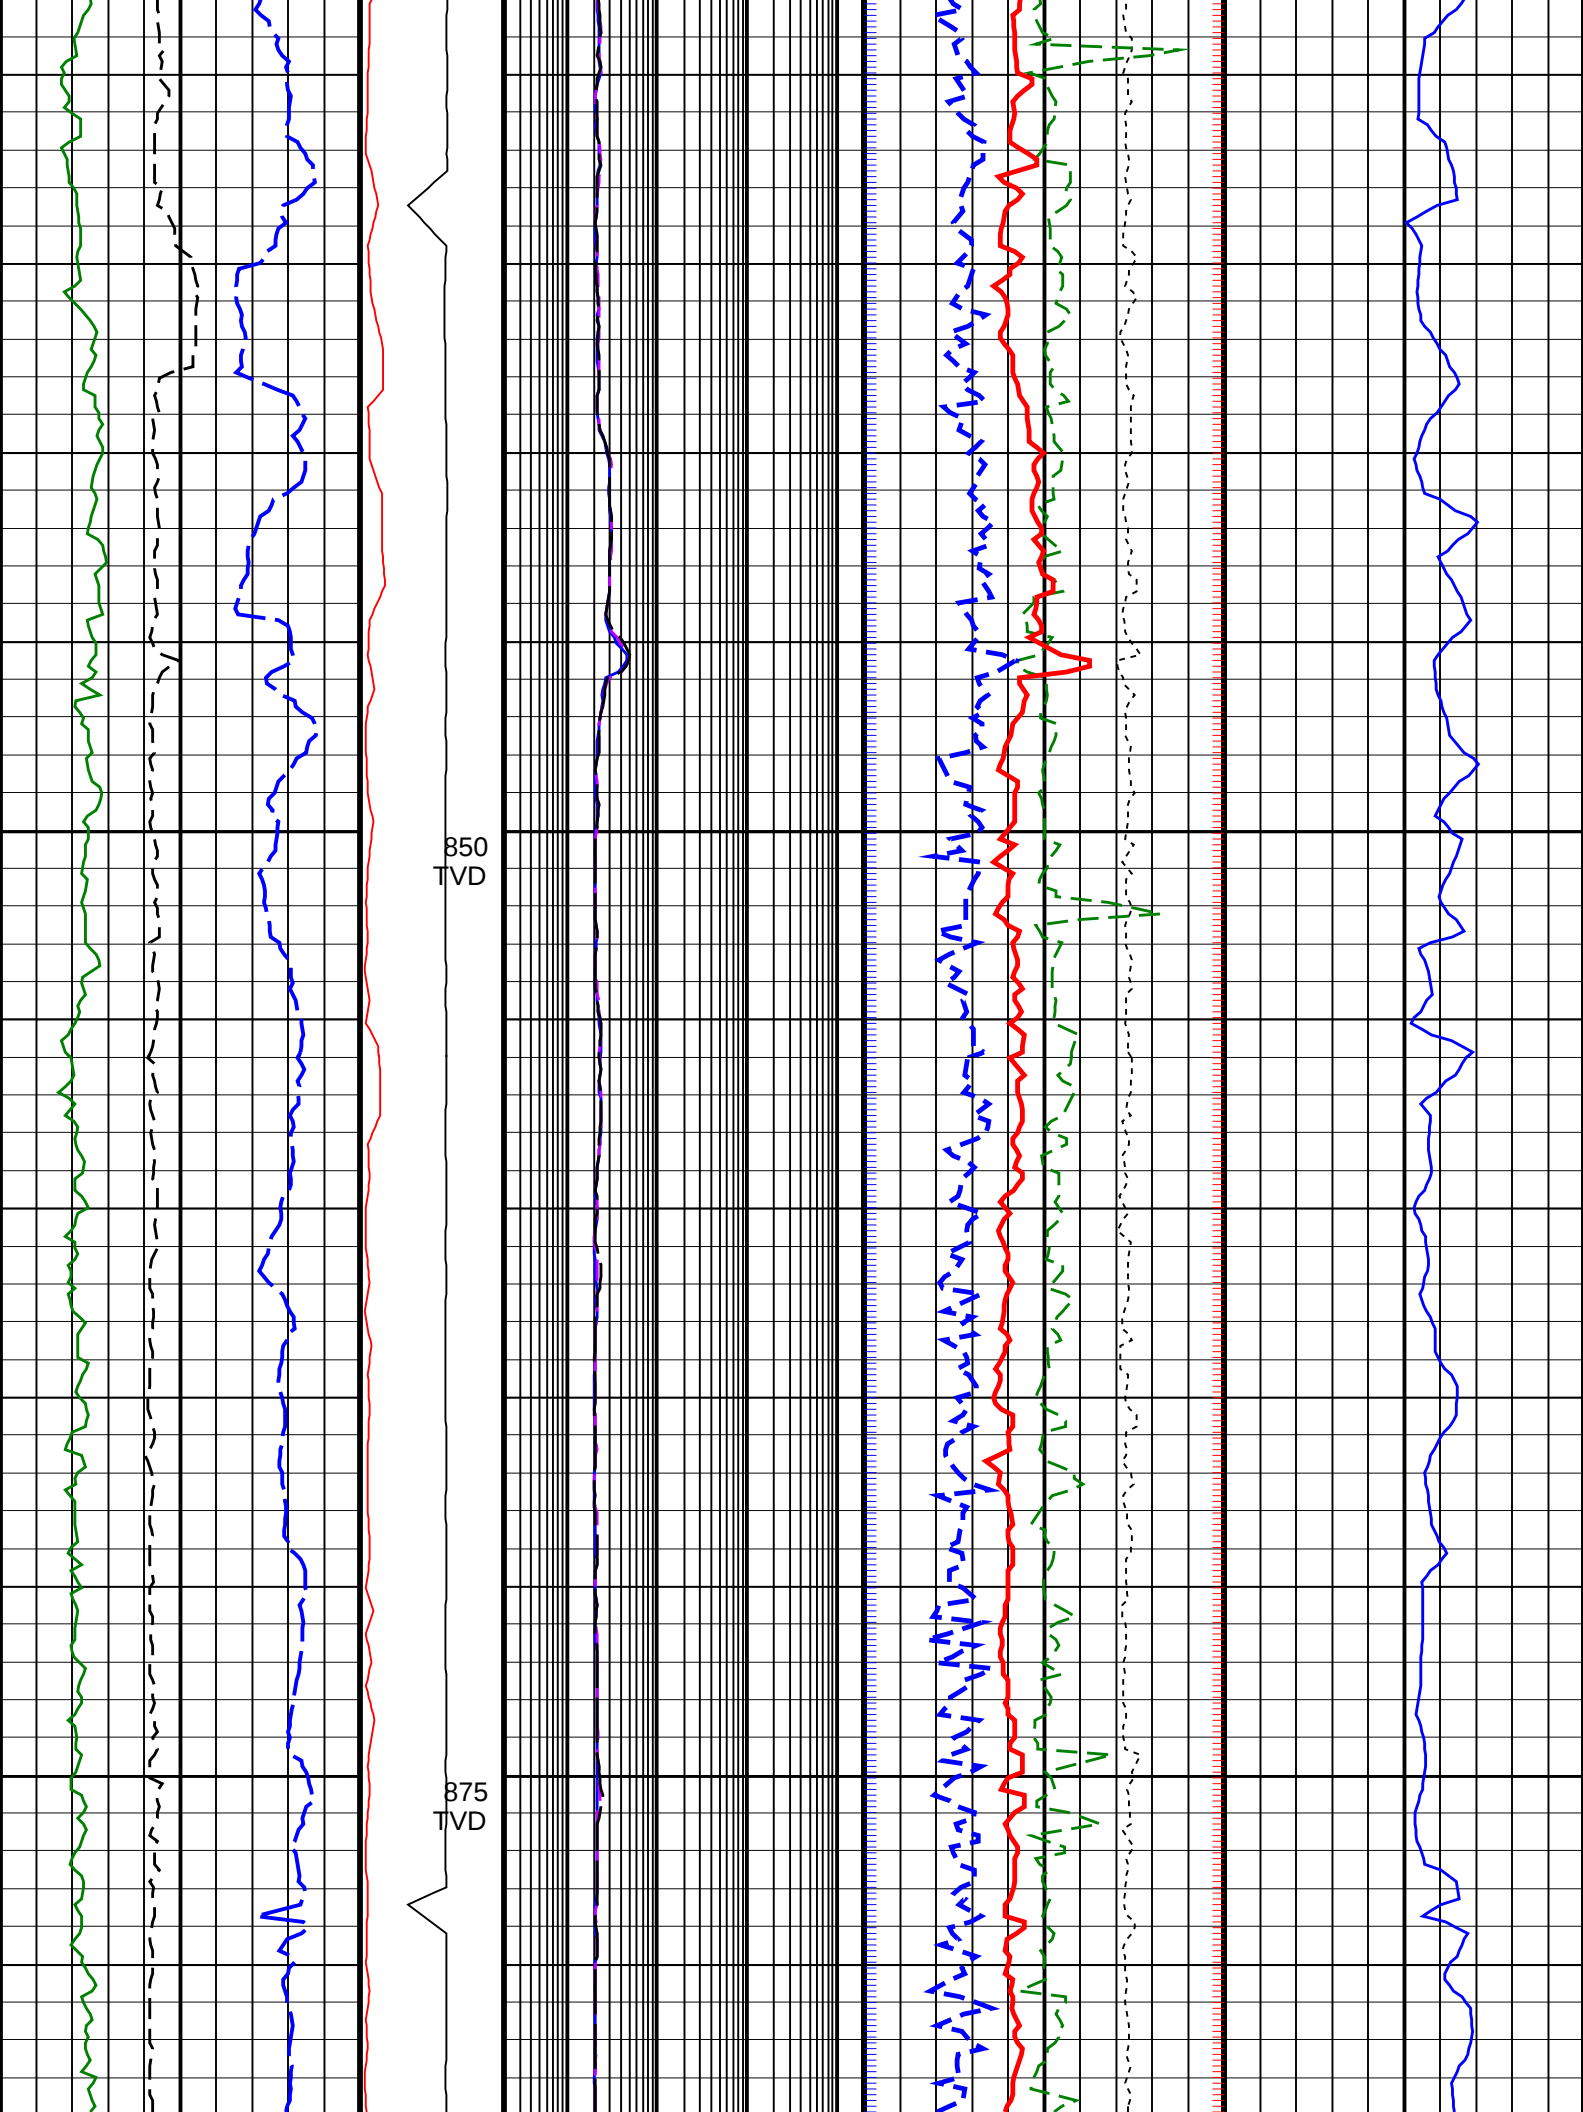


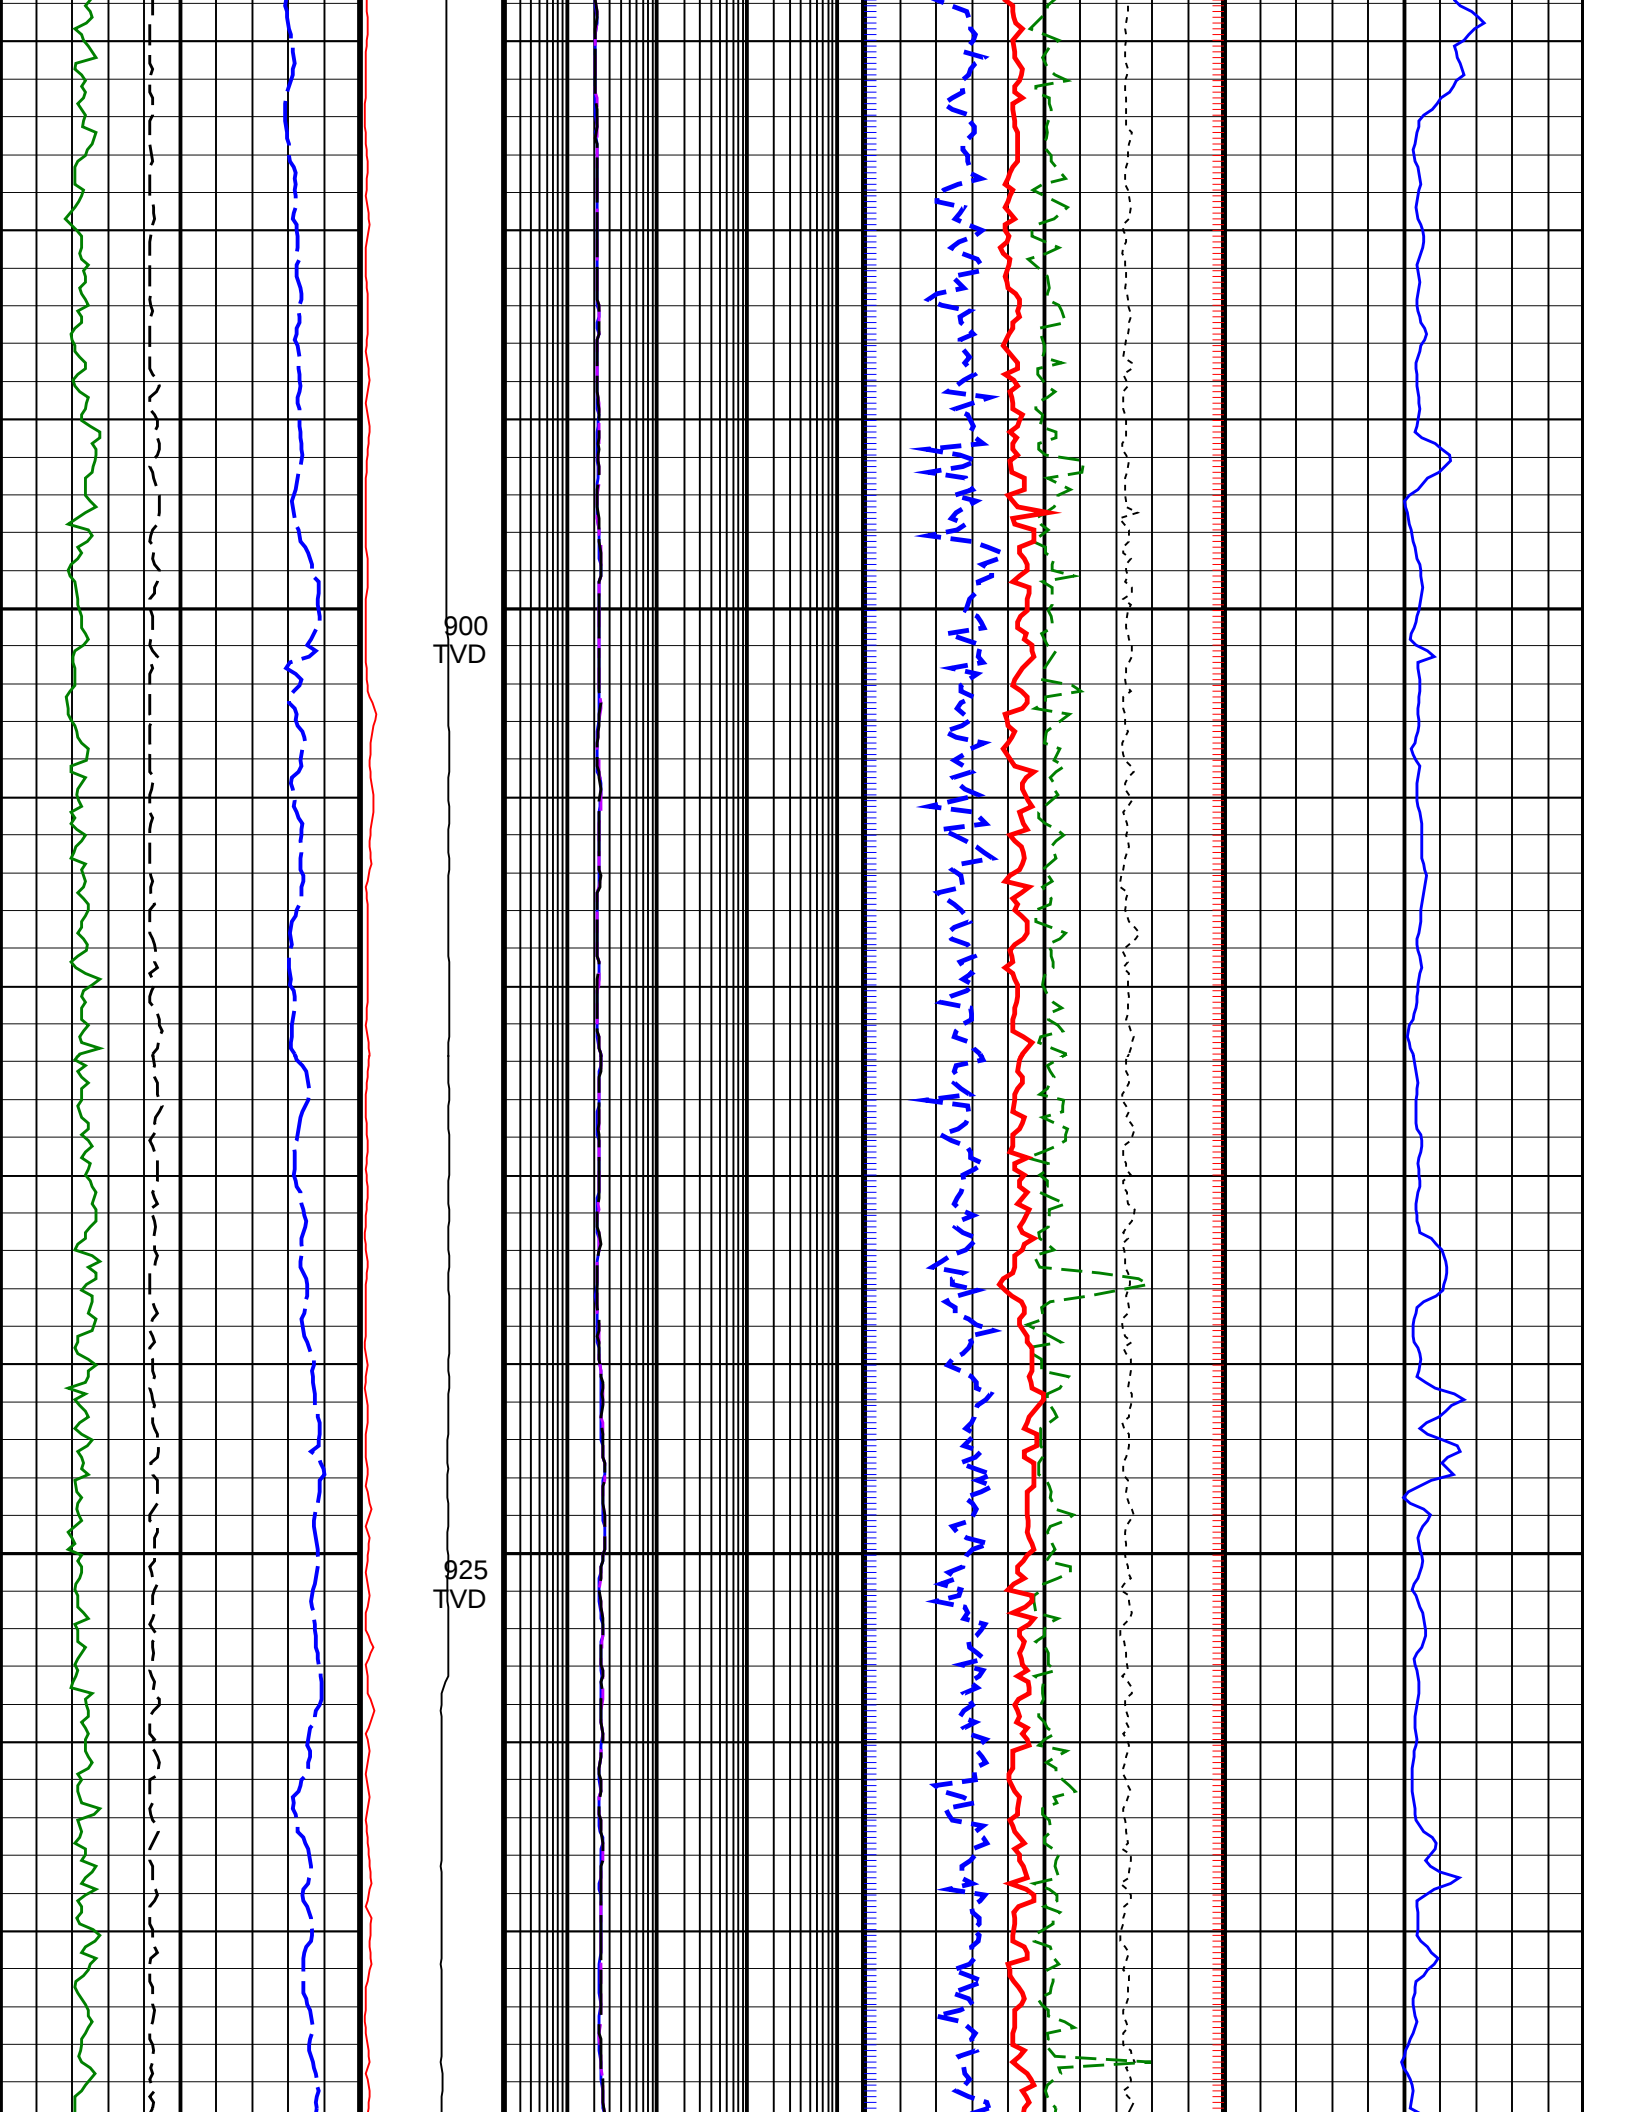


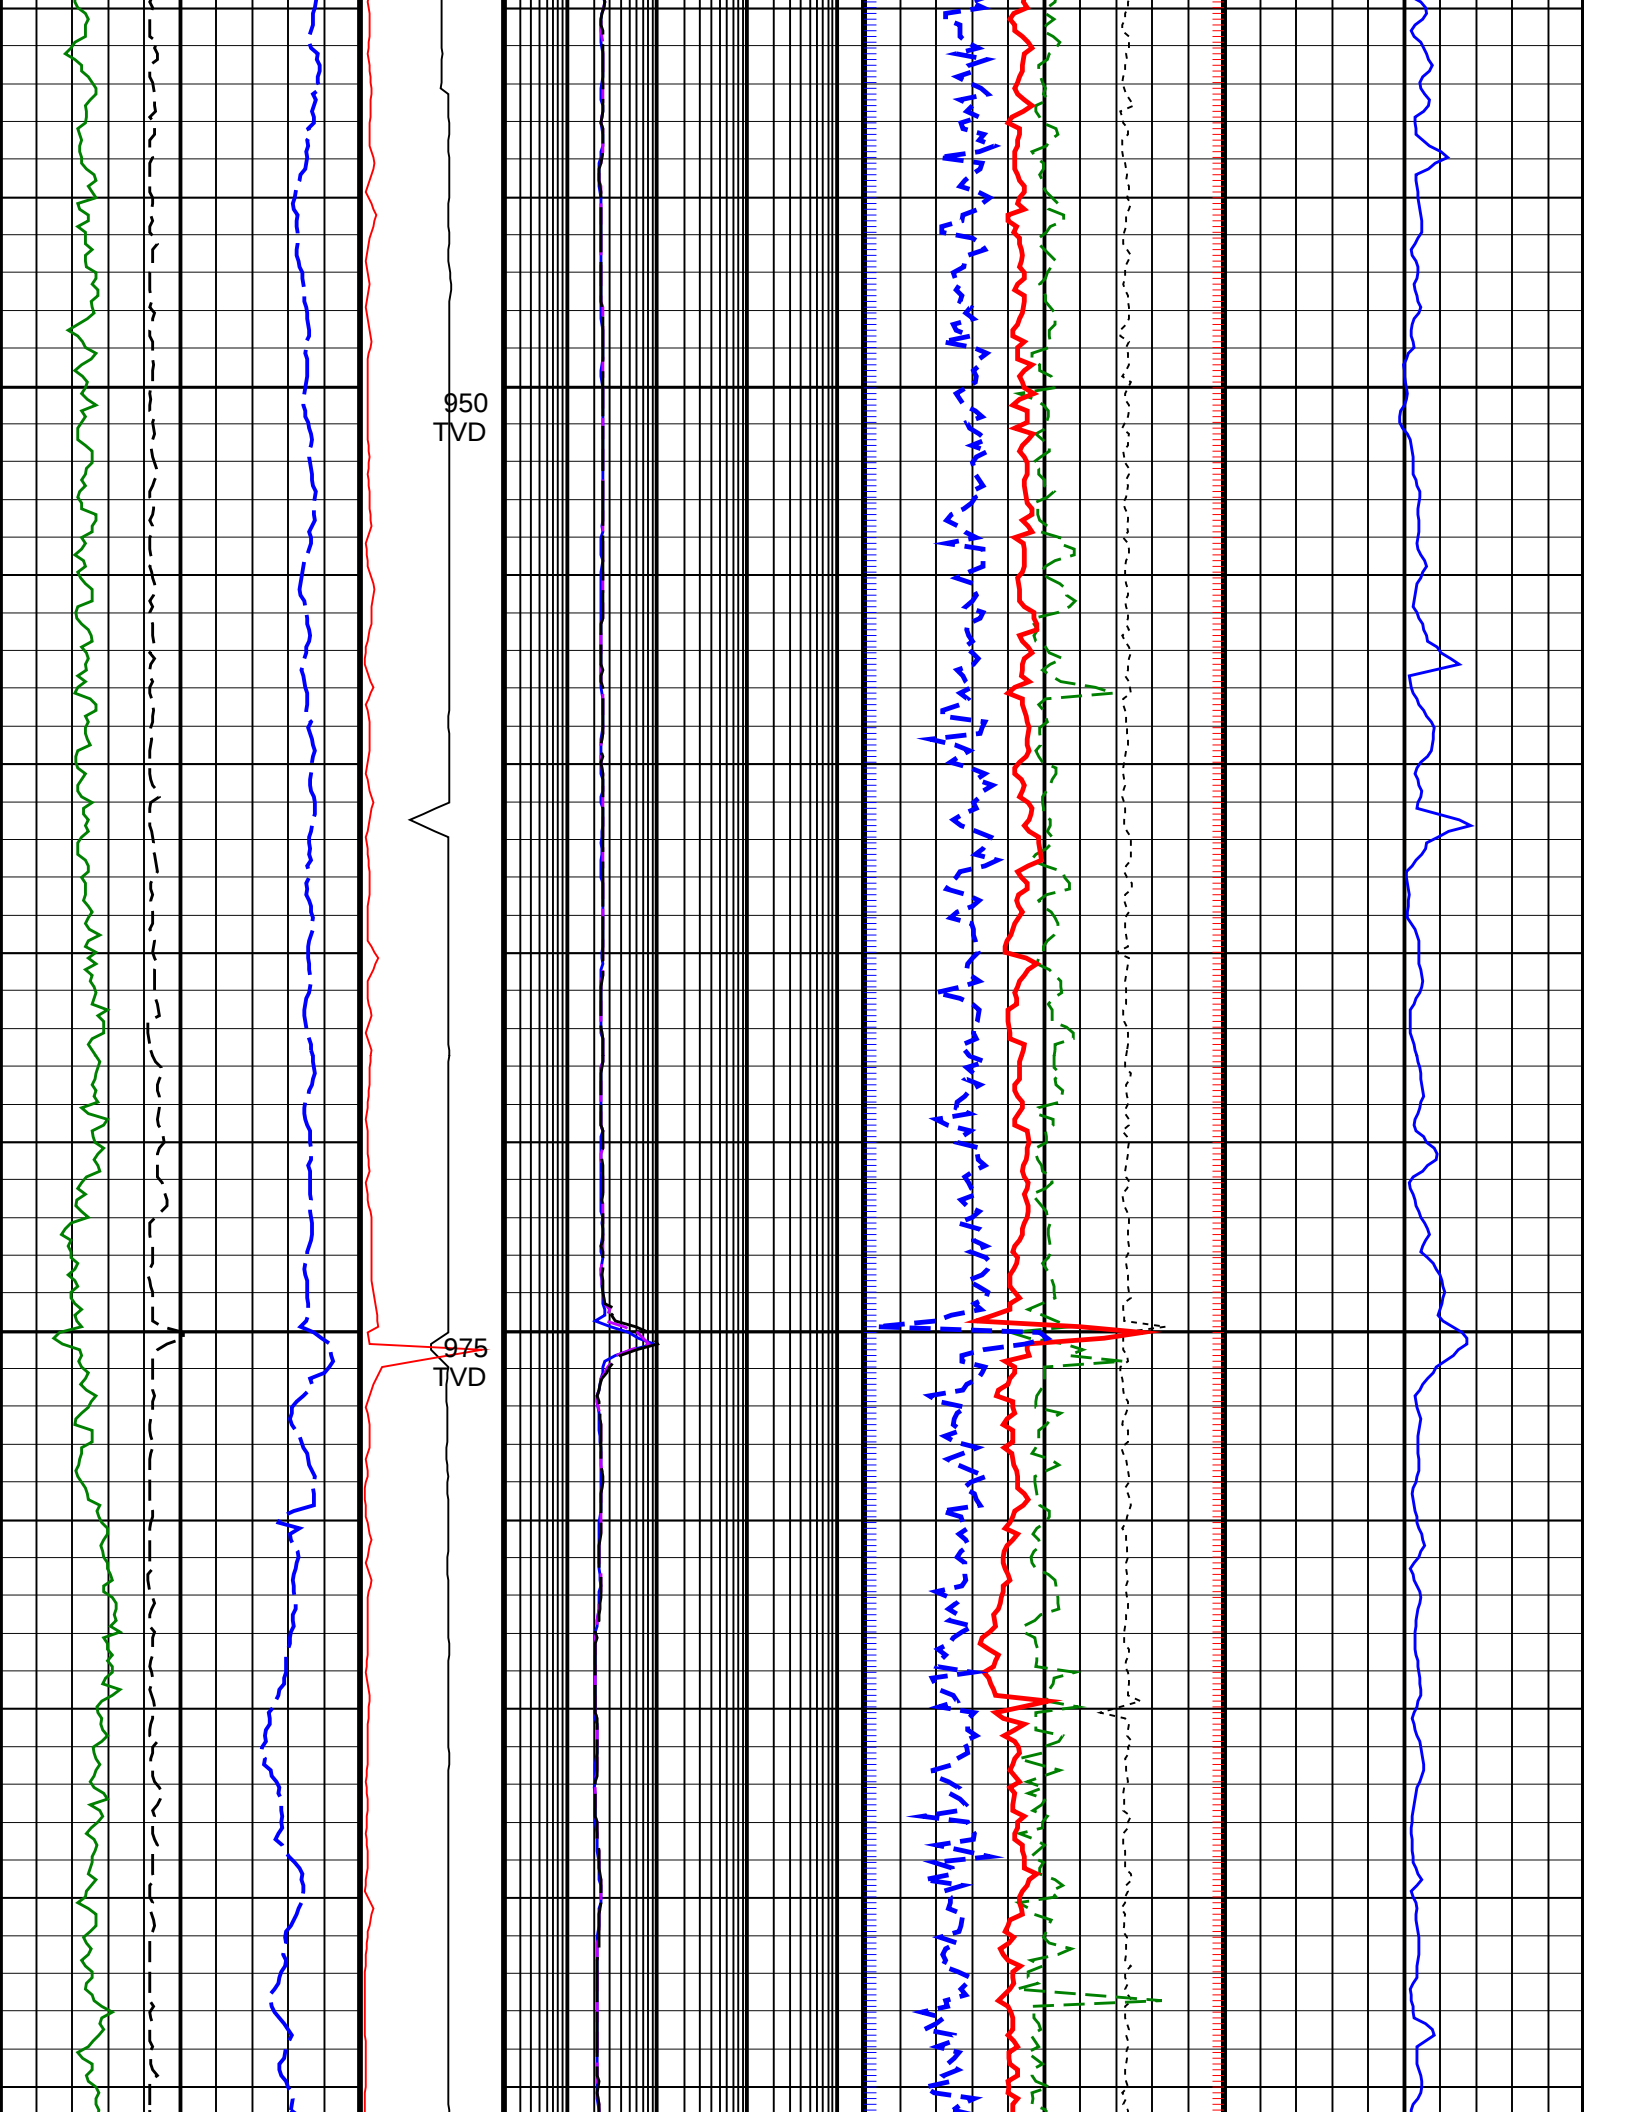


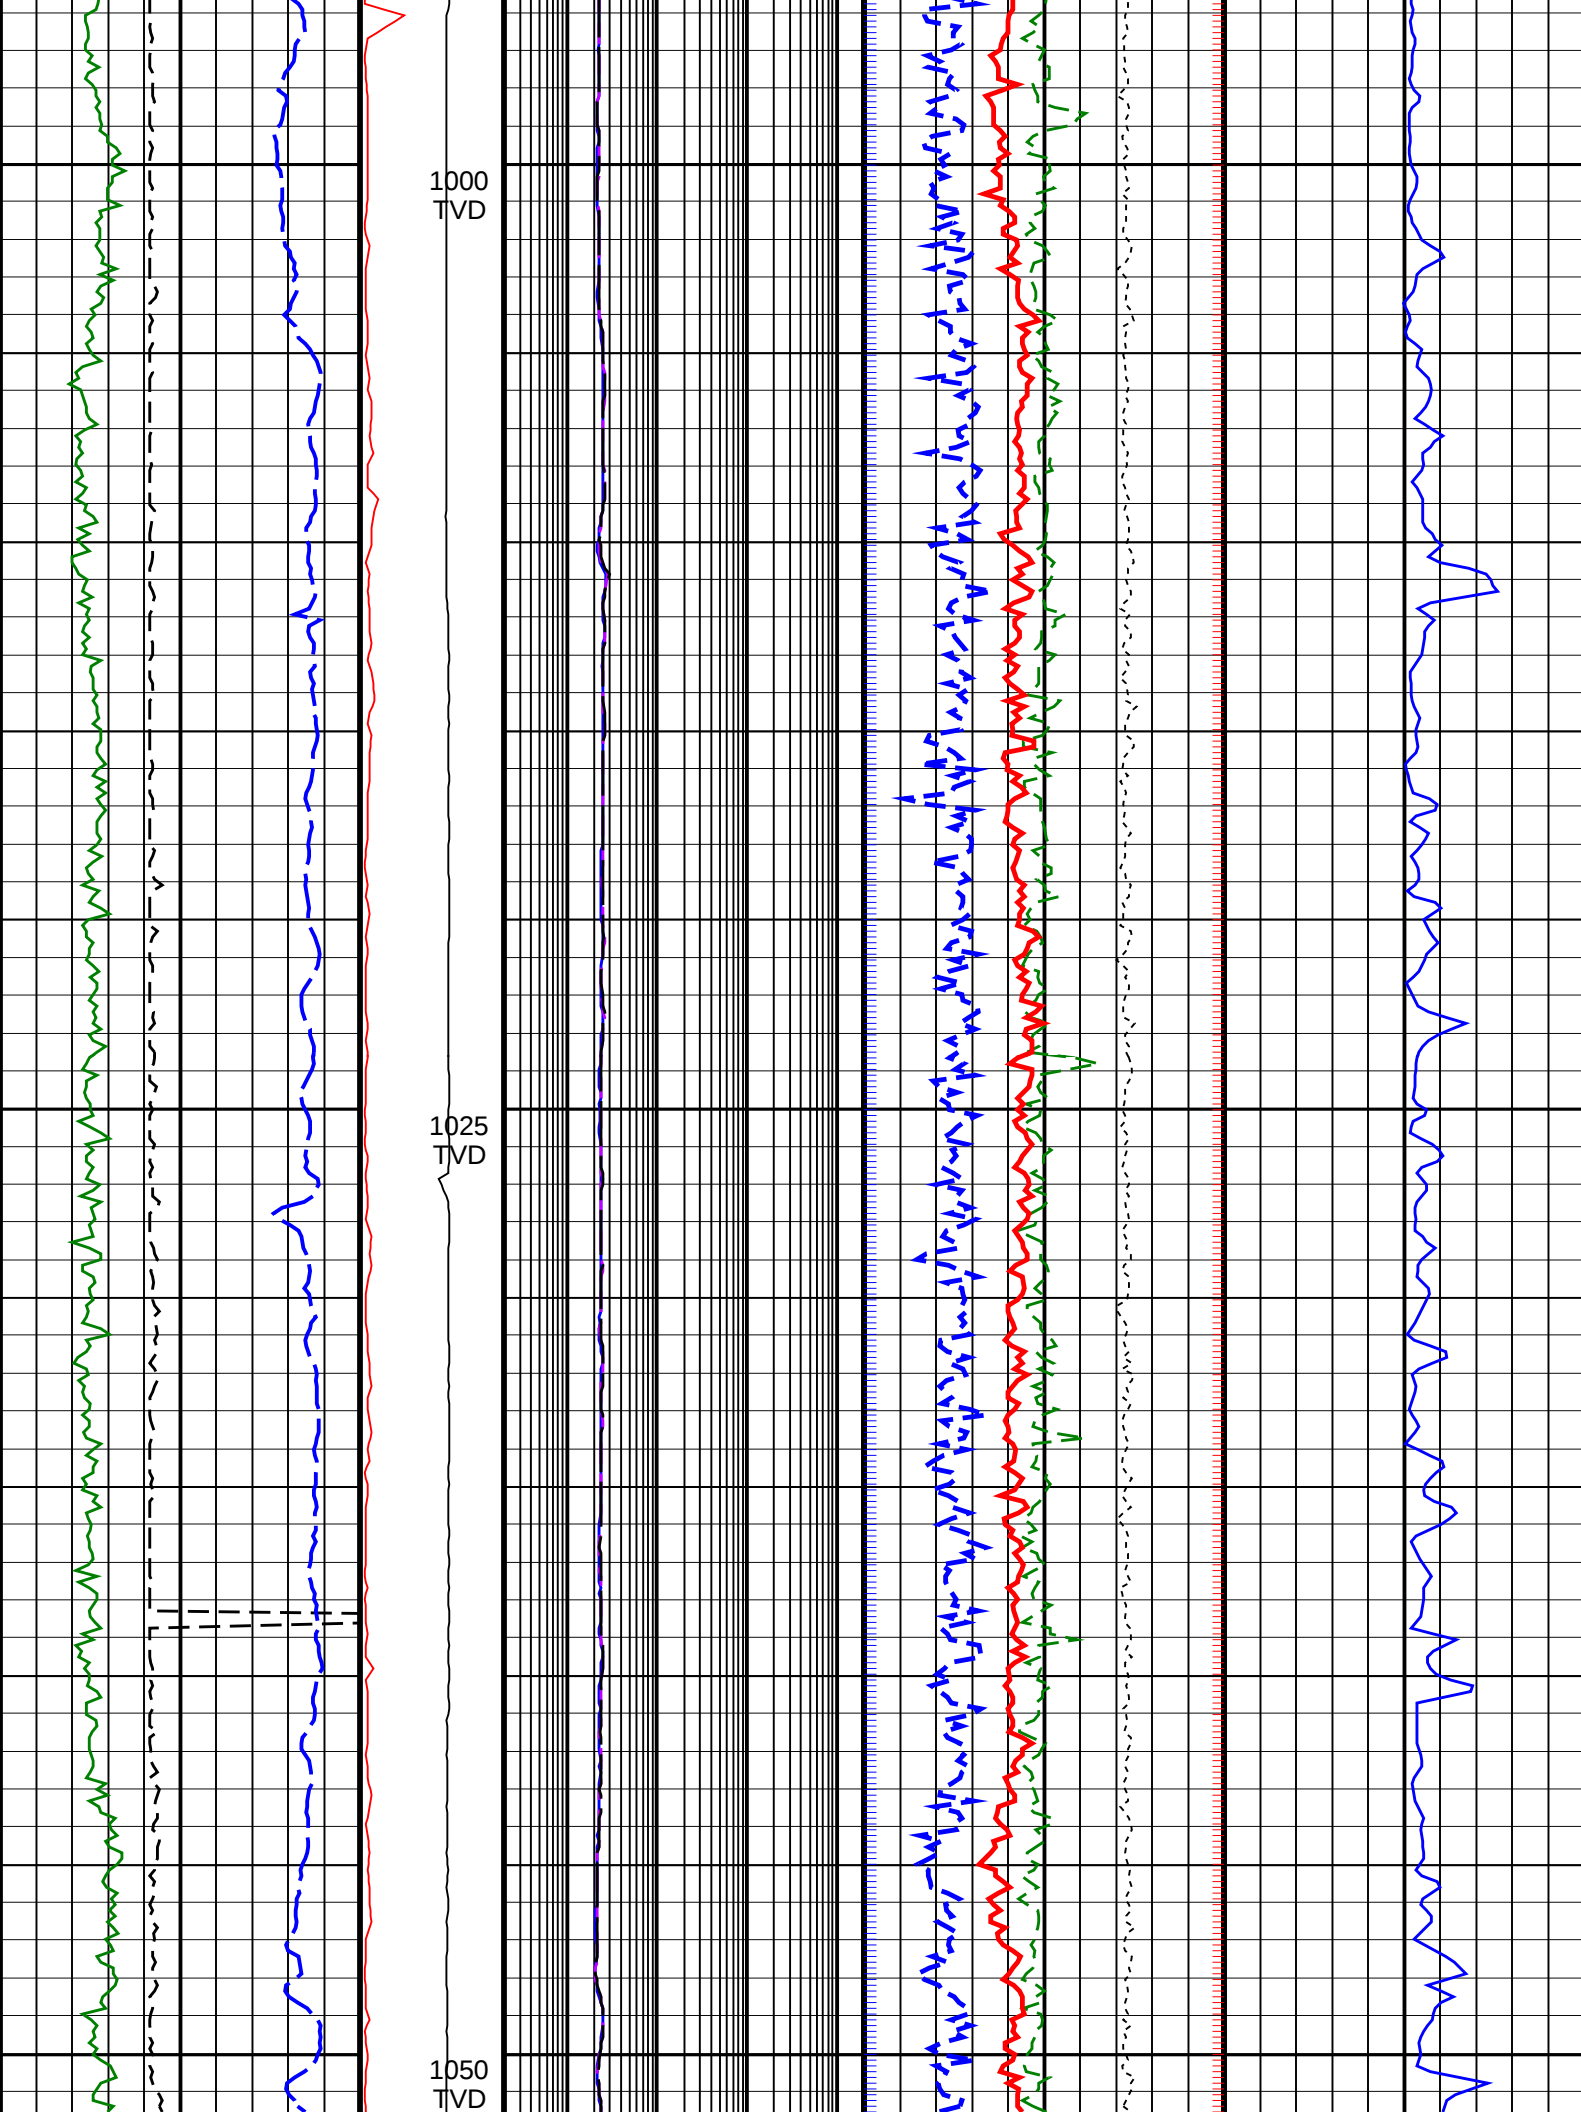


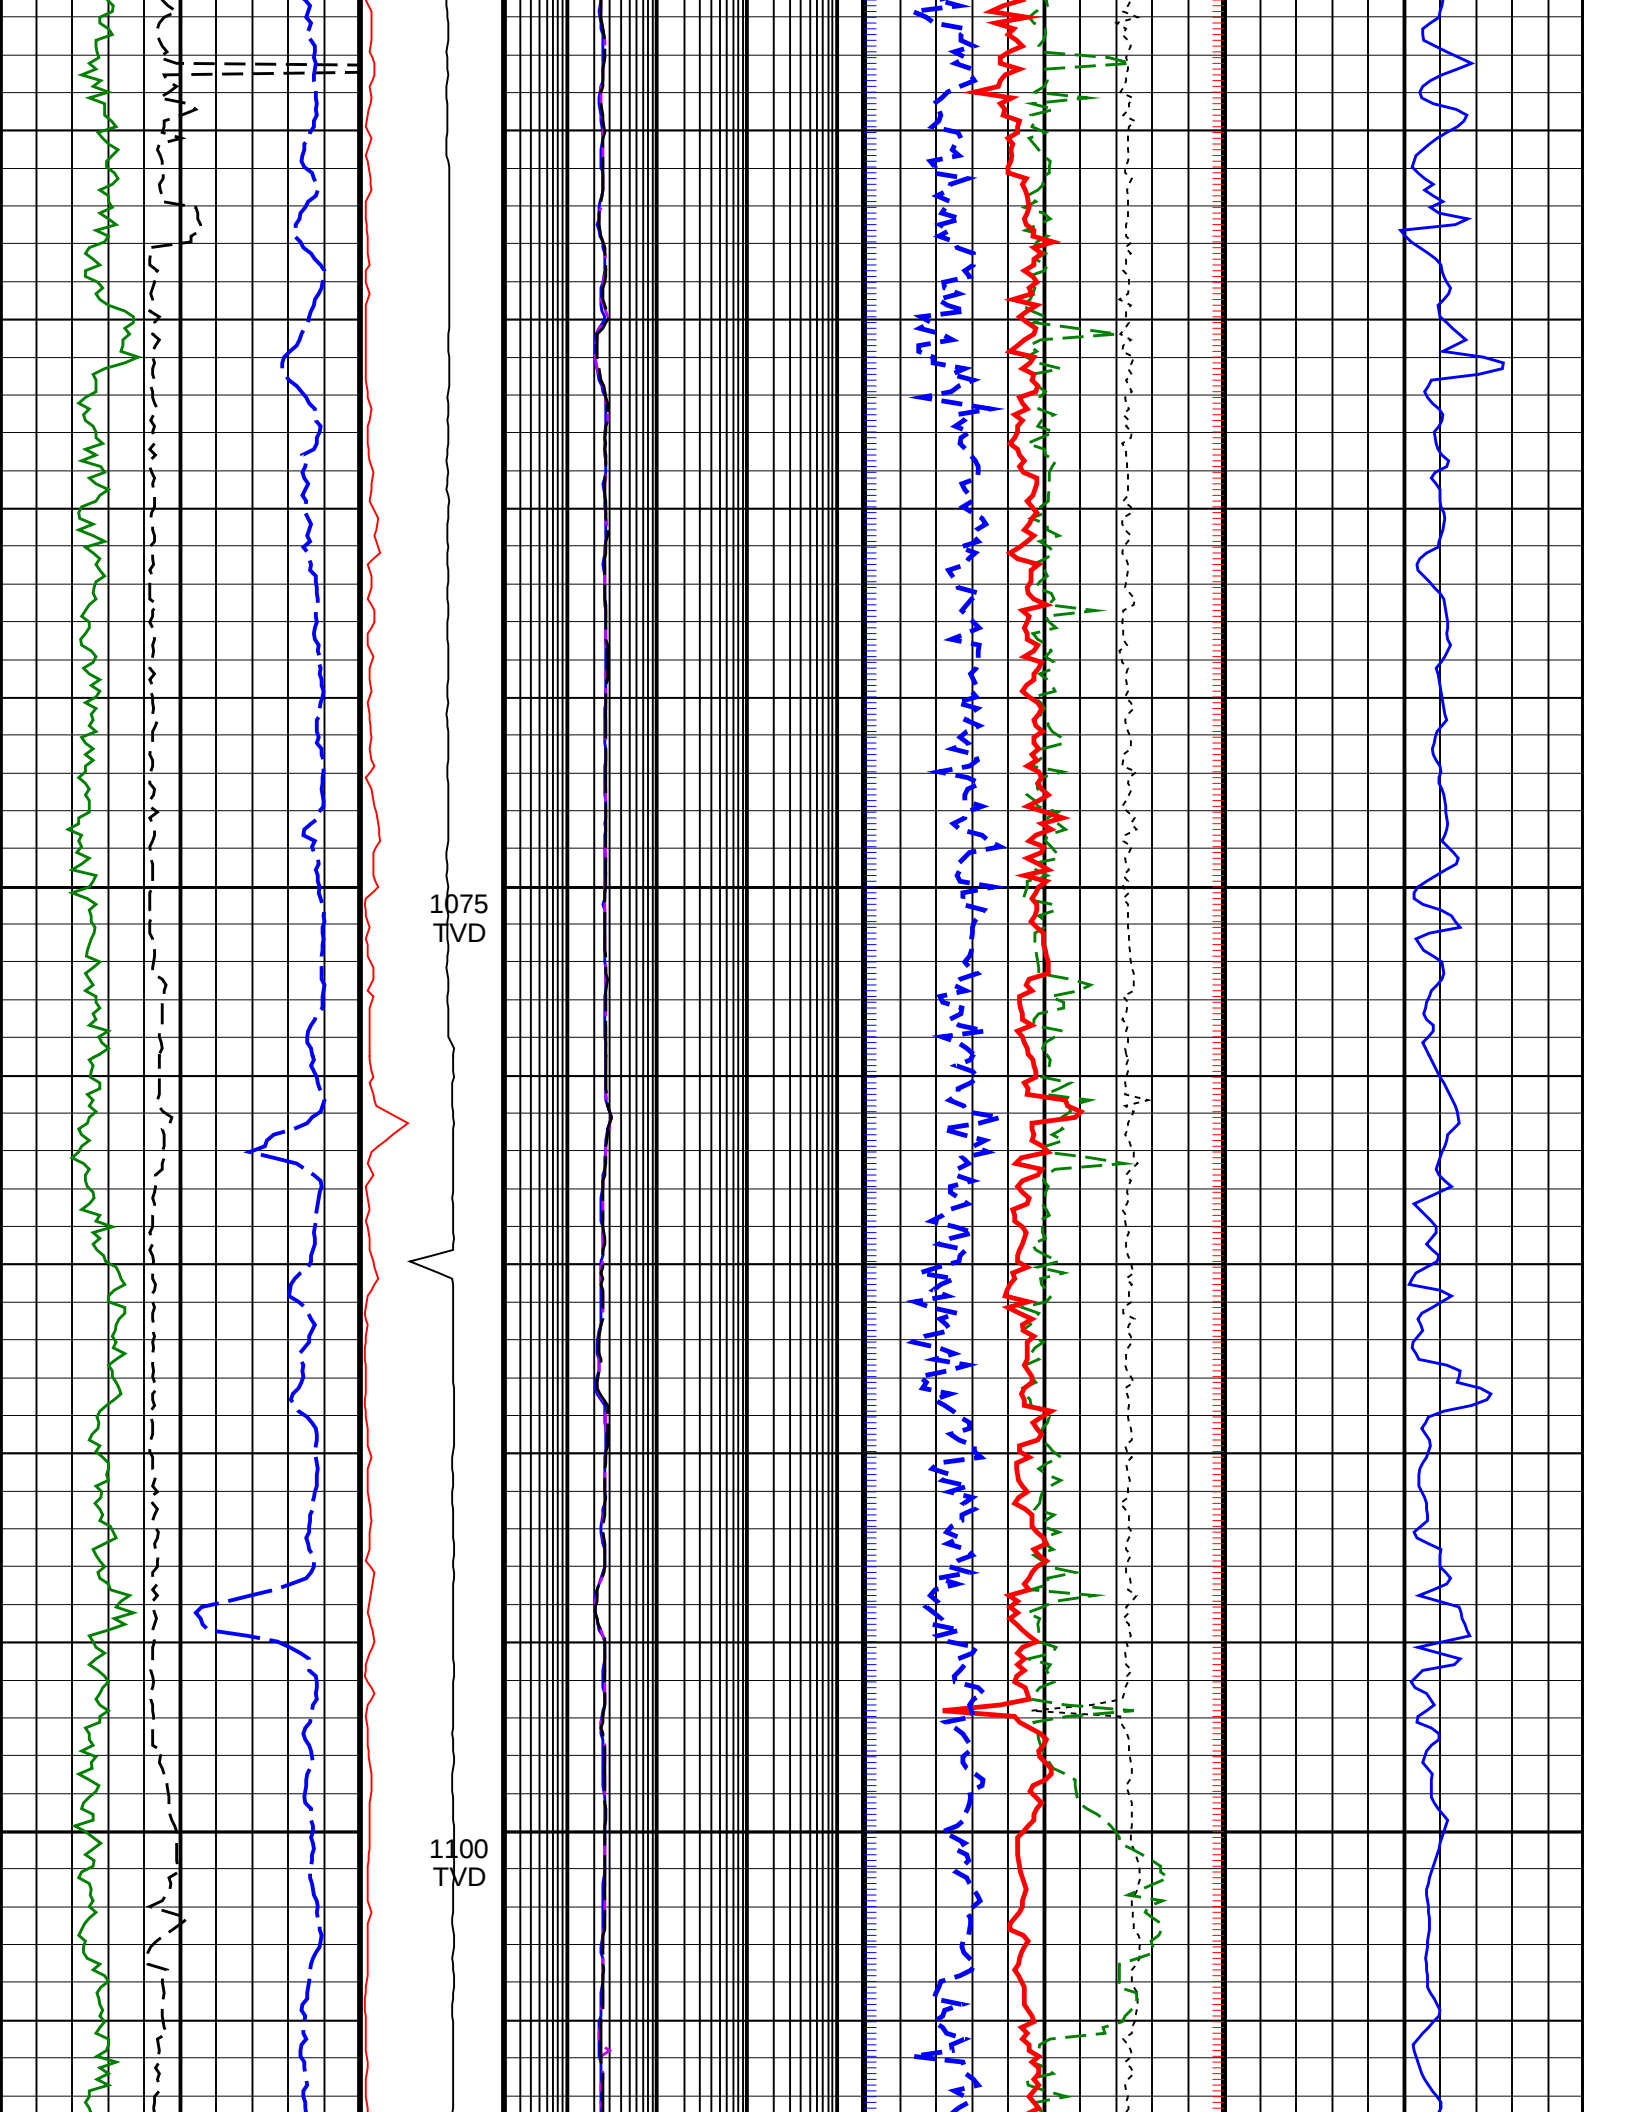


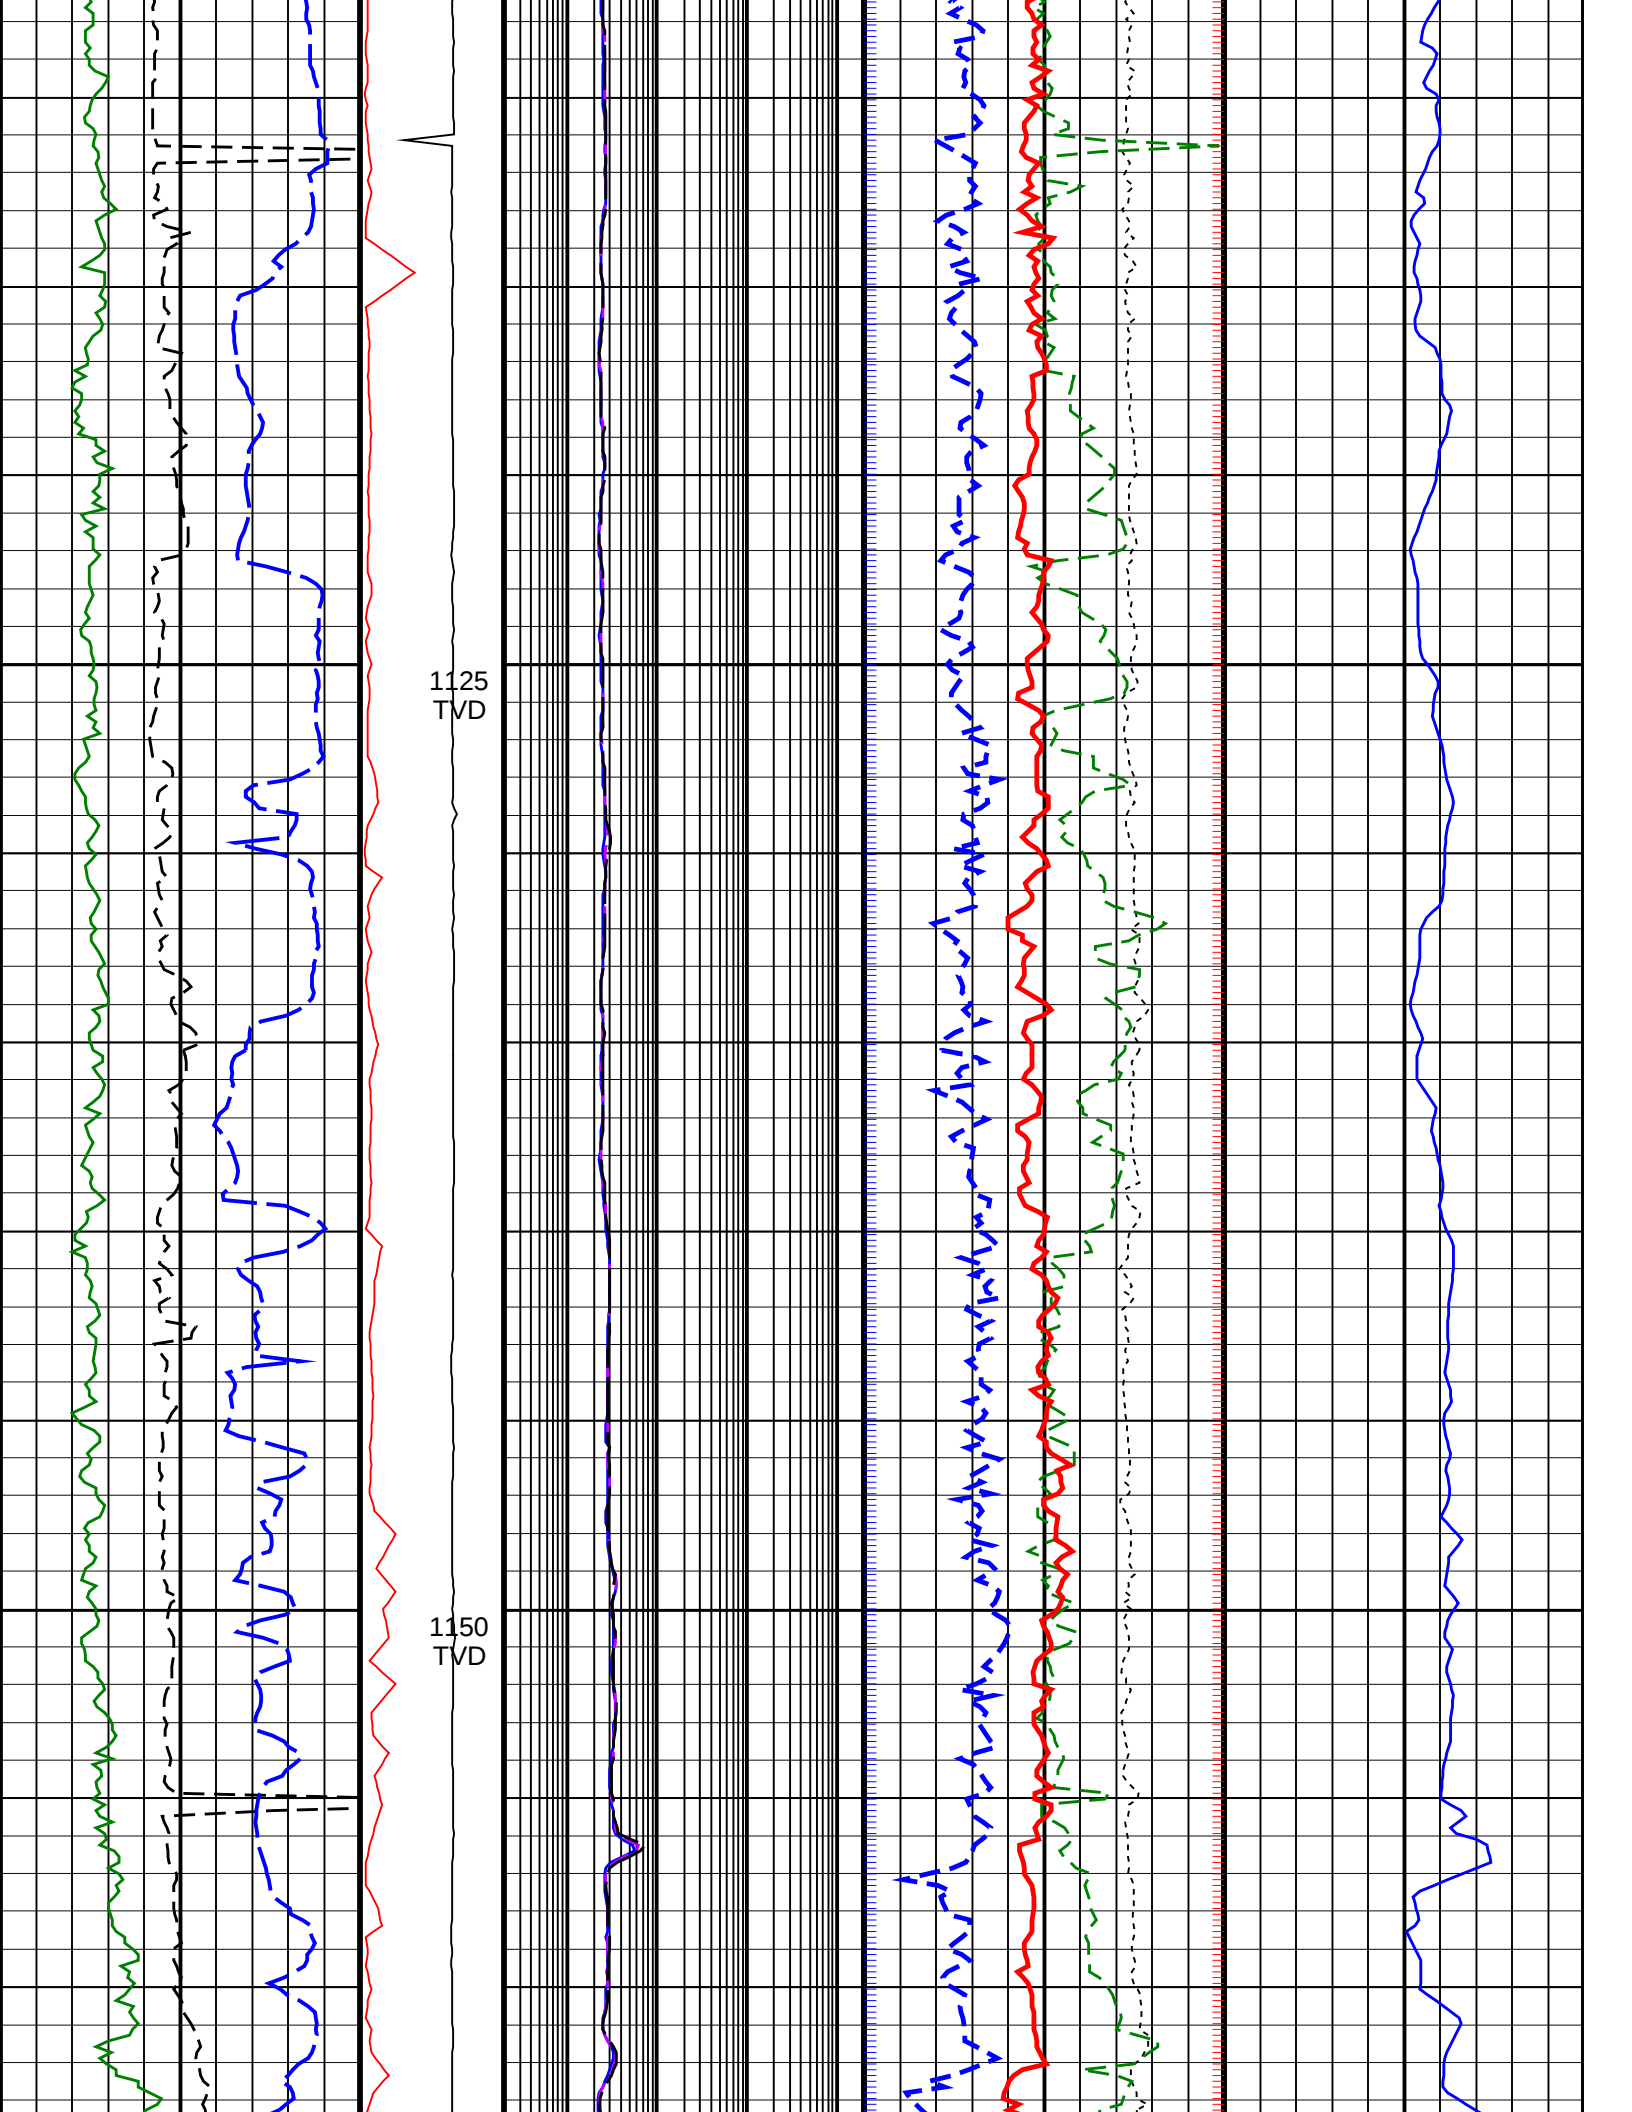


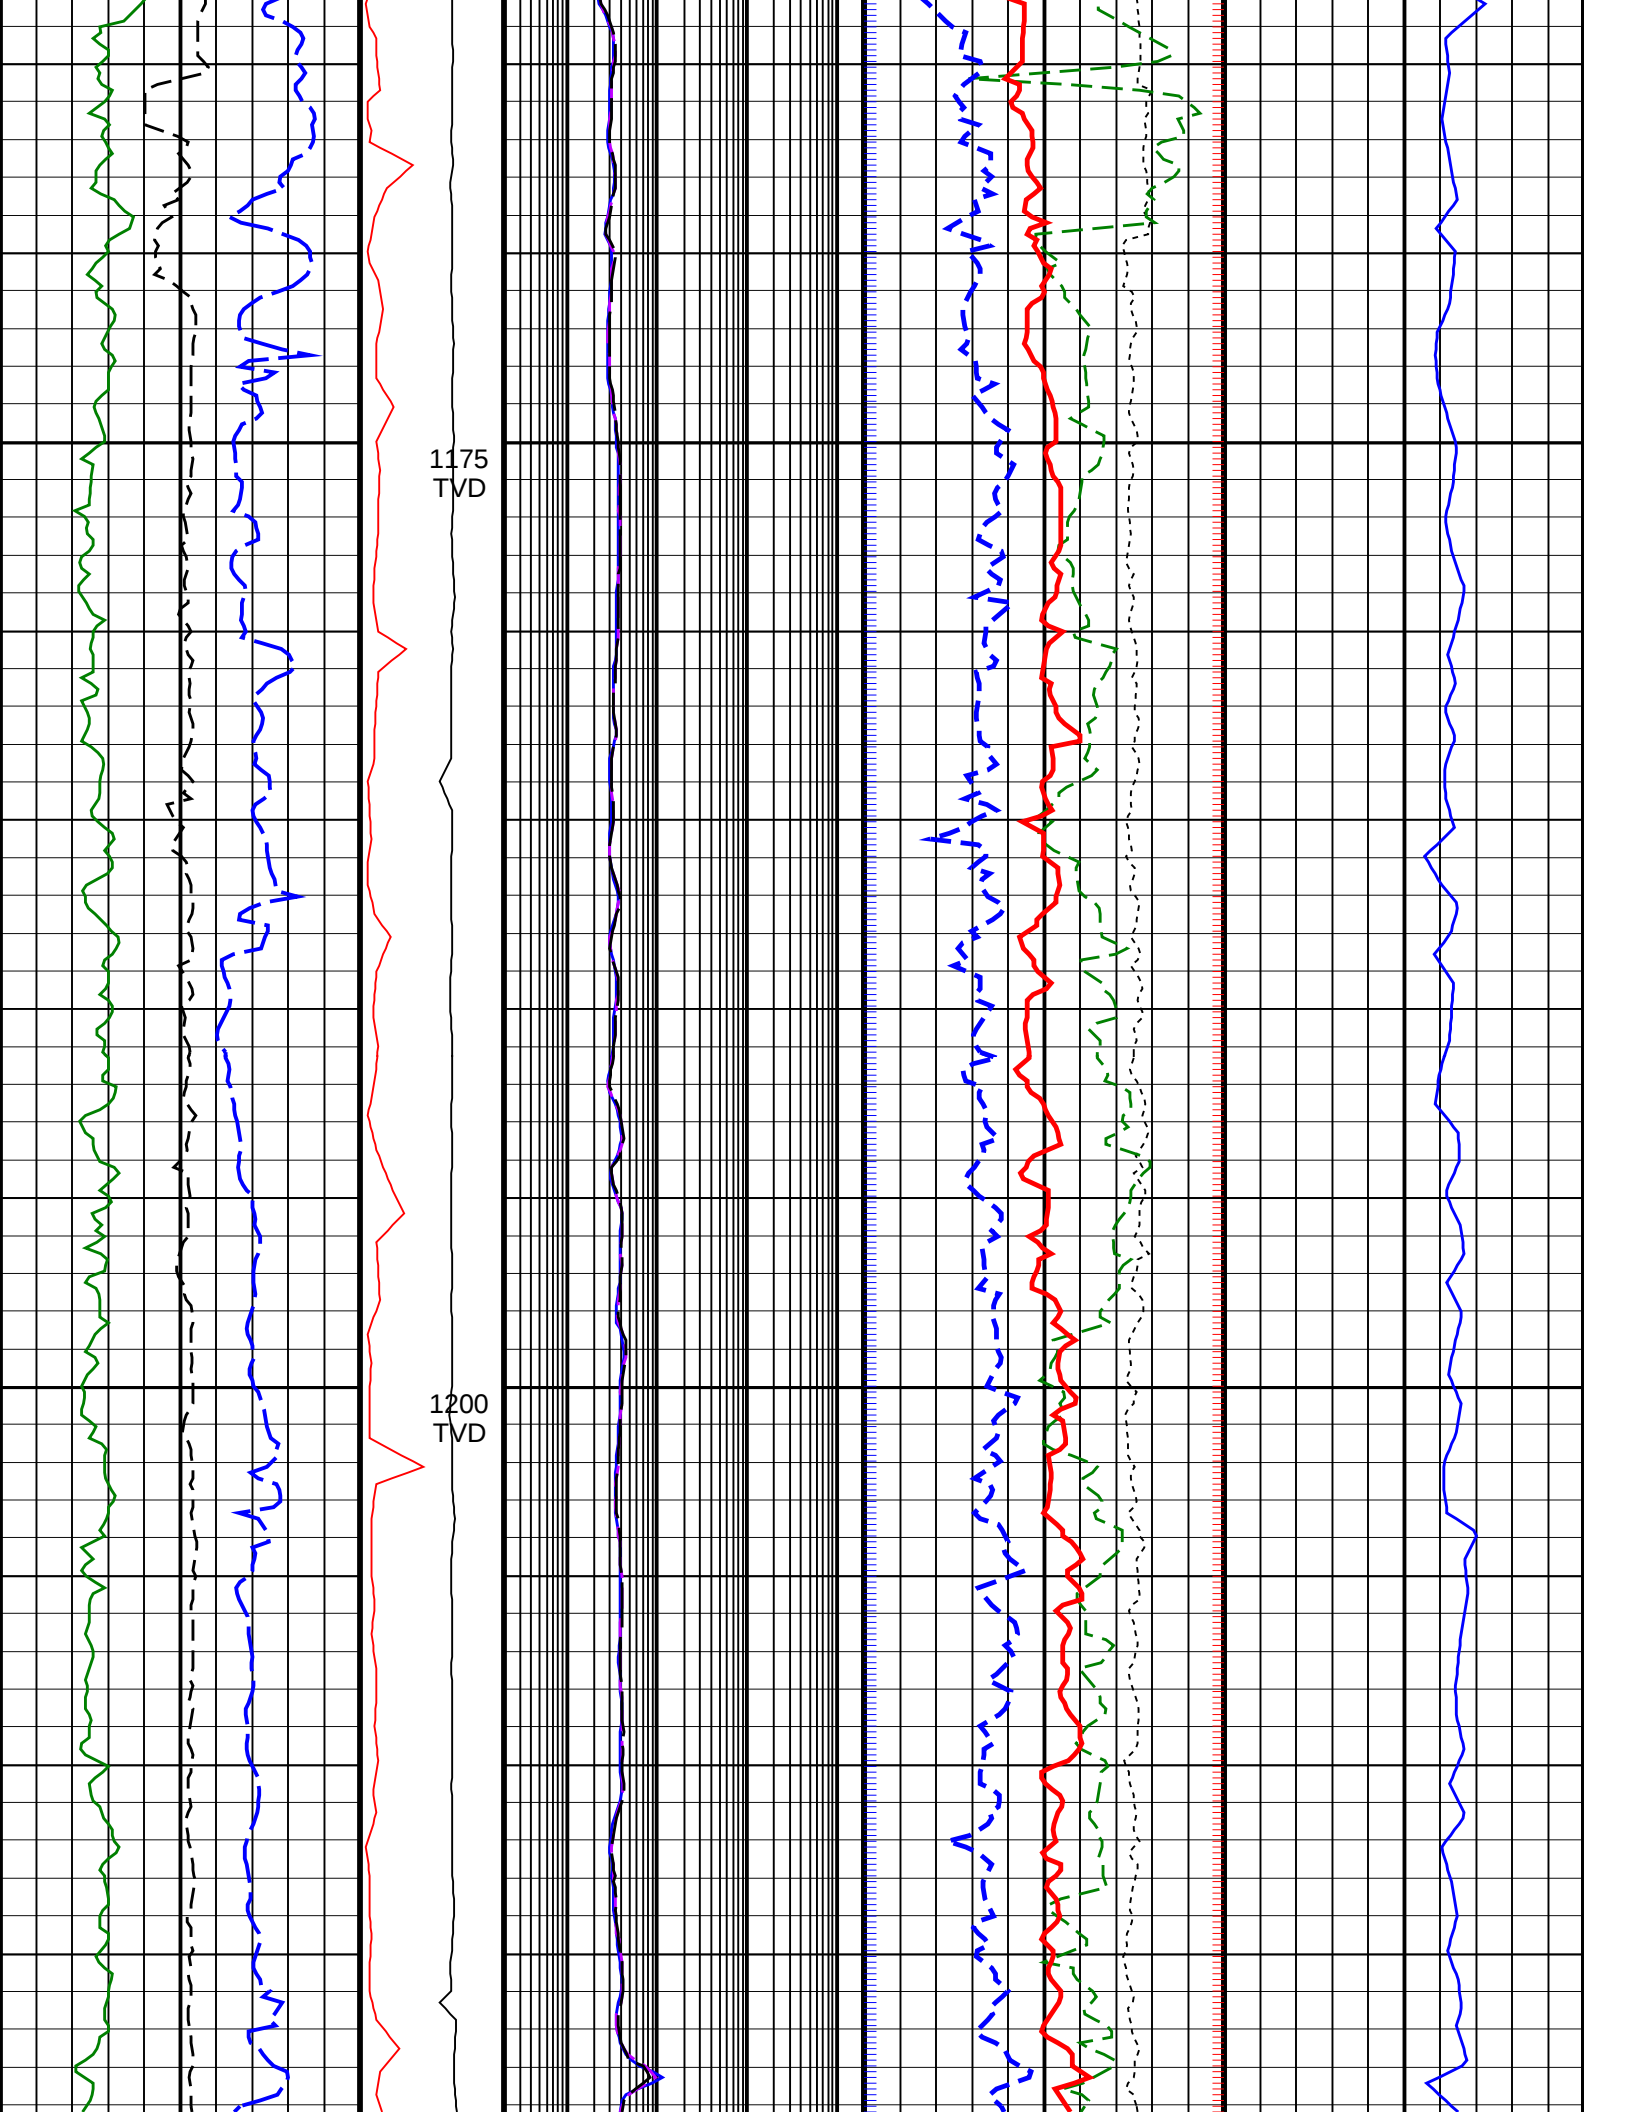


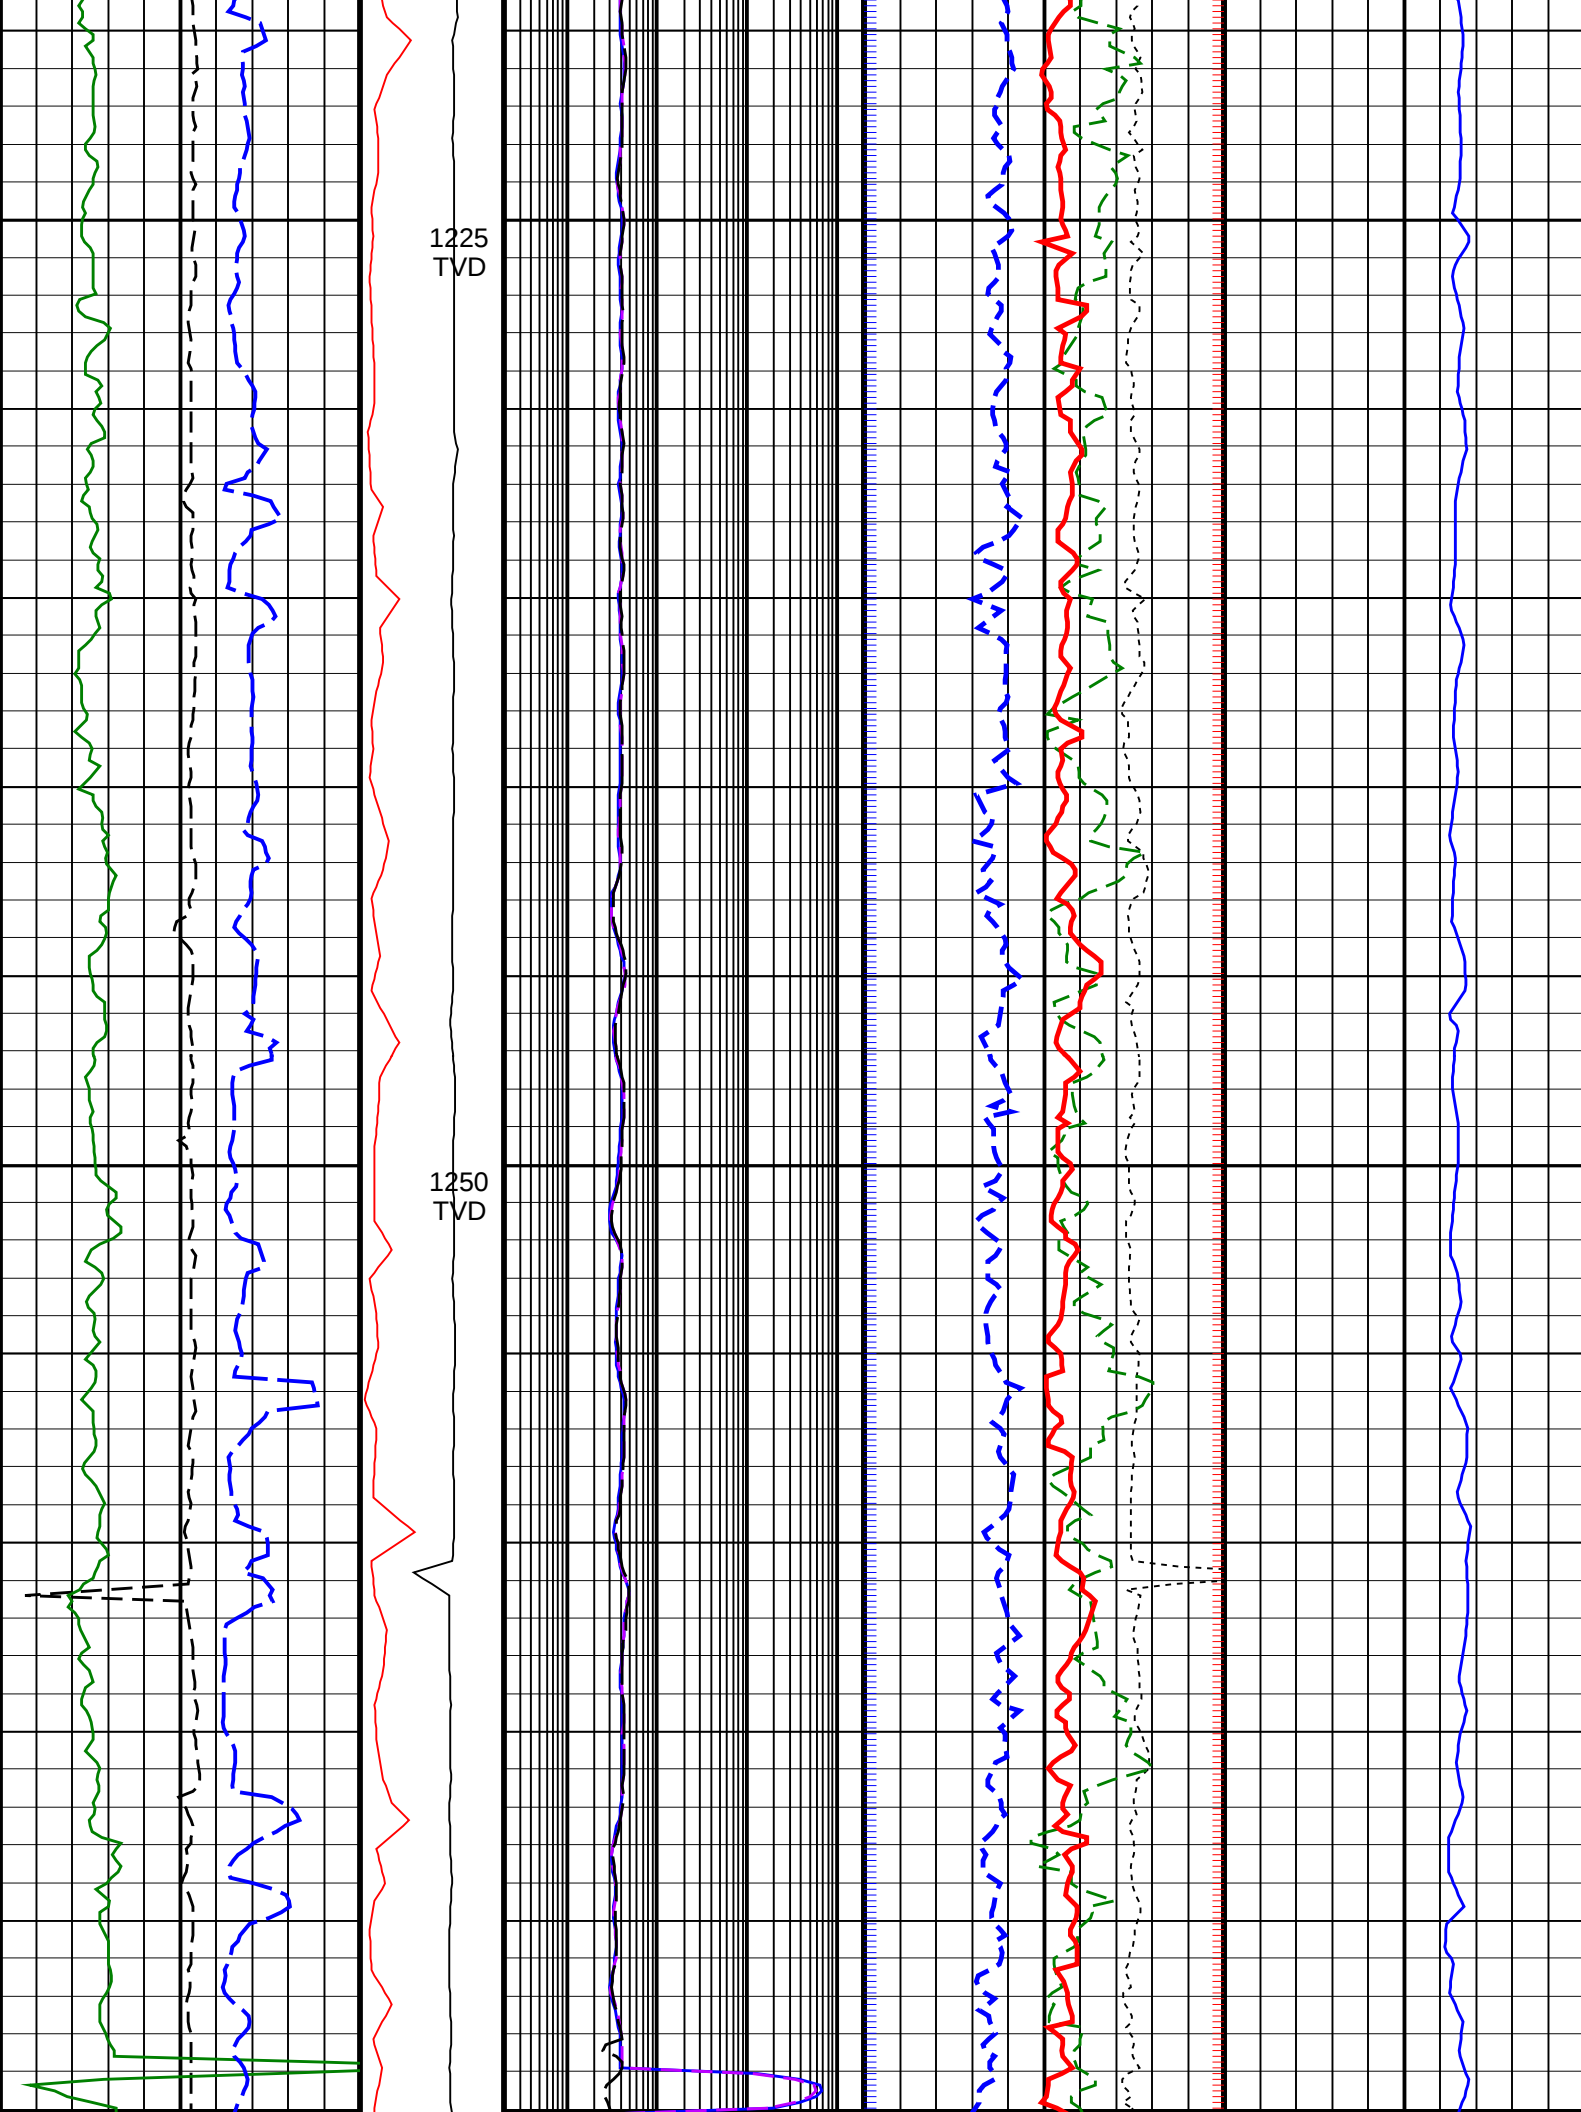


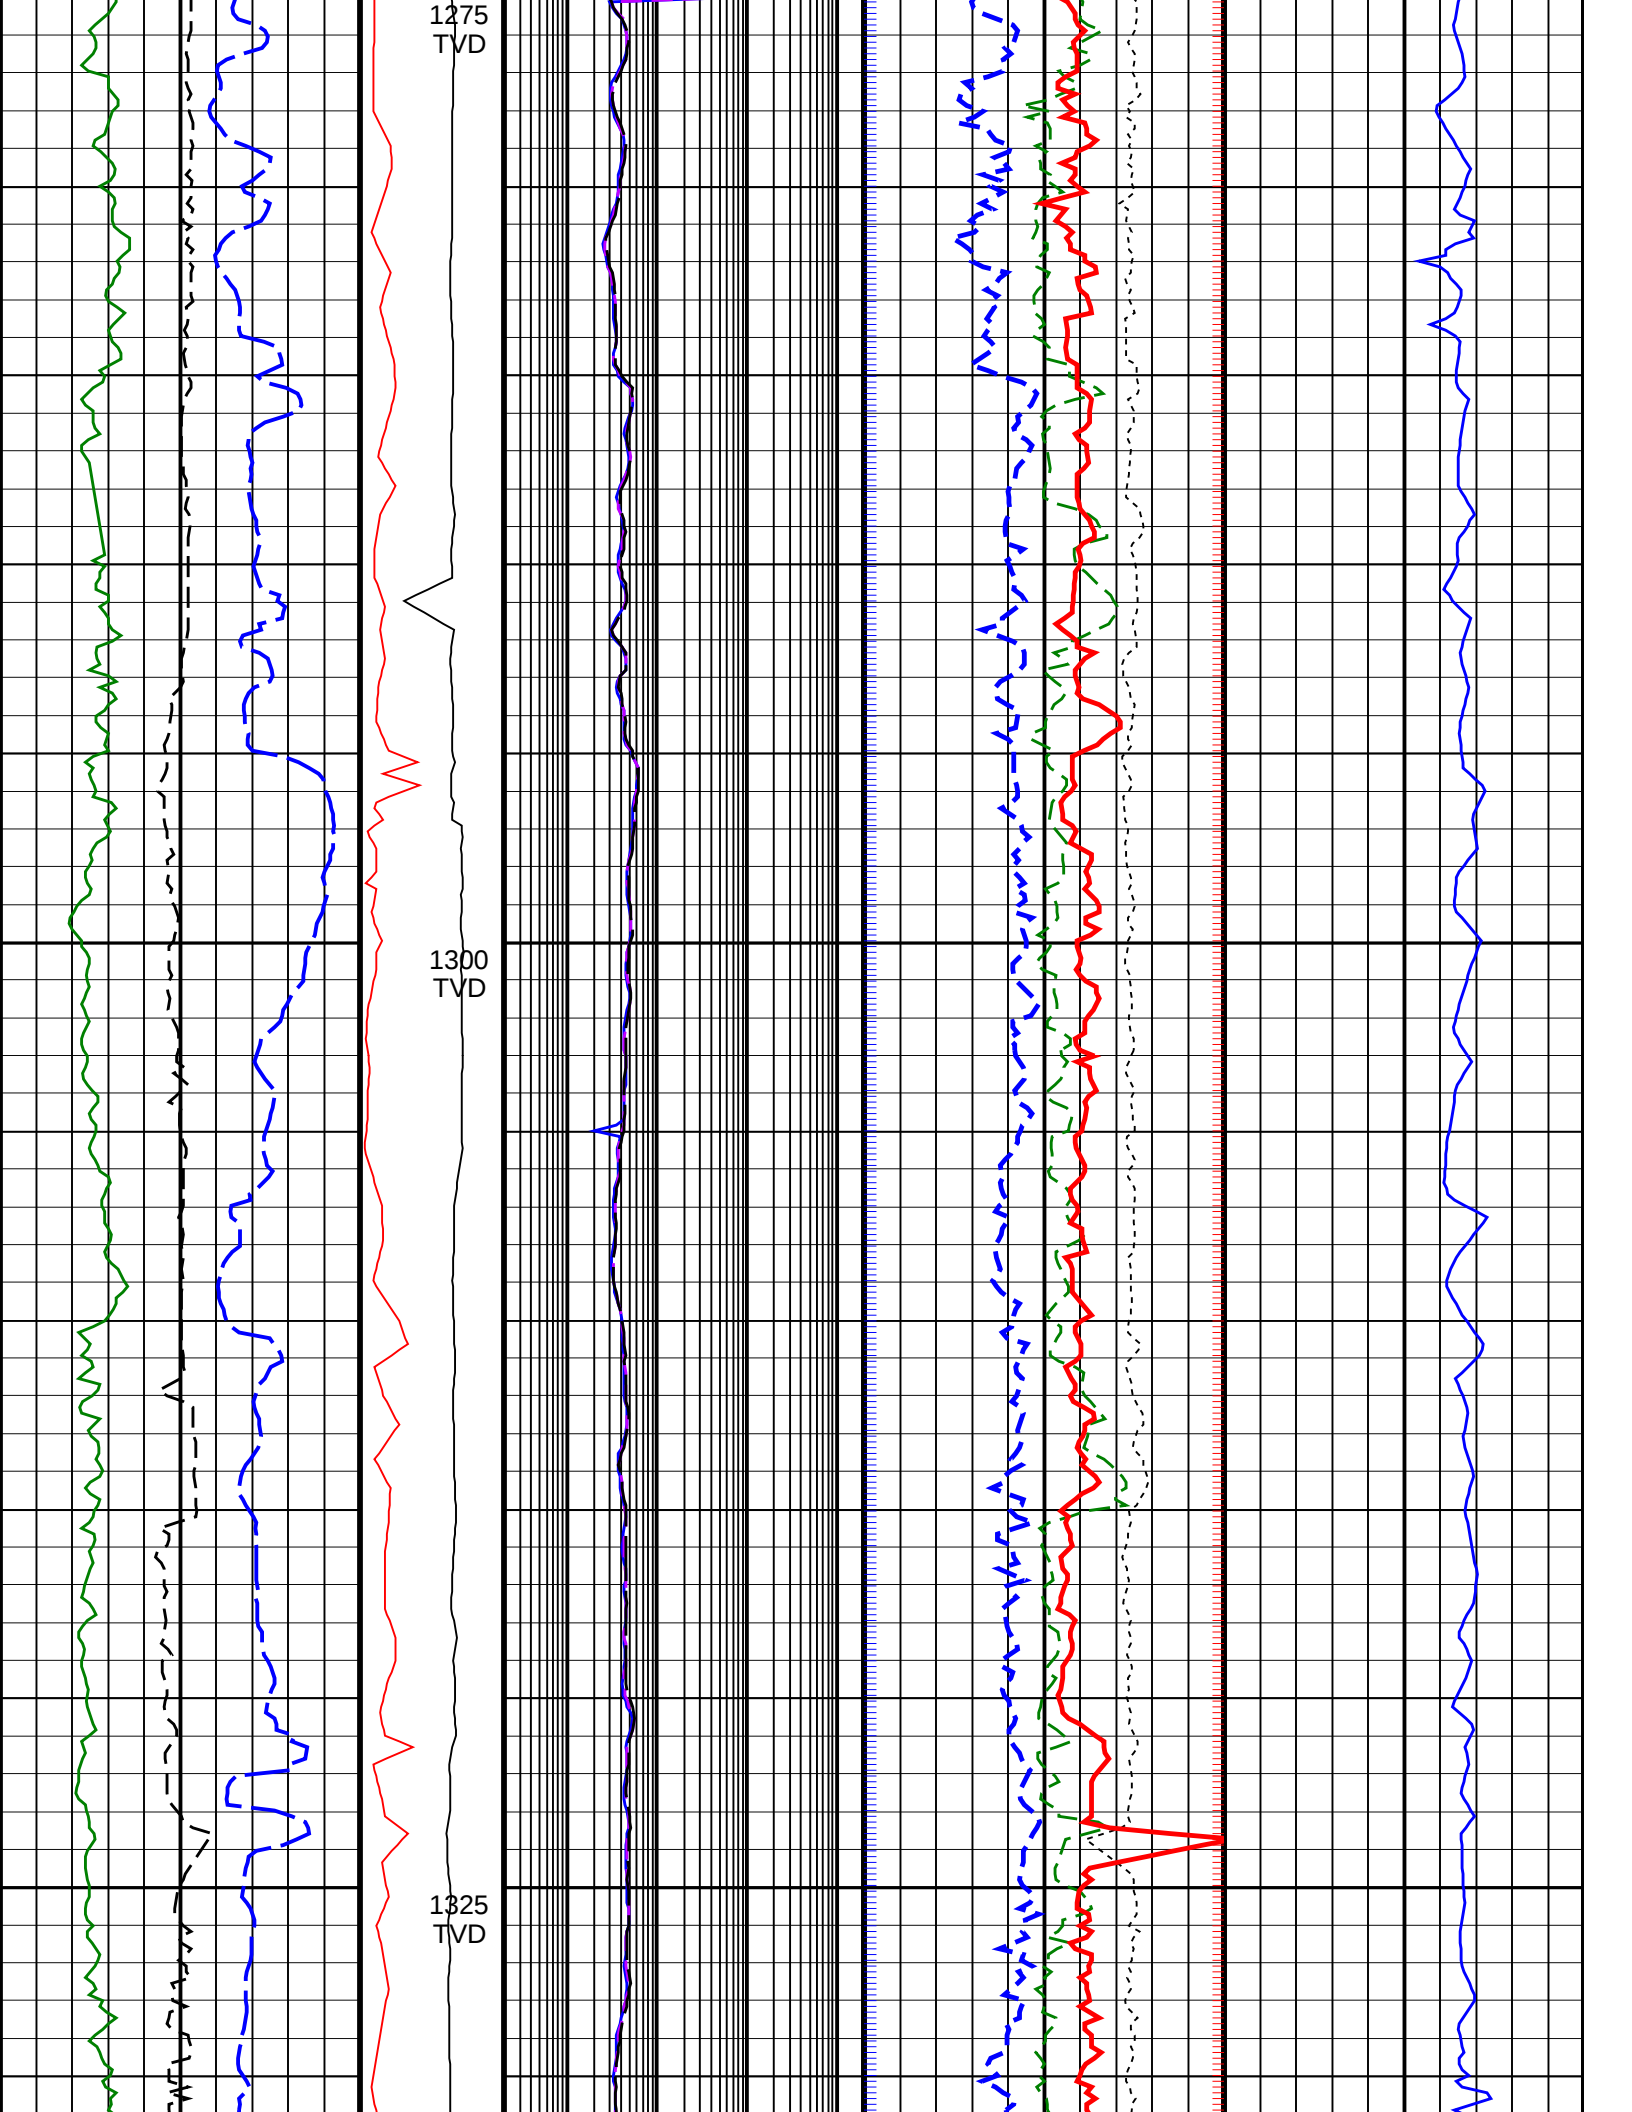


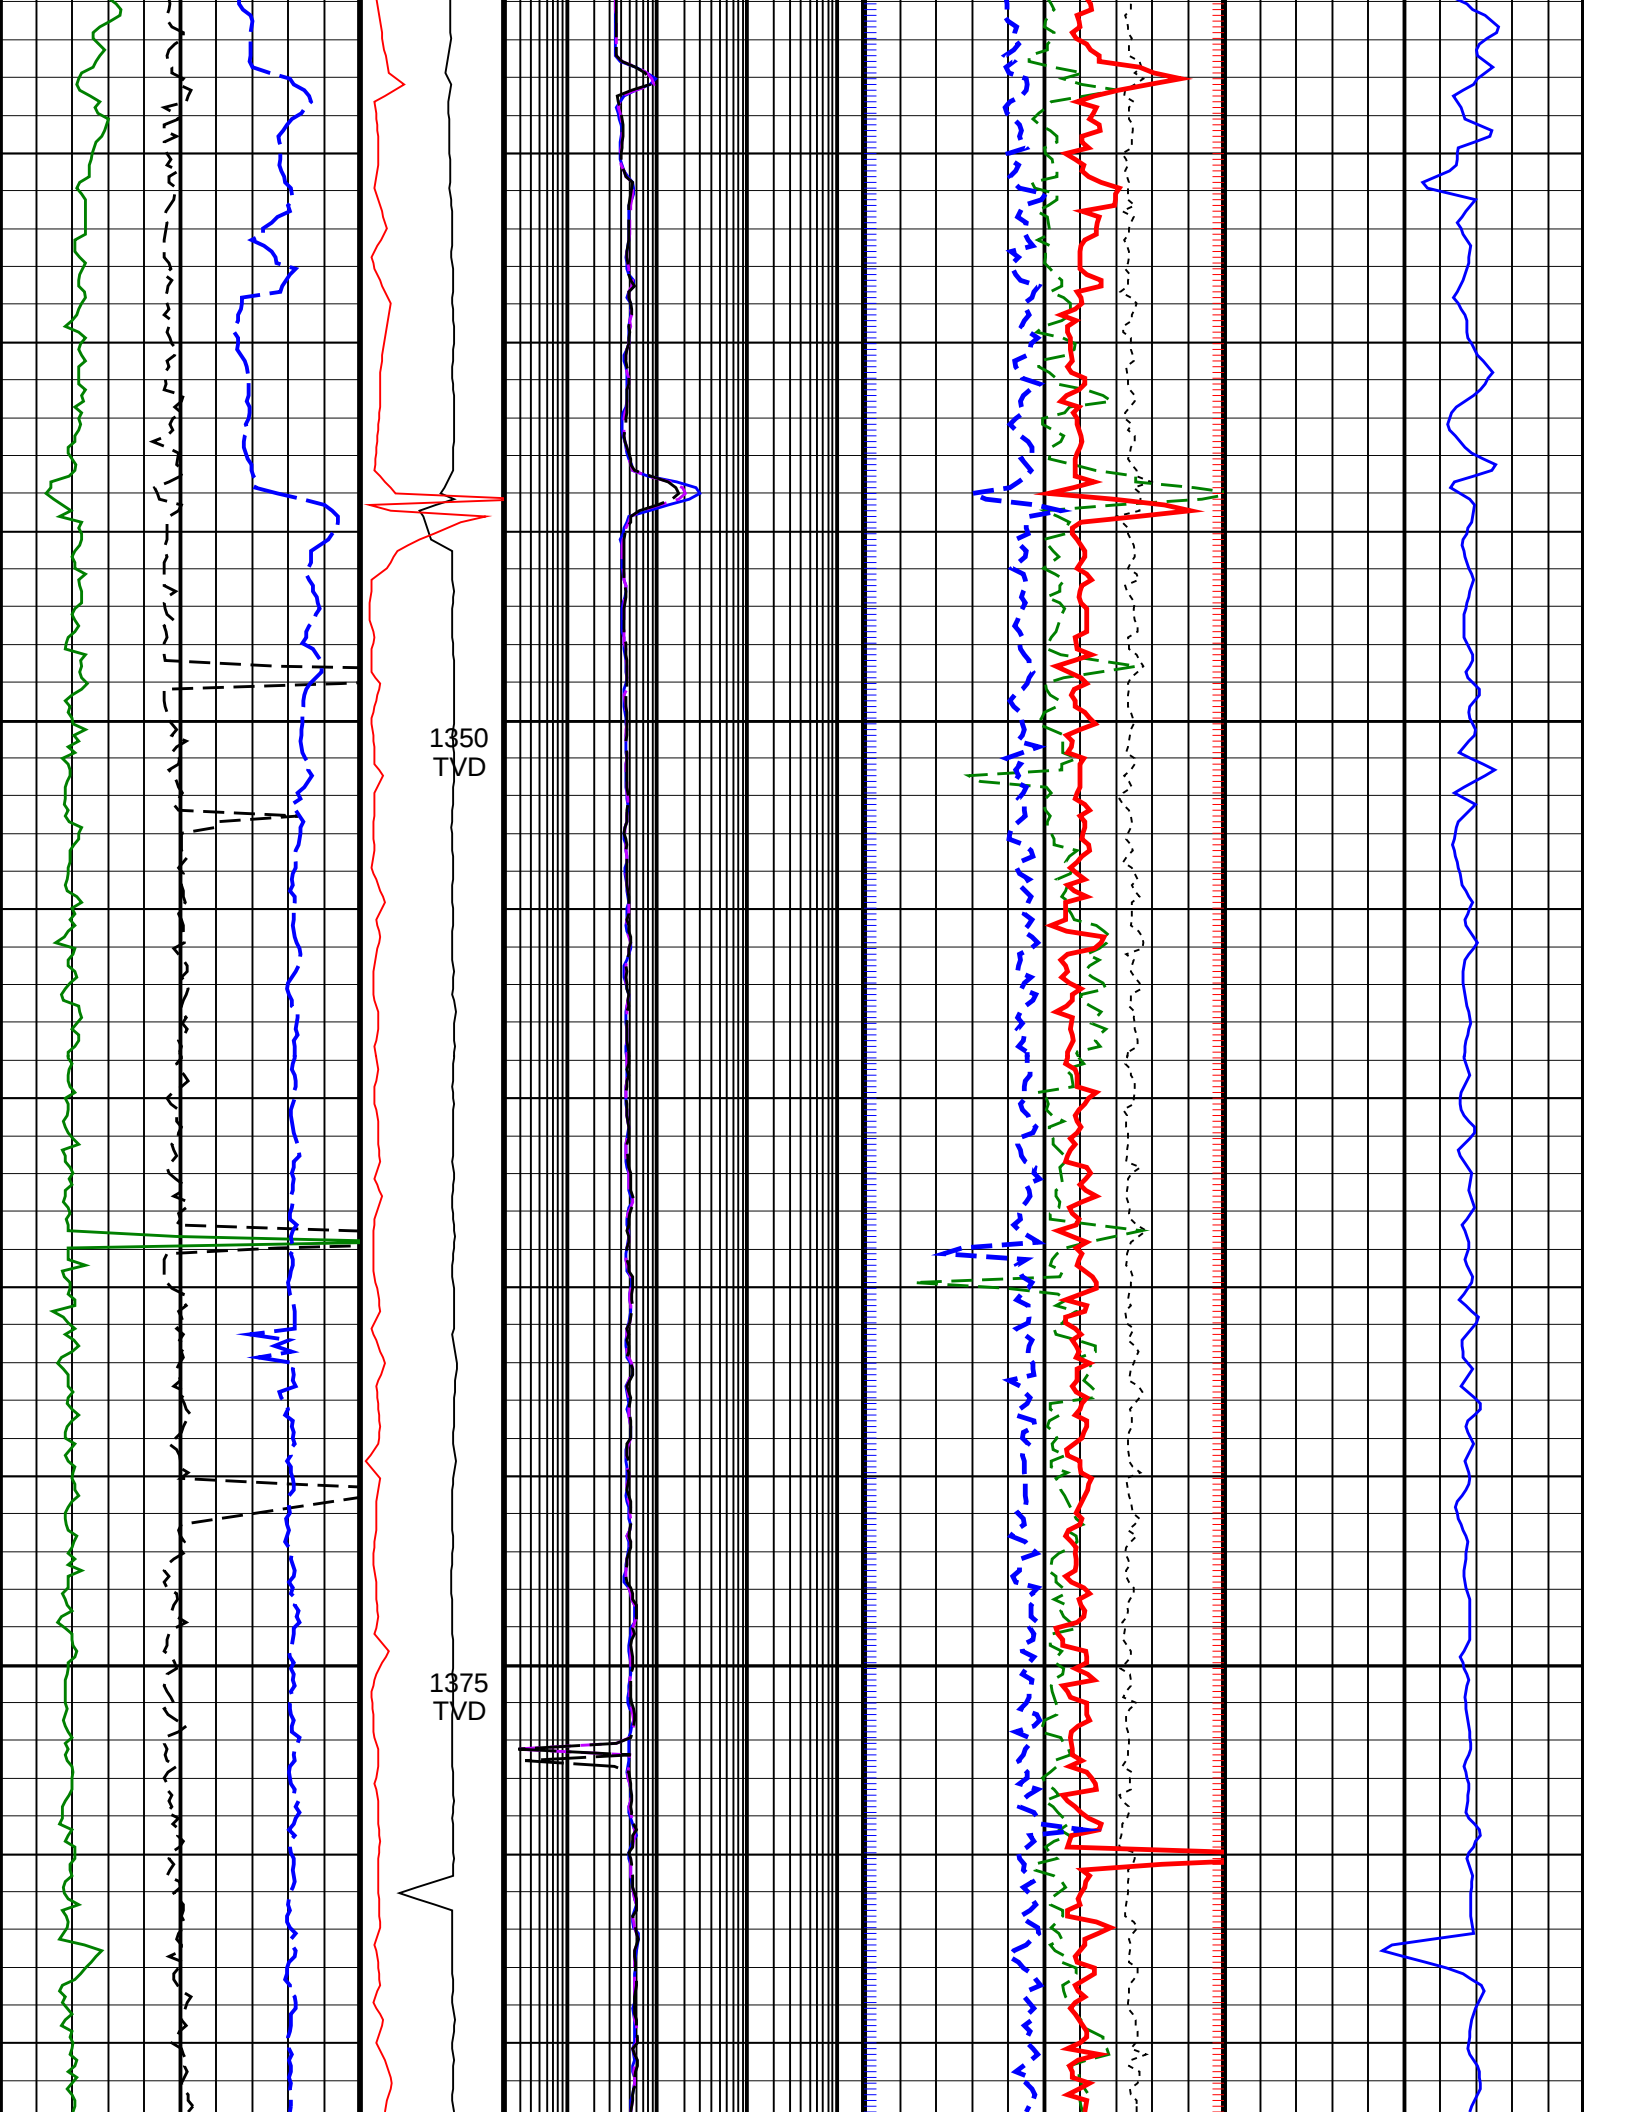


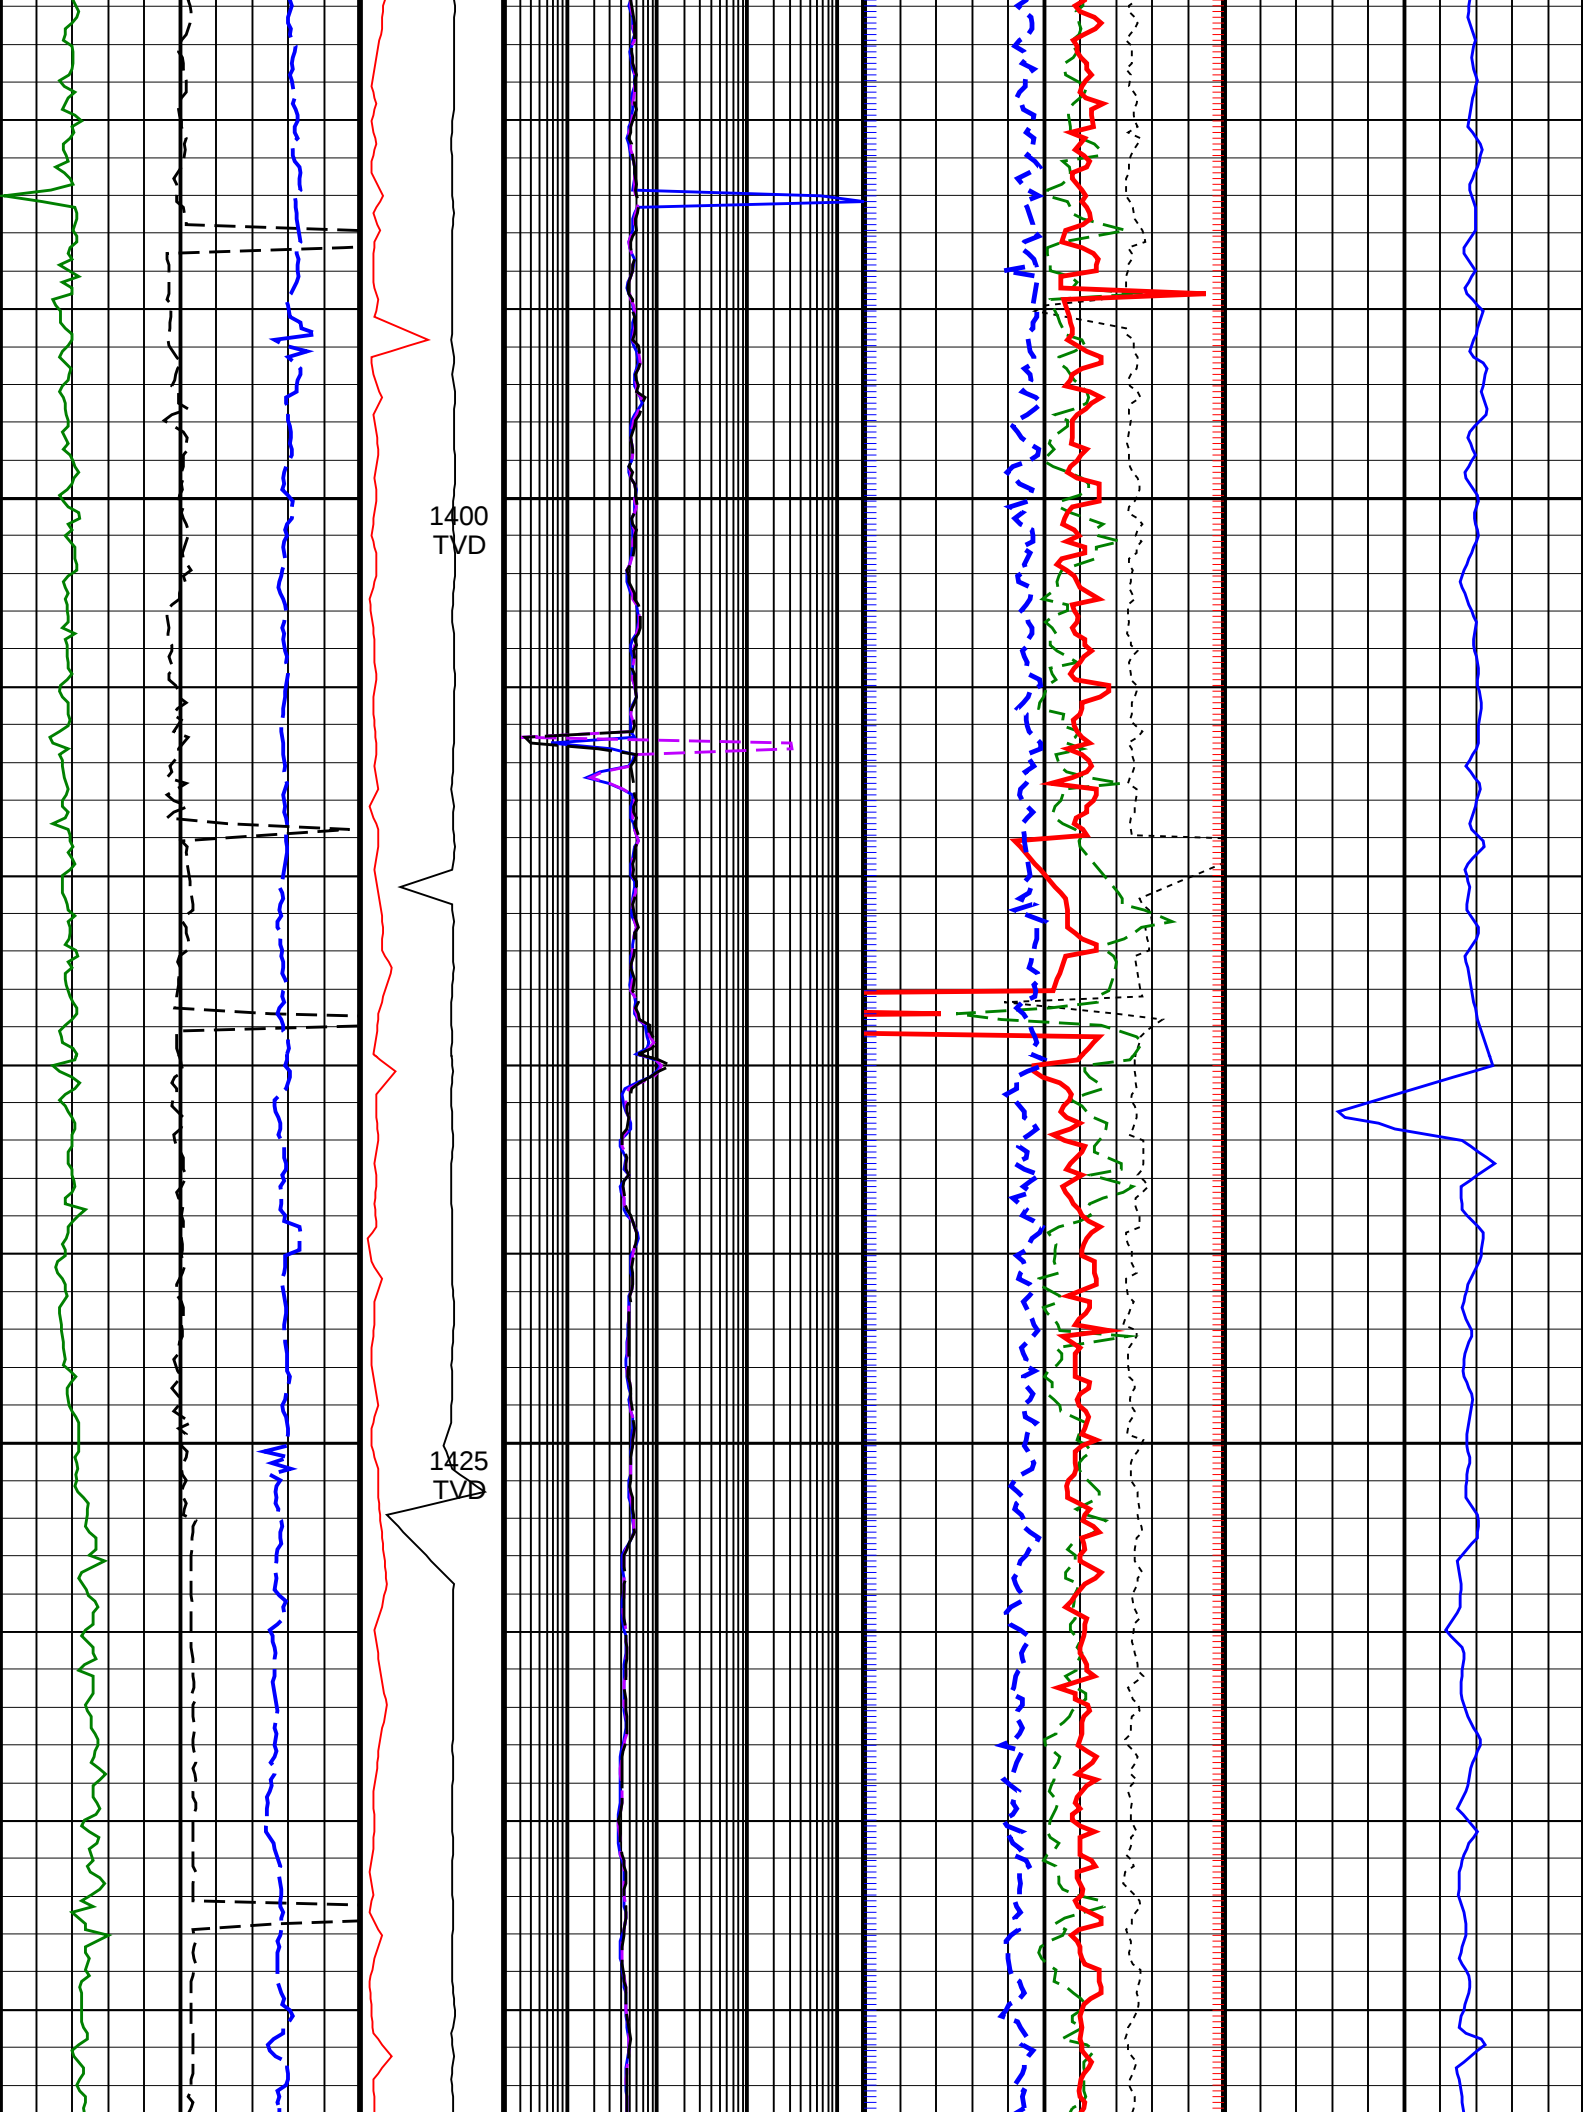


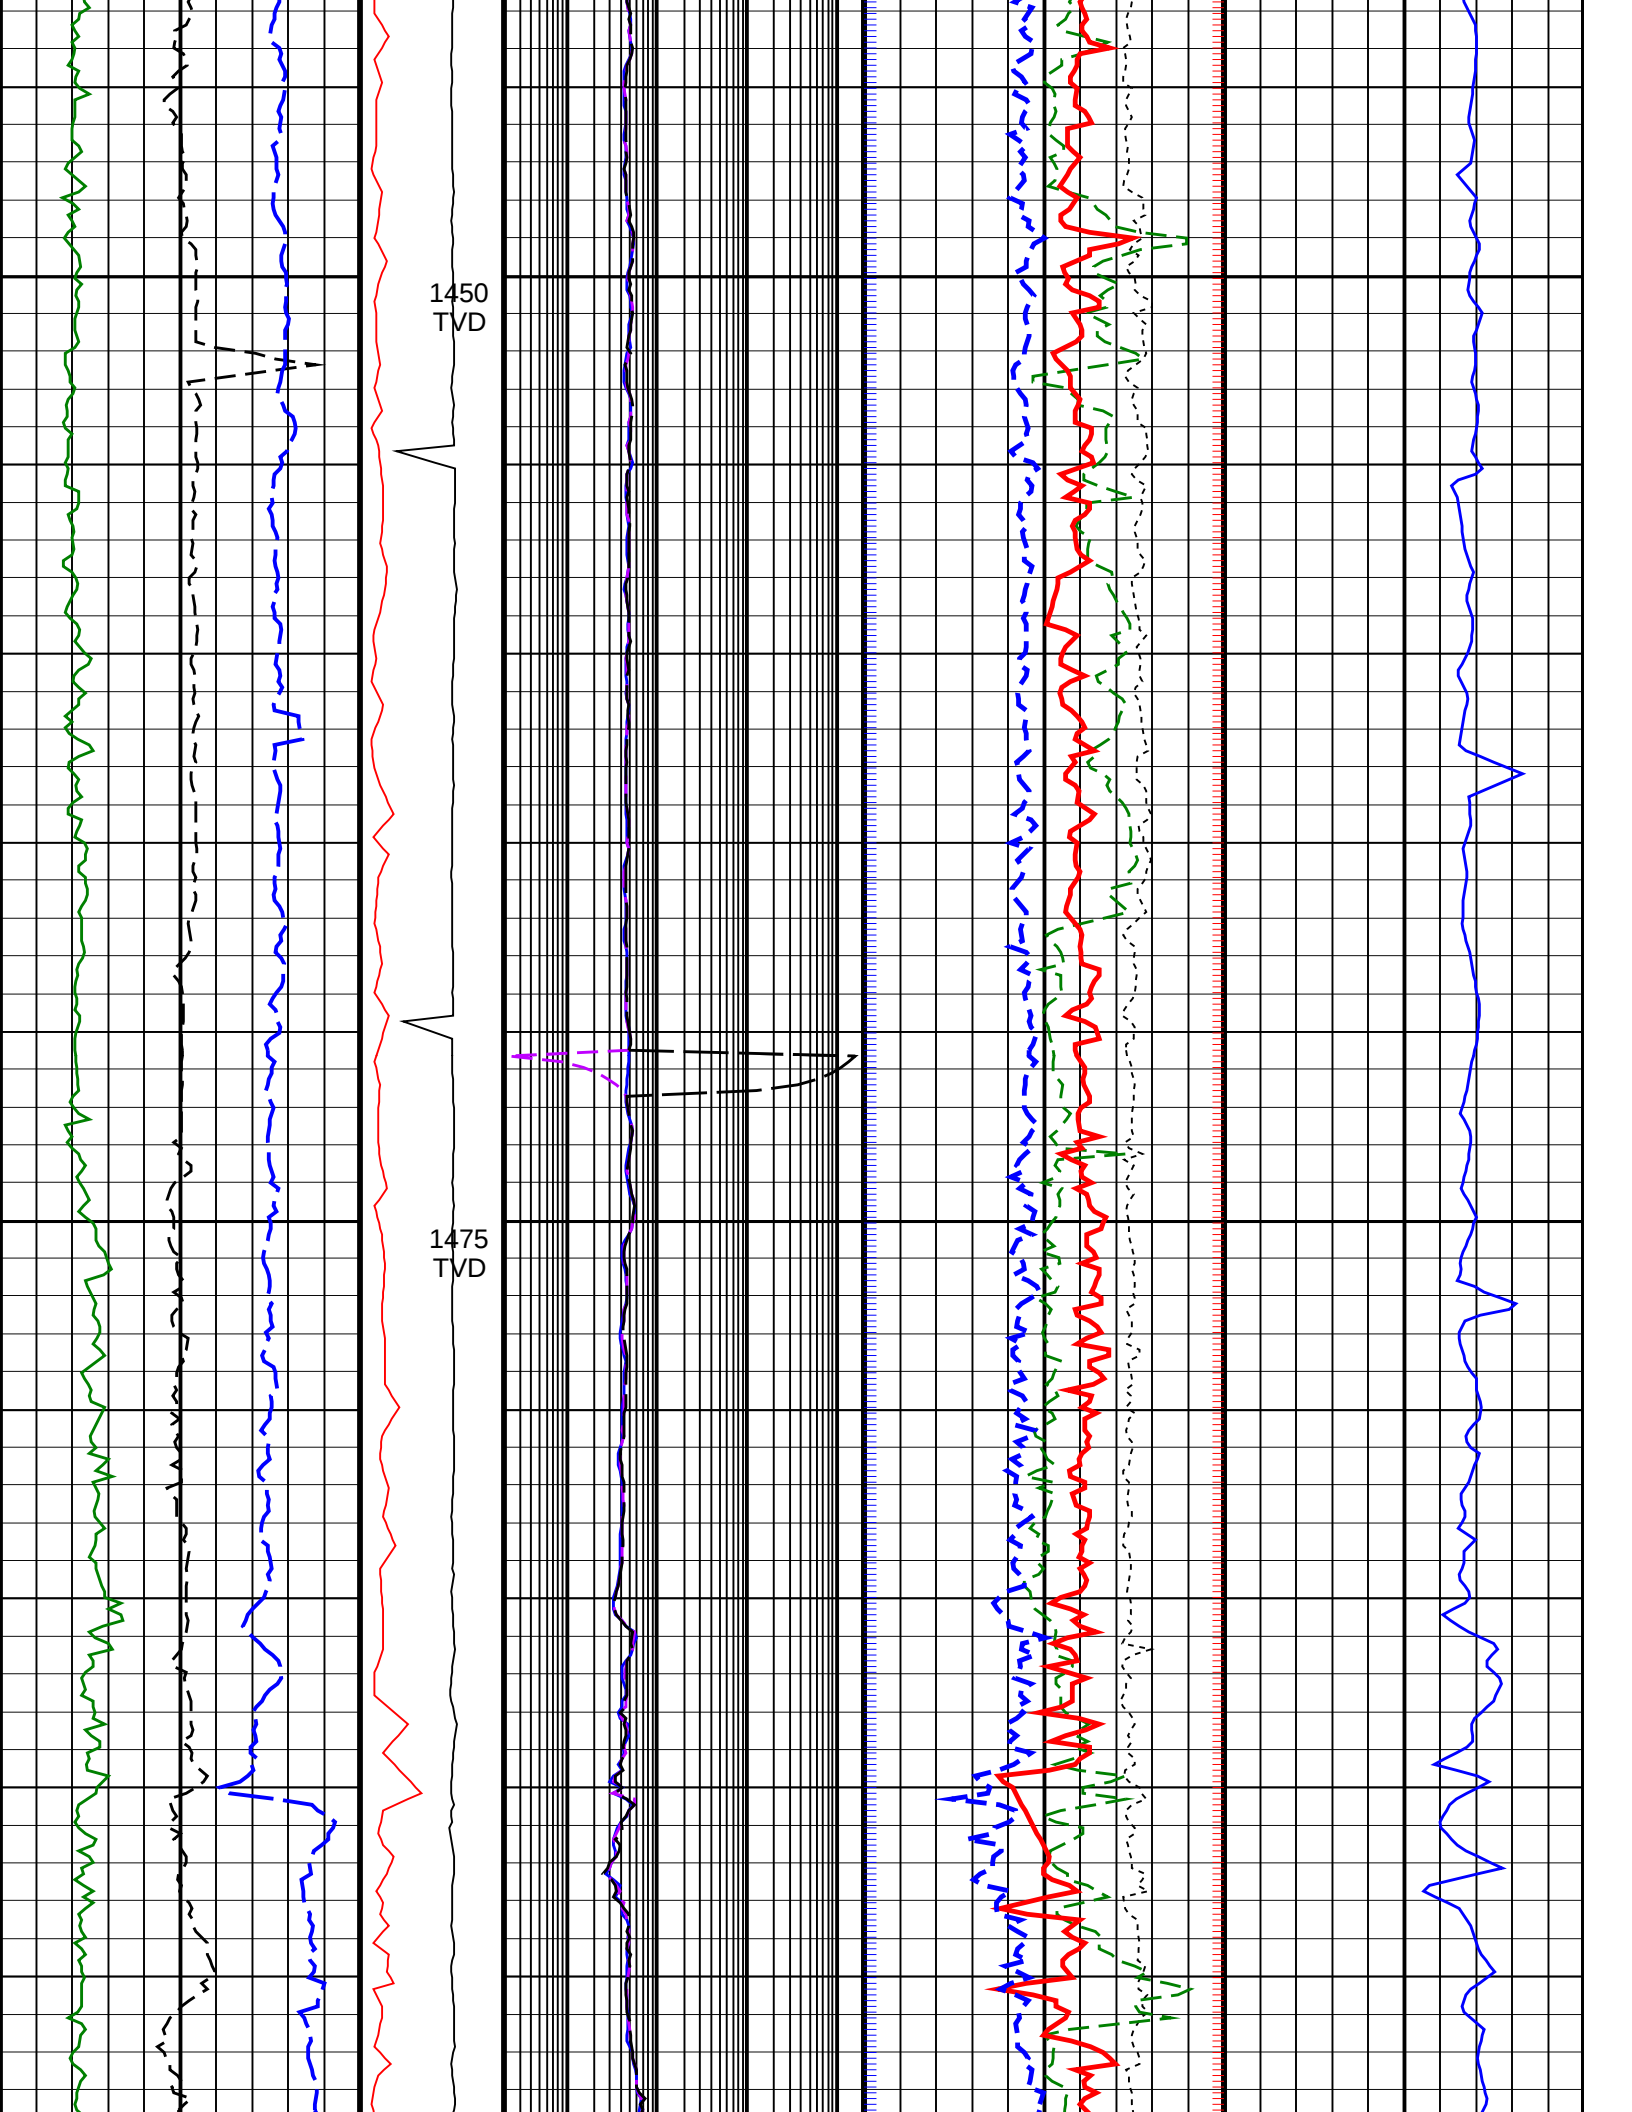


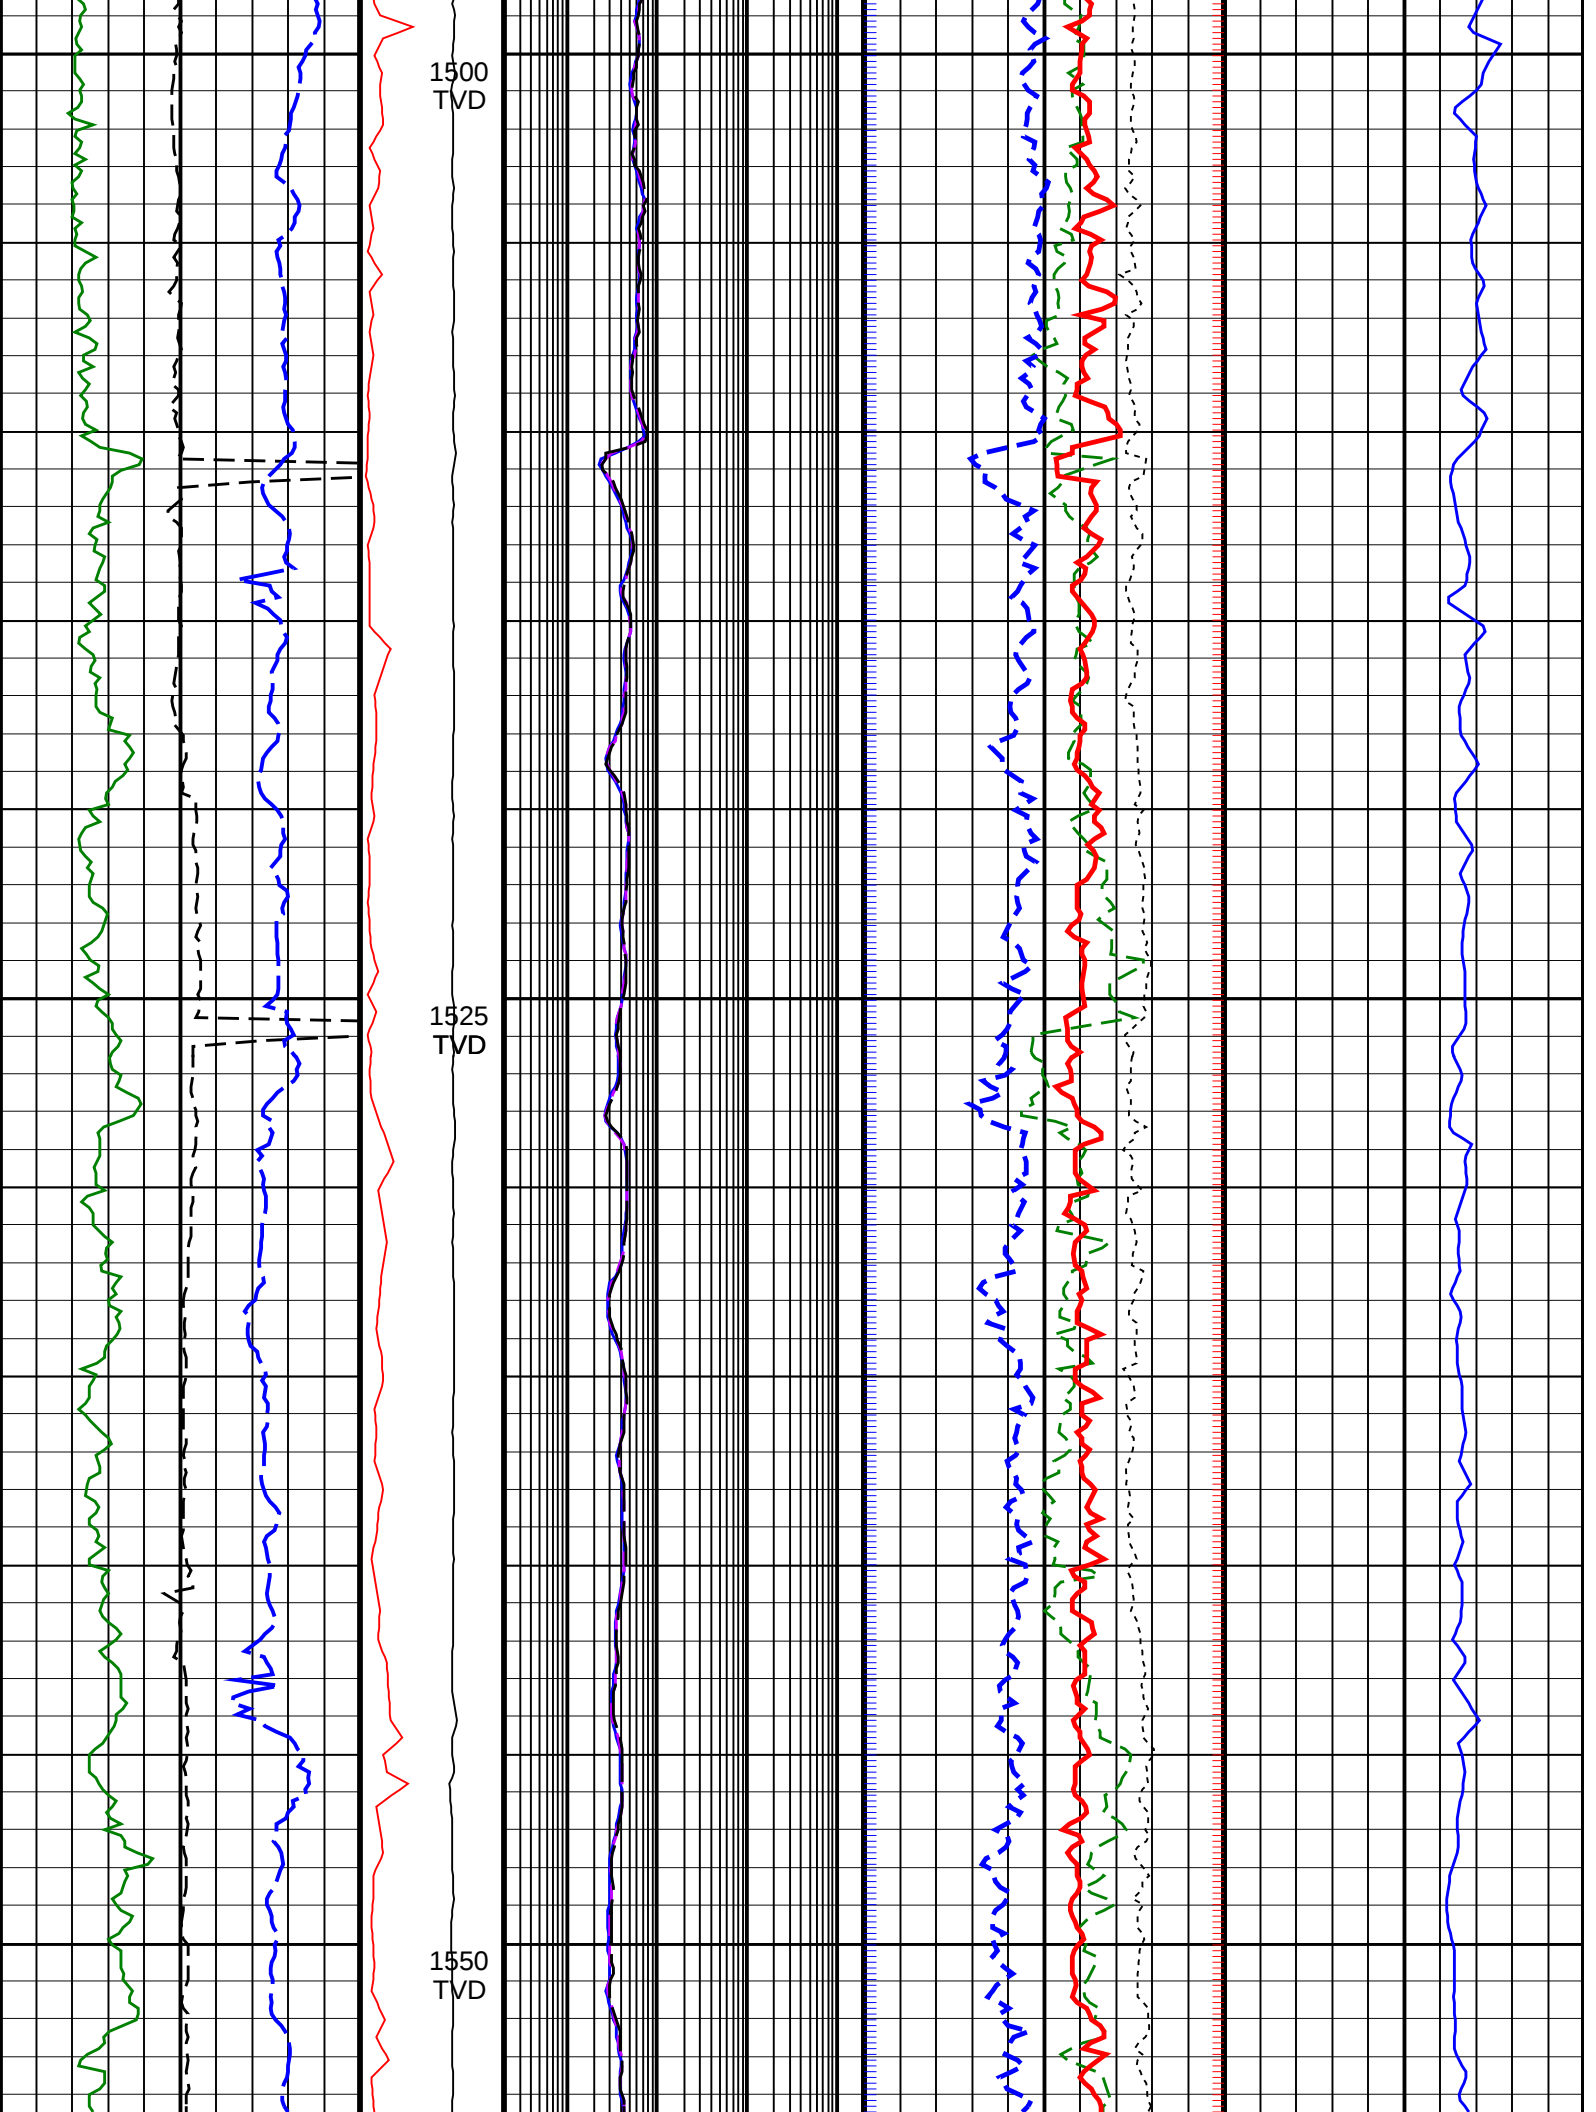


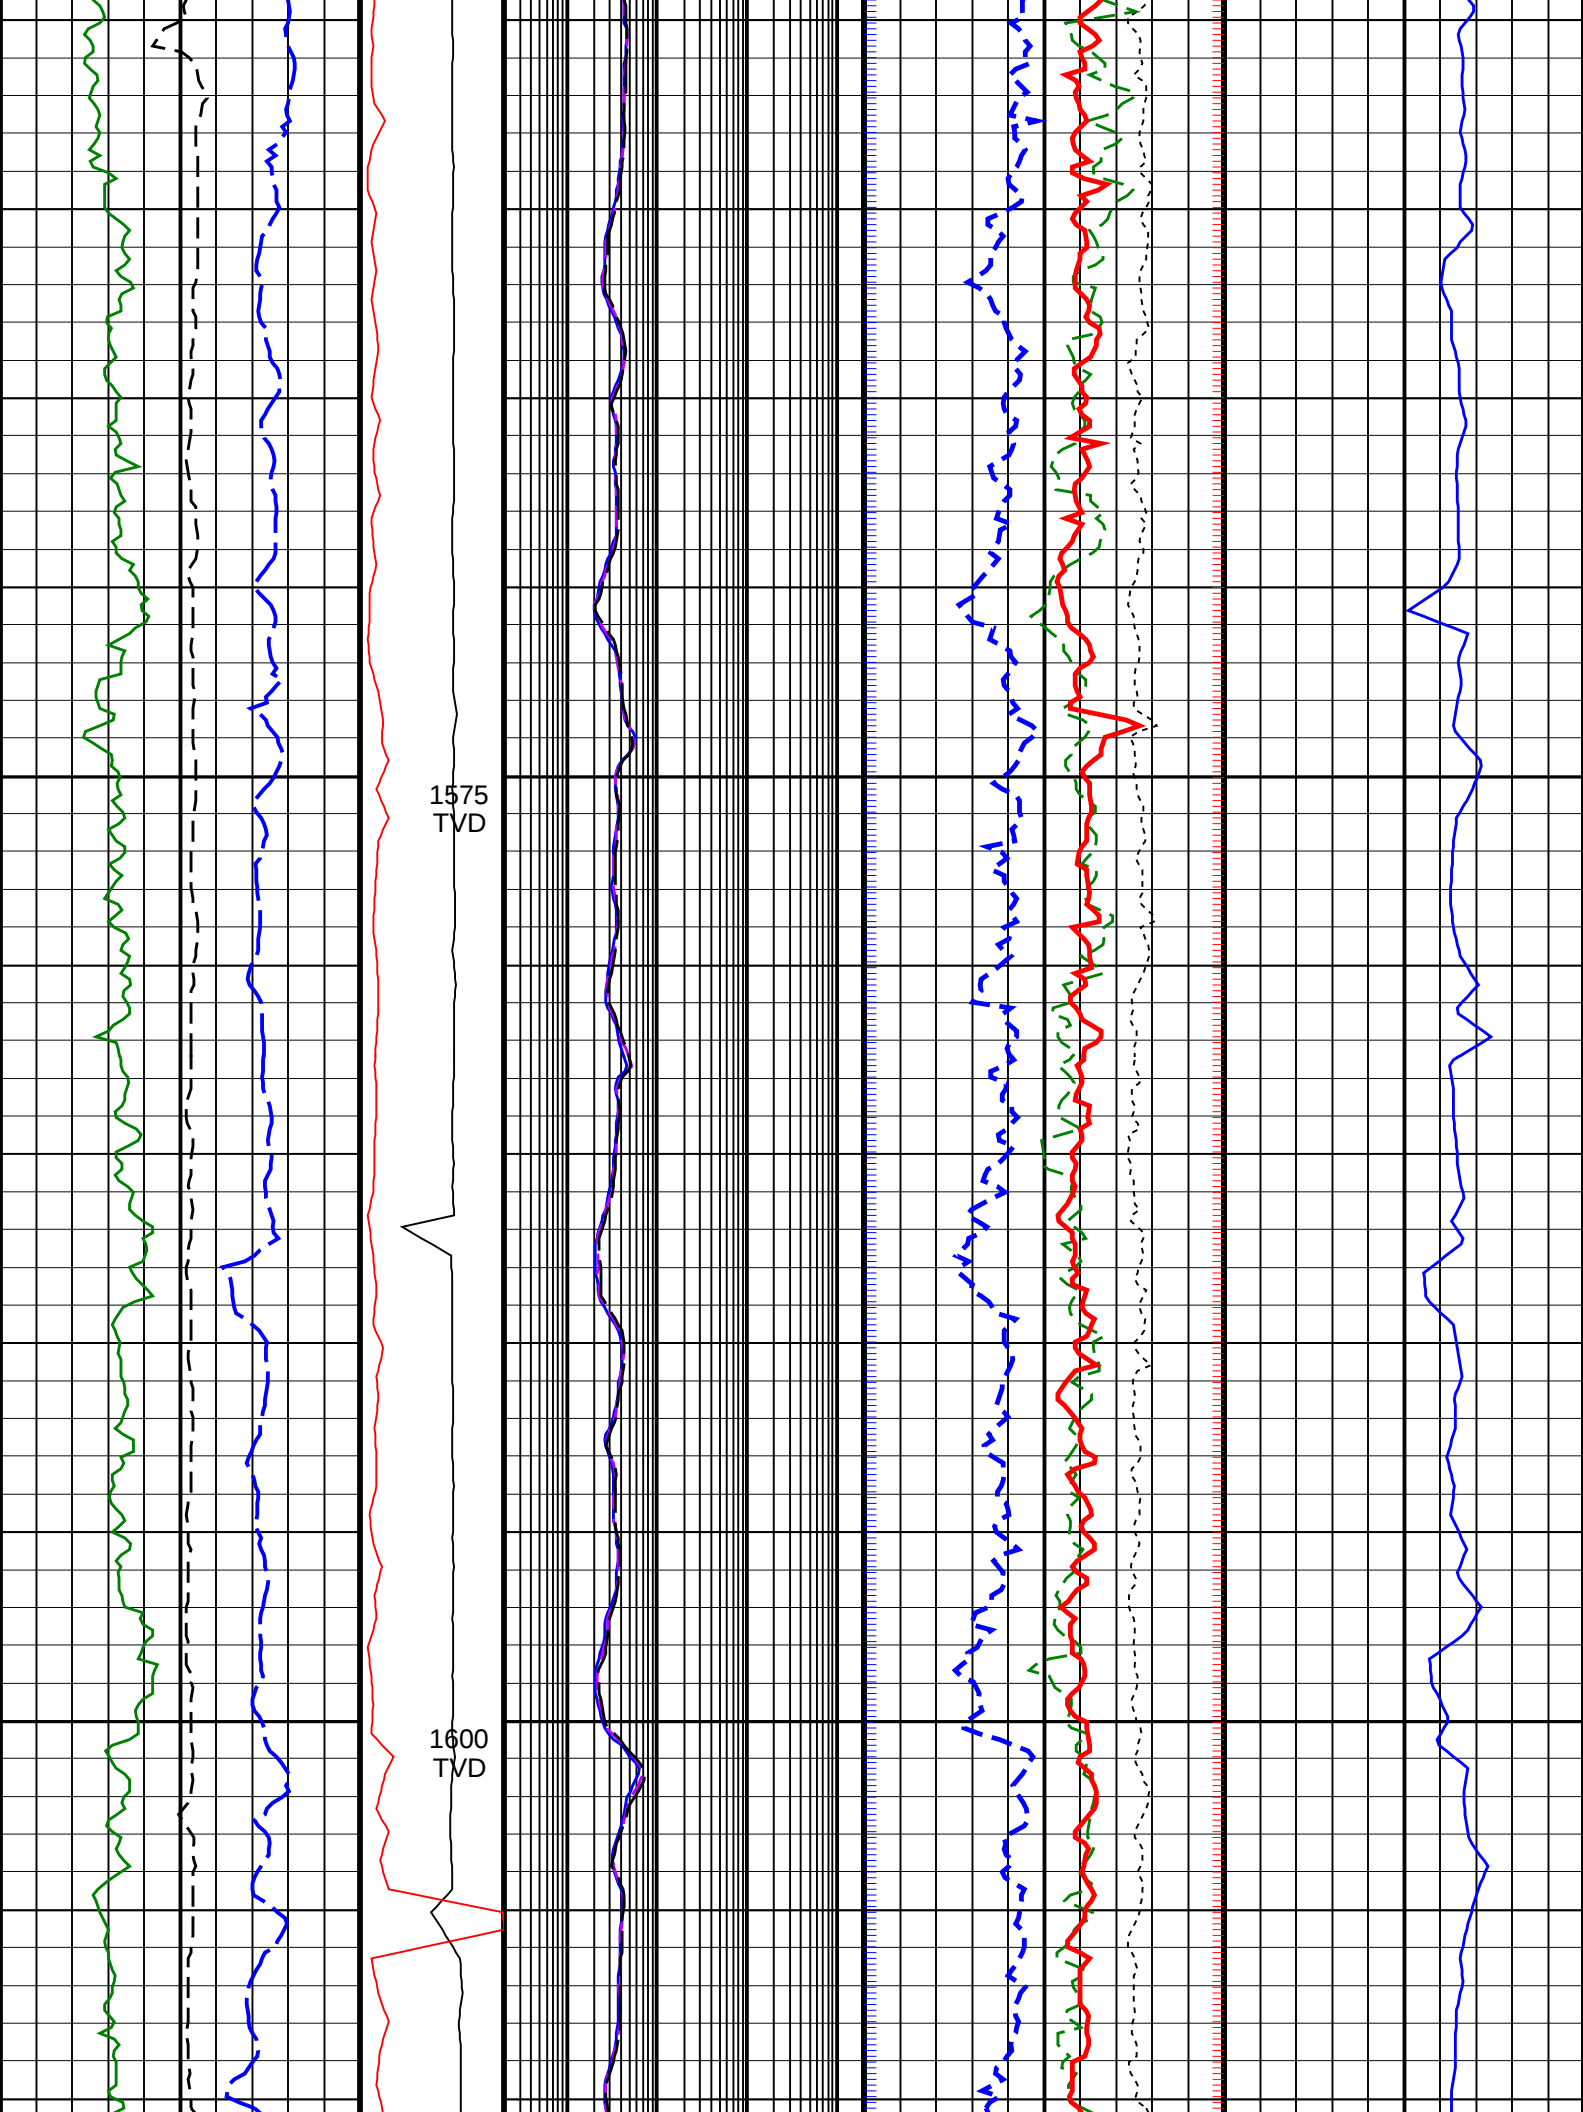


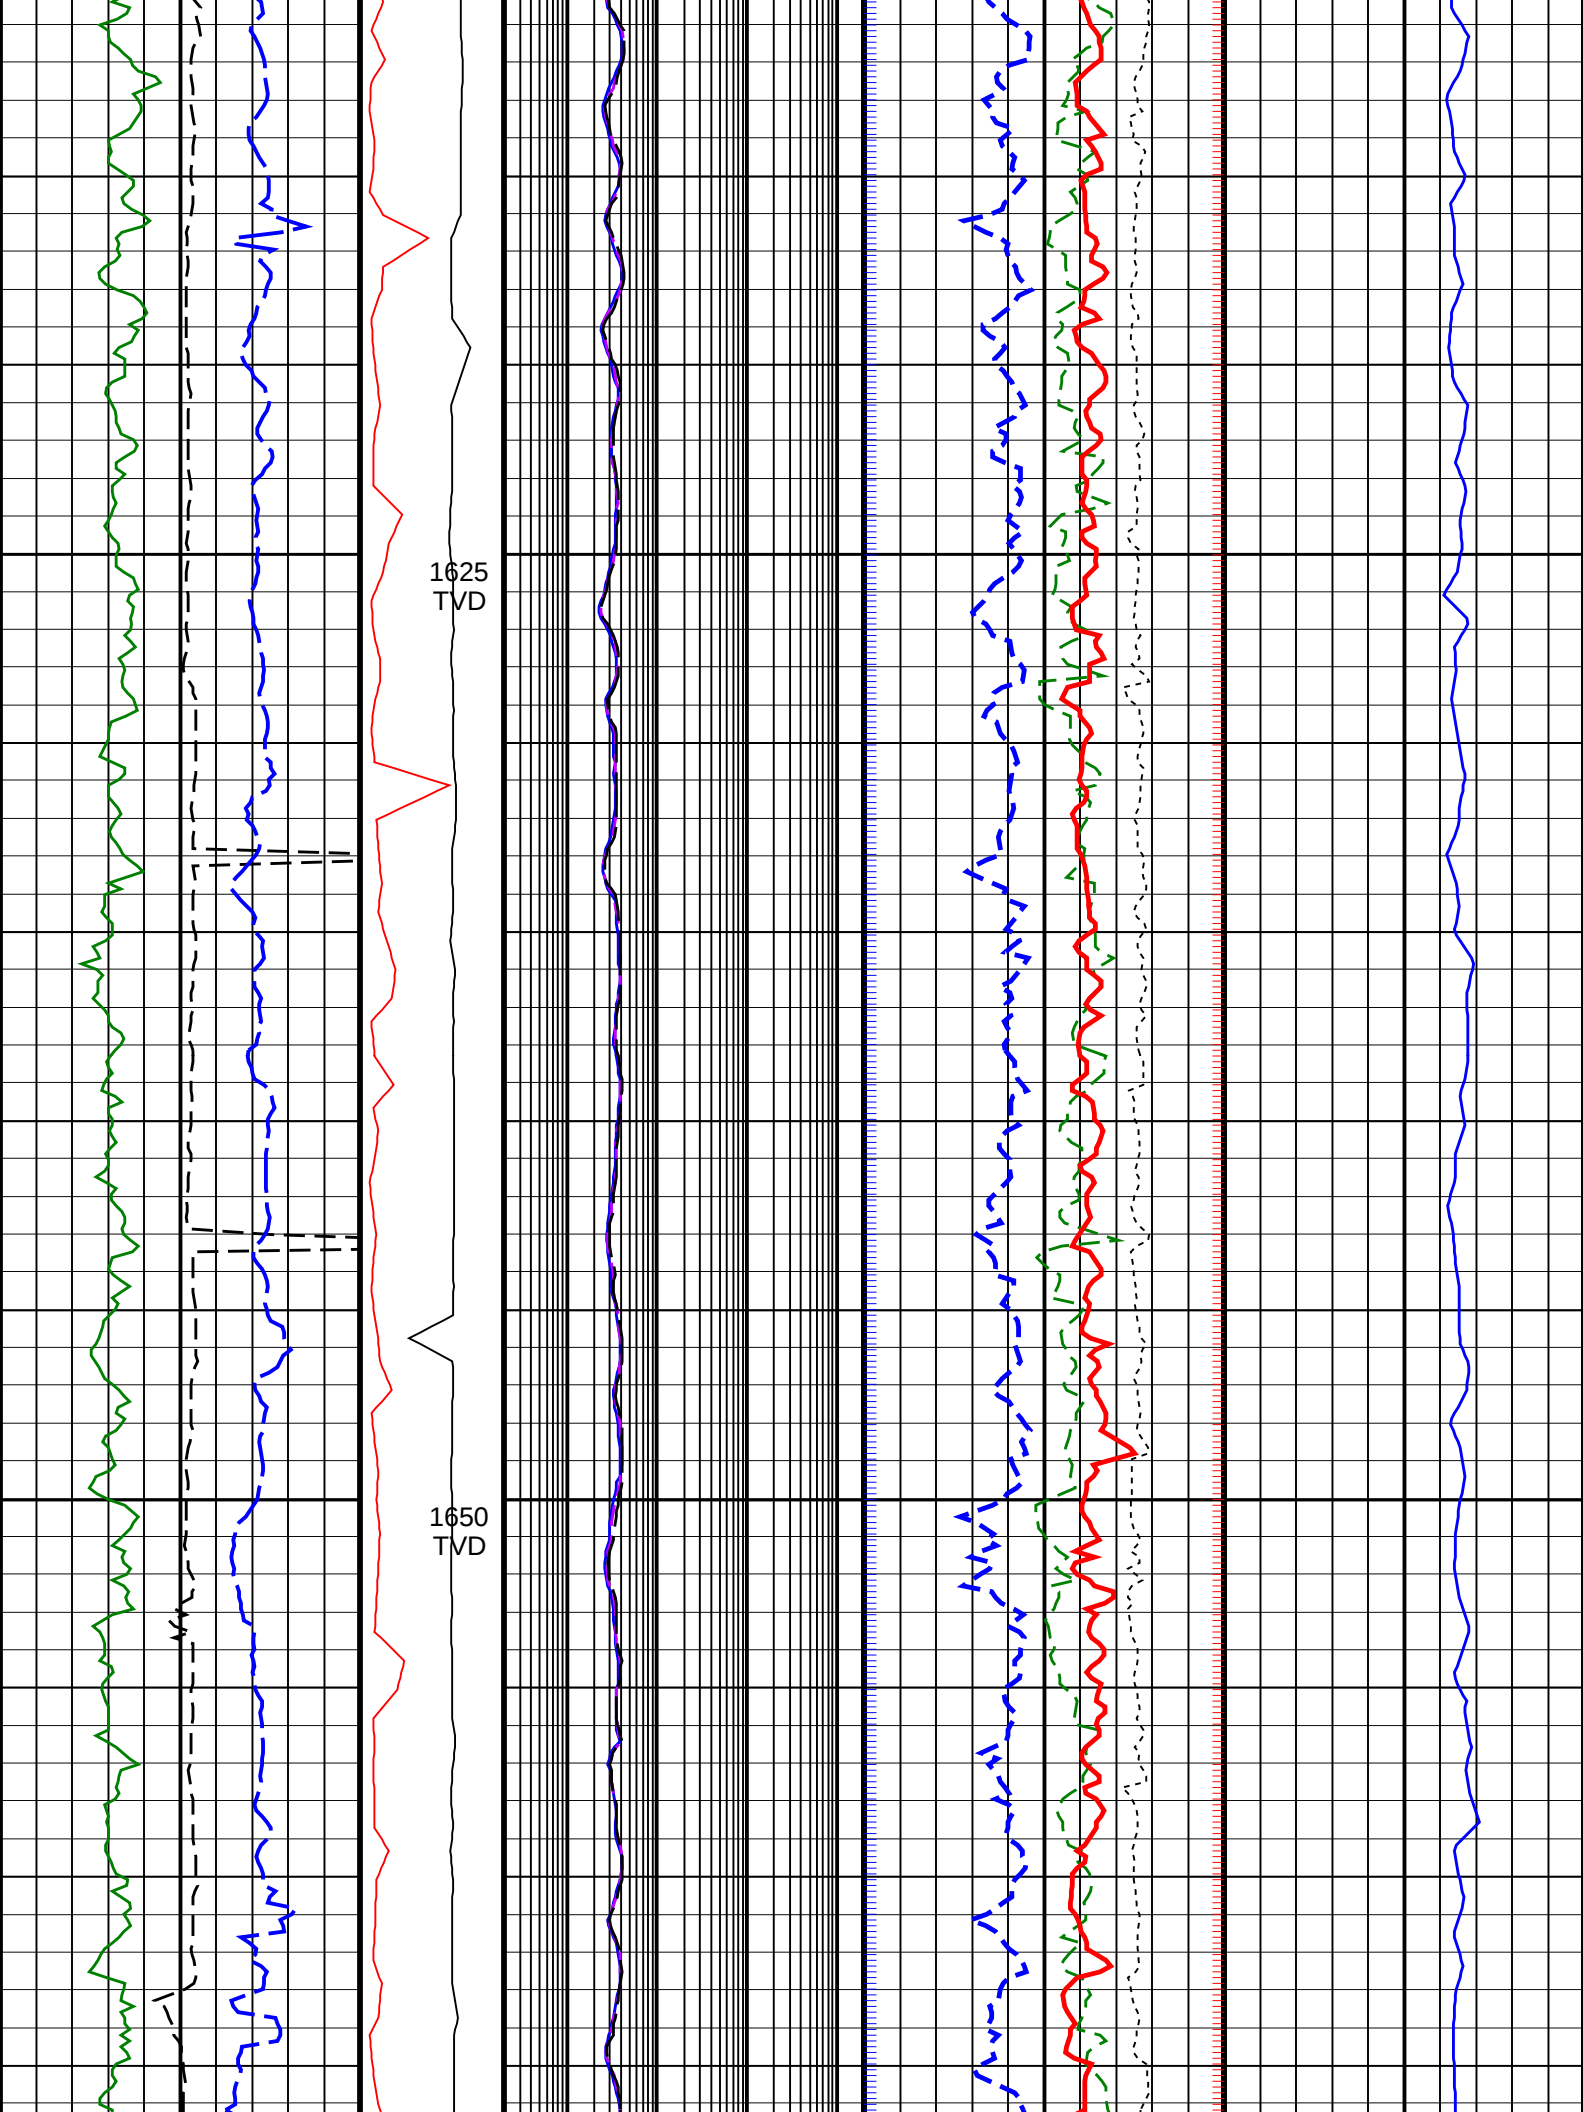


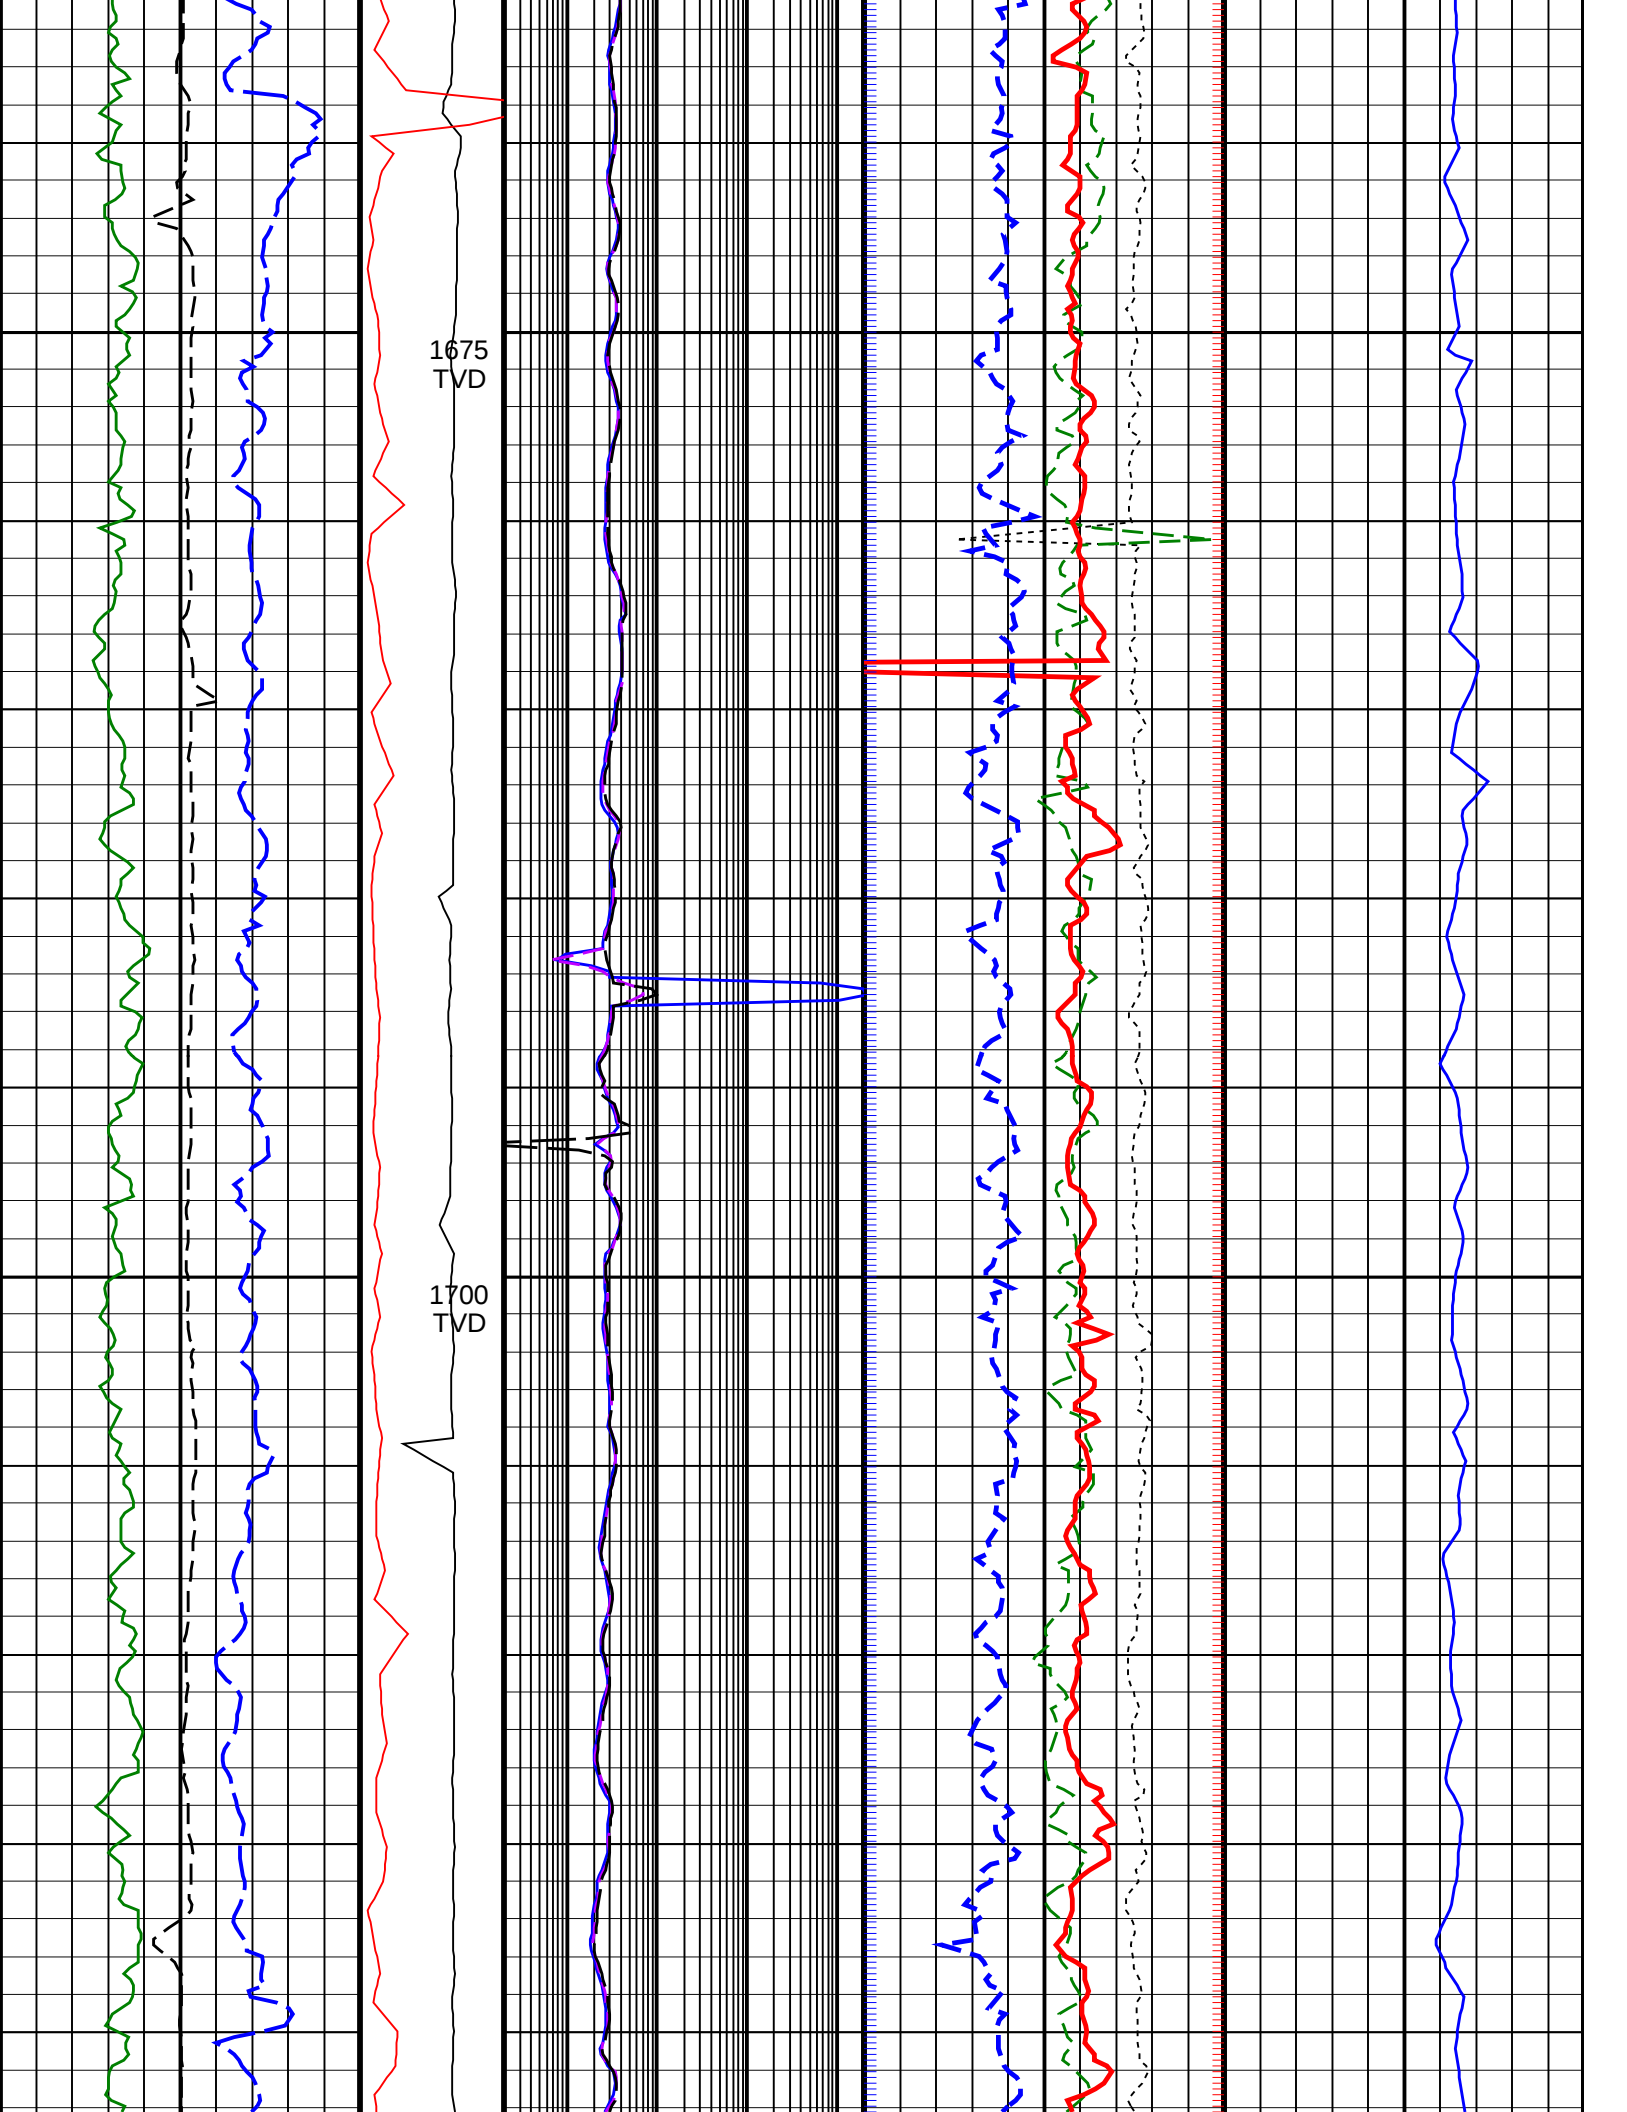


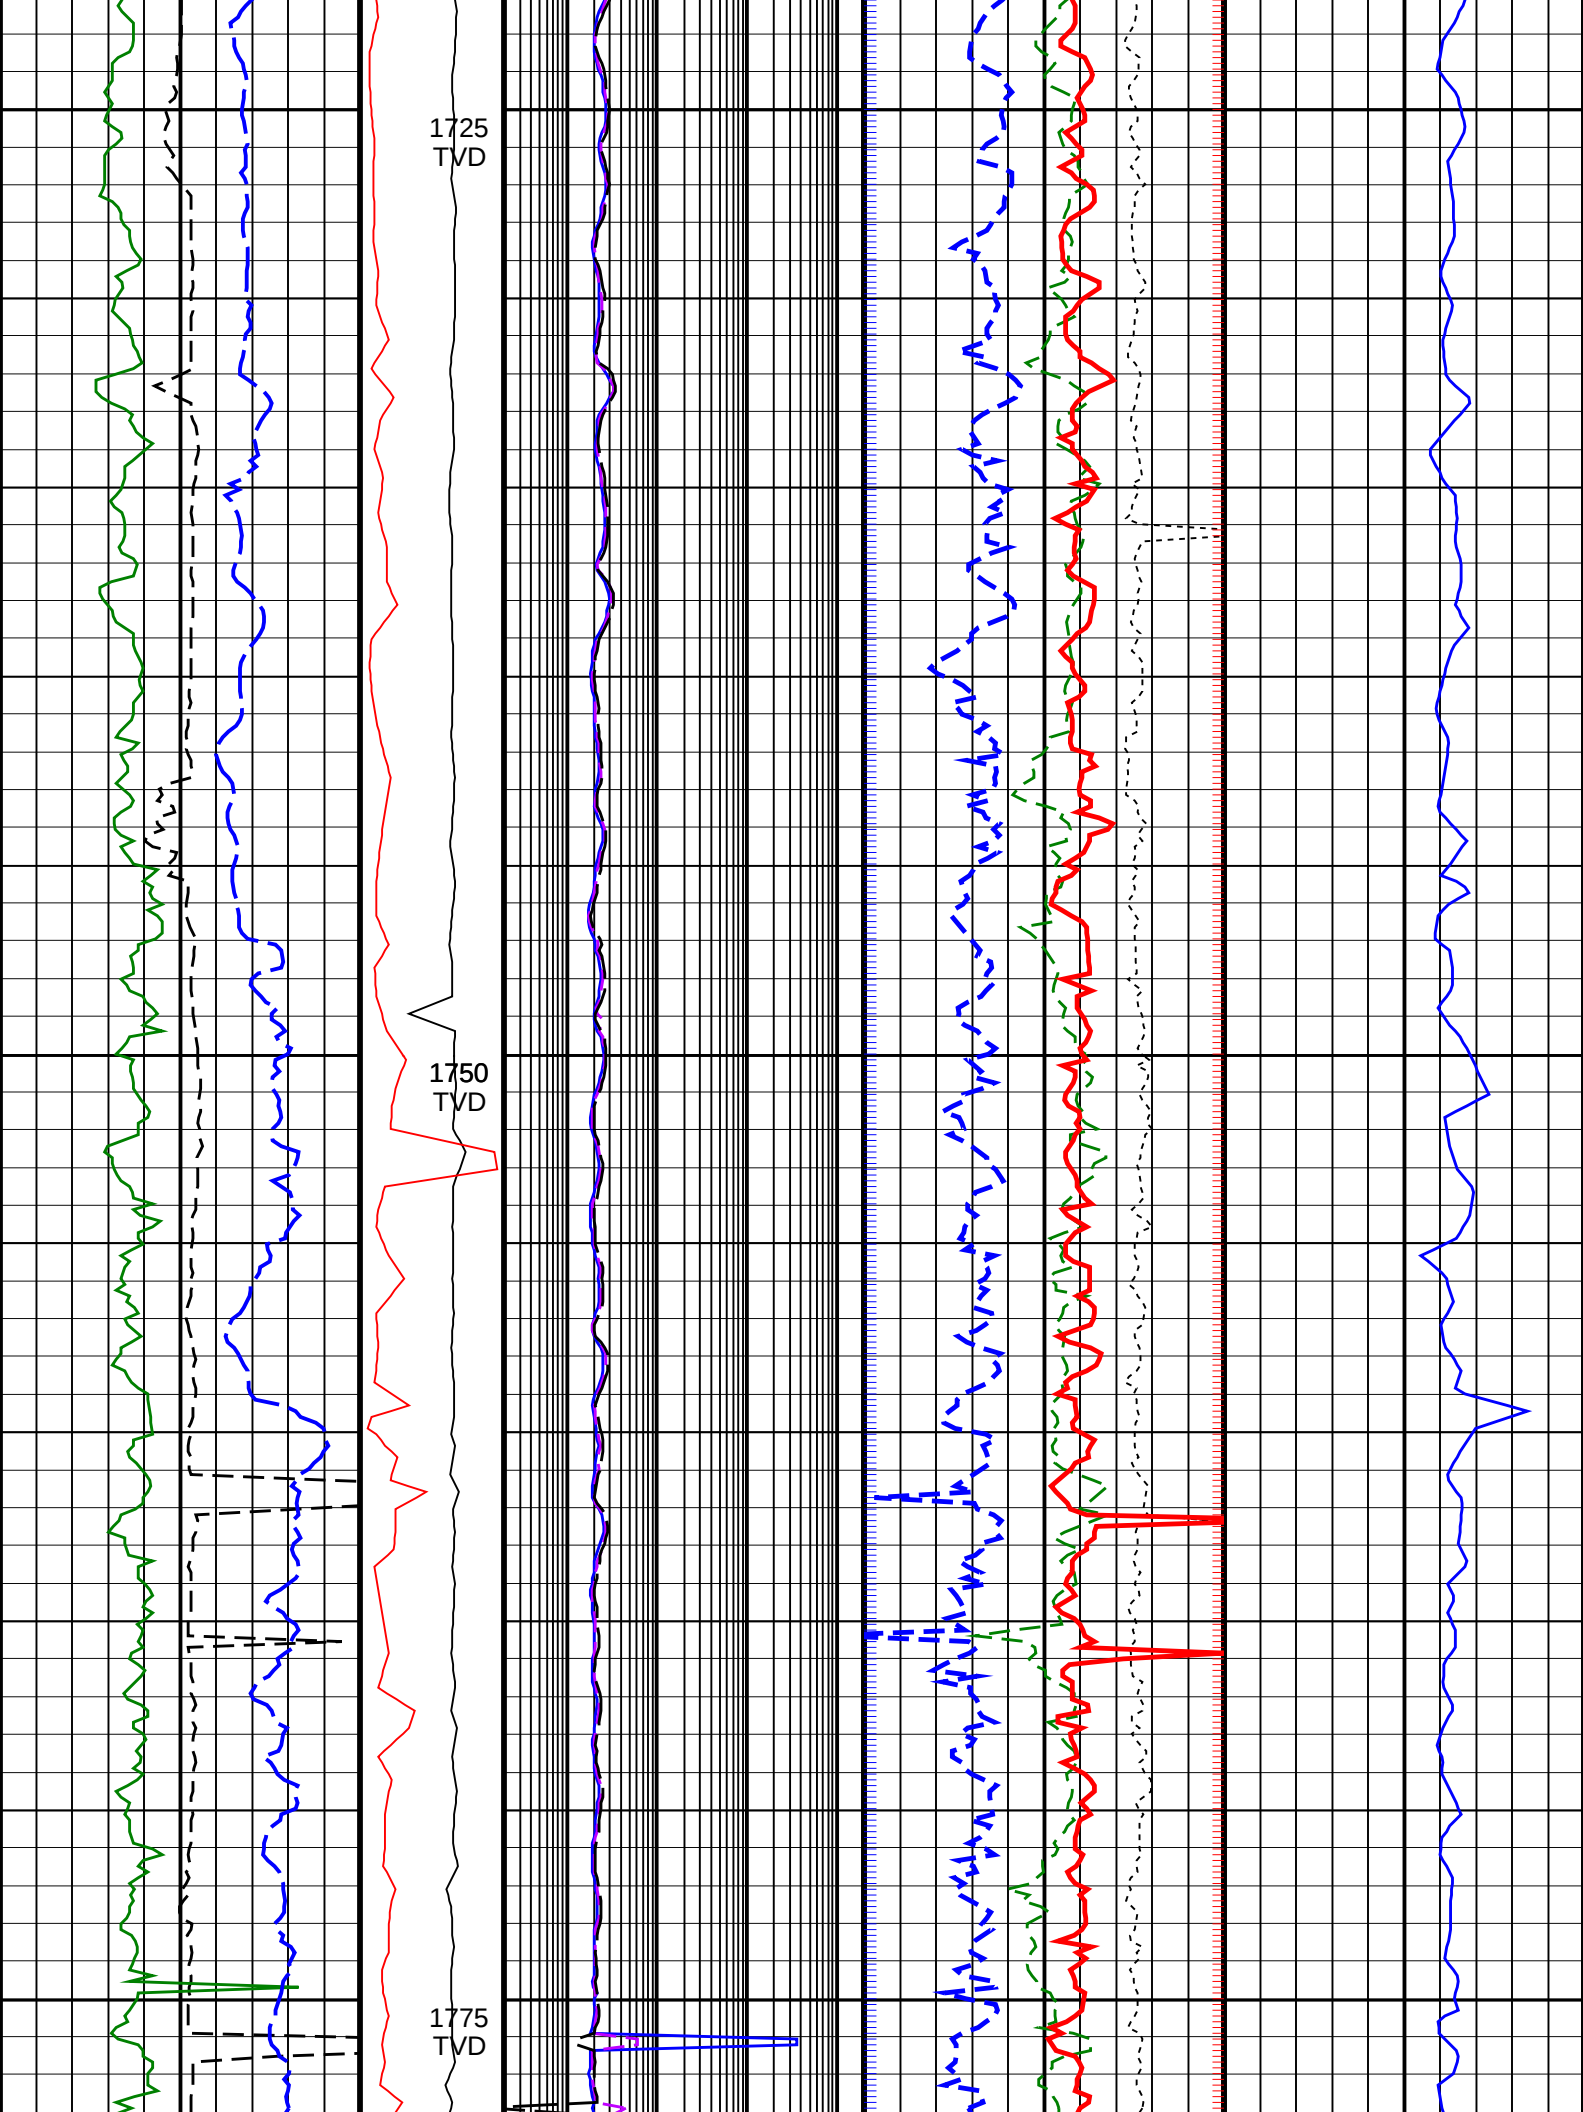


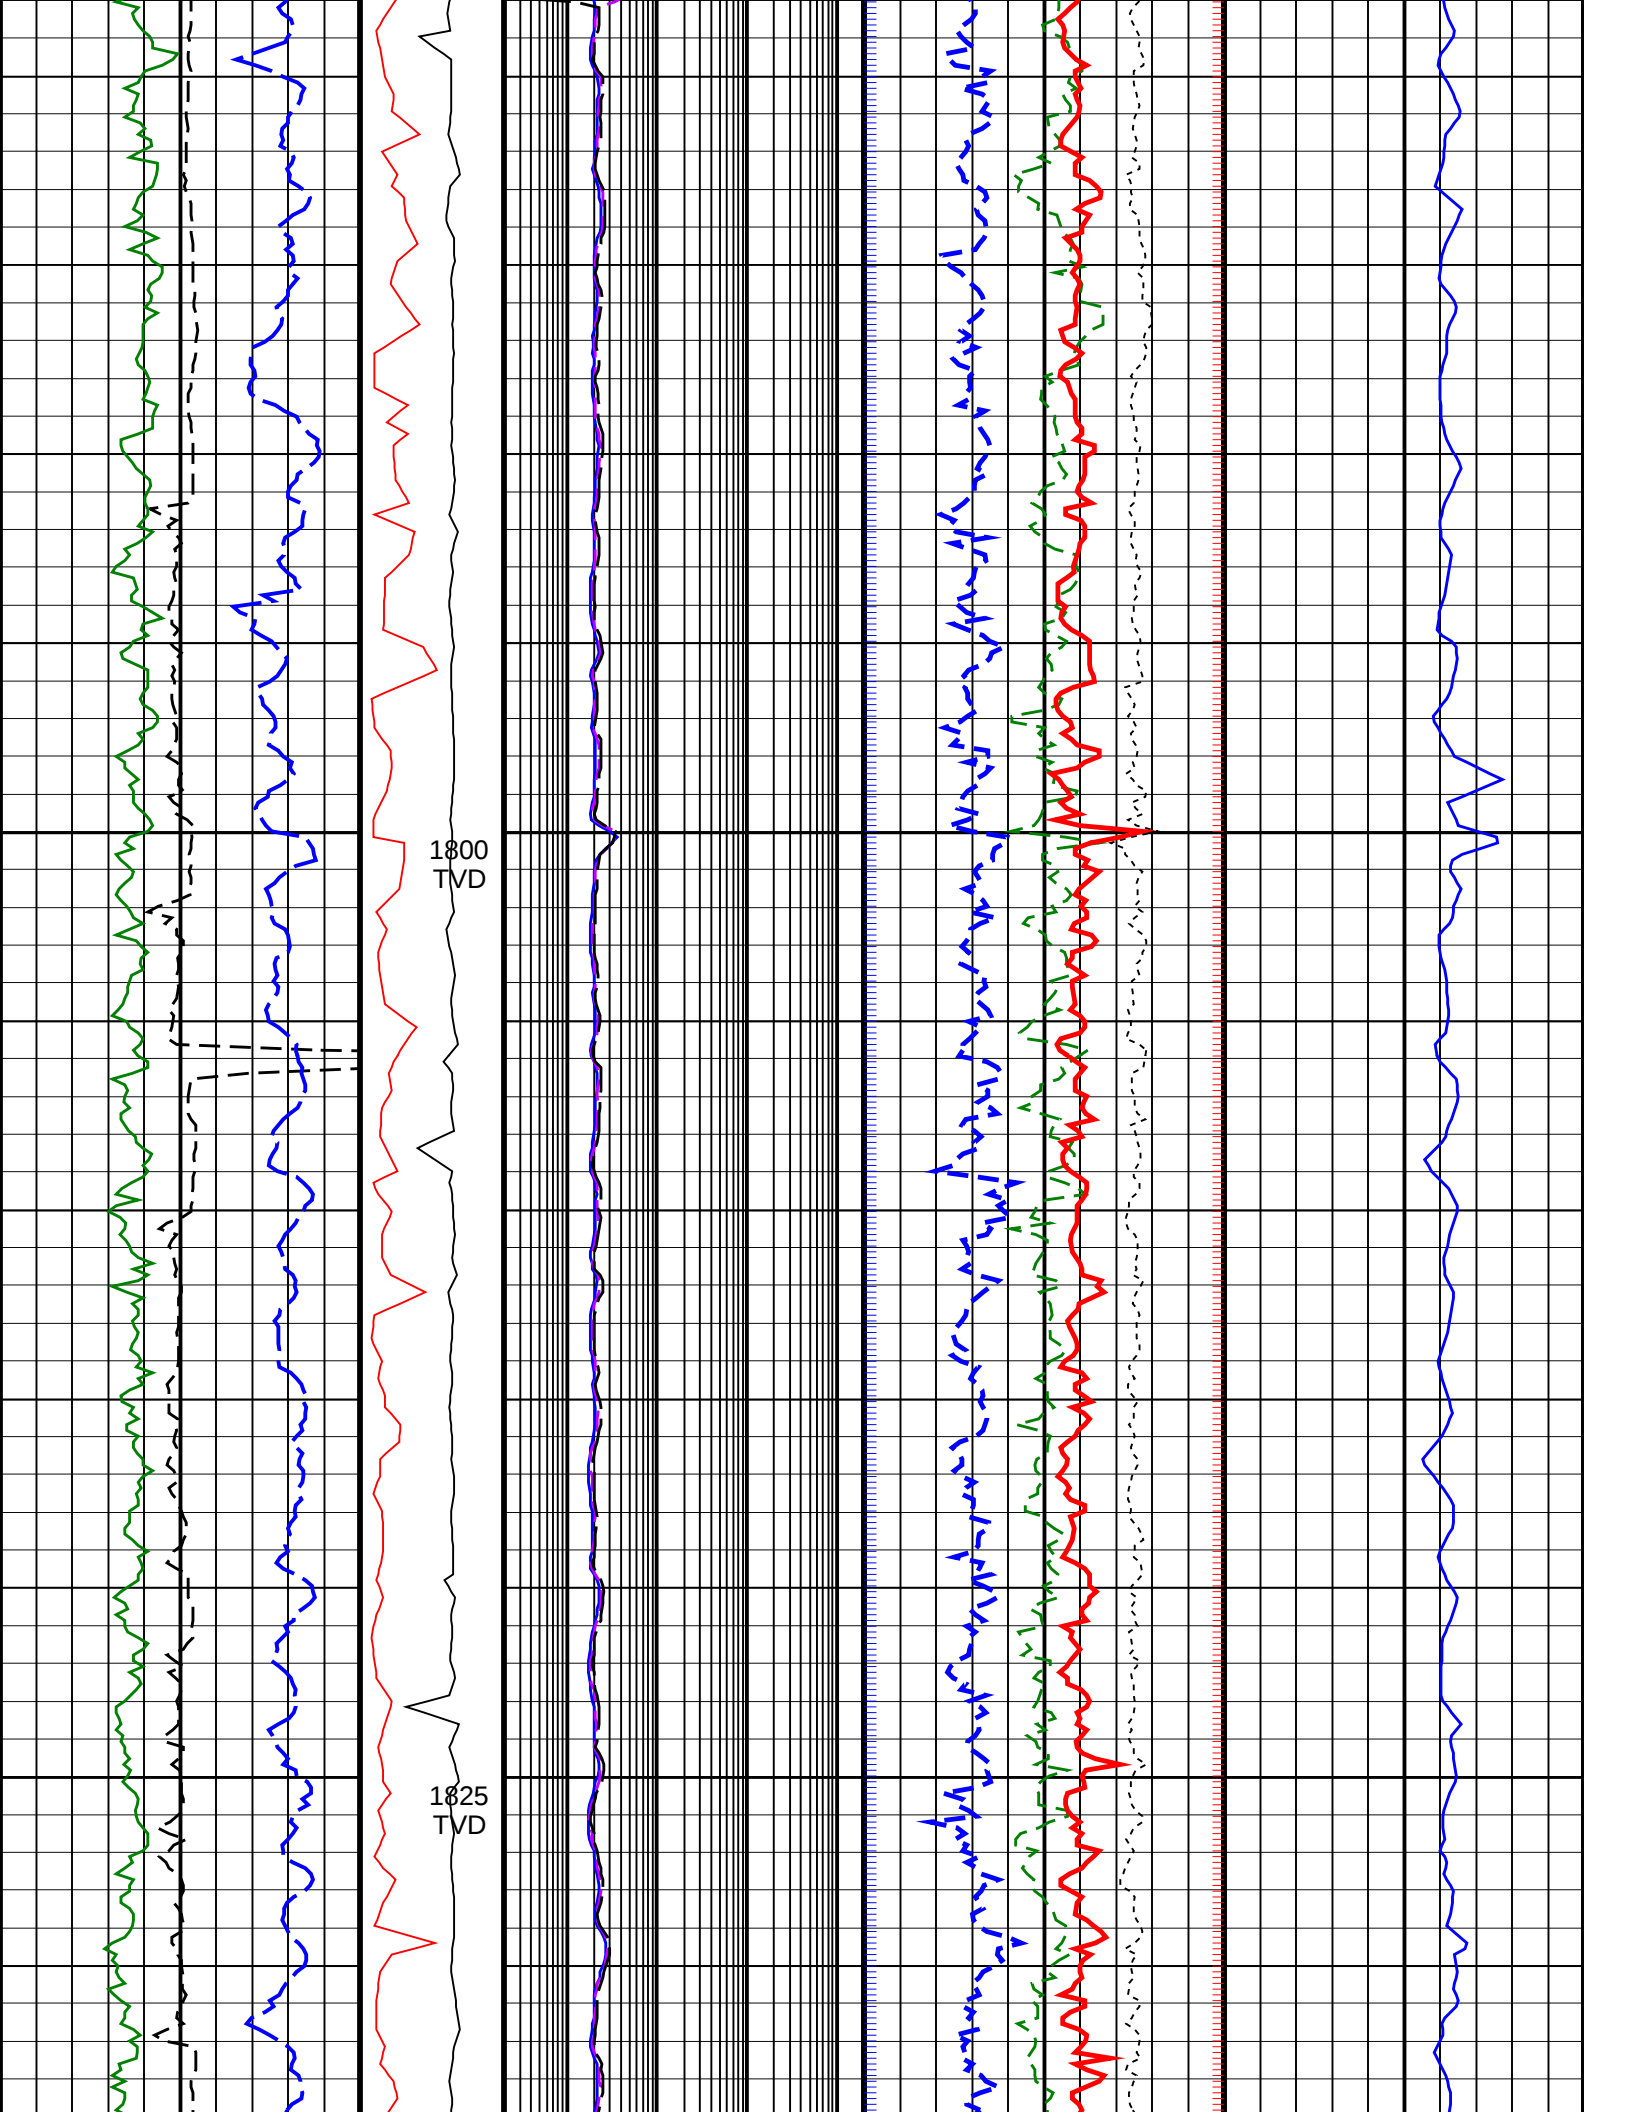


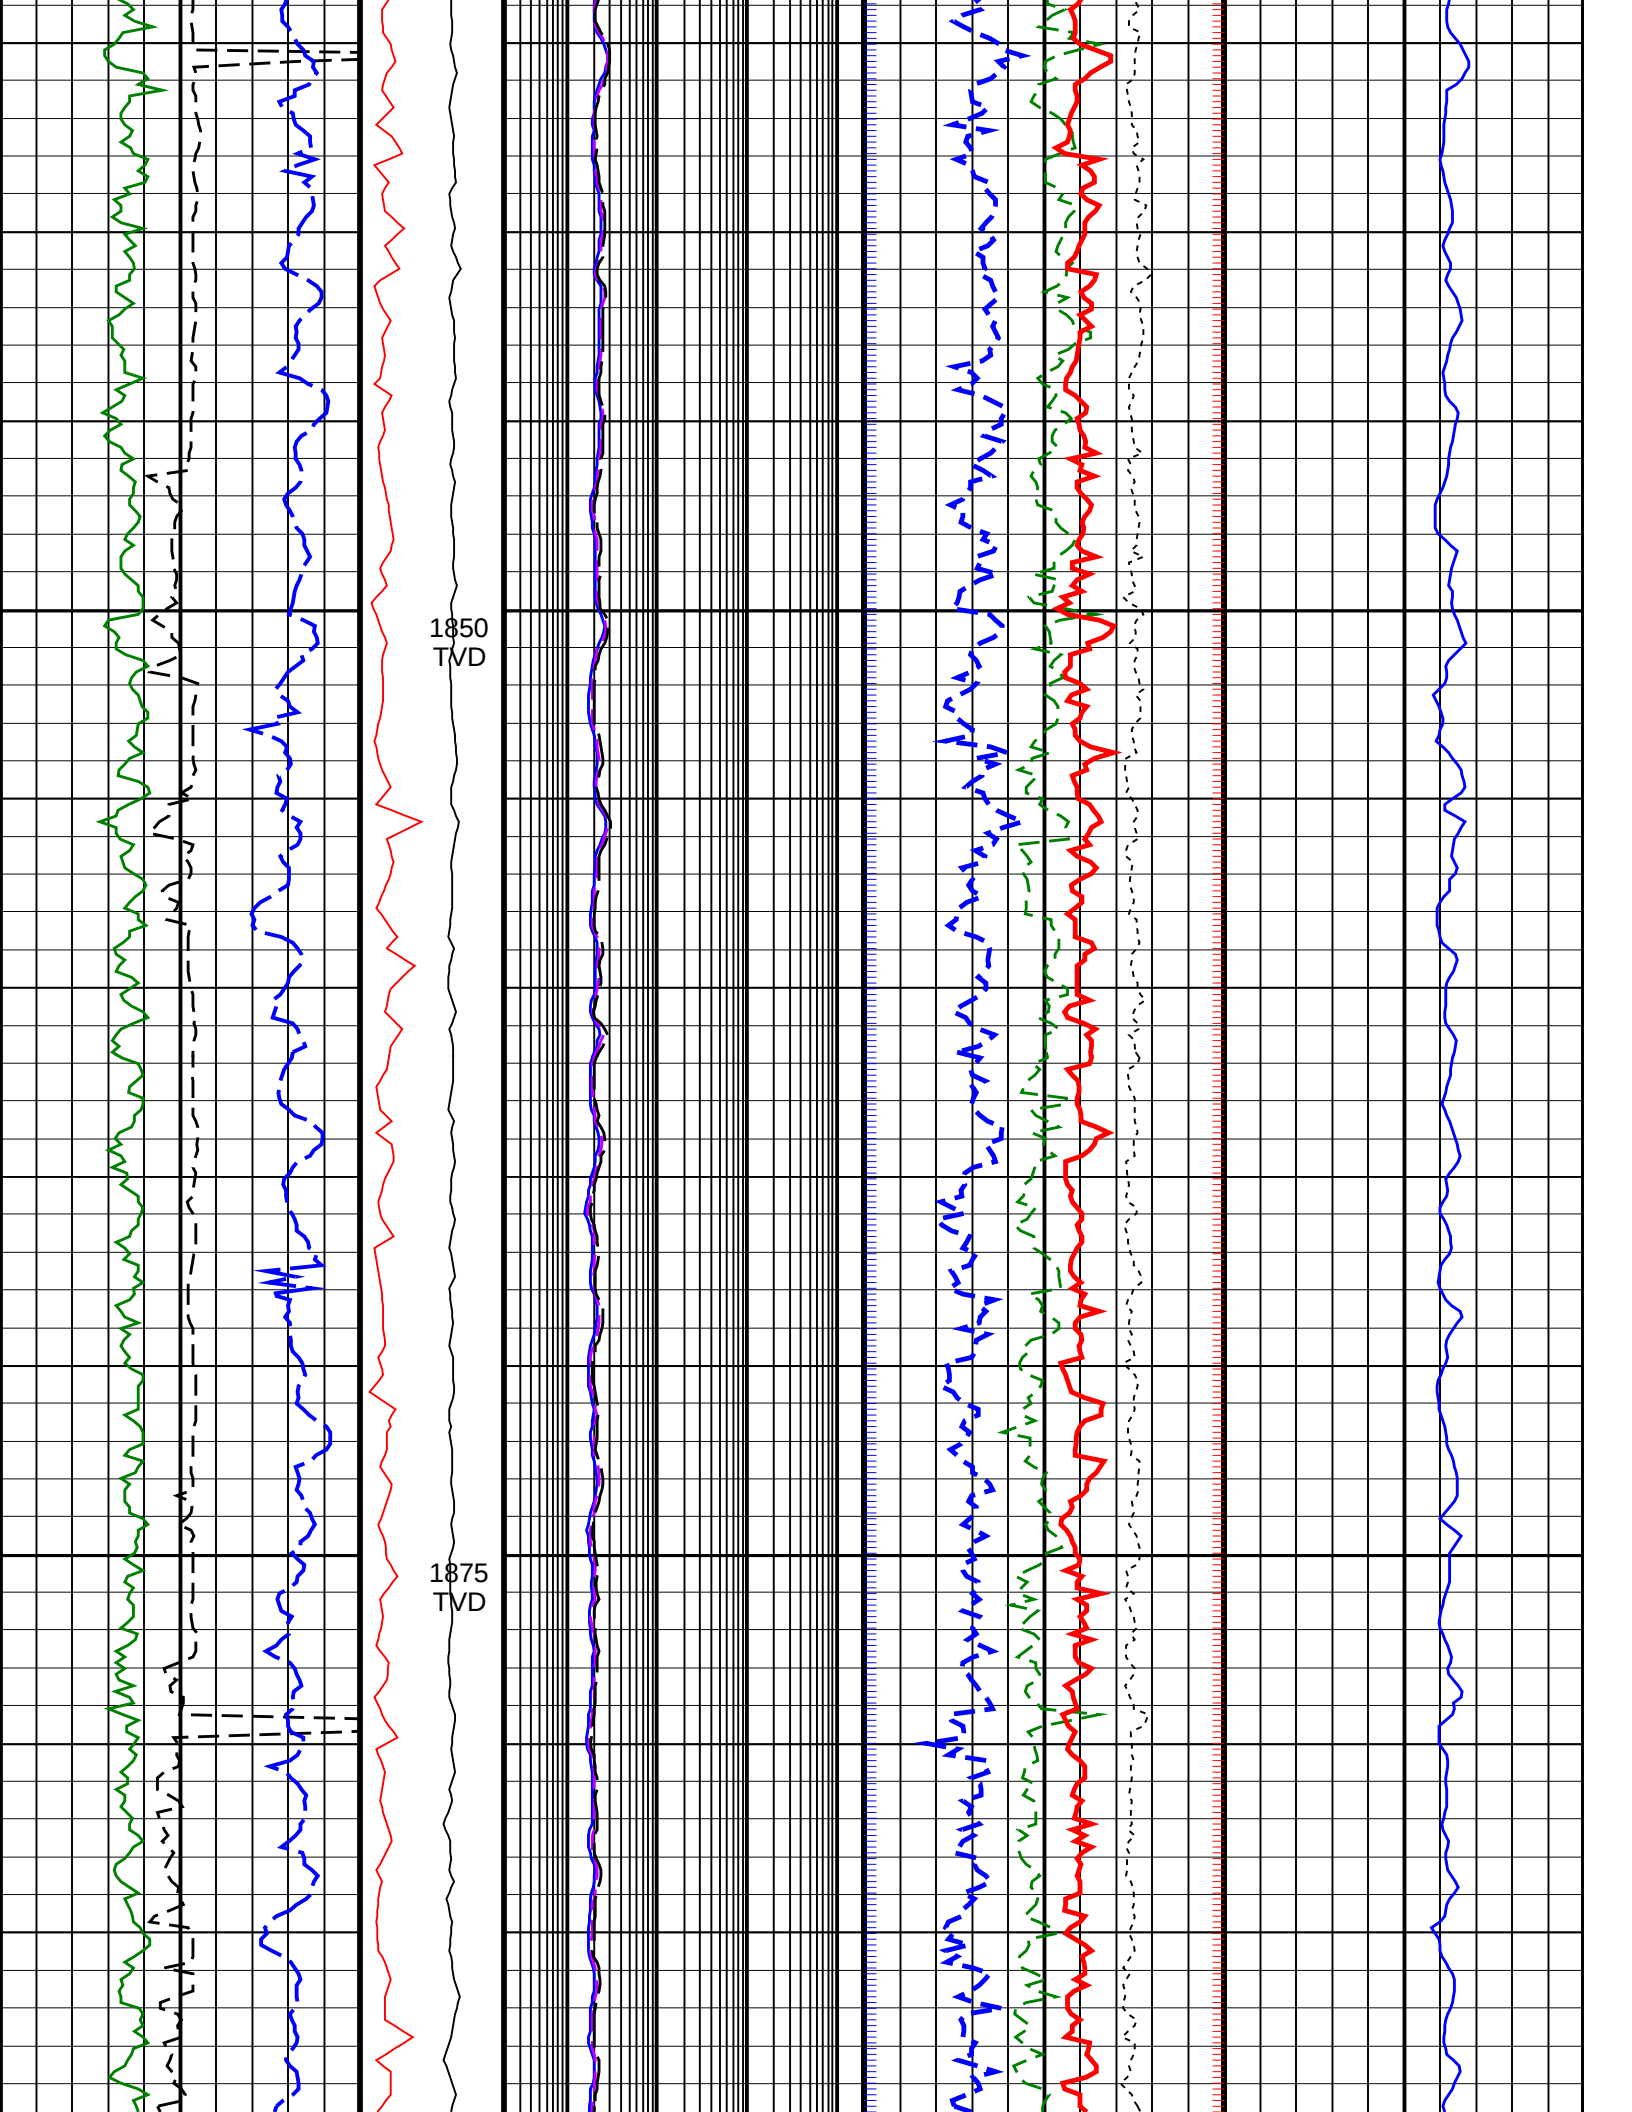


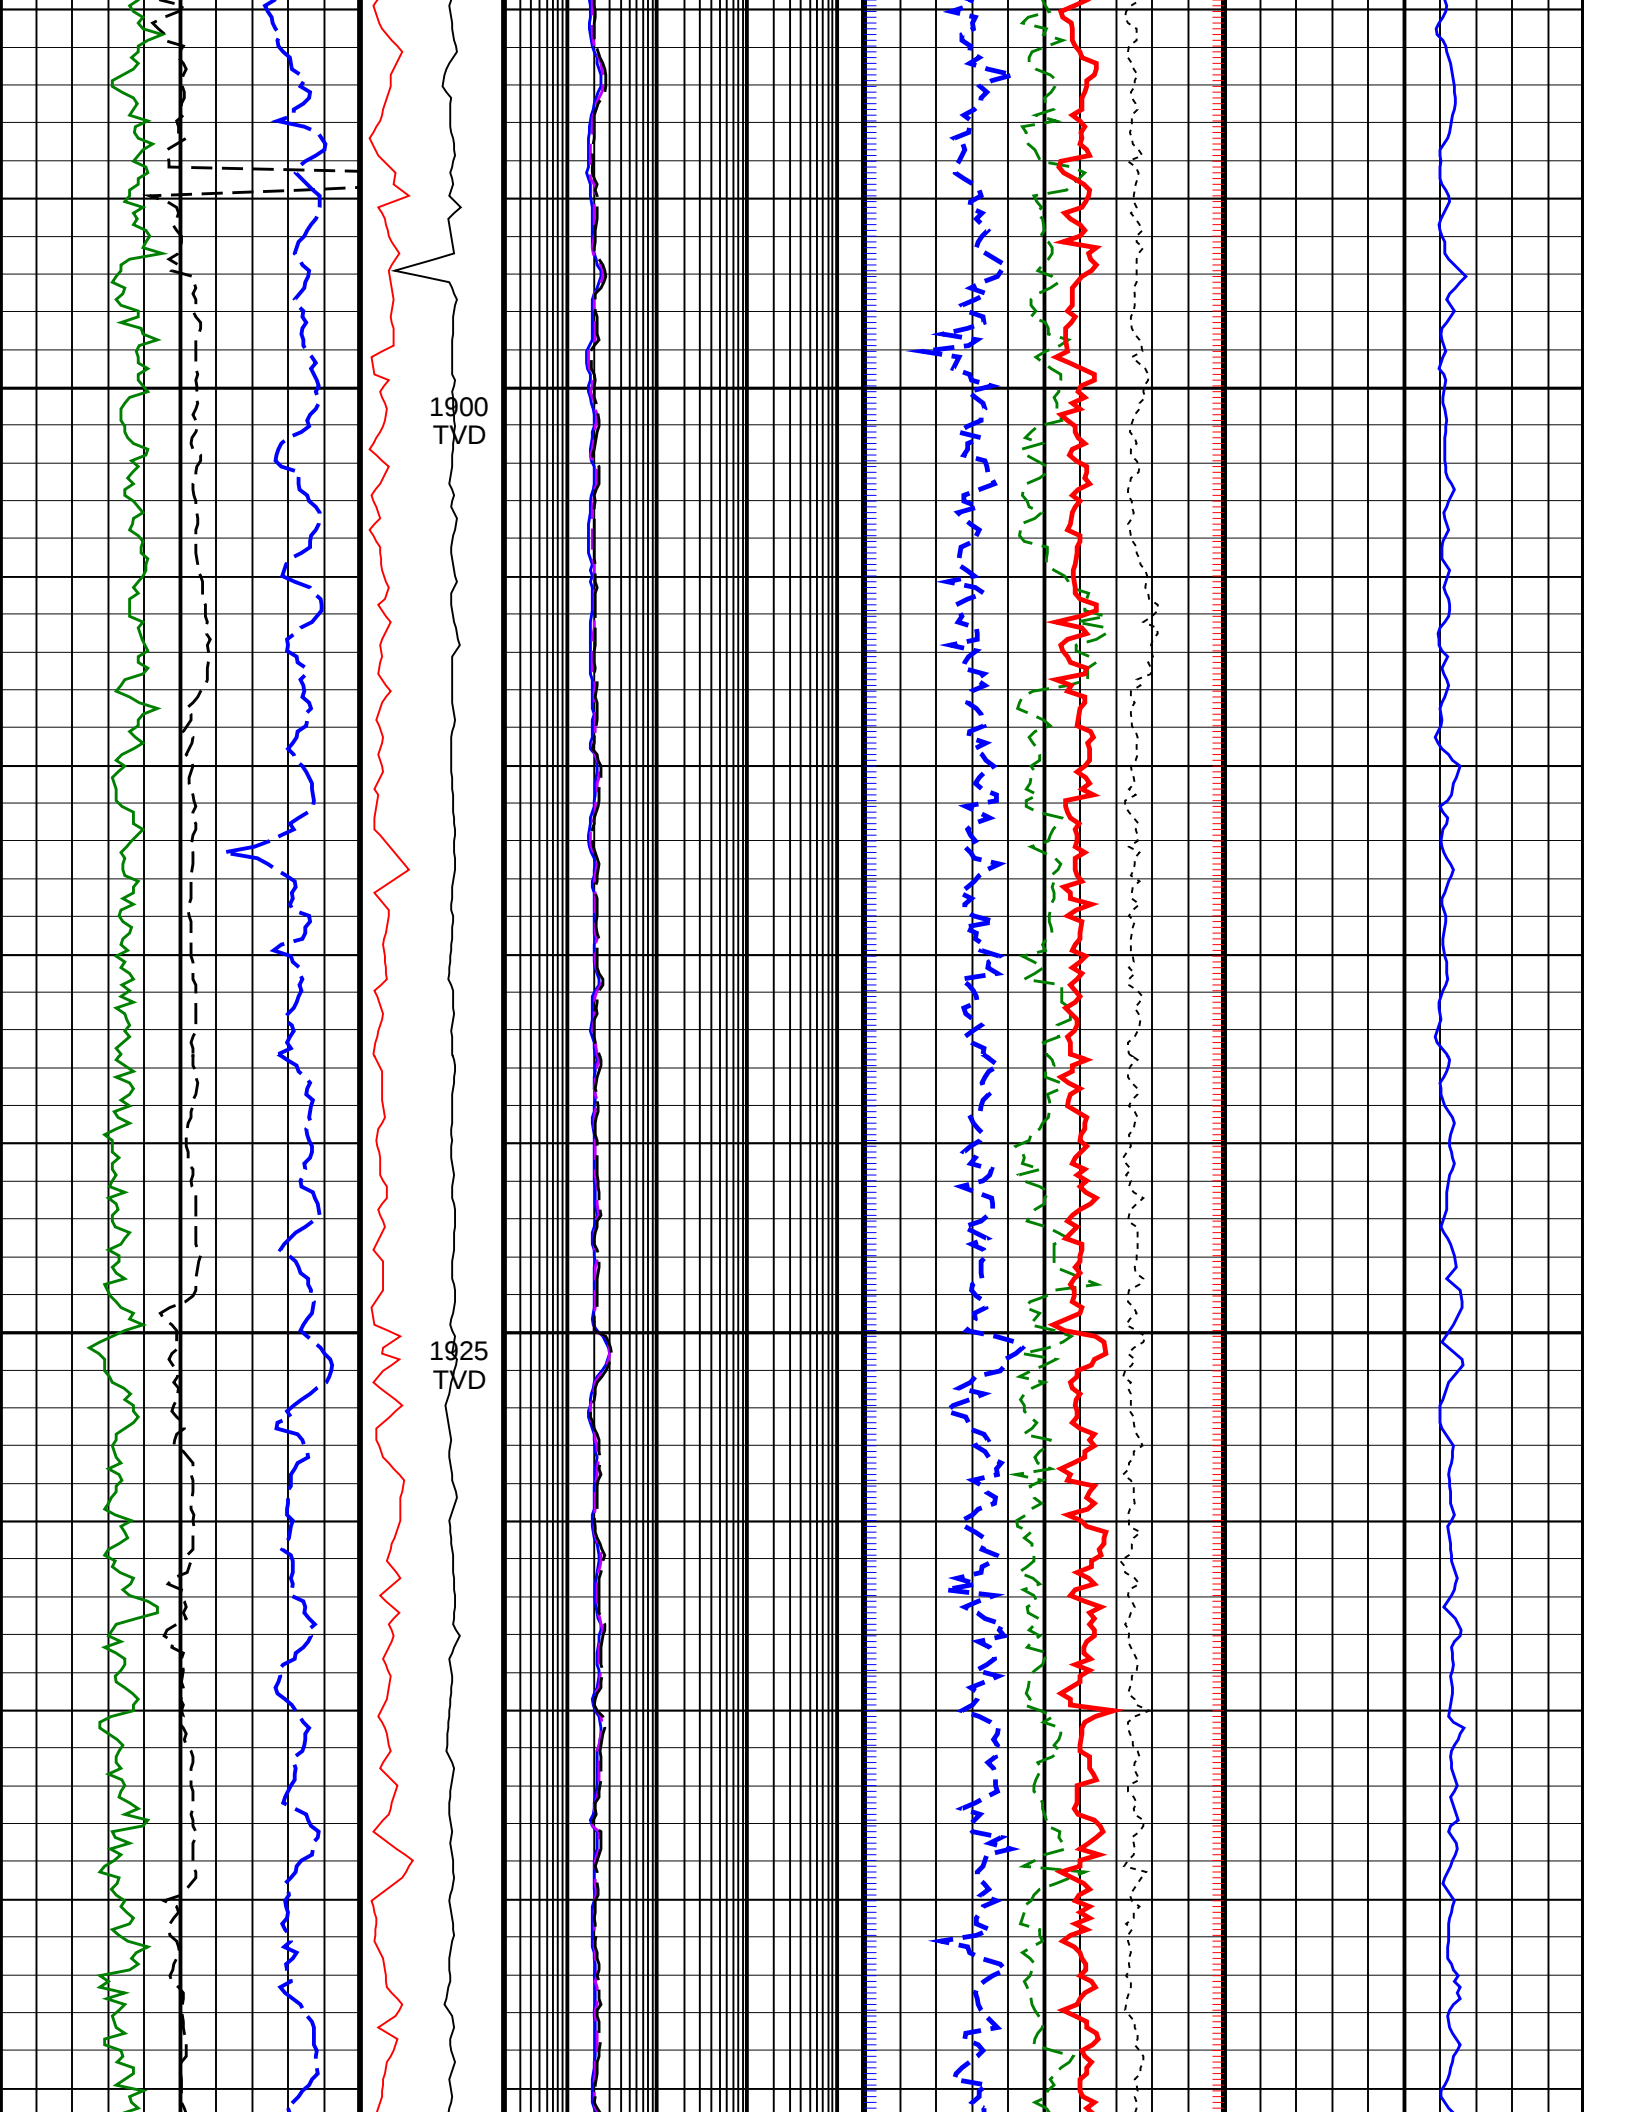


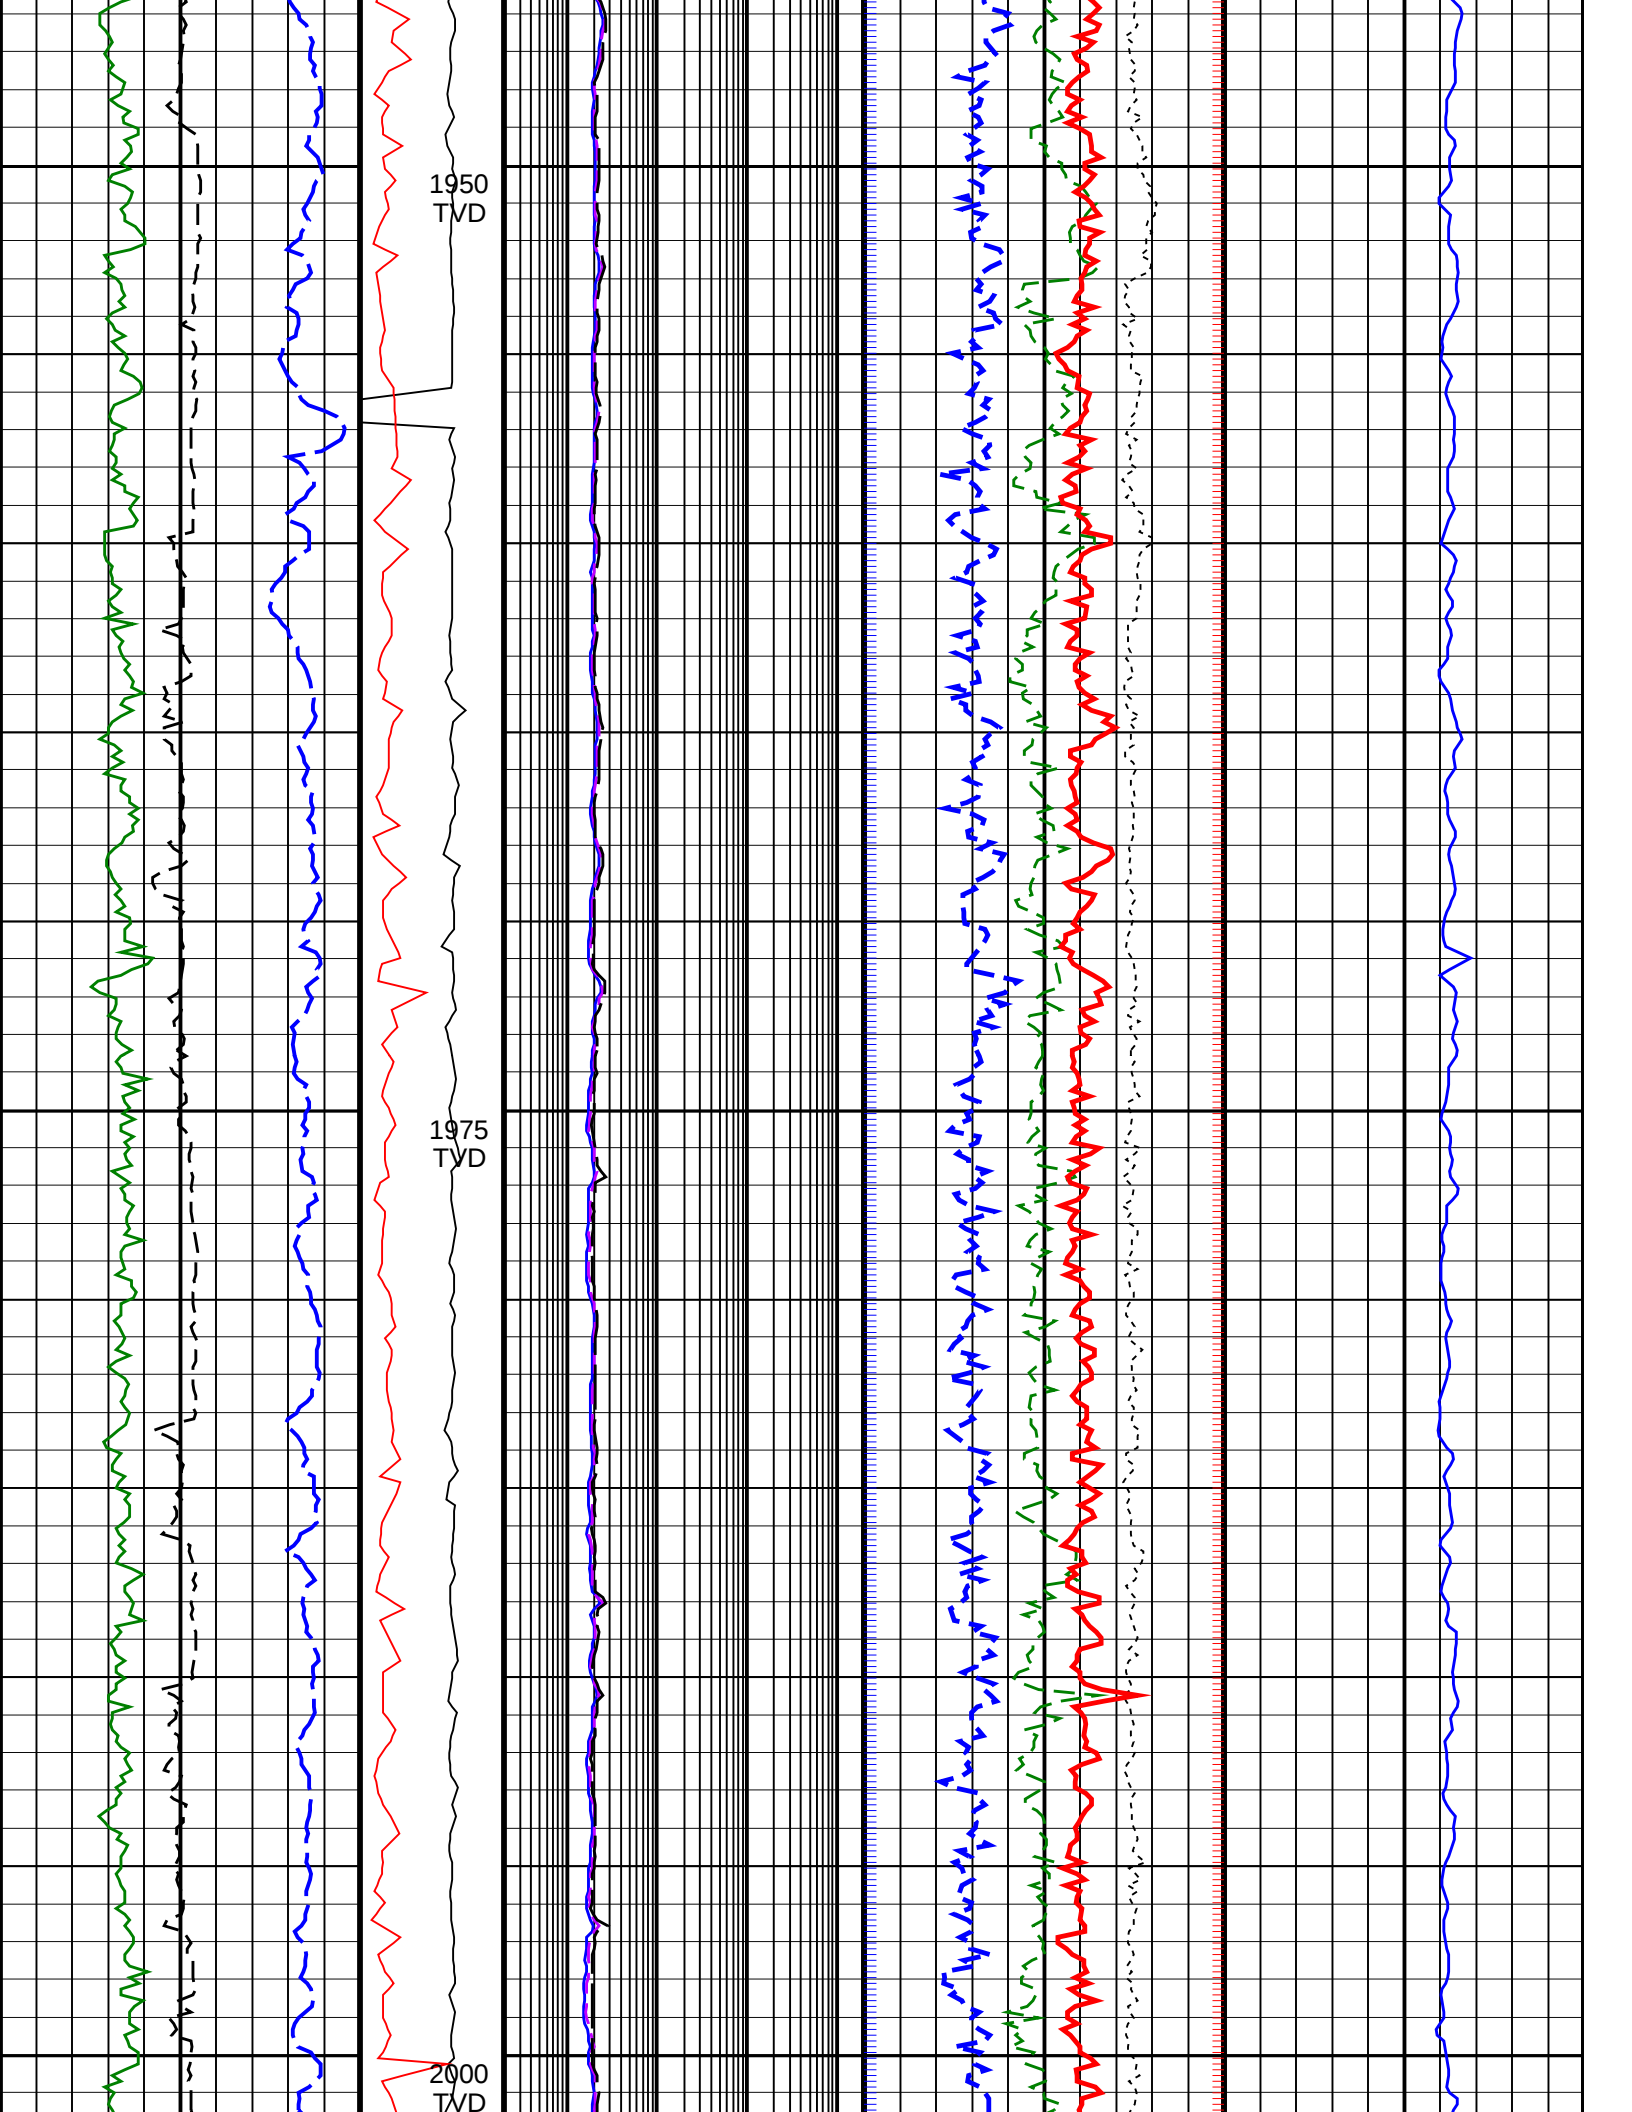


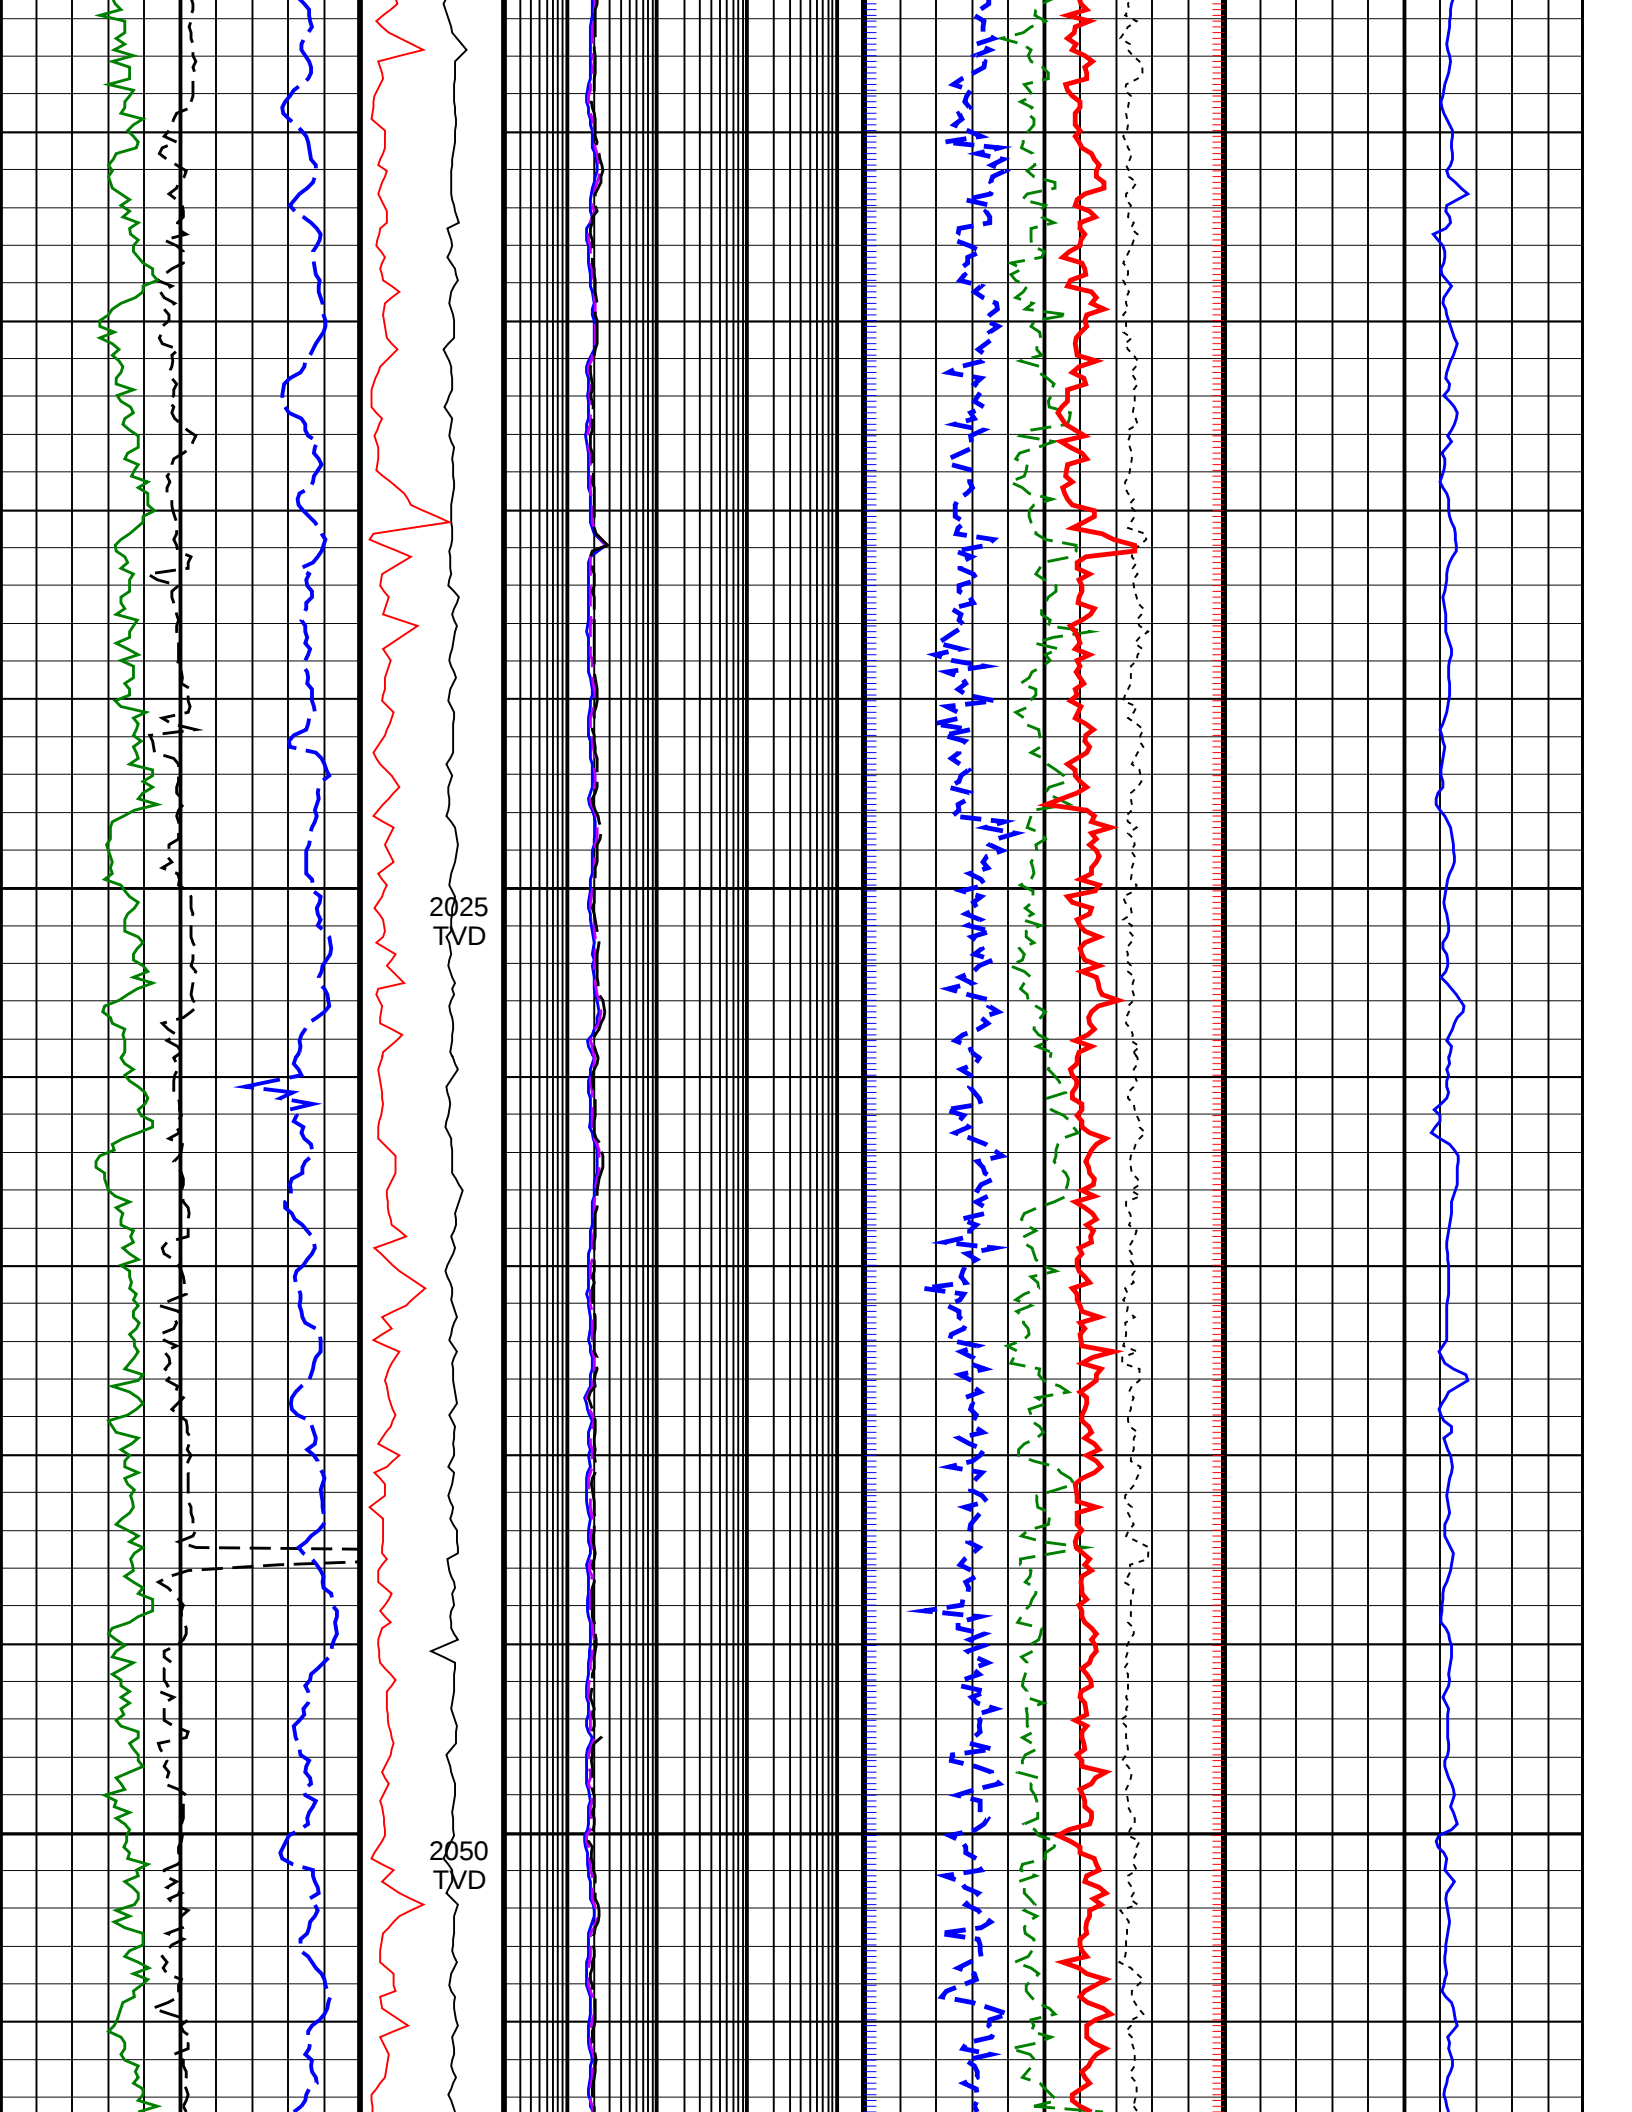


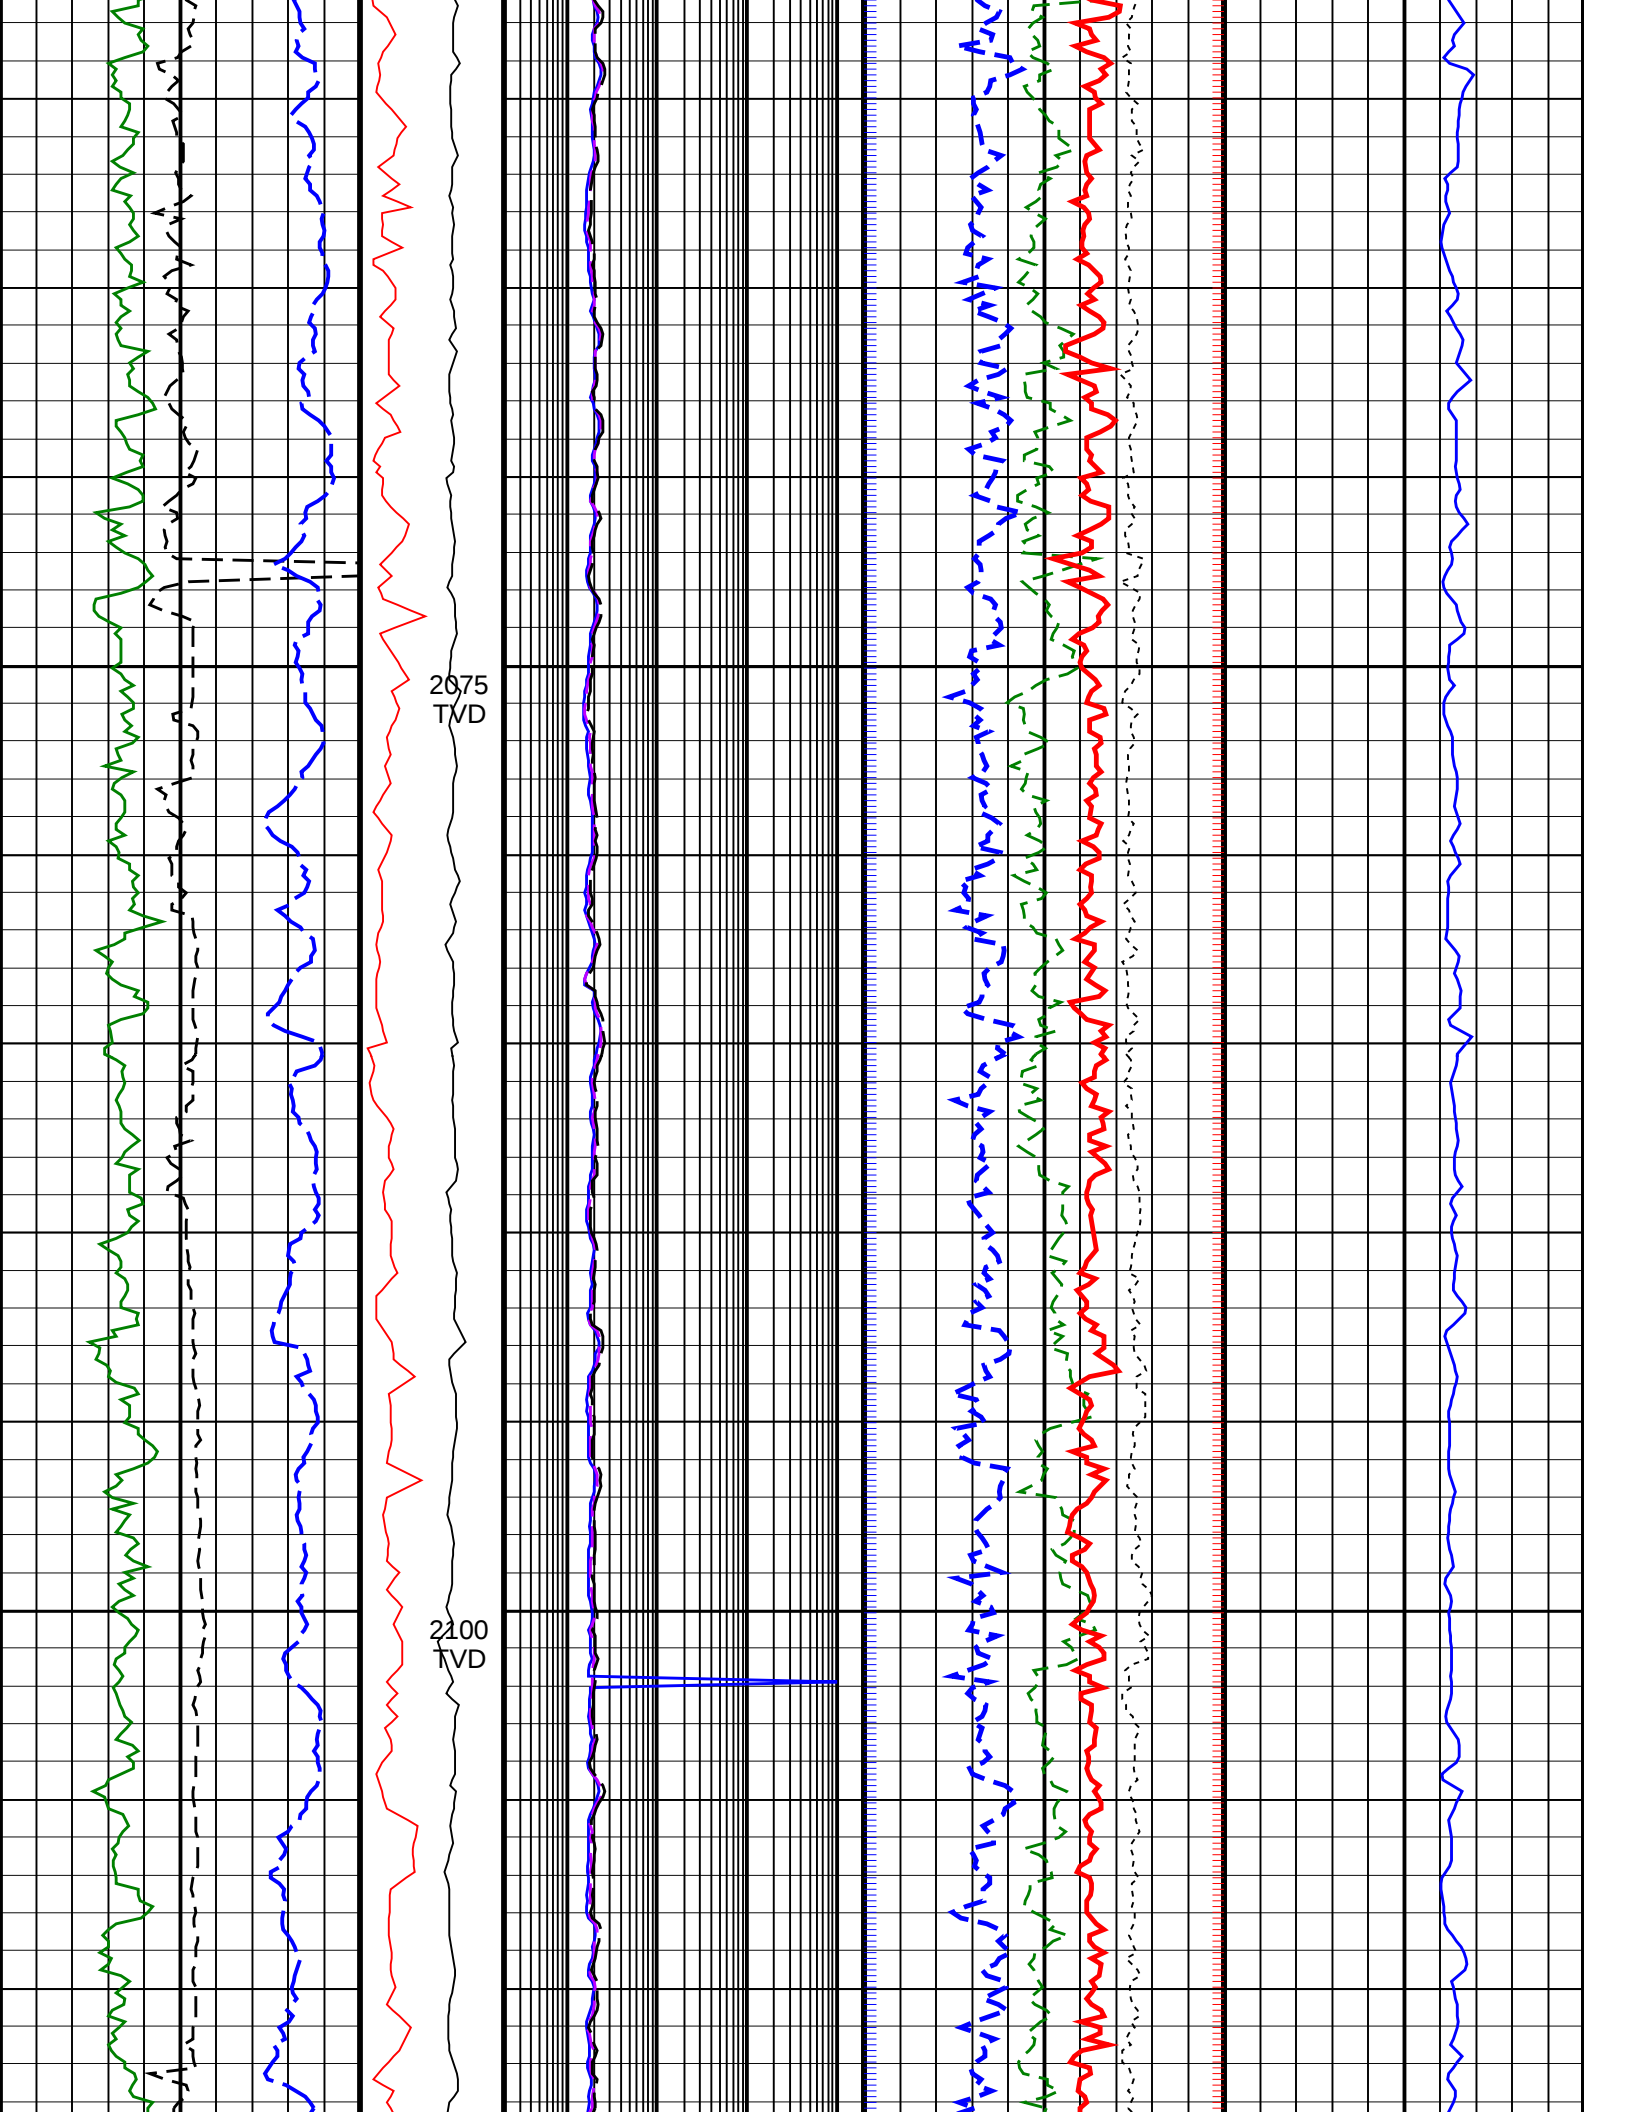


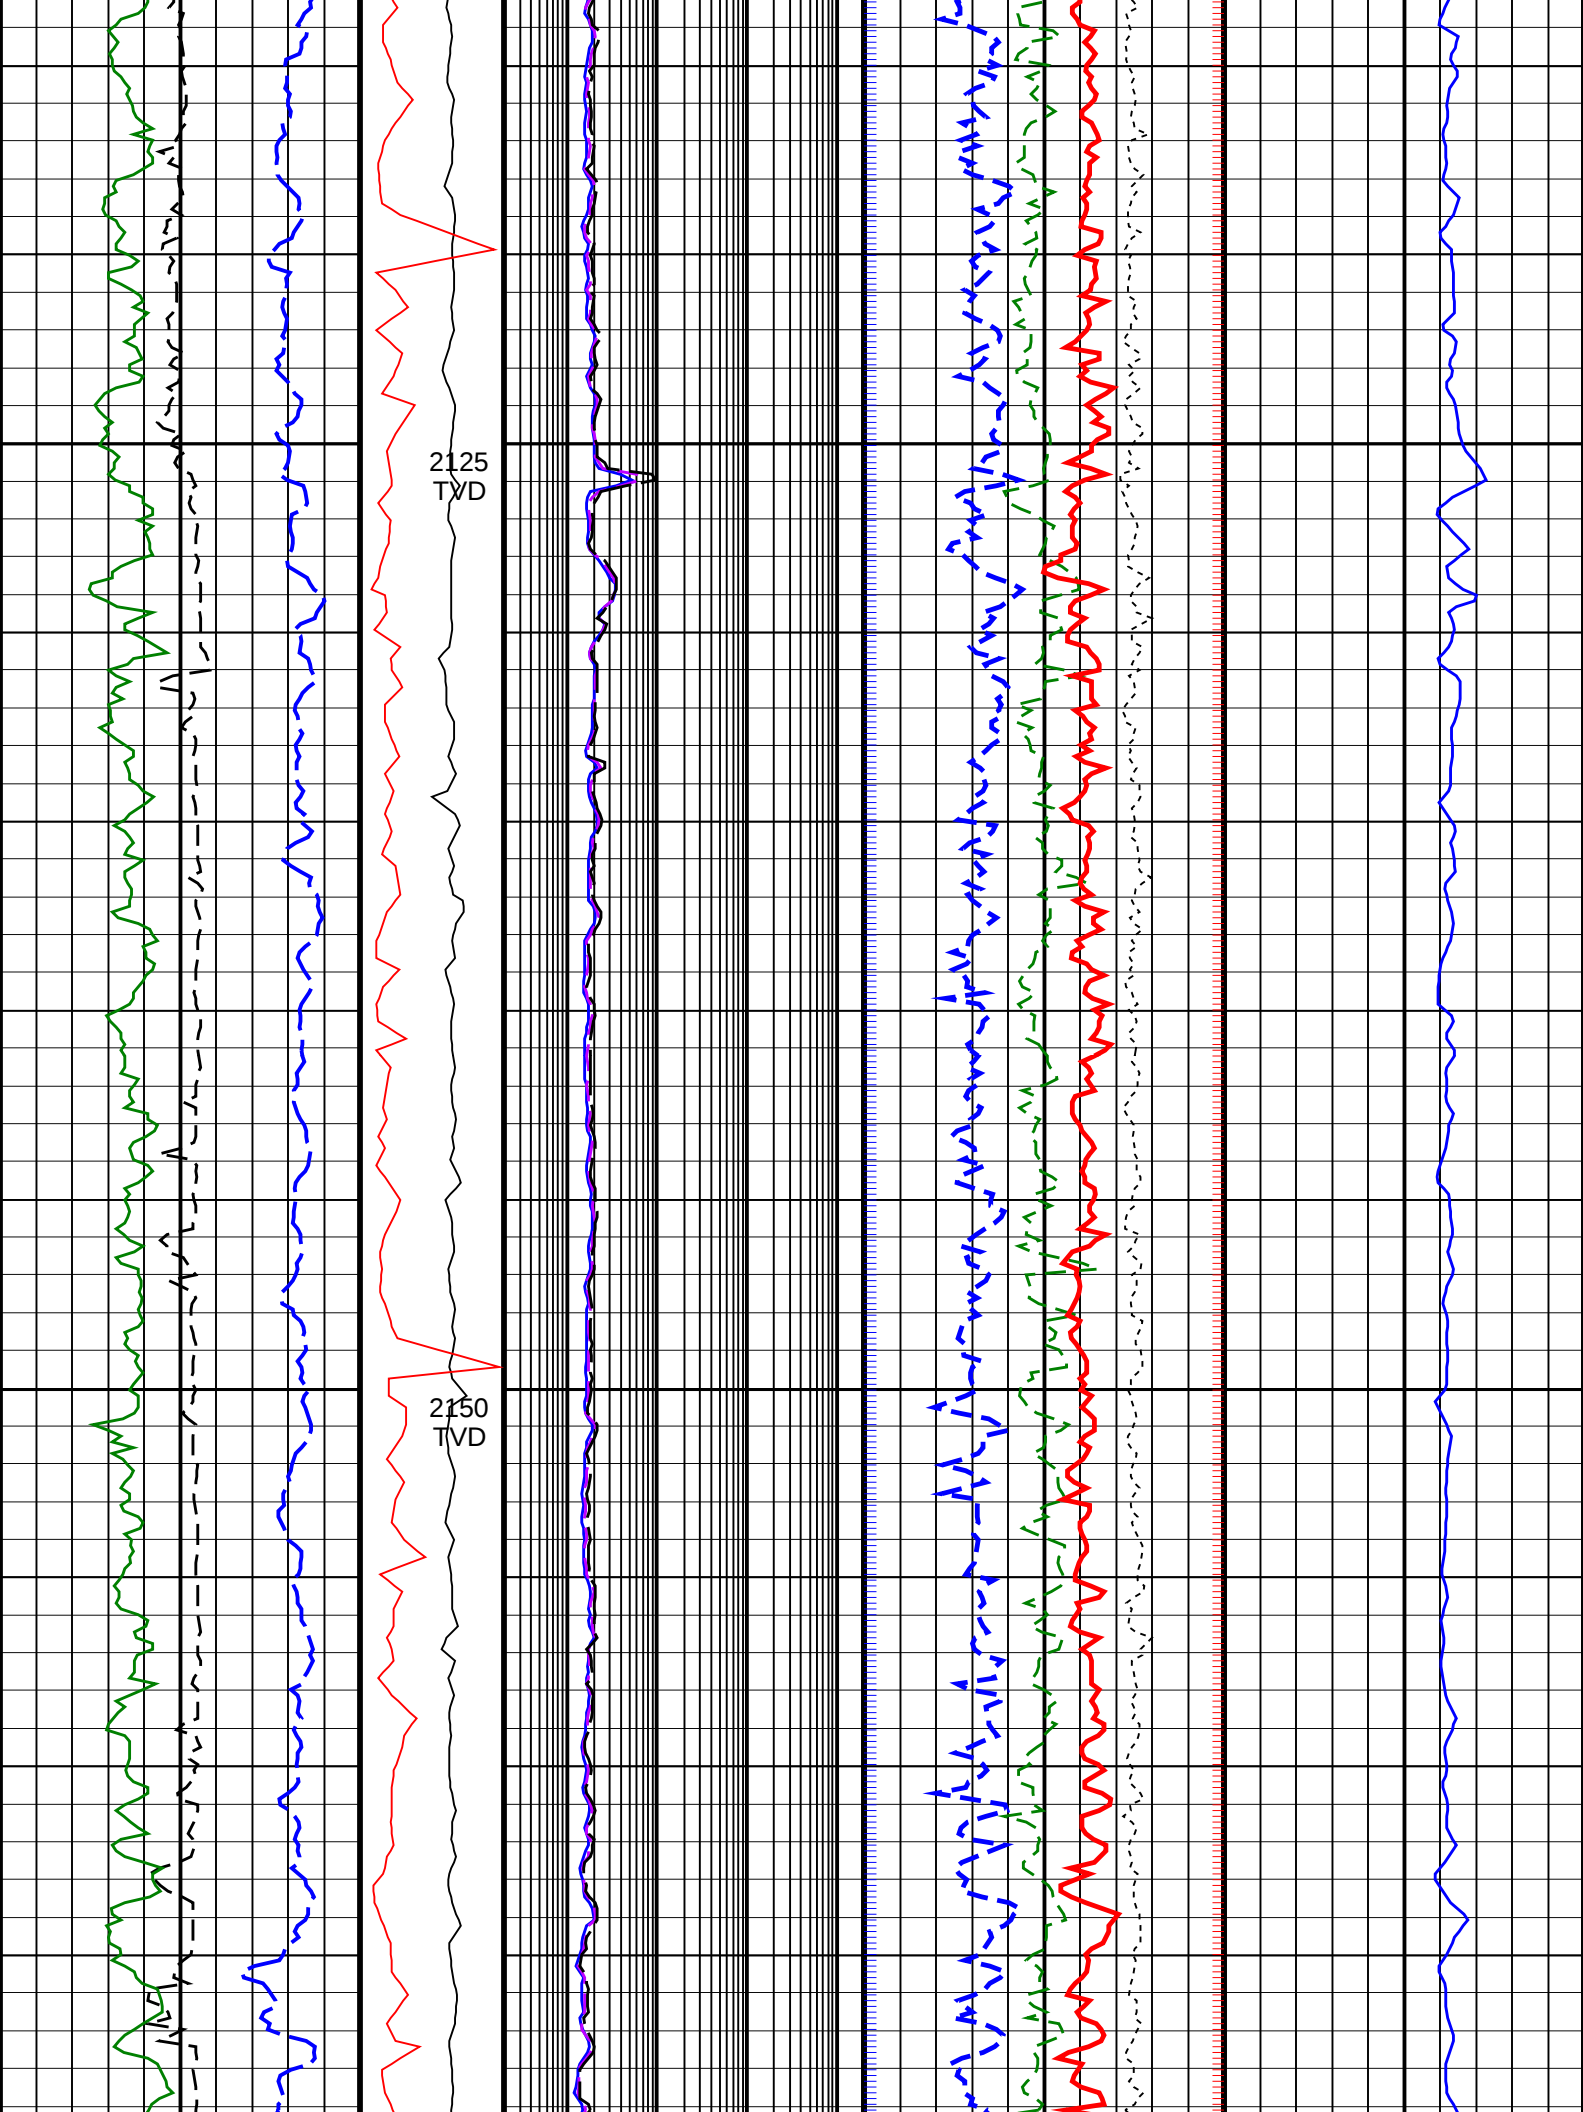


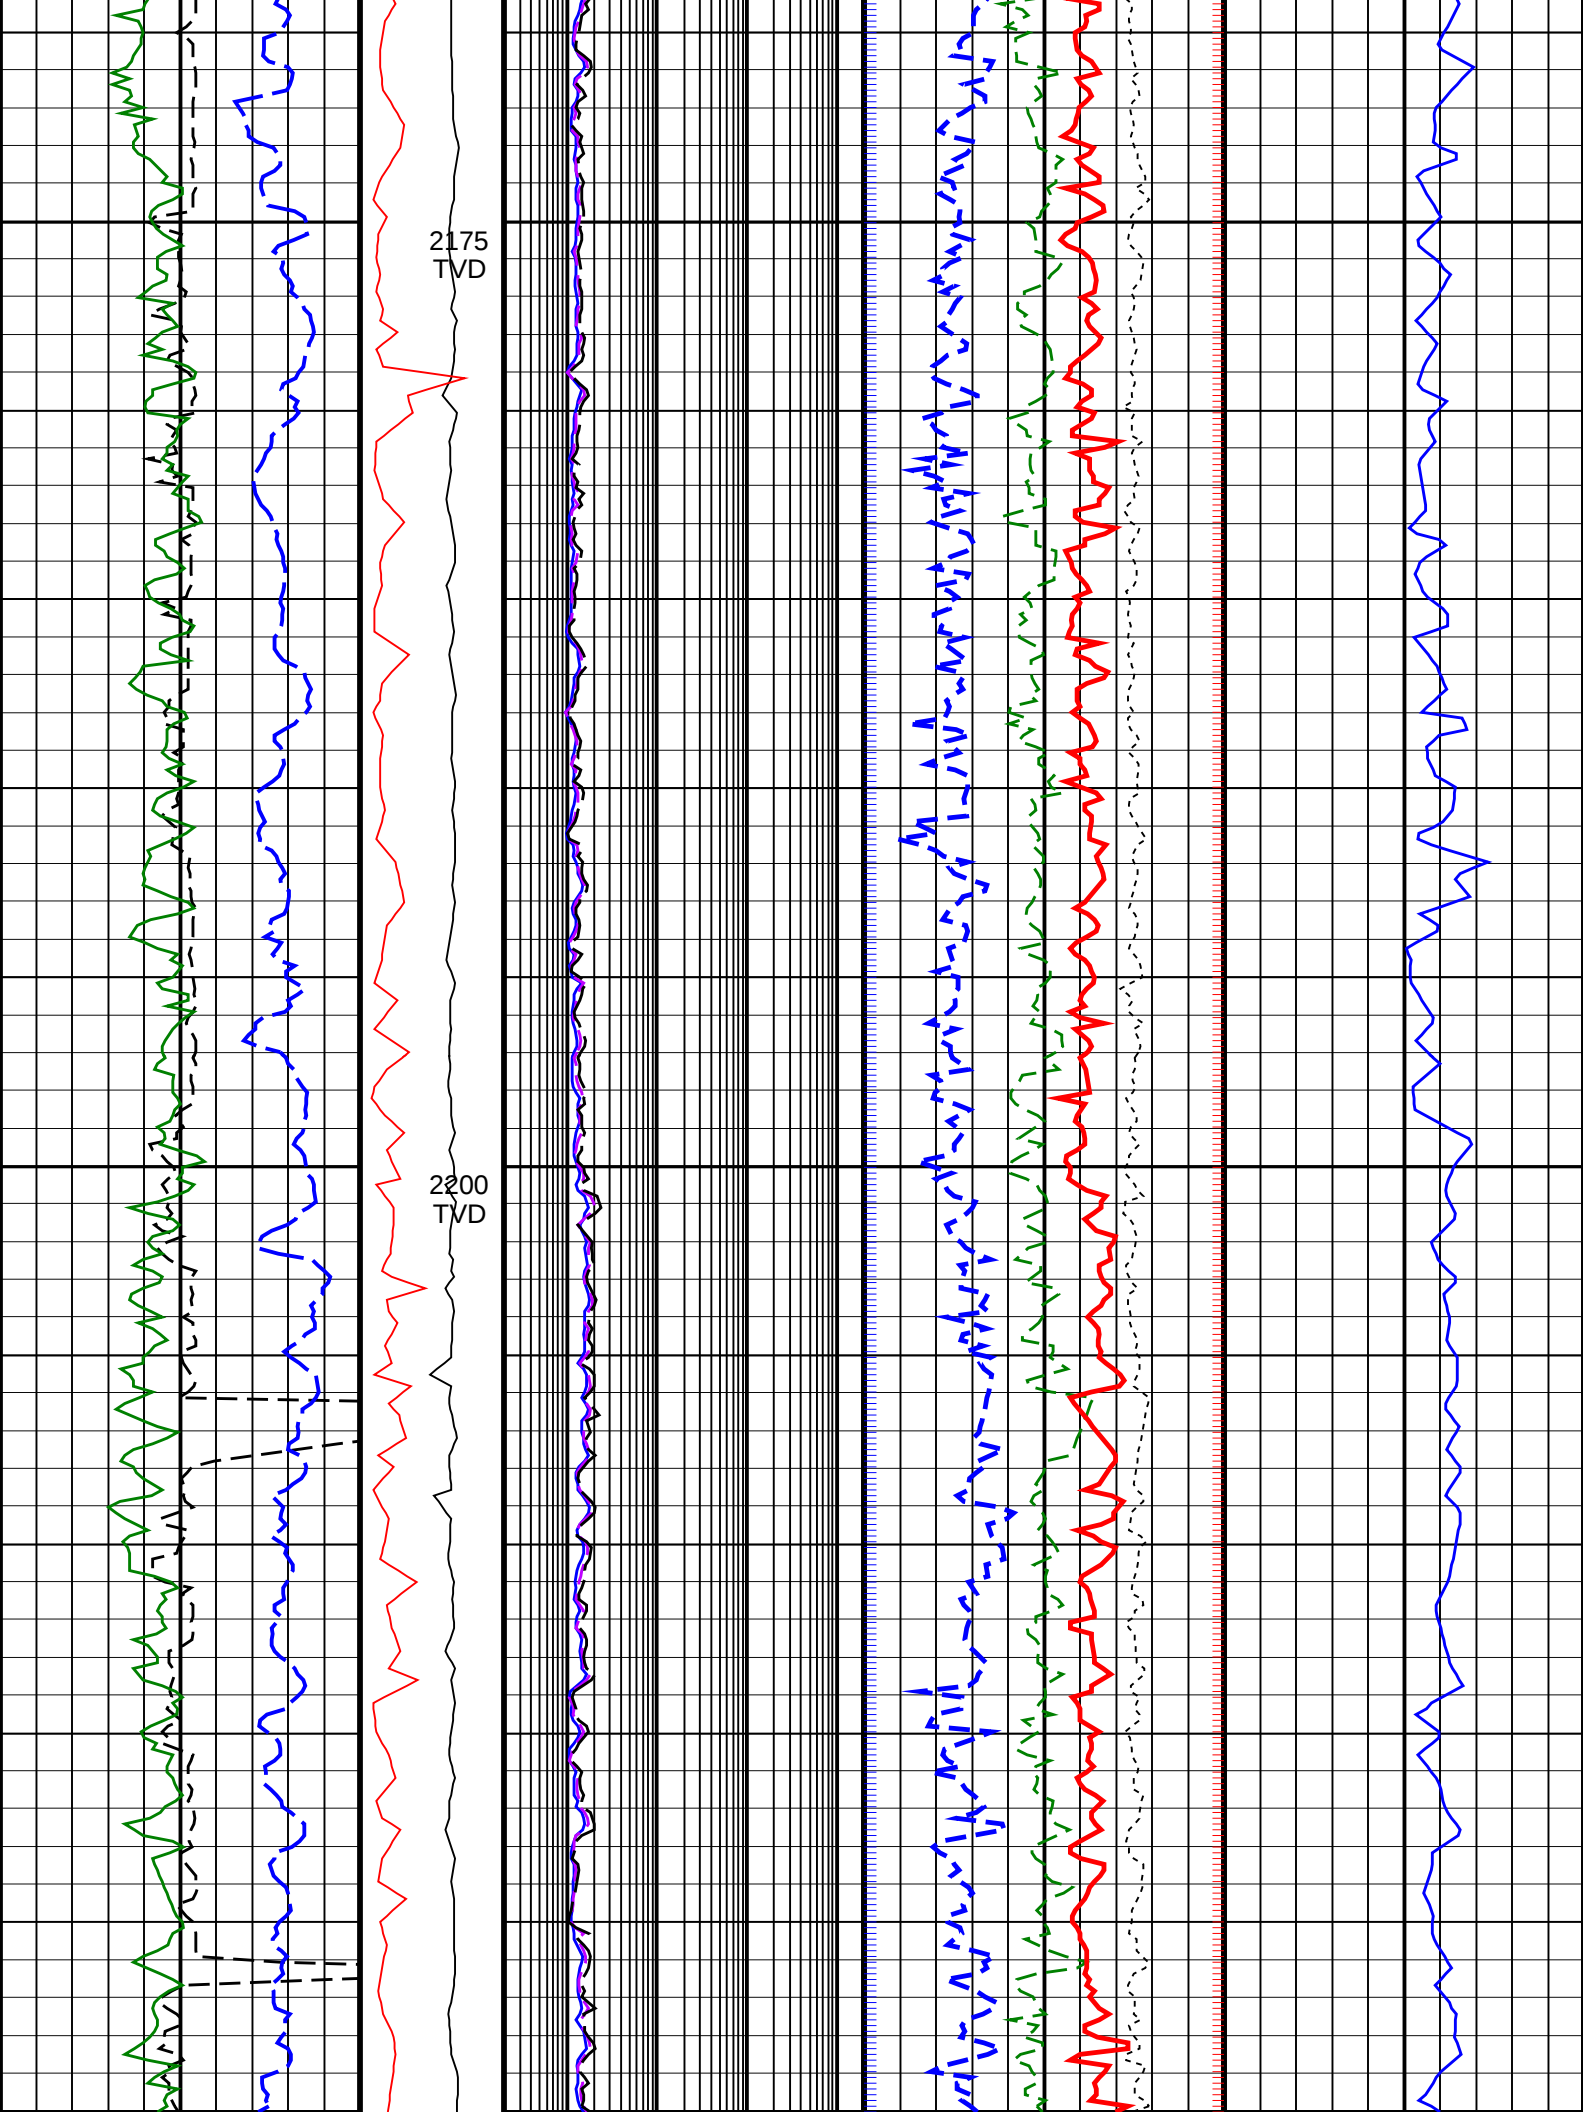

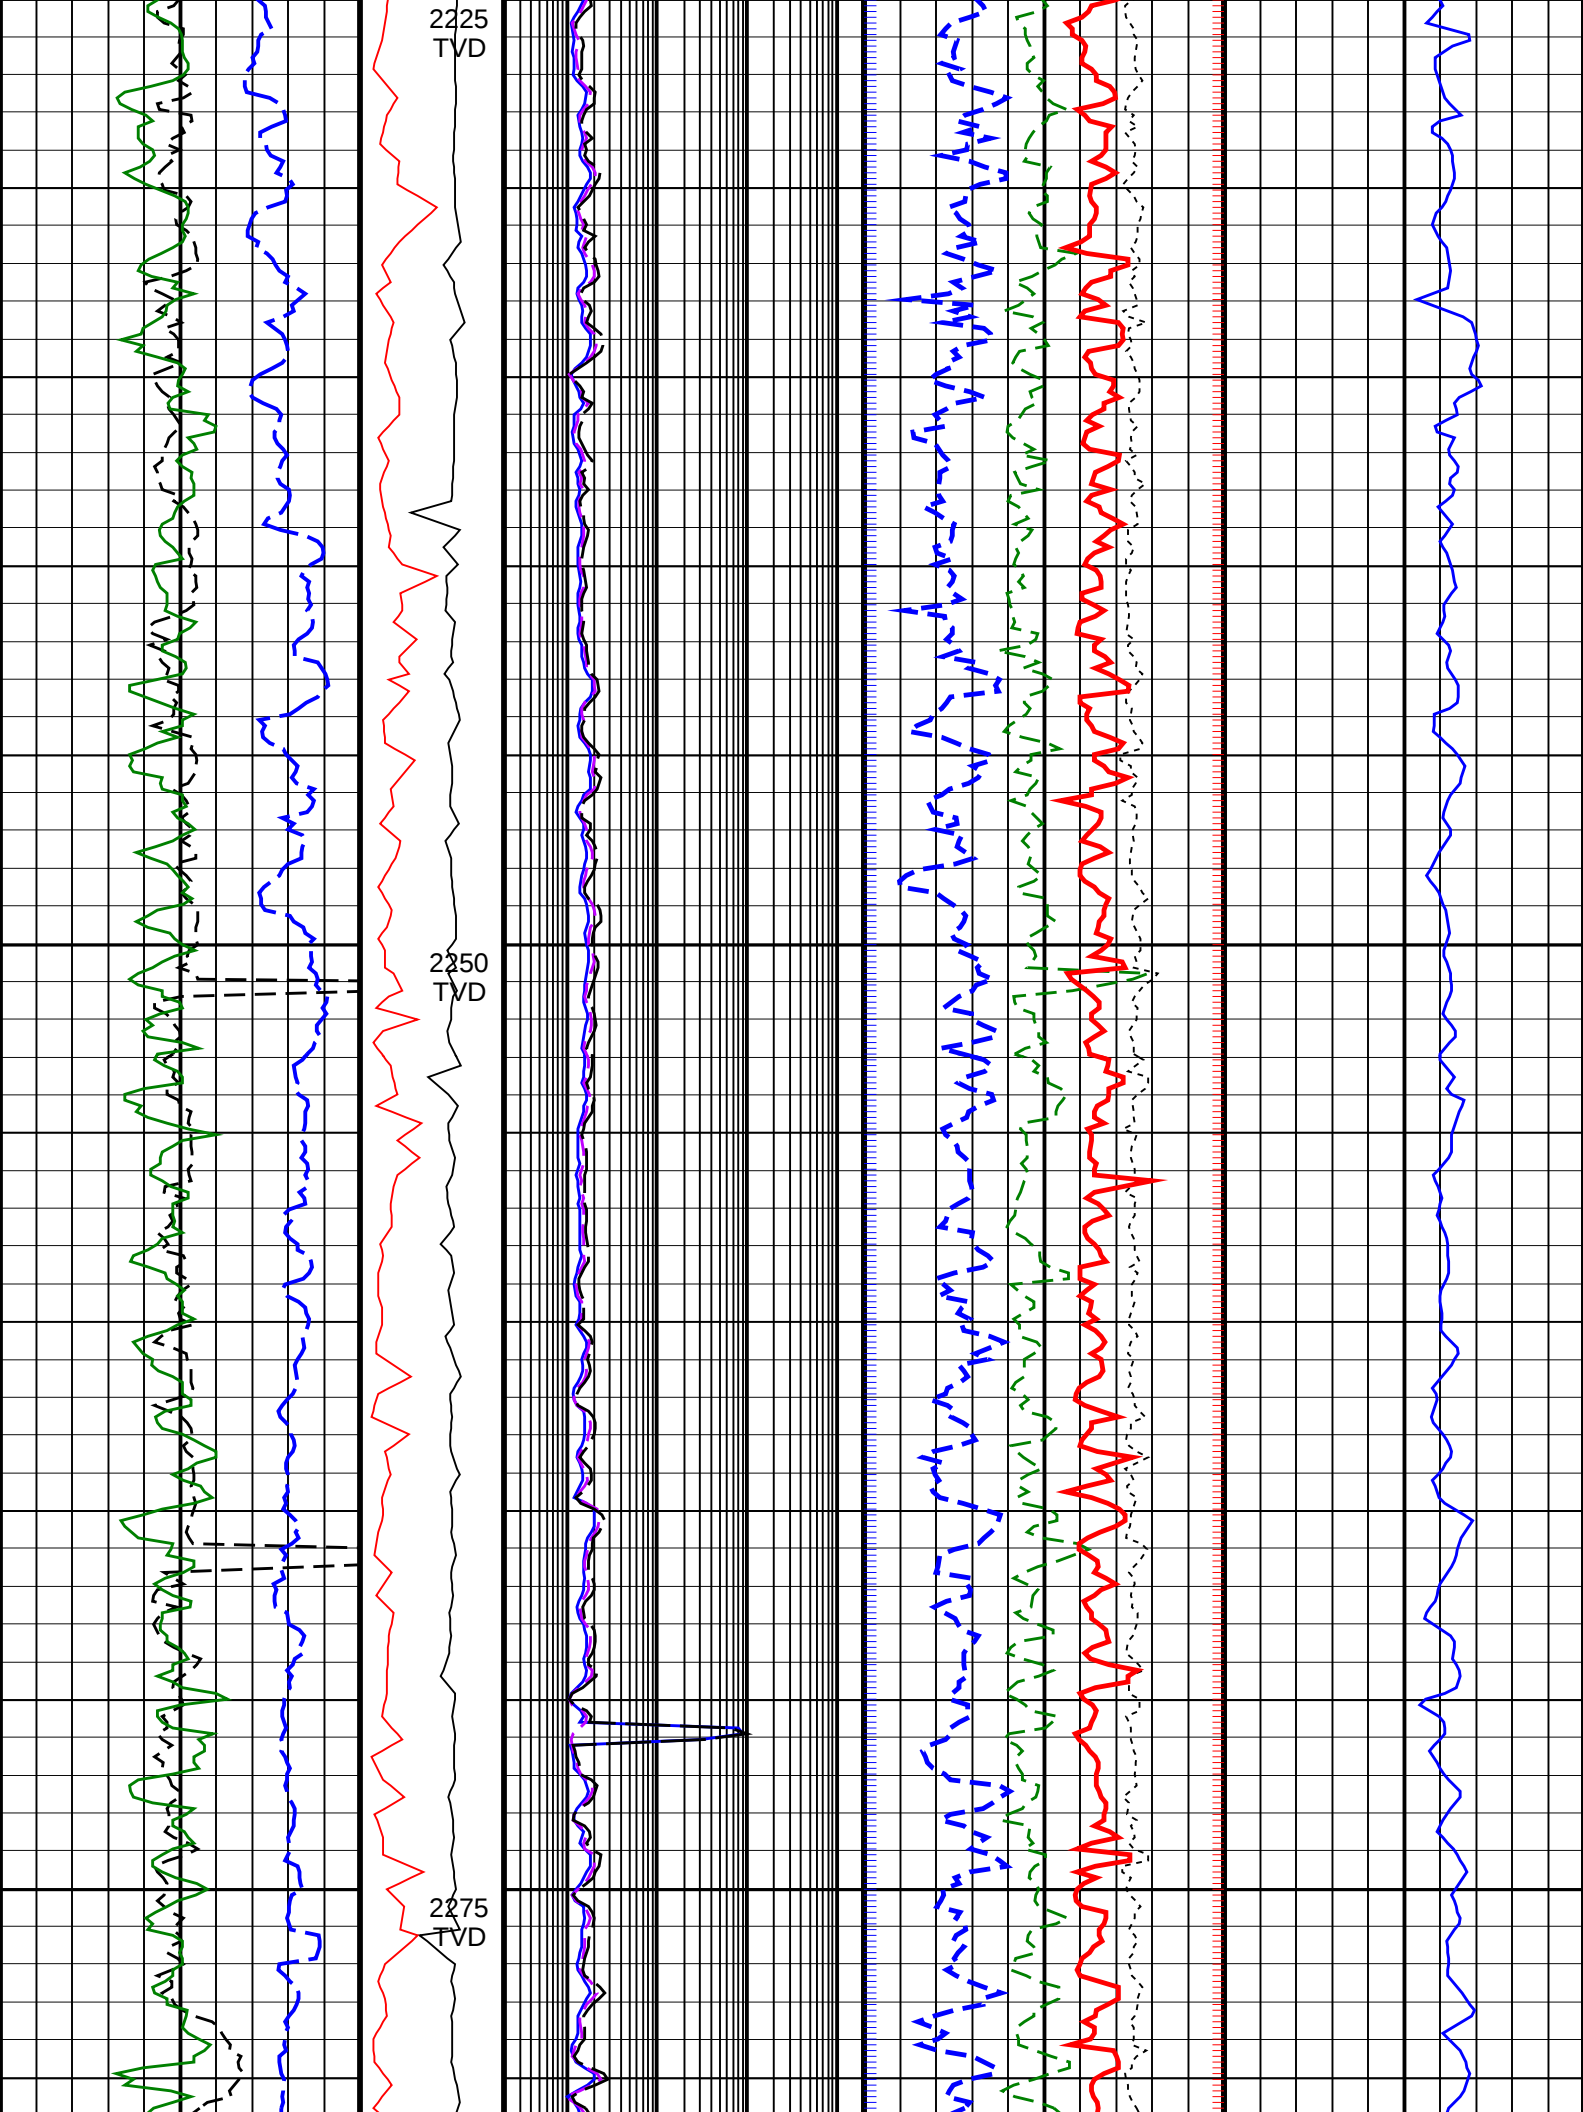

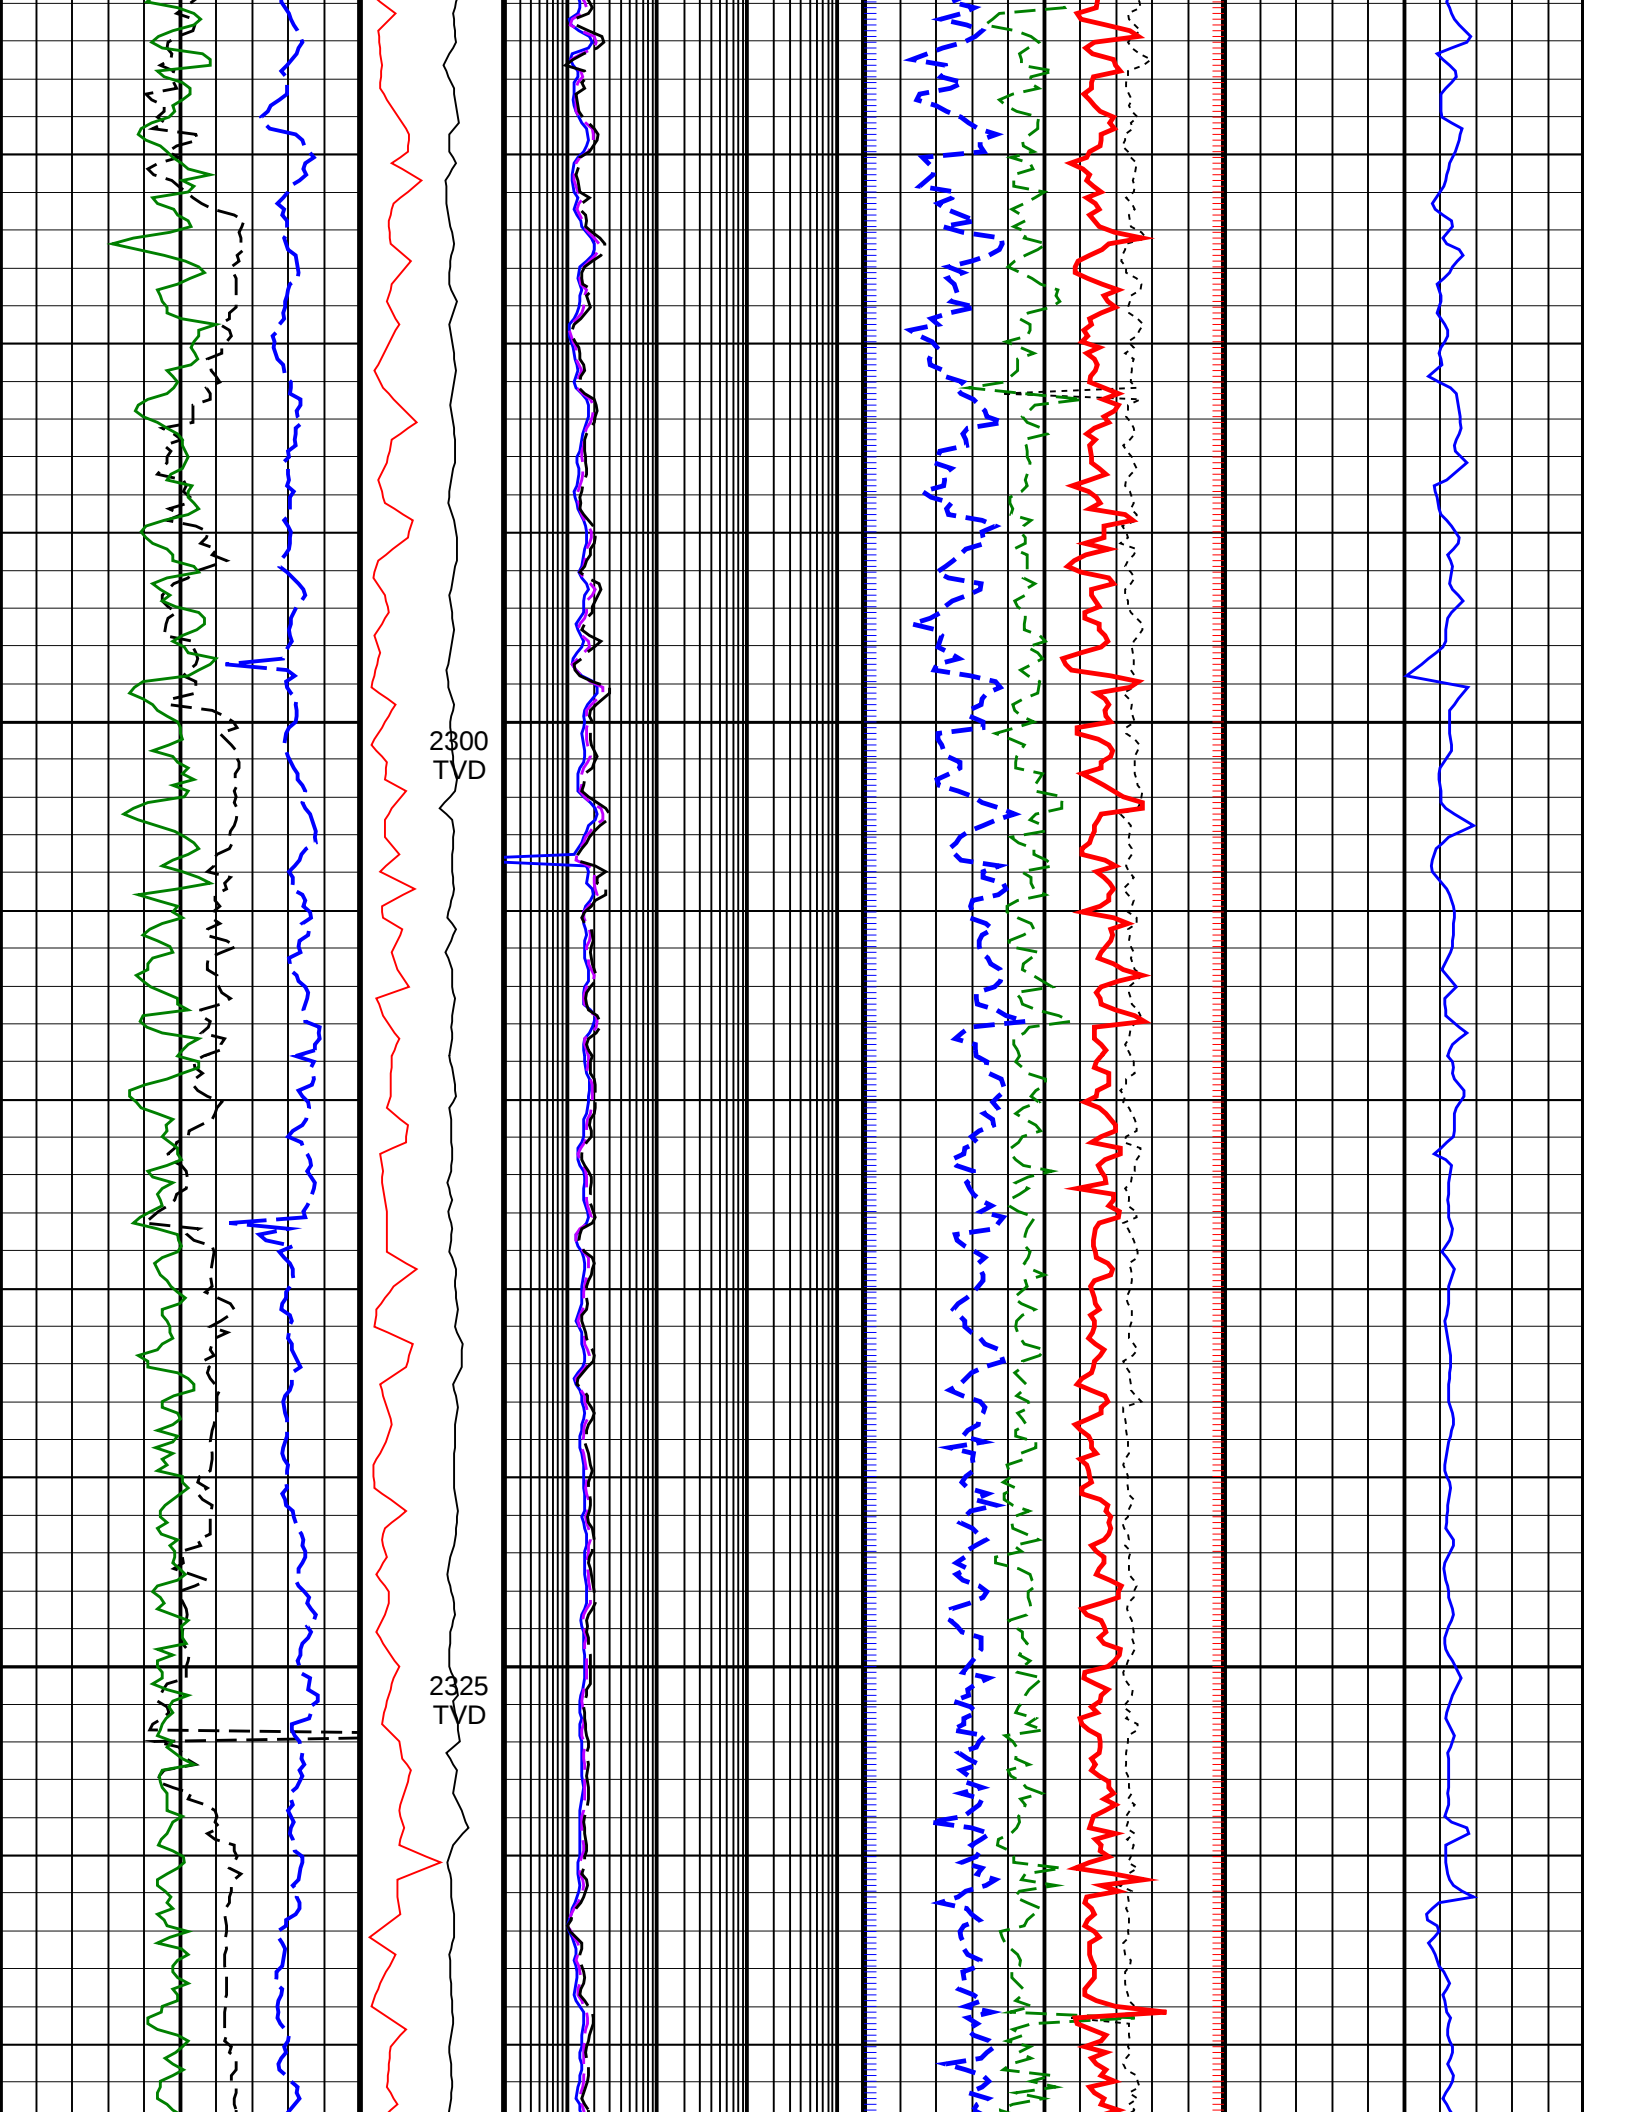

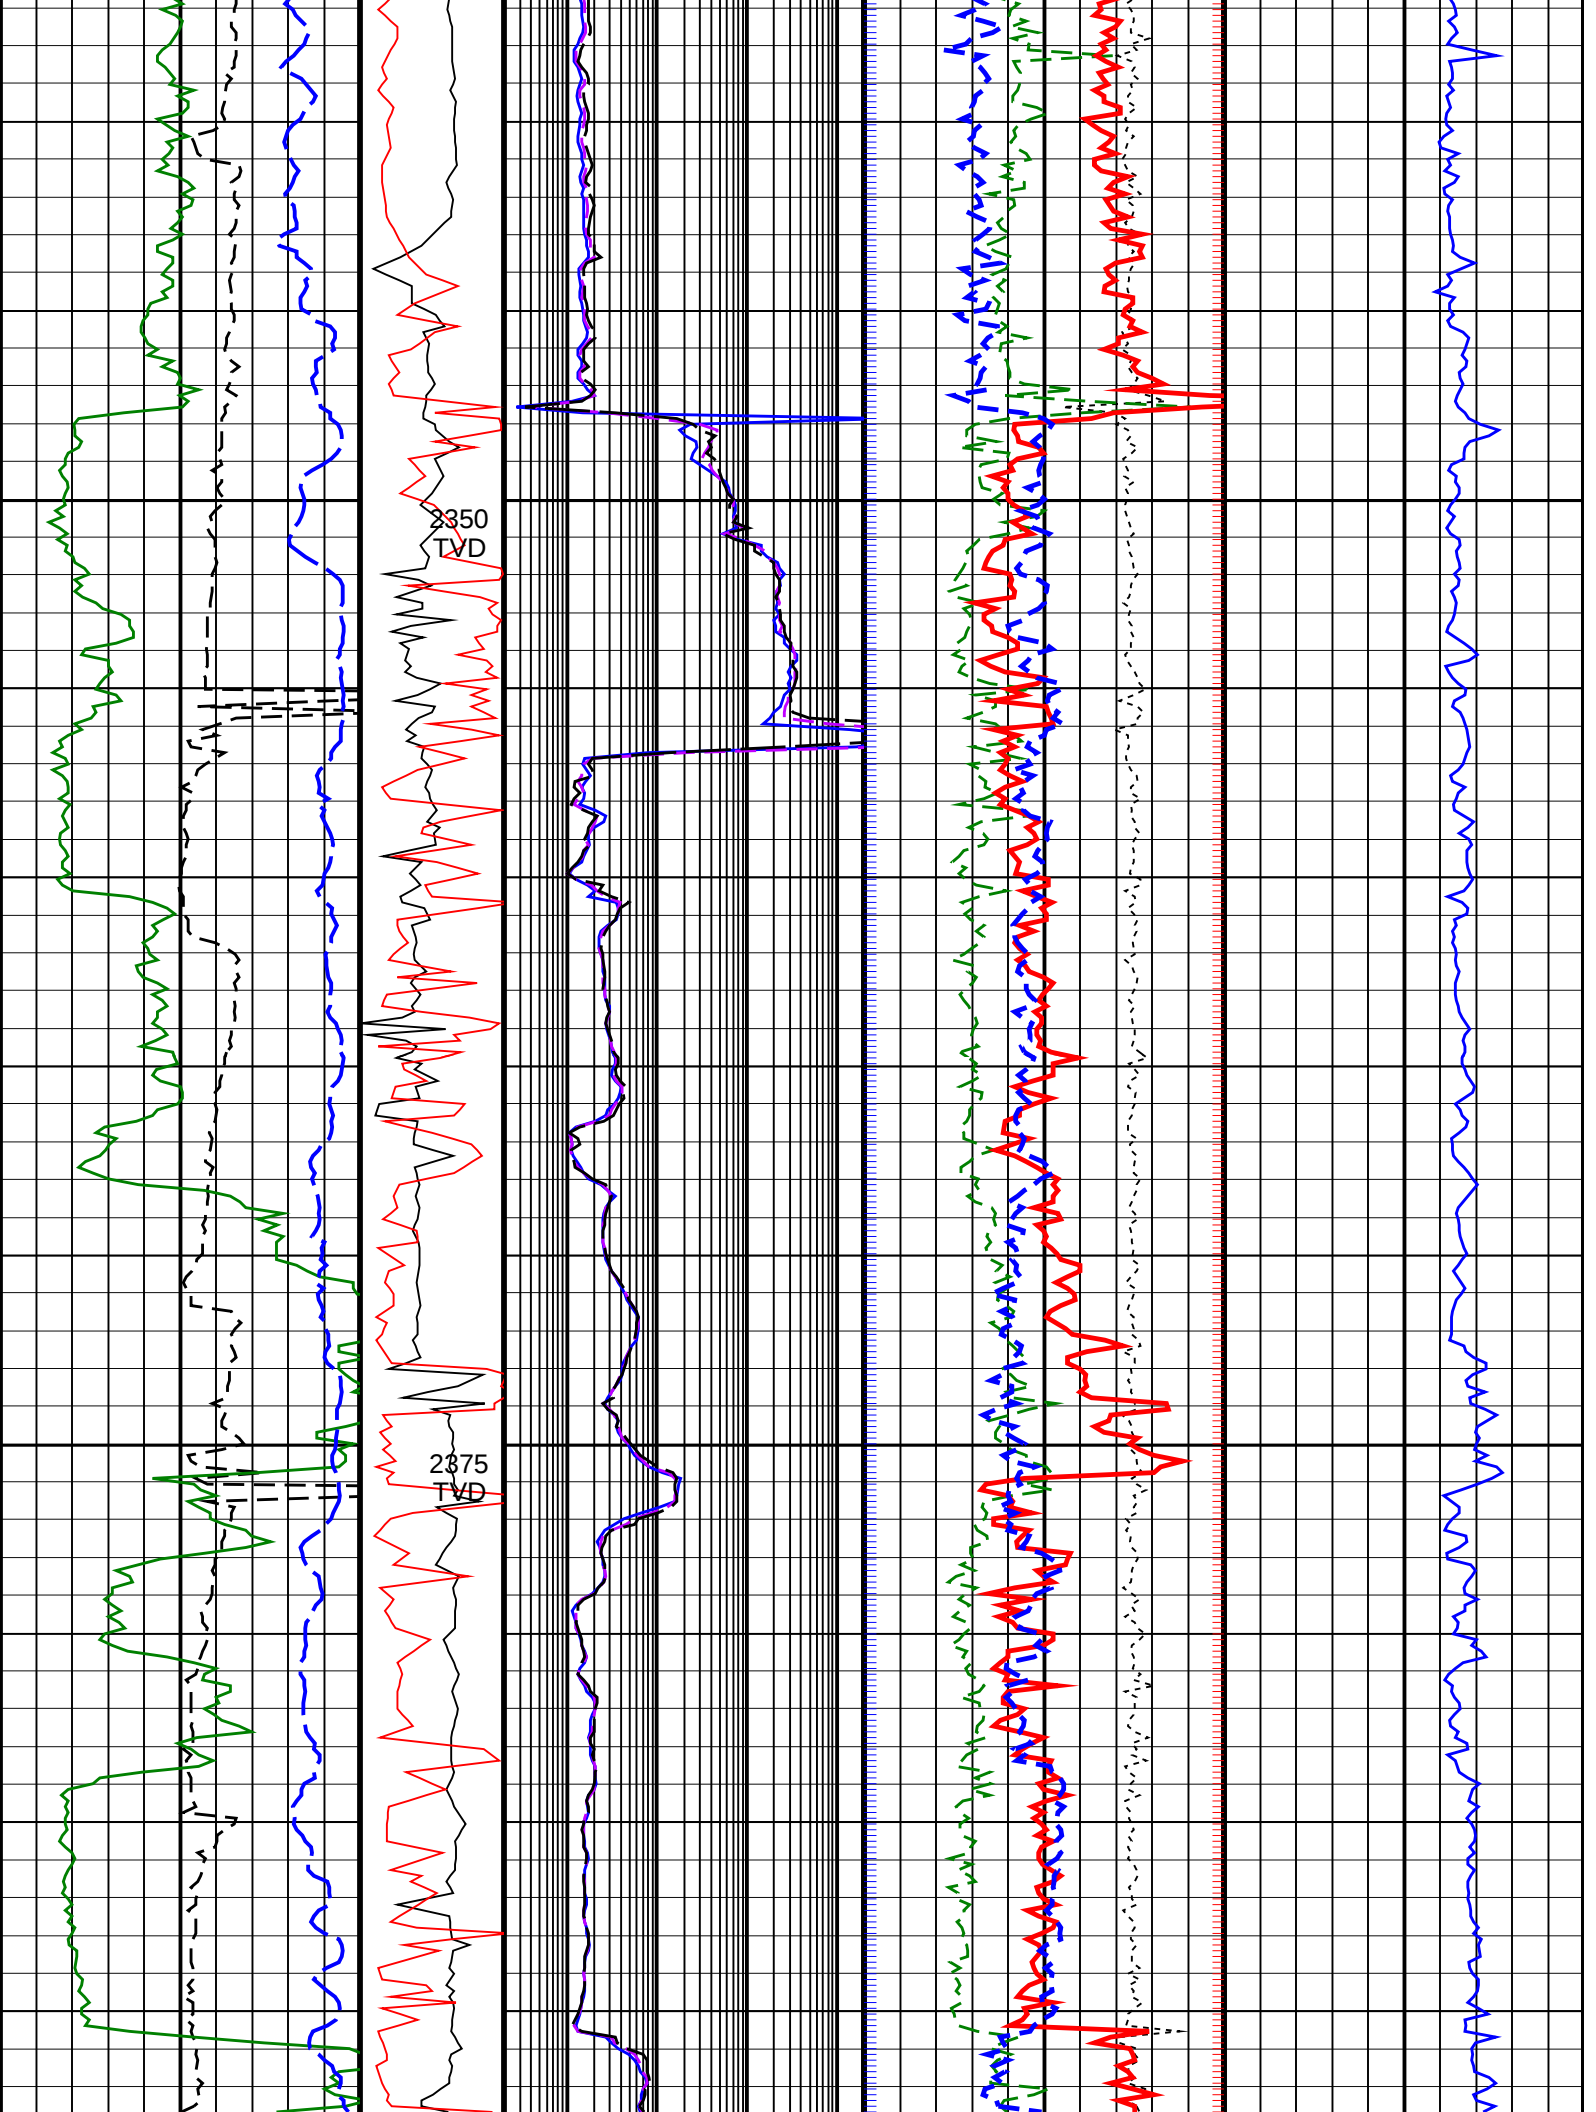

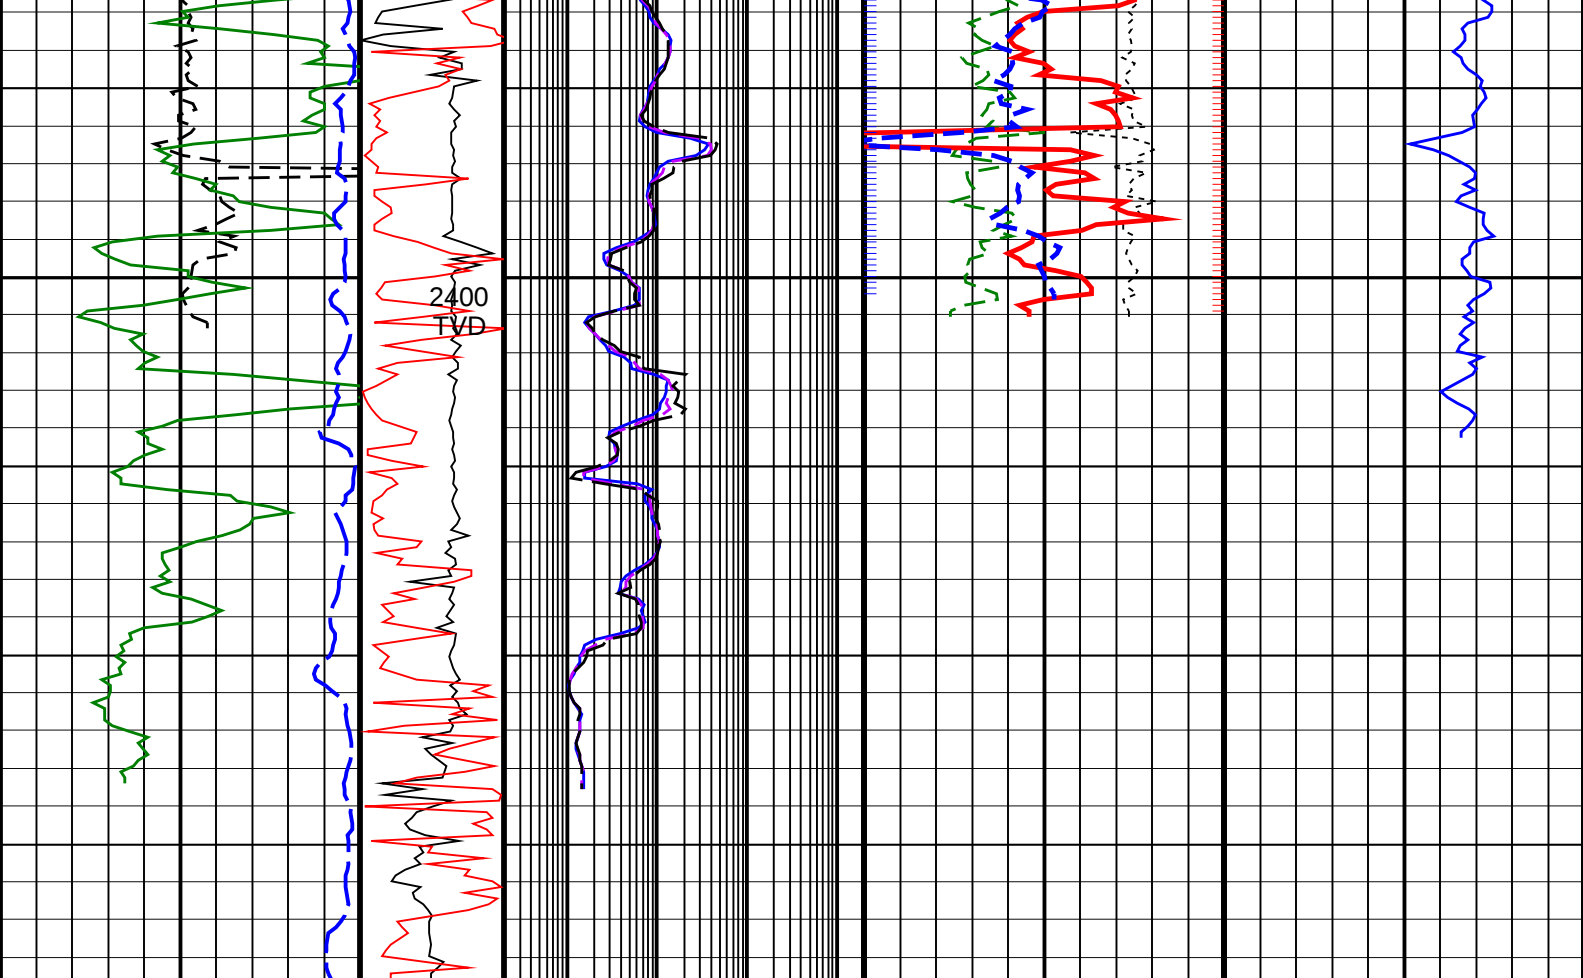

ROP*5 (ROP5) (M/HR) 2000 0	PKPK_RPM (Stick_RT) (RPM) 0250	ARC BHCorr Phase-Shift Resistivity 16-in. at 2 MHz, Real-Time (P16H_RT) 0.22000 (OHMM)	Bulk Density Correction, Bottom, Real-Time Computed Downhole (DRHB_DH_RT) -0.750.25 (G/C3)	Delta-T Compressional, Real-Time (DTCO_RT) 600100 (US/M)
Average Borehole Diameter, Real-Time (ADIA_ADN_RT) 616 (IN)	MWD Collar RPM (CRPM_RT) (RPM) 0250	ARC BHCorr Phase-Shift Resistivity 28-in. at 2 MHz, Real-Time (P28H_RT) 0.22000 (OHMM)	Photoelectric Factor, Bottom, Real-Time (PEB_RT) 010 (-----)	
ARC Gamma Ray, Real-Time (ARC_GR_RT) 0200 (GAPI)		ARC BHCorr Phase-Shift Resistivity 40-in. at 2 MHz, Real-Time (P40H_RT) 0.22000 (OHMM)	Bulk Density, Bottom, Real-Time Computed Downhole (ROBB_DH_RT) 1.852.85 (G/C3)	
			Thermal Neutron Porosity, Real-Time (TNPH_ADN_RT) 0.45-0.15 (V/V)	

PIP SUMMARY				
		ROBB (Density Bottom) +		
TNPH (Thermal Neutron Porosity) +				

IDEAL Version: ID14_0C_16				
IDF				
ARC6A-AA	id14_0c_16	MWD_10	id14_0c_16	
SON675	id14_0c_16	ADN	id14_0c_16	