

Elver-1 EcoScope Service RT 200MD

Format: ECO-SON-GVR_200MD_RT


Vertical Scale: 1:200


Graphics File Created: 10-Jan-2009 09:42


PIP SUMMARY


- └ Gamma Ray Samples
- └ Resisitivity Samples


		Shallow Button Resistivity, Real-Time (RES_BS_RT) 0.2 (OHMM) 2000				Equivalent Circulating Density, Real-Time (ECD_ ECO_RT) 0.8 (G/C3) 1.6	
		Deep Button Resistivity, Real-Time (RES_BD_RT) 0.2 (OHMM) 2000					
Ultrasonic Caliper, Average Diameter, Real-Time, Recomputed at Surface (UCAV_ECO_RT) 6 (IN) 16		Ring Resistivity, Real-Time (RES_RING_RT) 0.2 (OHMM) 2000		Photoelectric Factor, Bottom, Real-Time, Computed Downhole (PEB_DH_ ECO_RT) 0 (----) 10	Bulk Density Correction, Bottom, Real-Time Computed Downhole (DRHB_DH_ ECO_RT) (G/C3) -0.25 0.25	Delta-T Compressional, Real-Time (DTCO_RT) 40 (US/F) 140	
Gamma Ray, Average, Real-Time (GRMA_ECO_RT) 0 (GAPI) 200		ARC Phase Shift Resistivity 40 inch at 2 MHz, Real-Time (P40H_ECO_RT) 0.2 (OHMM) 2000		Bulk Density, Bottom, Real-Time, Computed Downhole (ROBB_DH_ECO_ RT) 1.95 (G/C3) 2.95		Coherence at Compressional Peak, Real-Time (CHCO_RT) -4 (----) 1	
ROP*5 (ROP5) 200 (M/HR) 0		MWD Collar RPM (CRPM_RT) (RPM) 0 400	ARC Phase Shift Resistivity 16 inch at 2 MHz, Real-Time (P16H_ECO_RT) 0.2 (OHMM) 2000	Best Thermal Neutron Porosity, Average, Real-Time (BPHI_ECO_RT) 0.45 (V/V) -0.15		Downhole Annulus Temperature, Real Time, Computed Downhole (DHAT_ DH_ECO_RT) 0 (DEGC) 200	

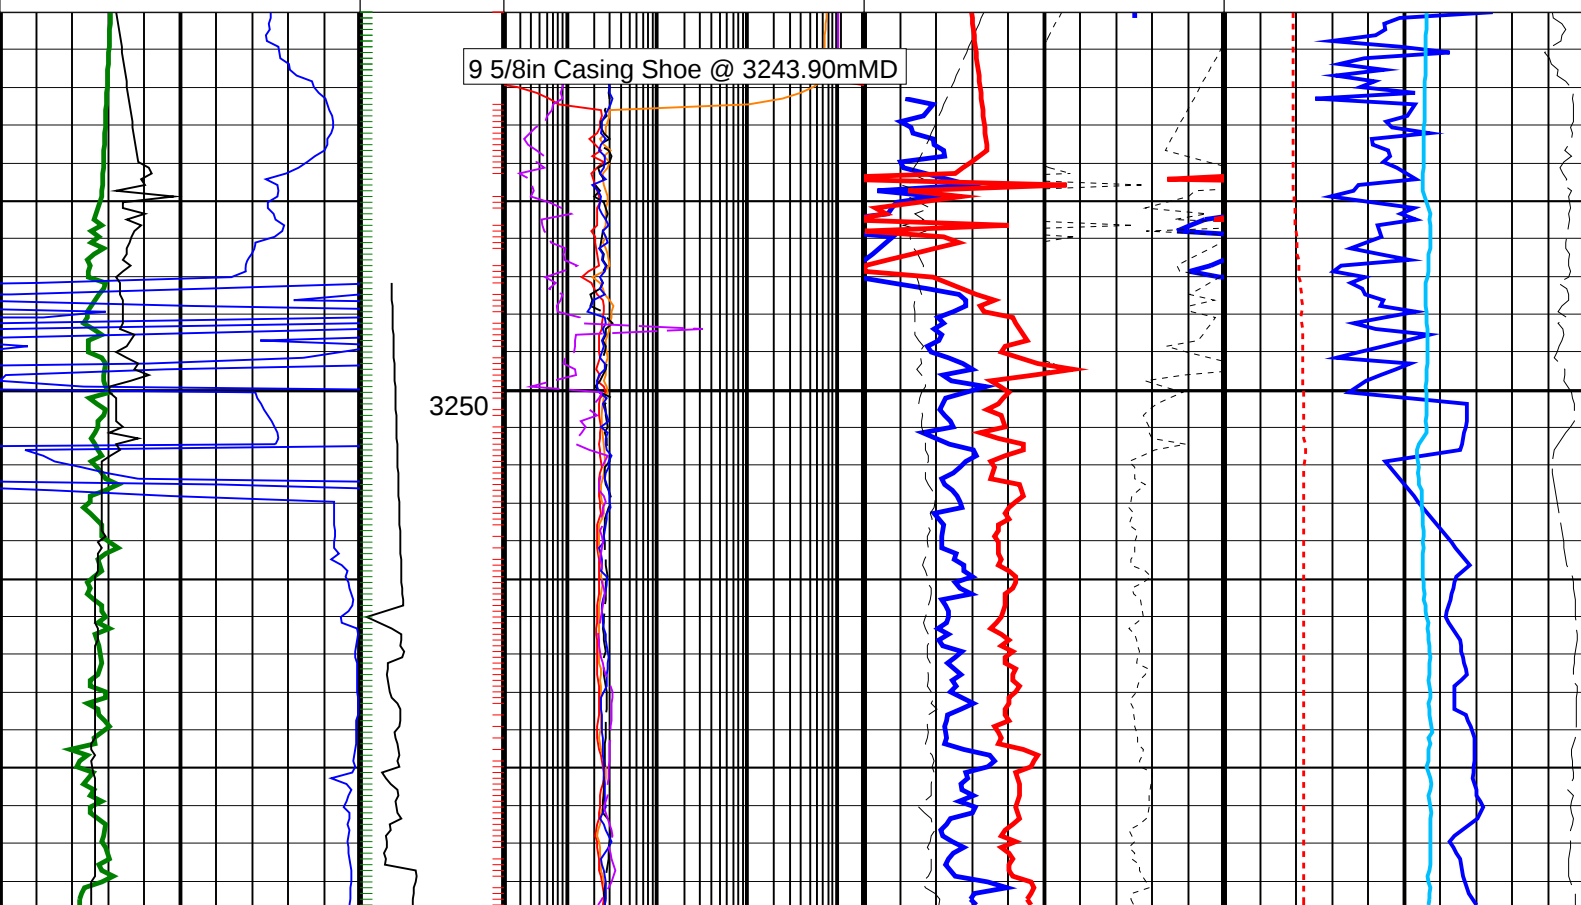


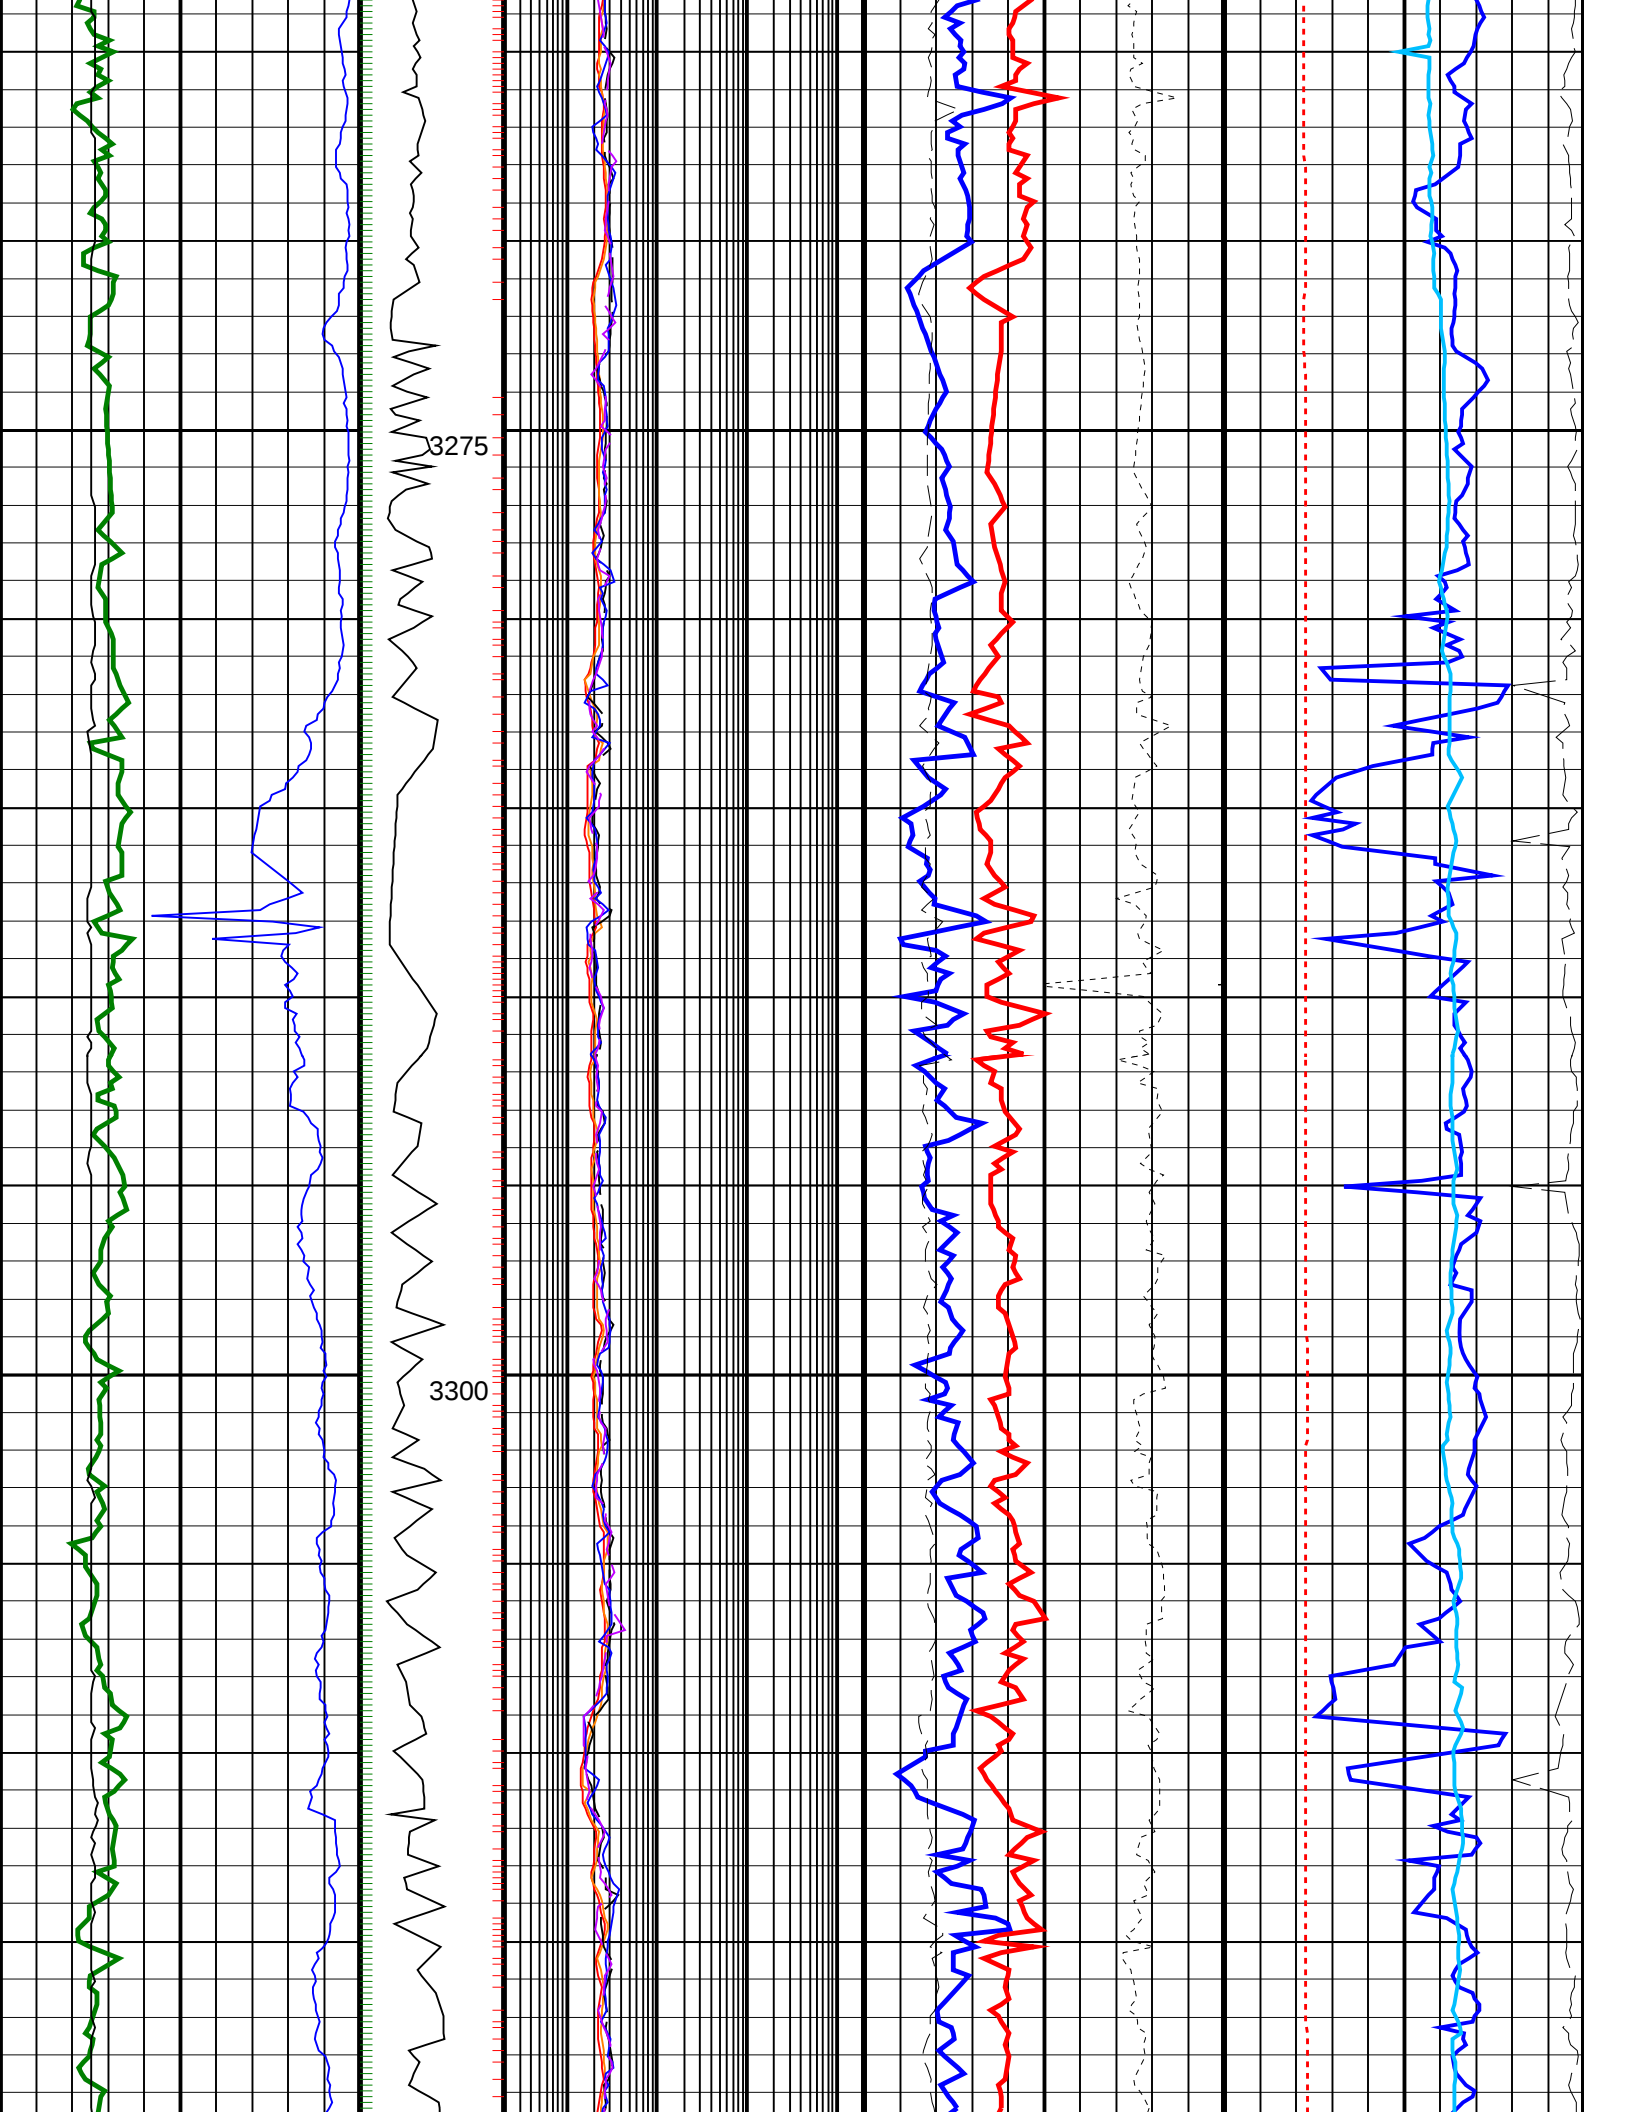


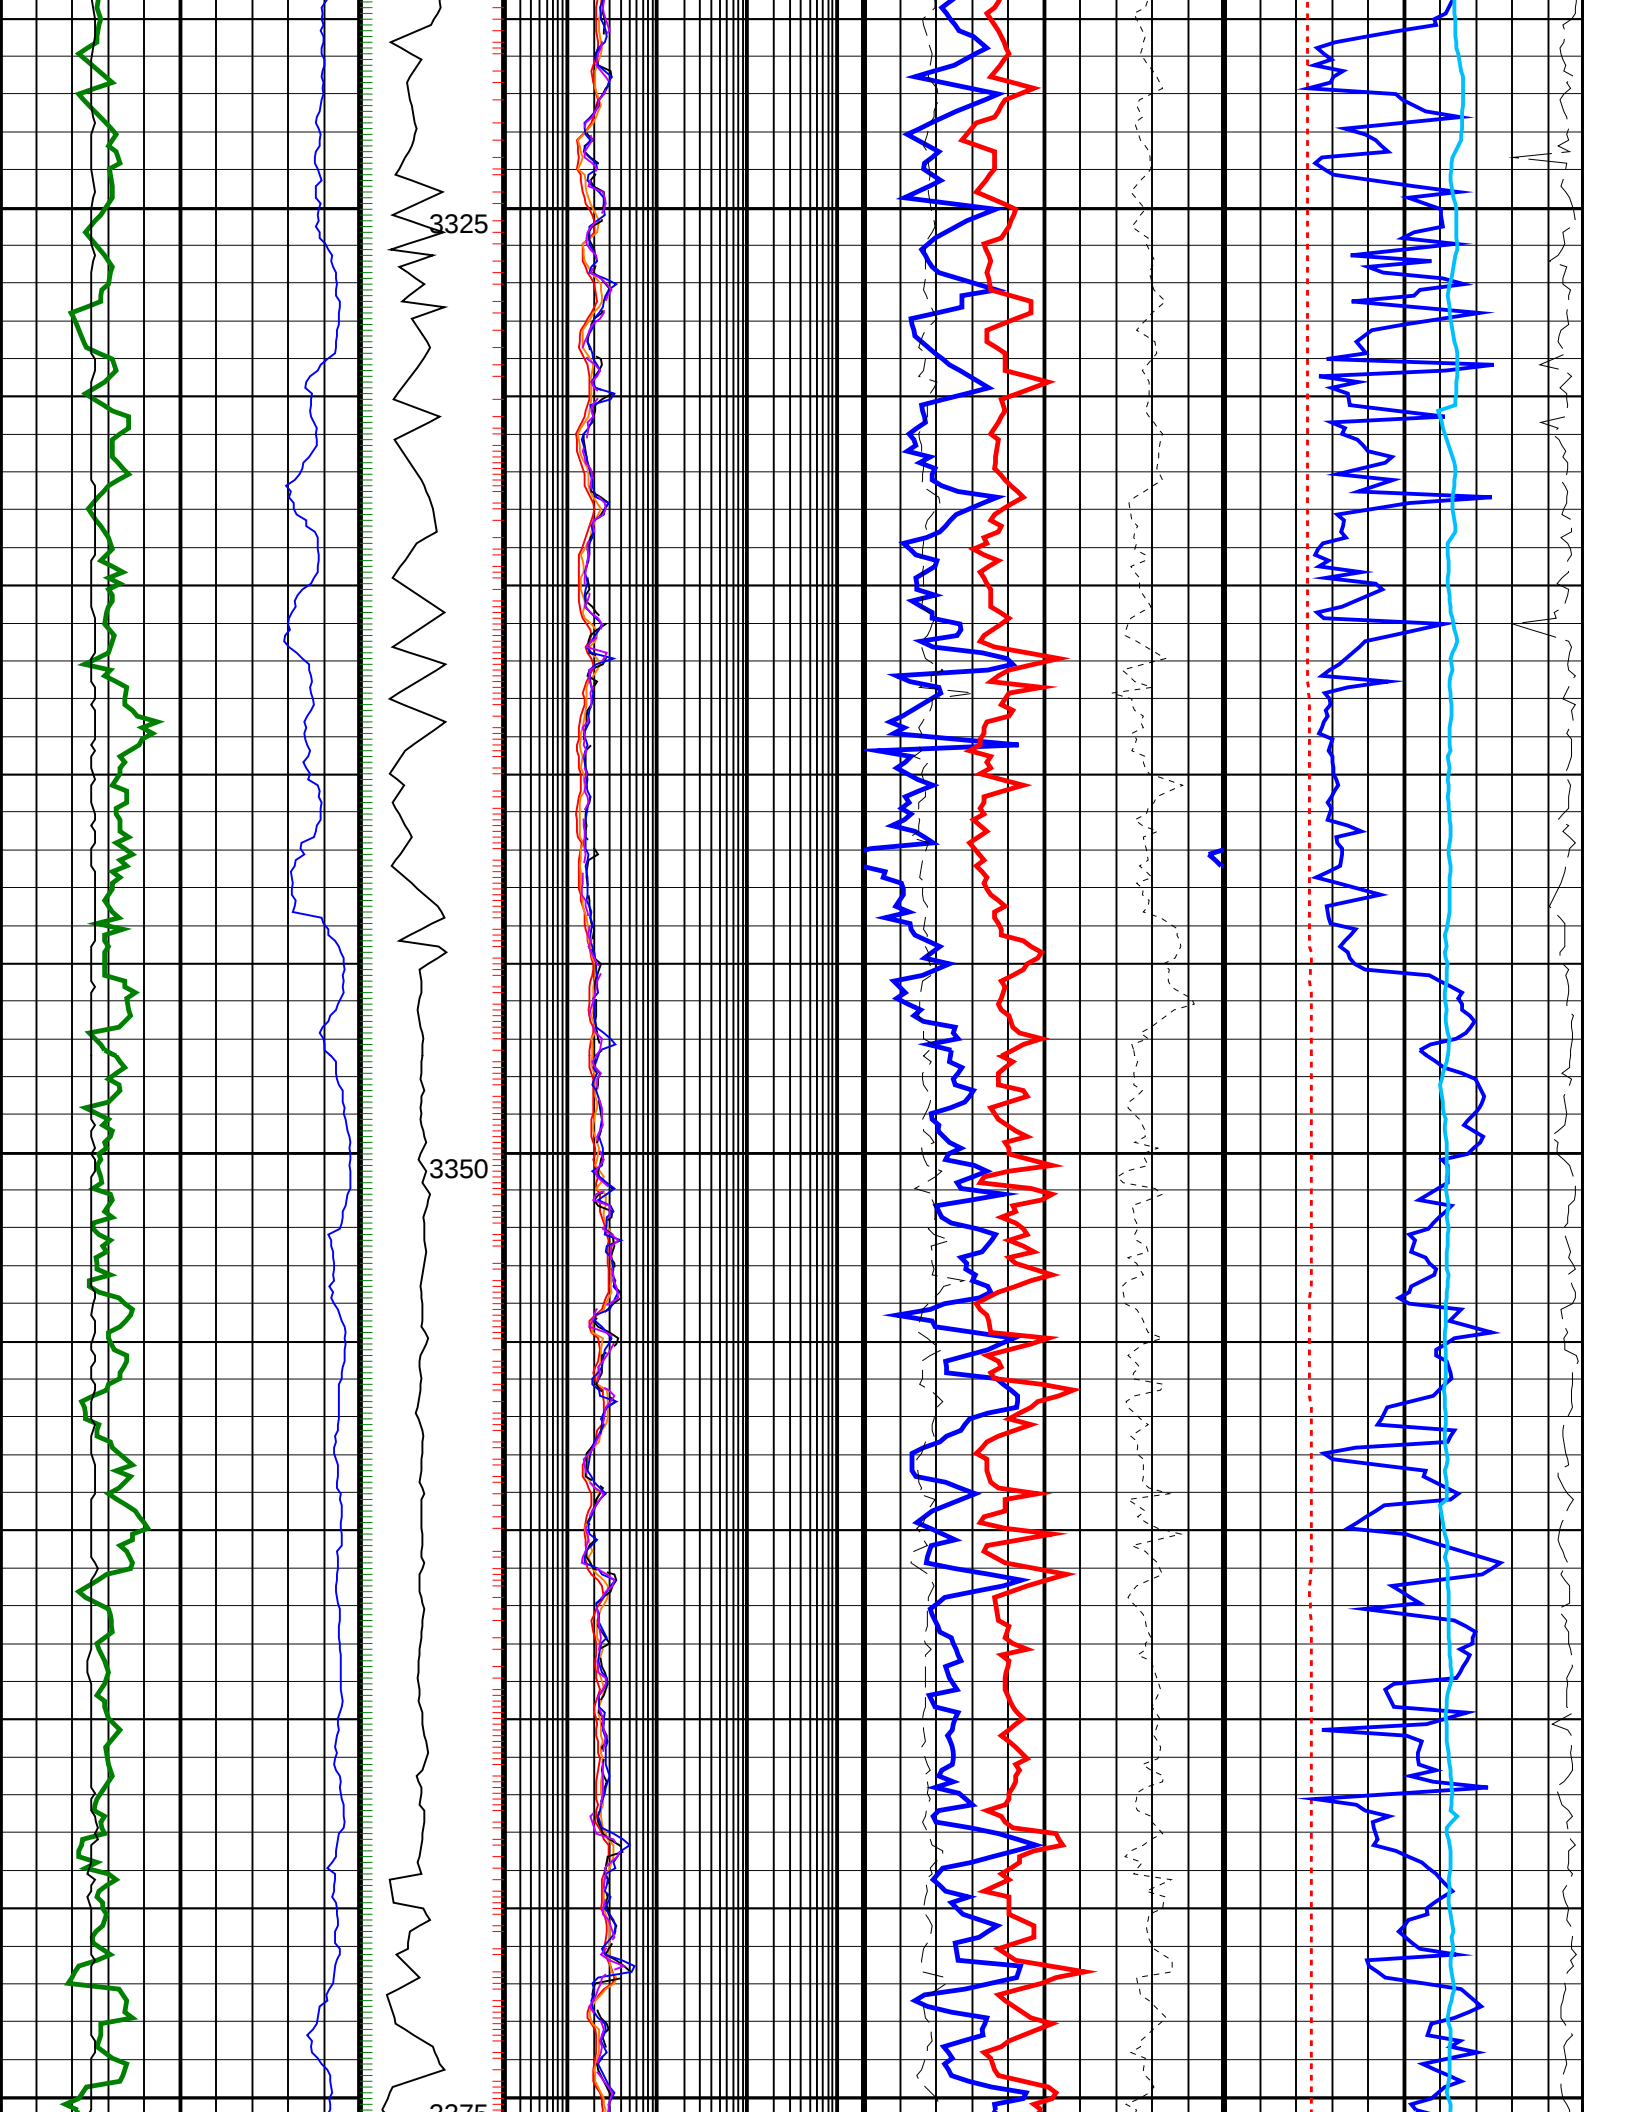


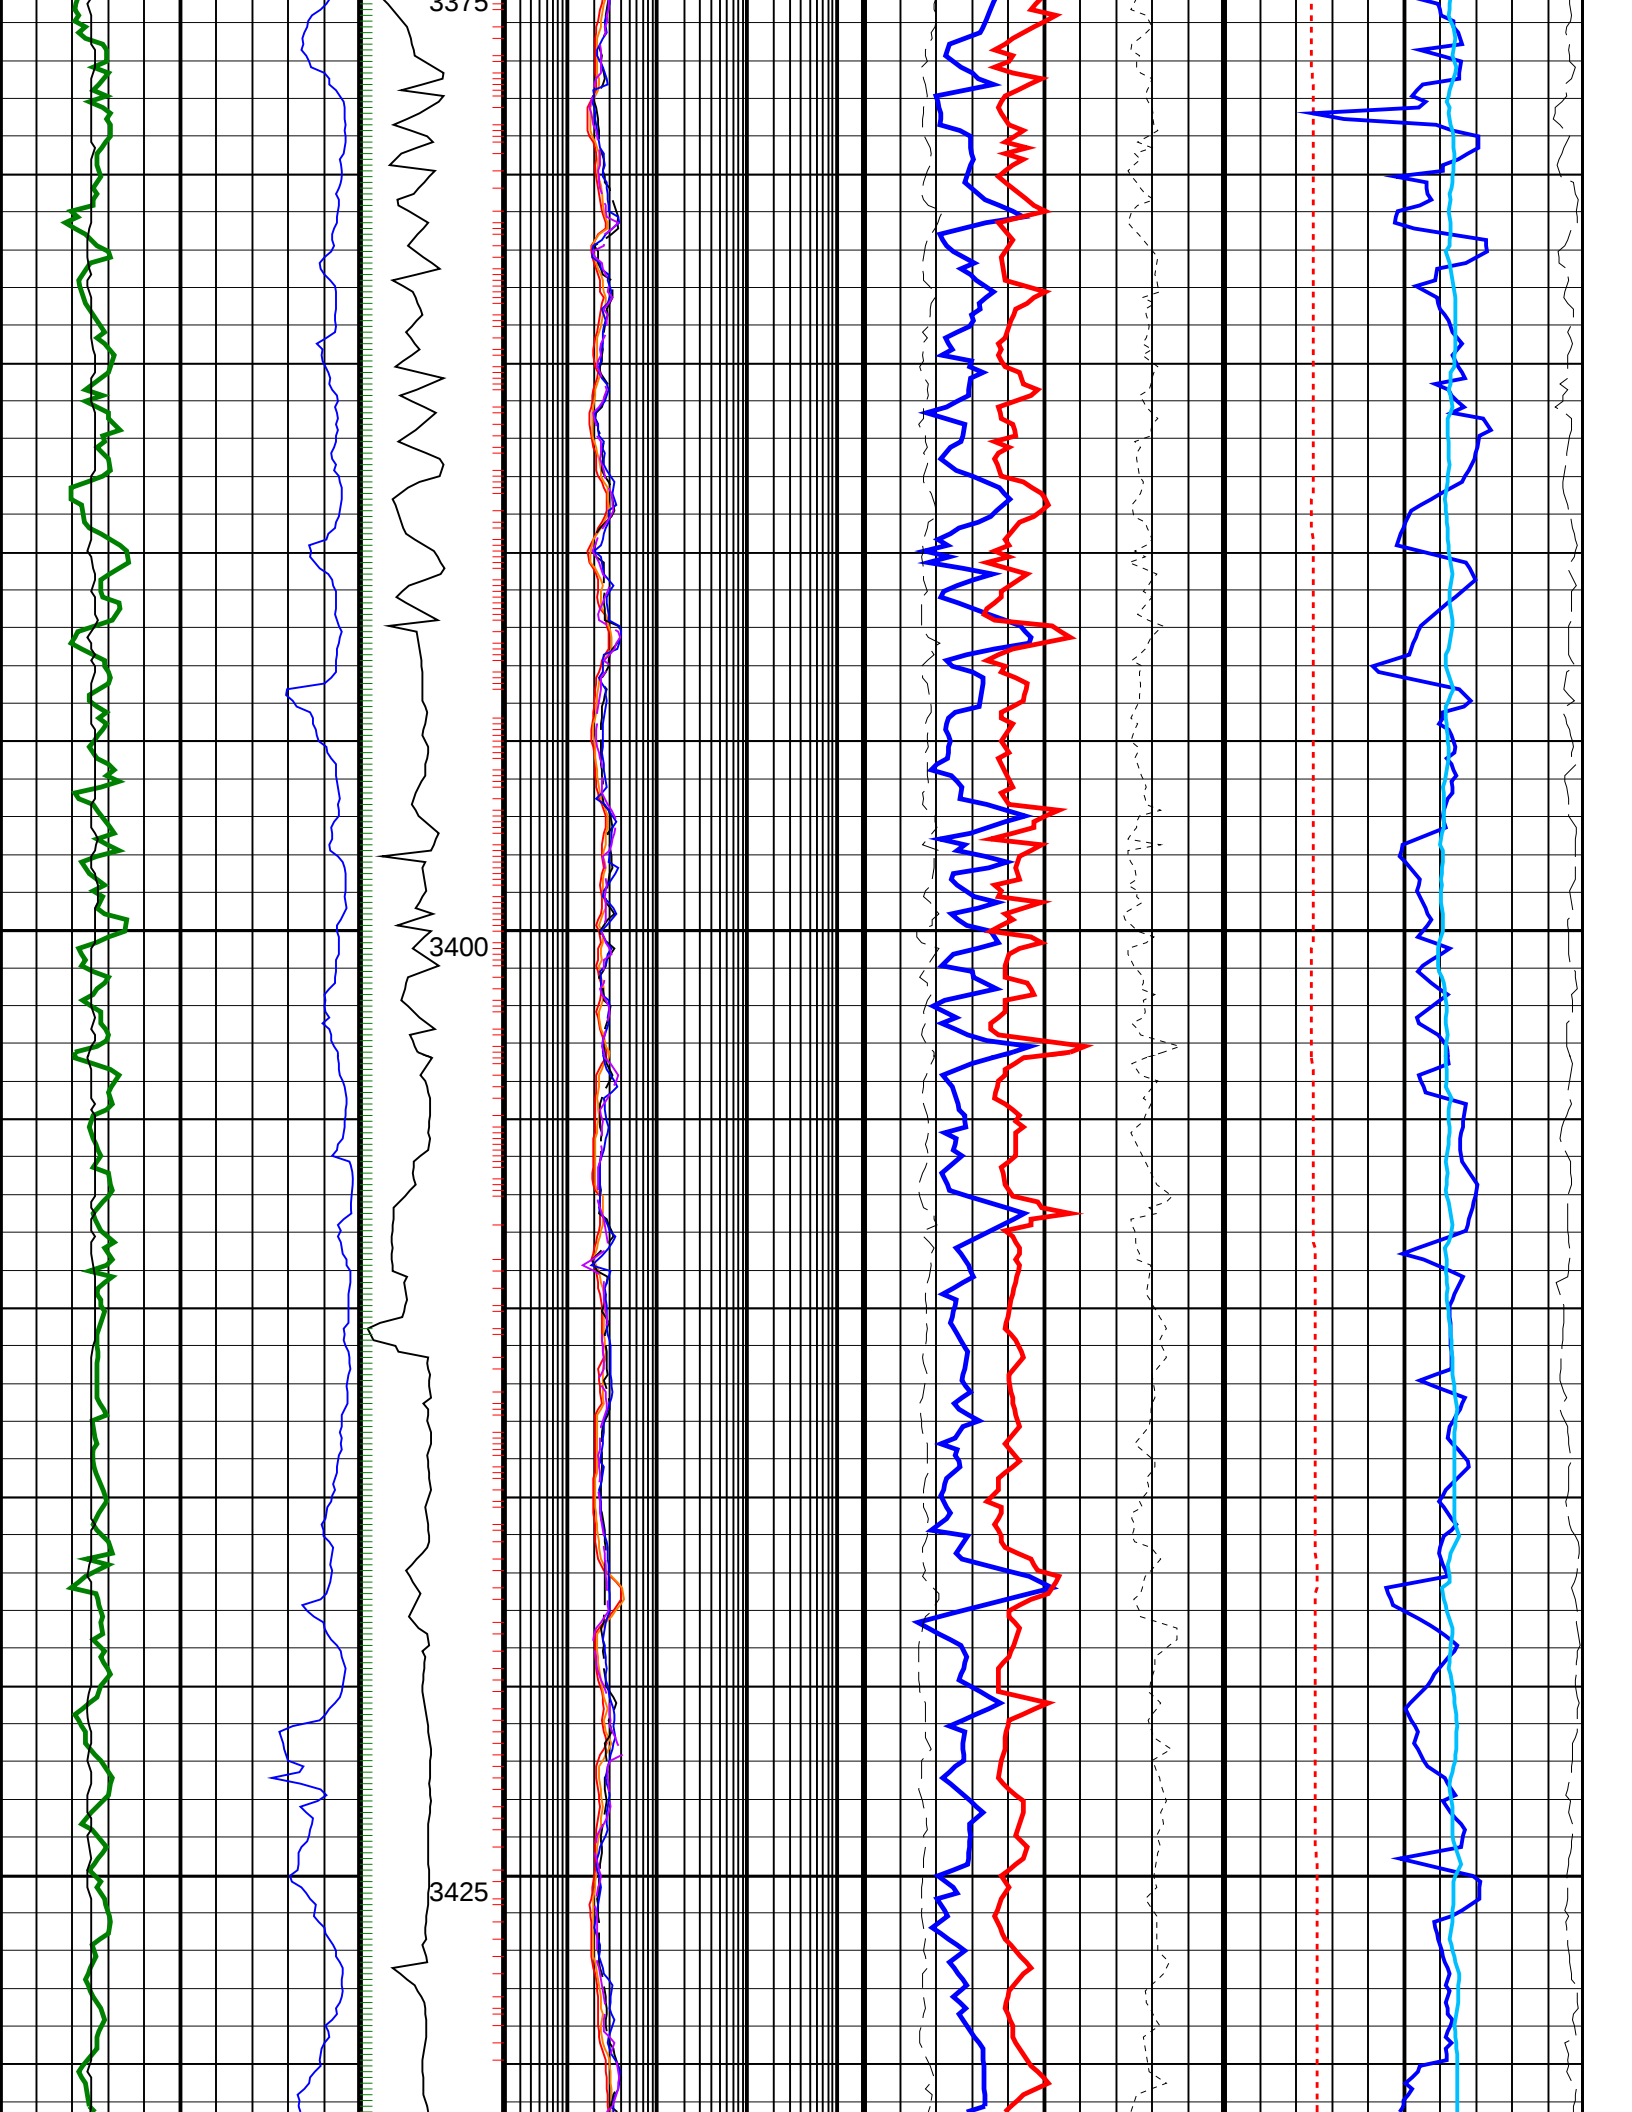

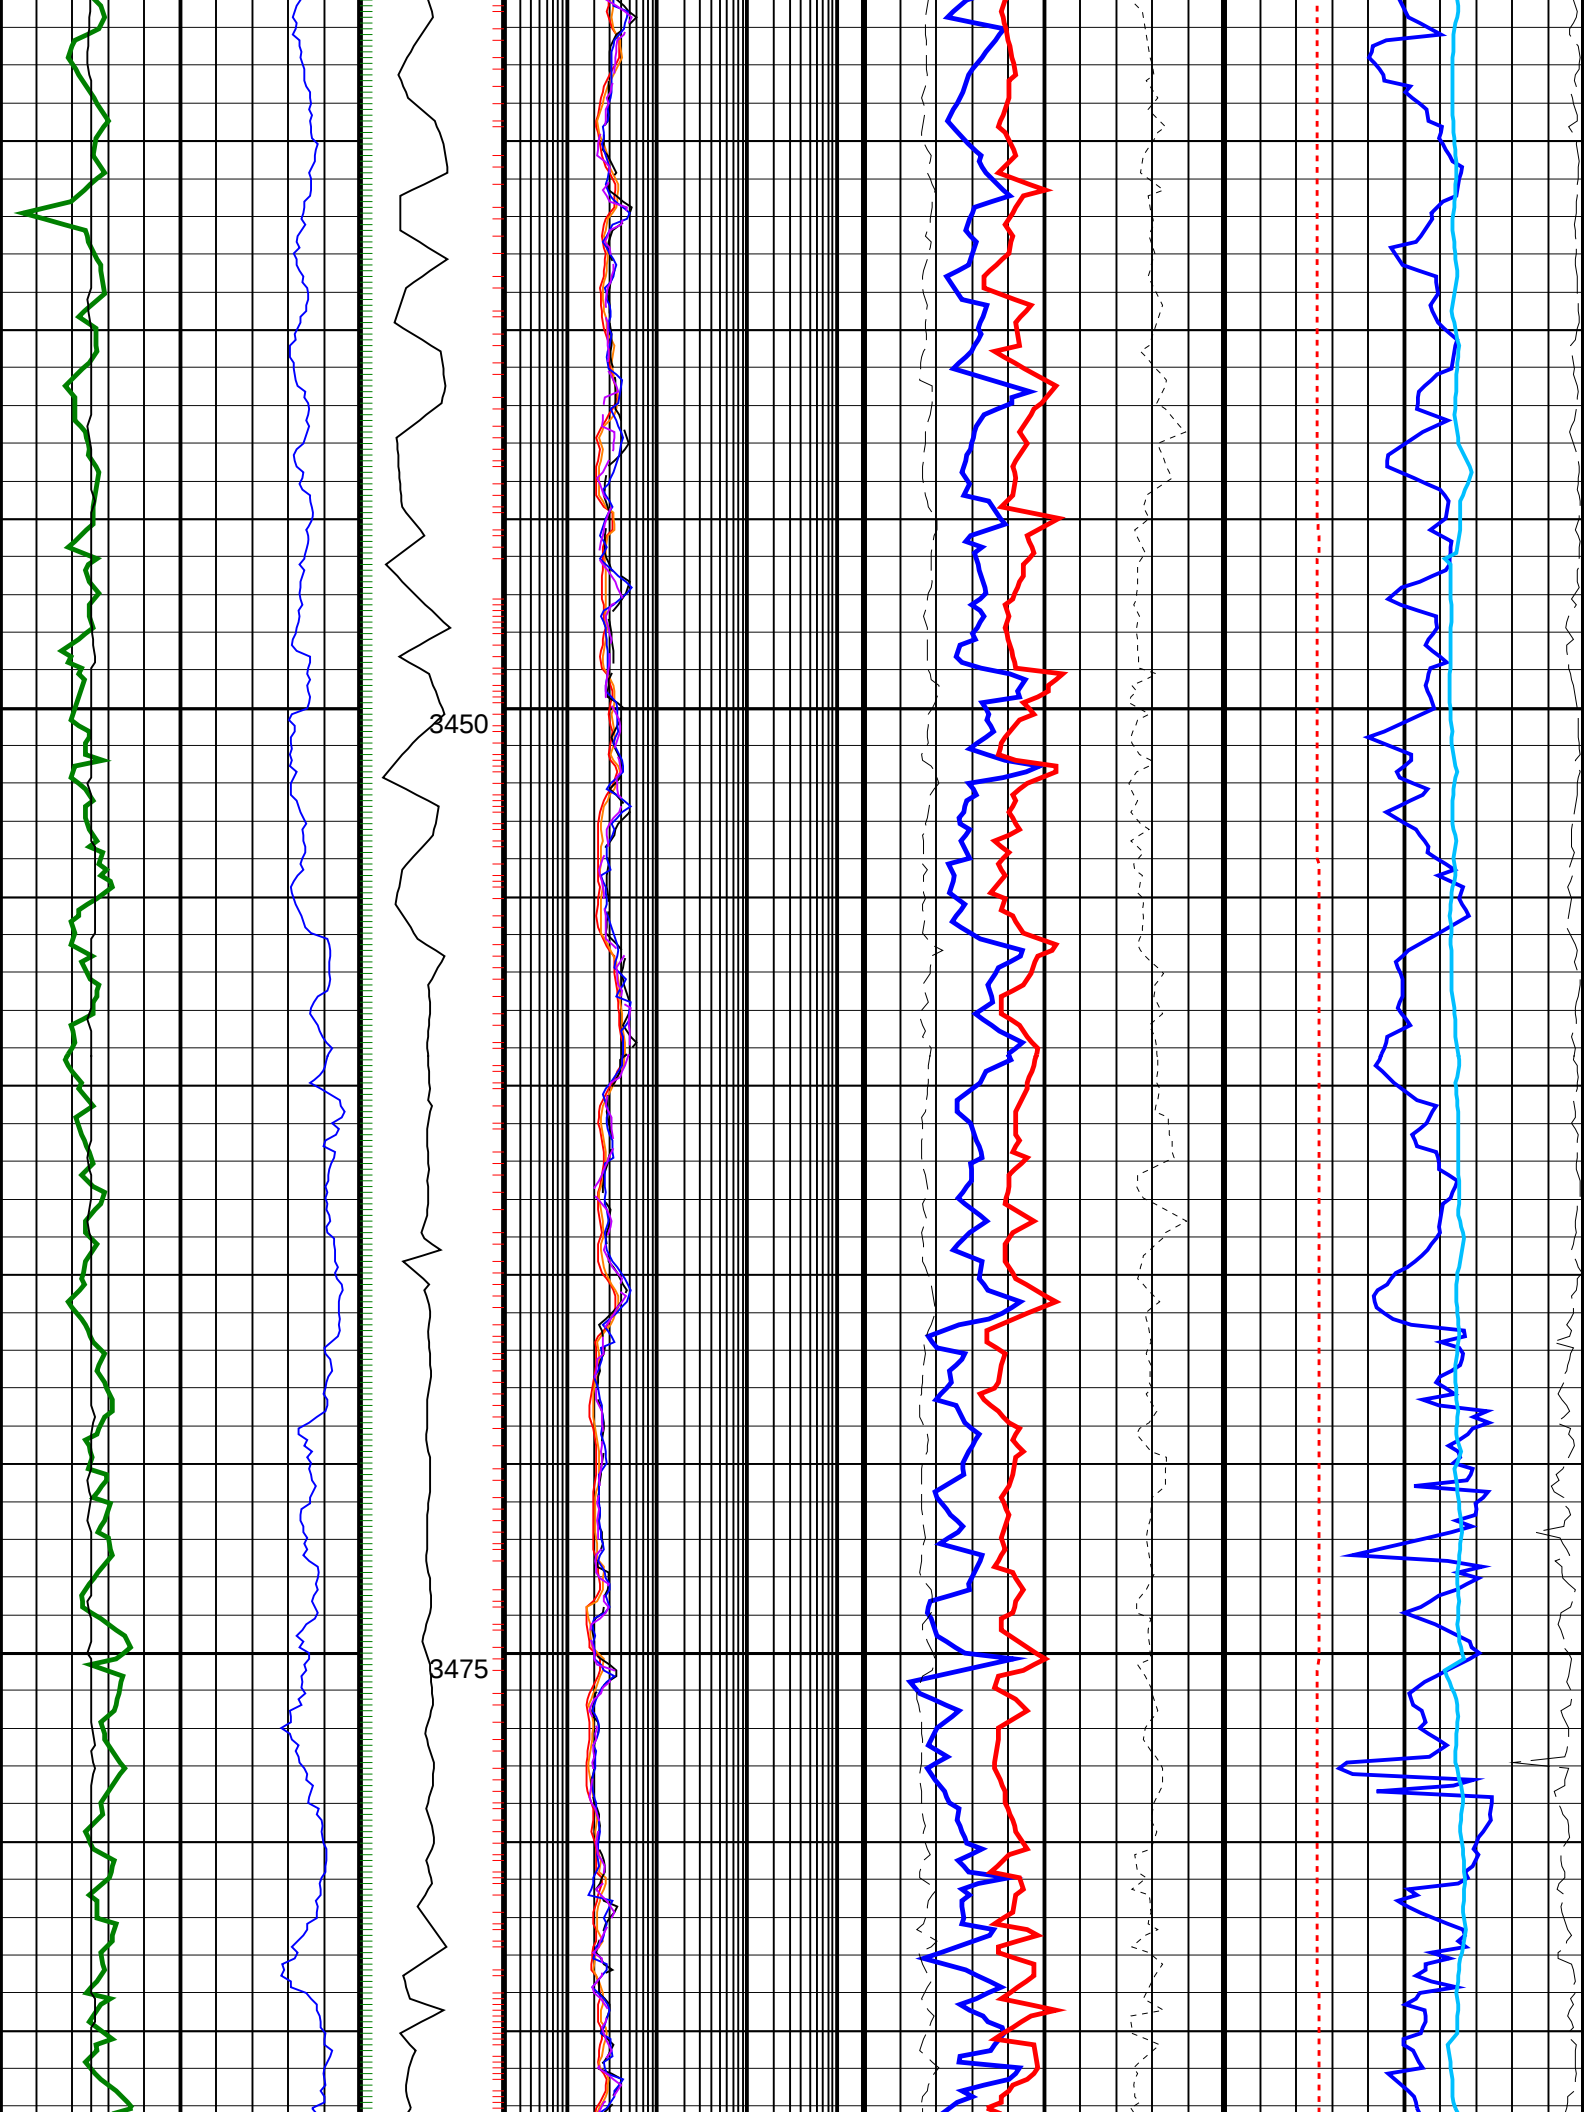

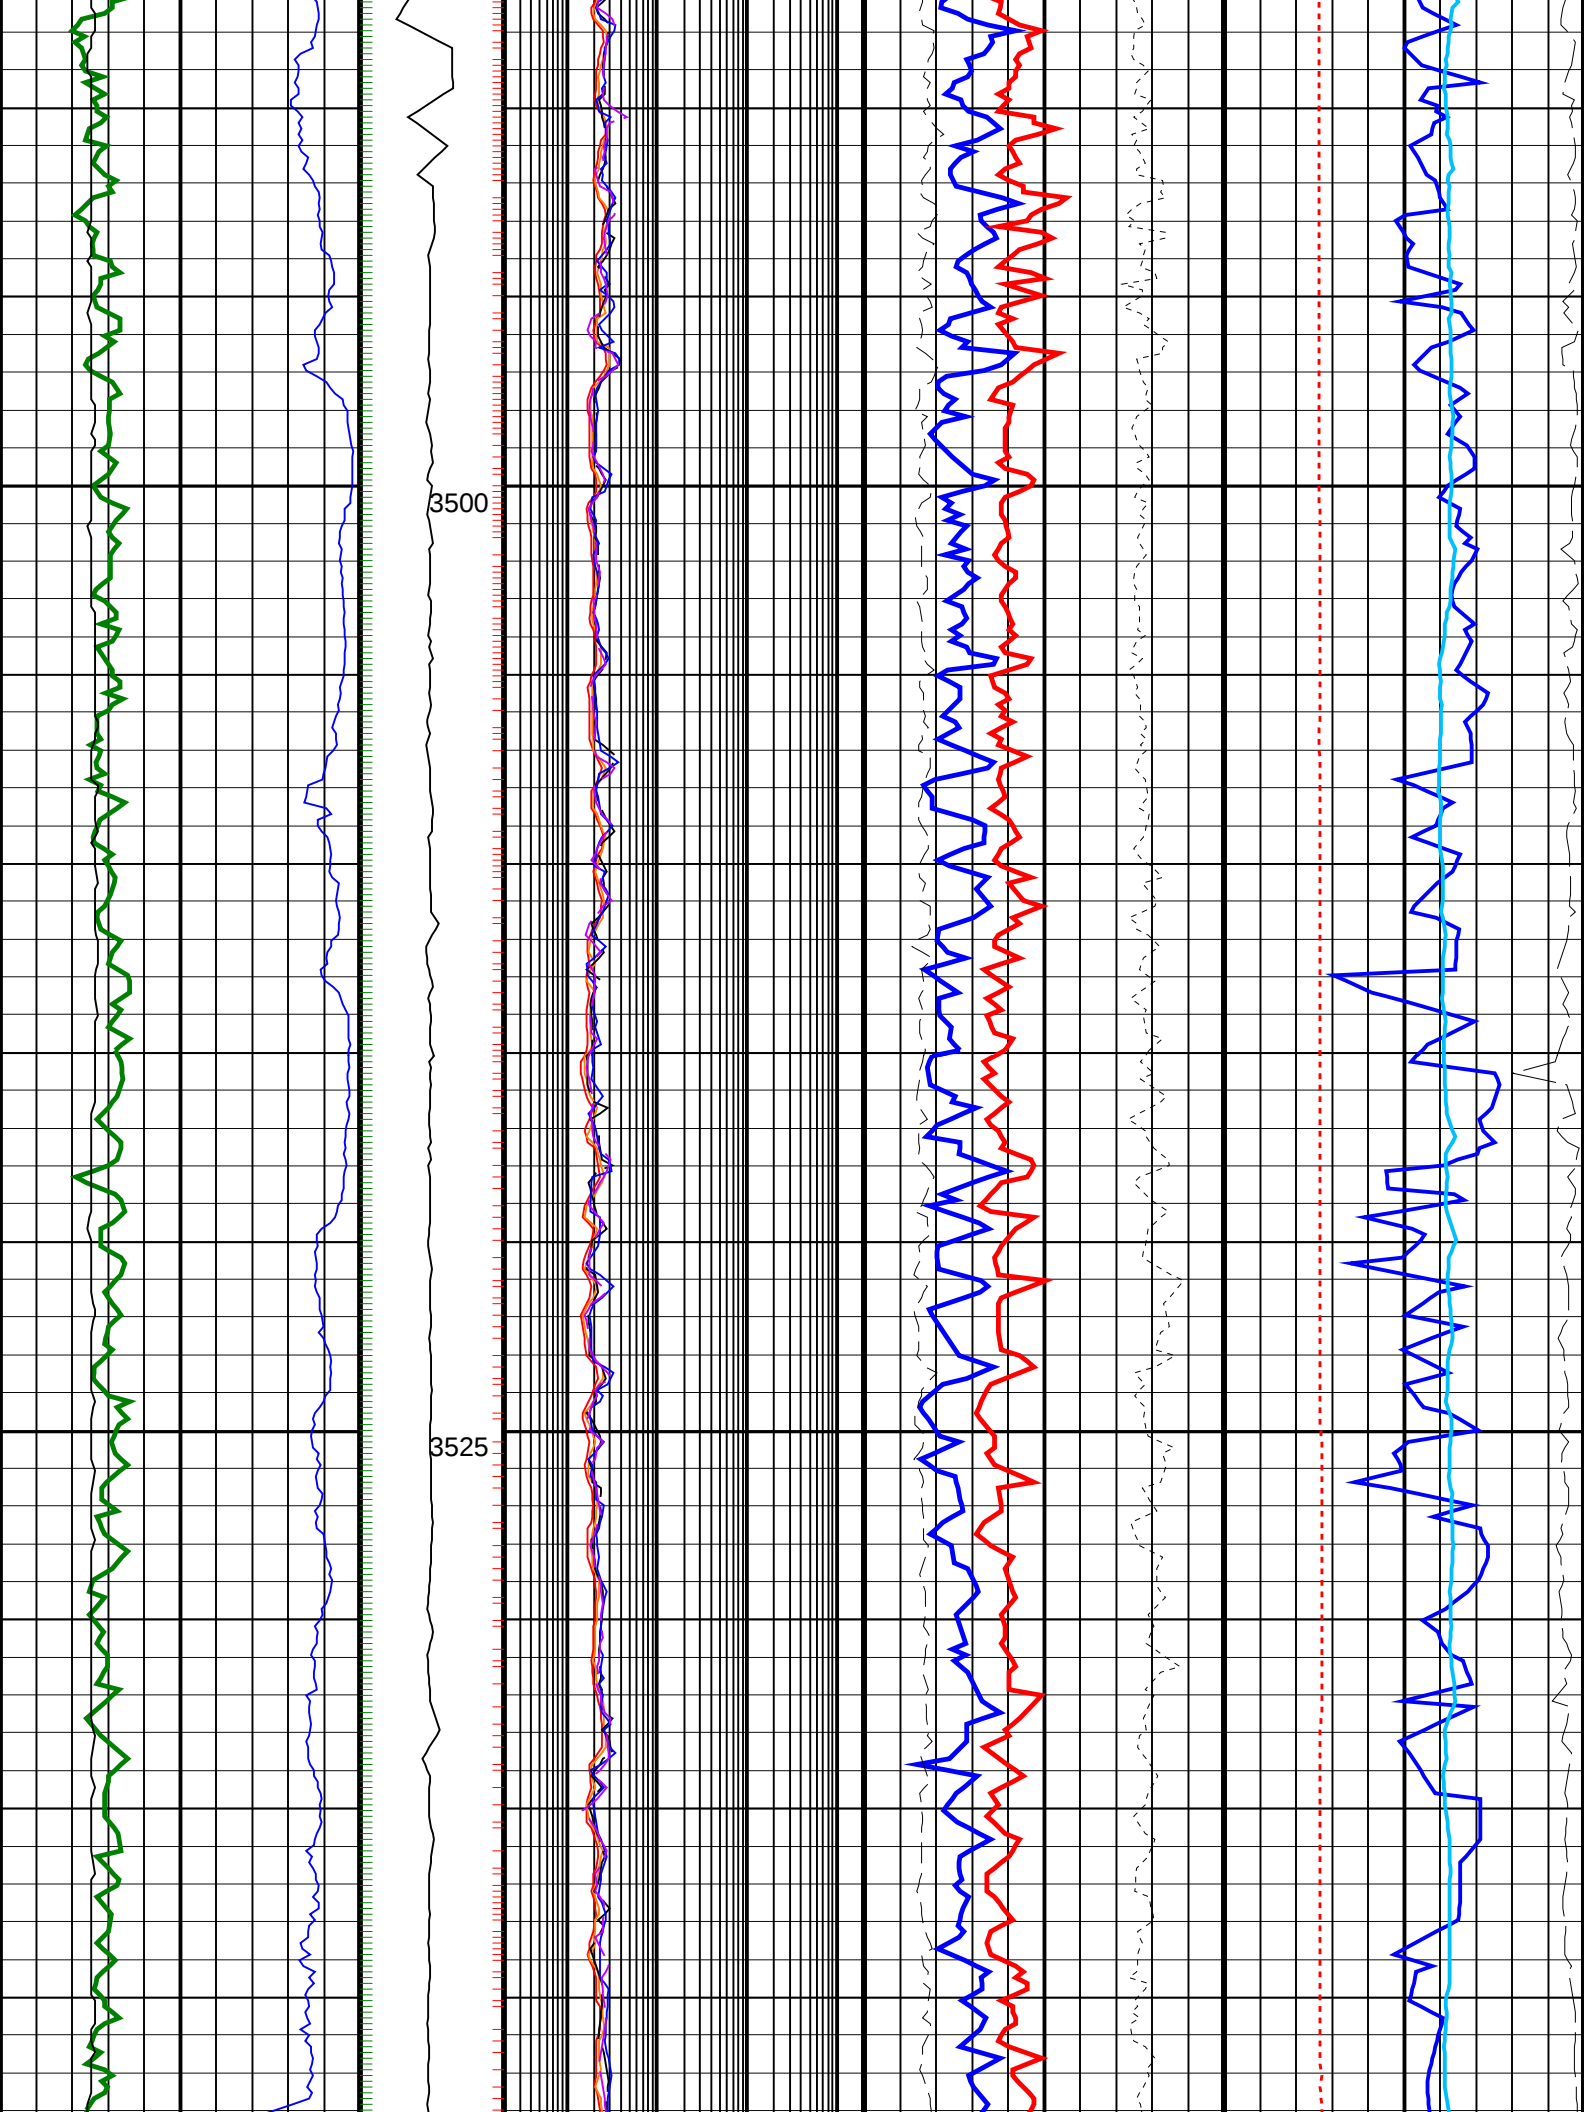

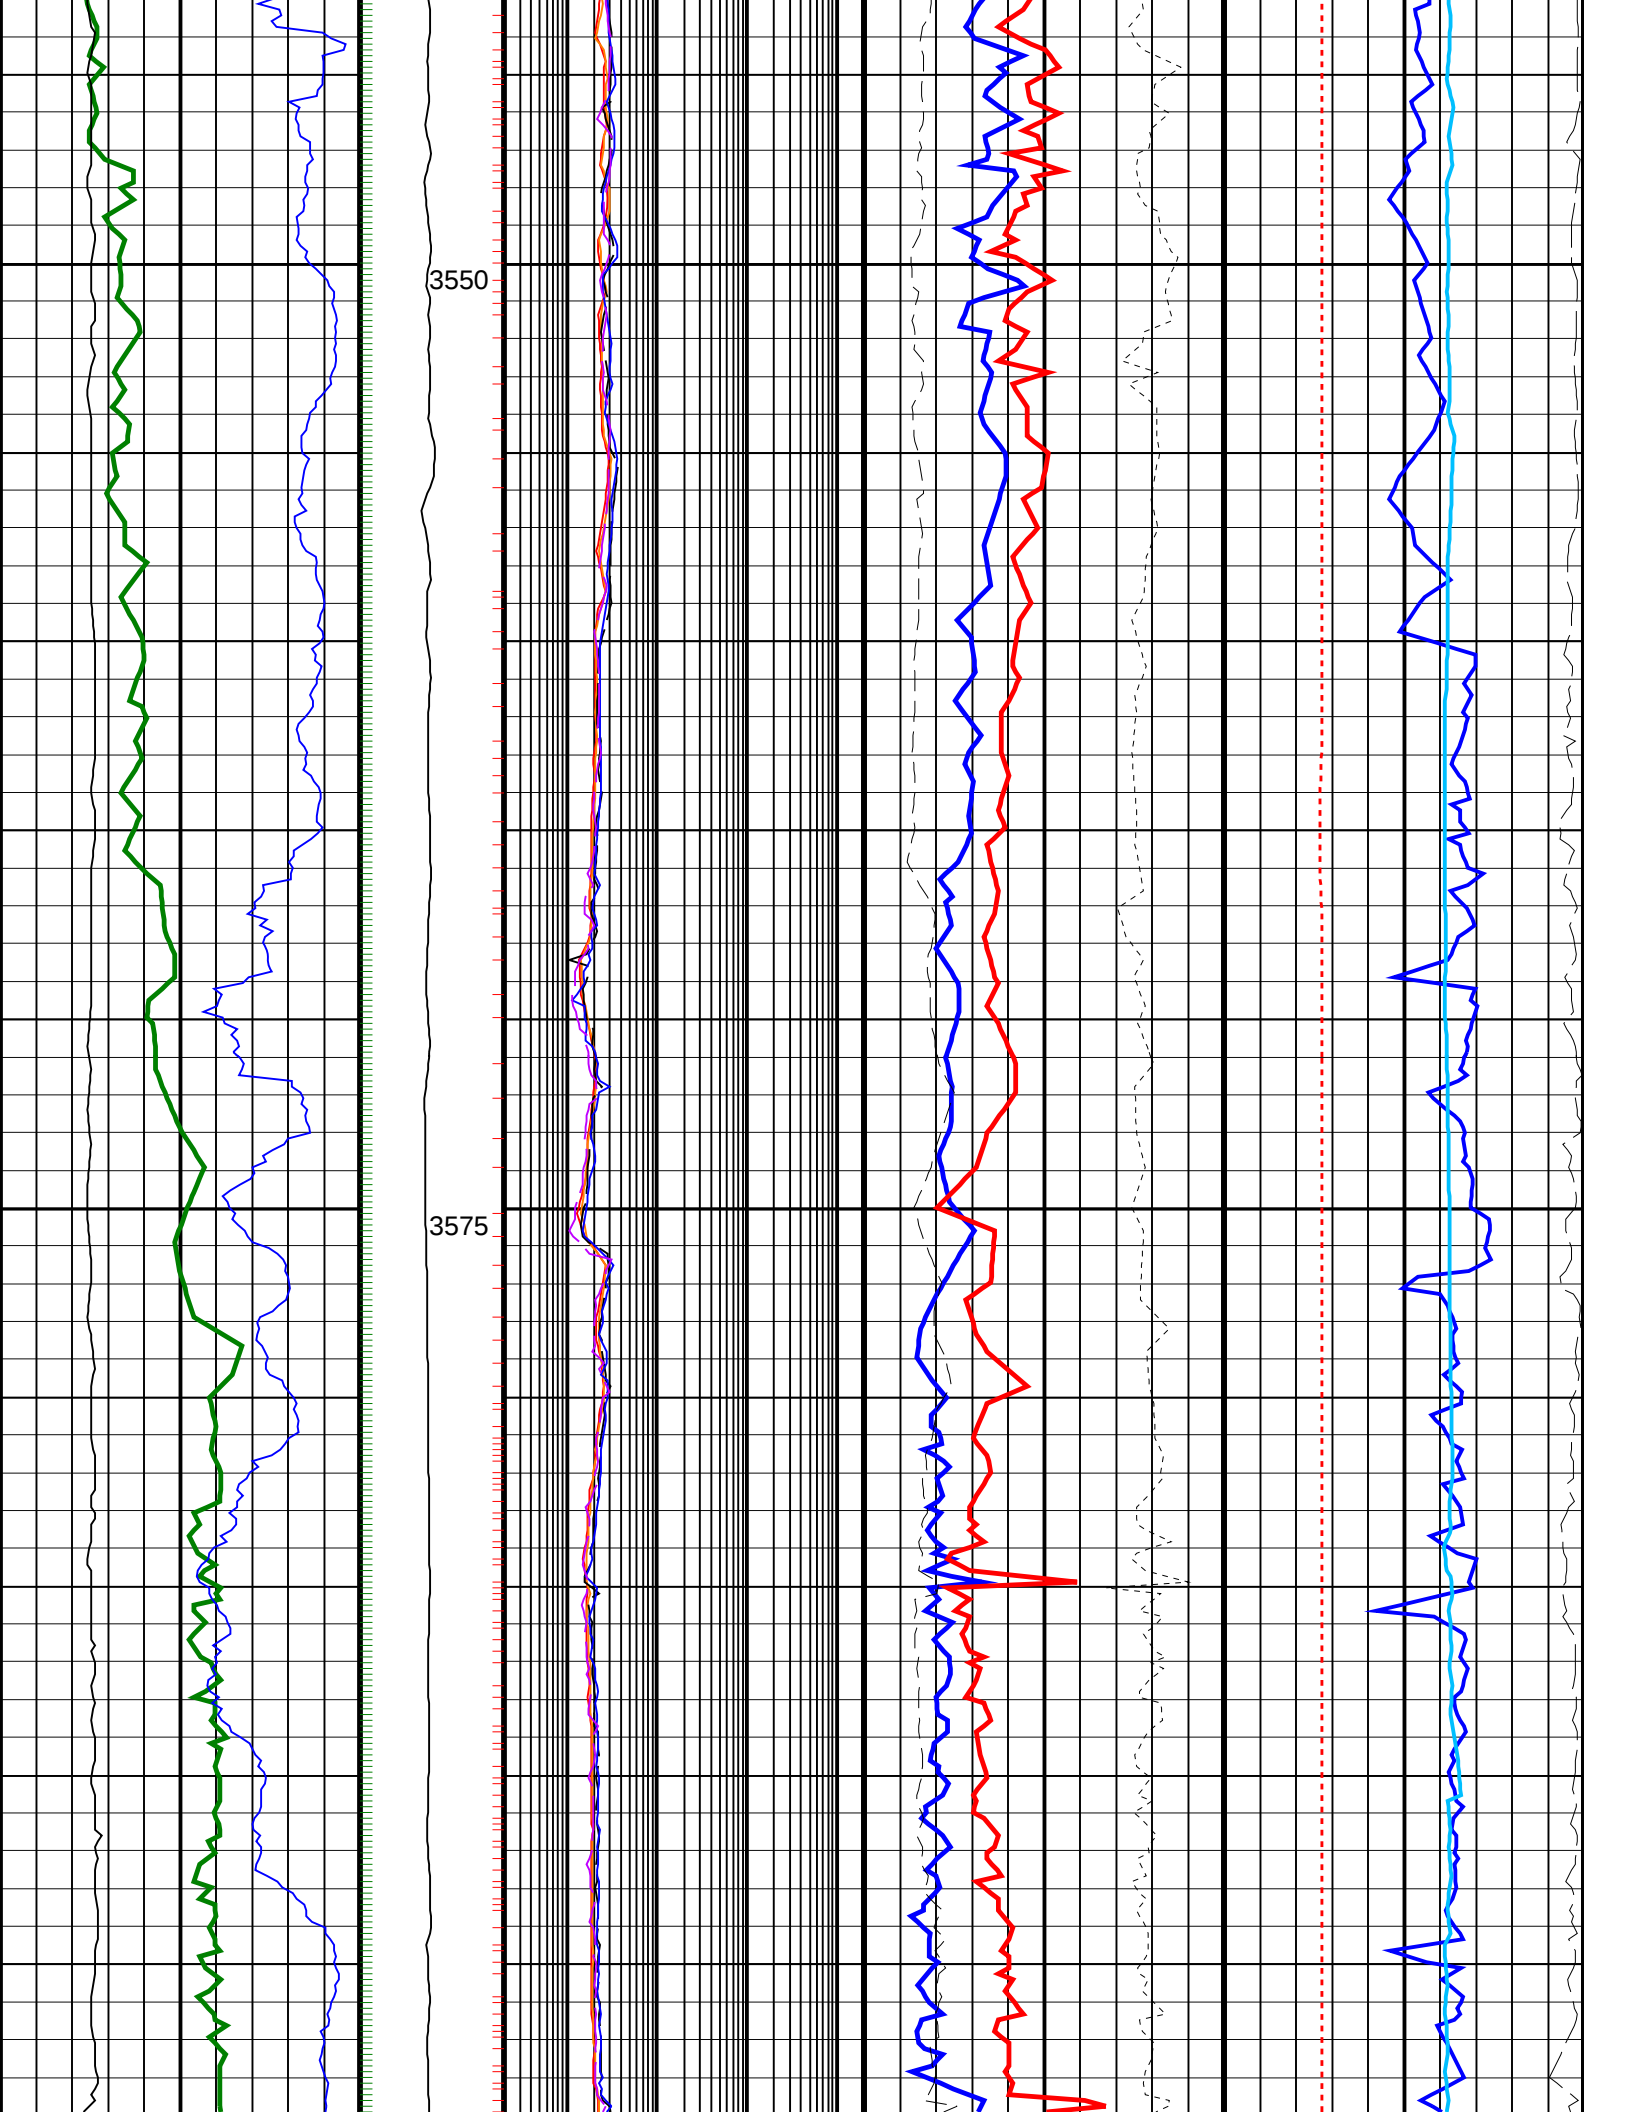


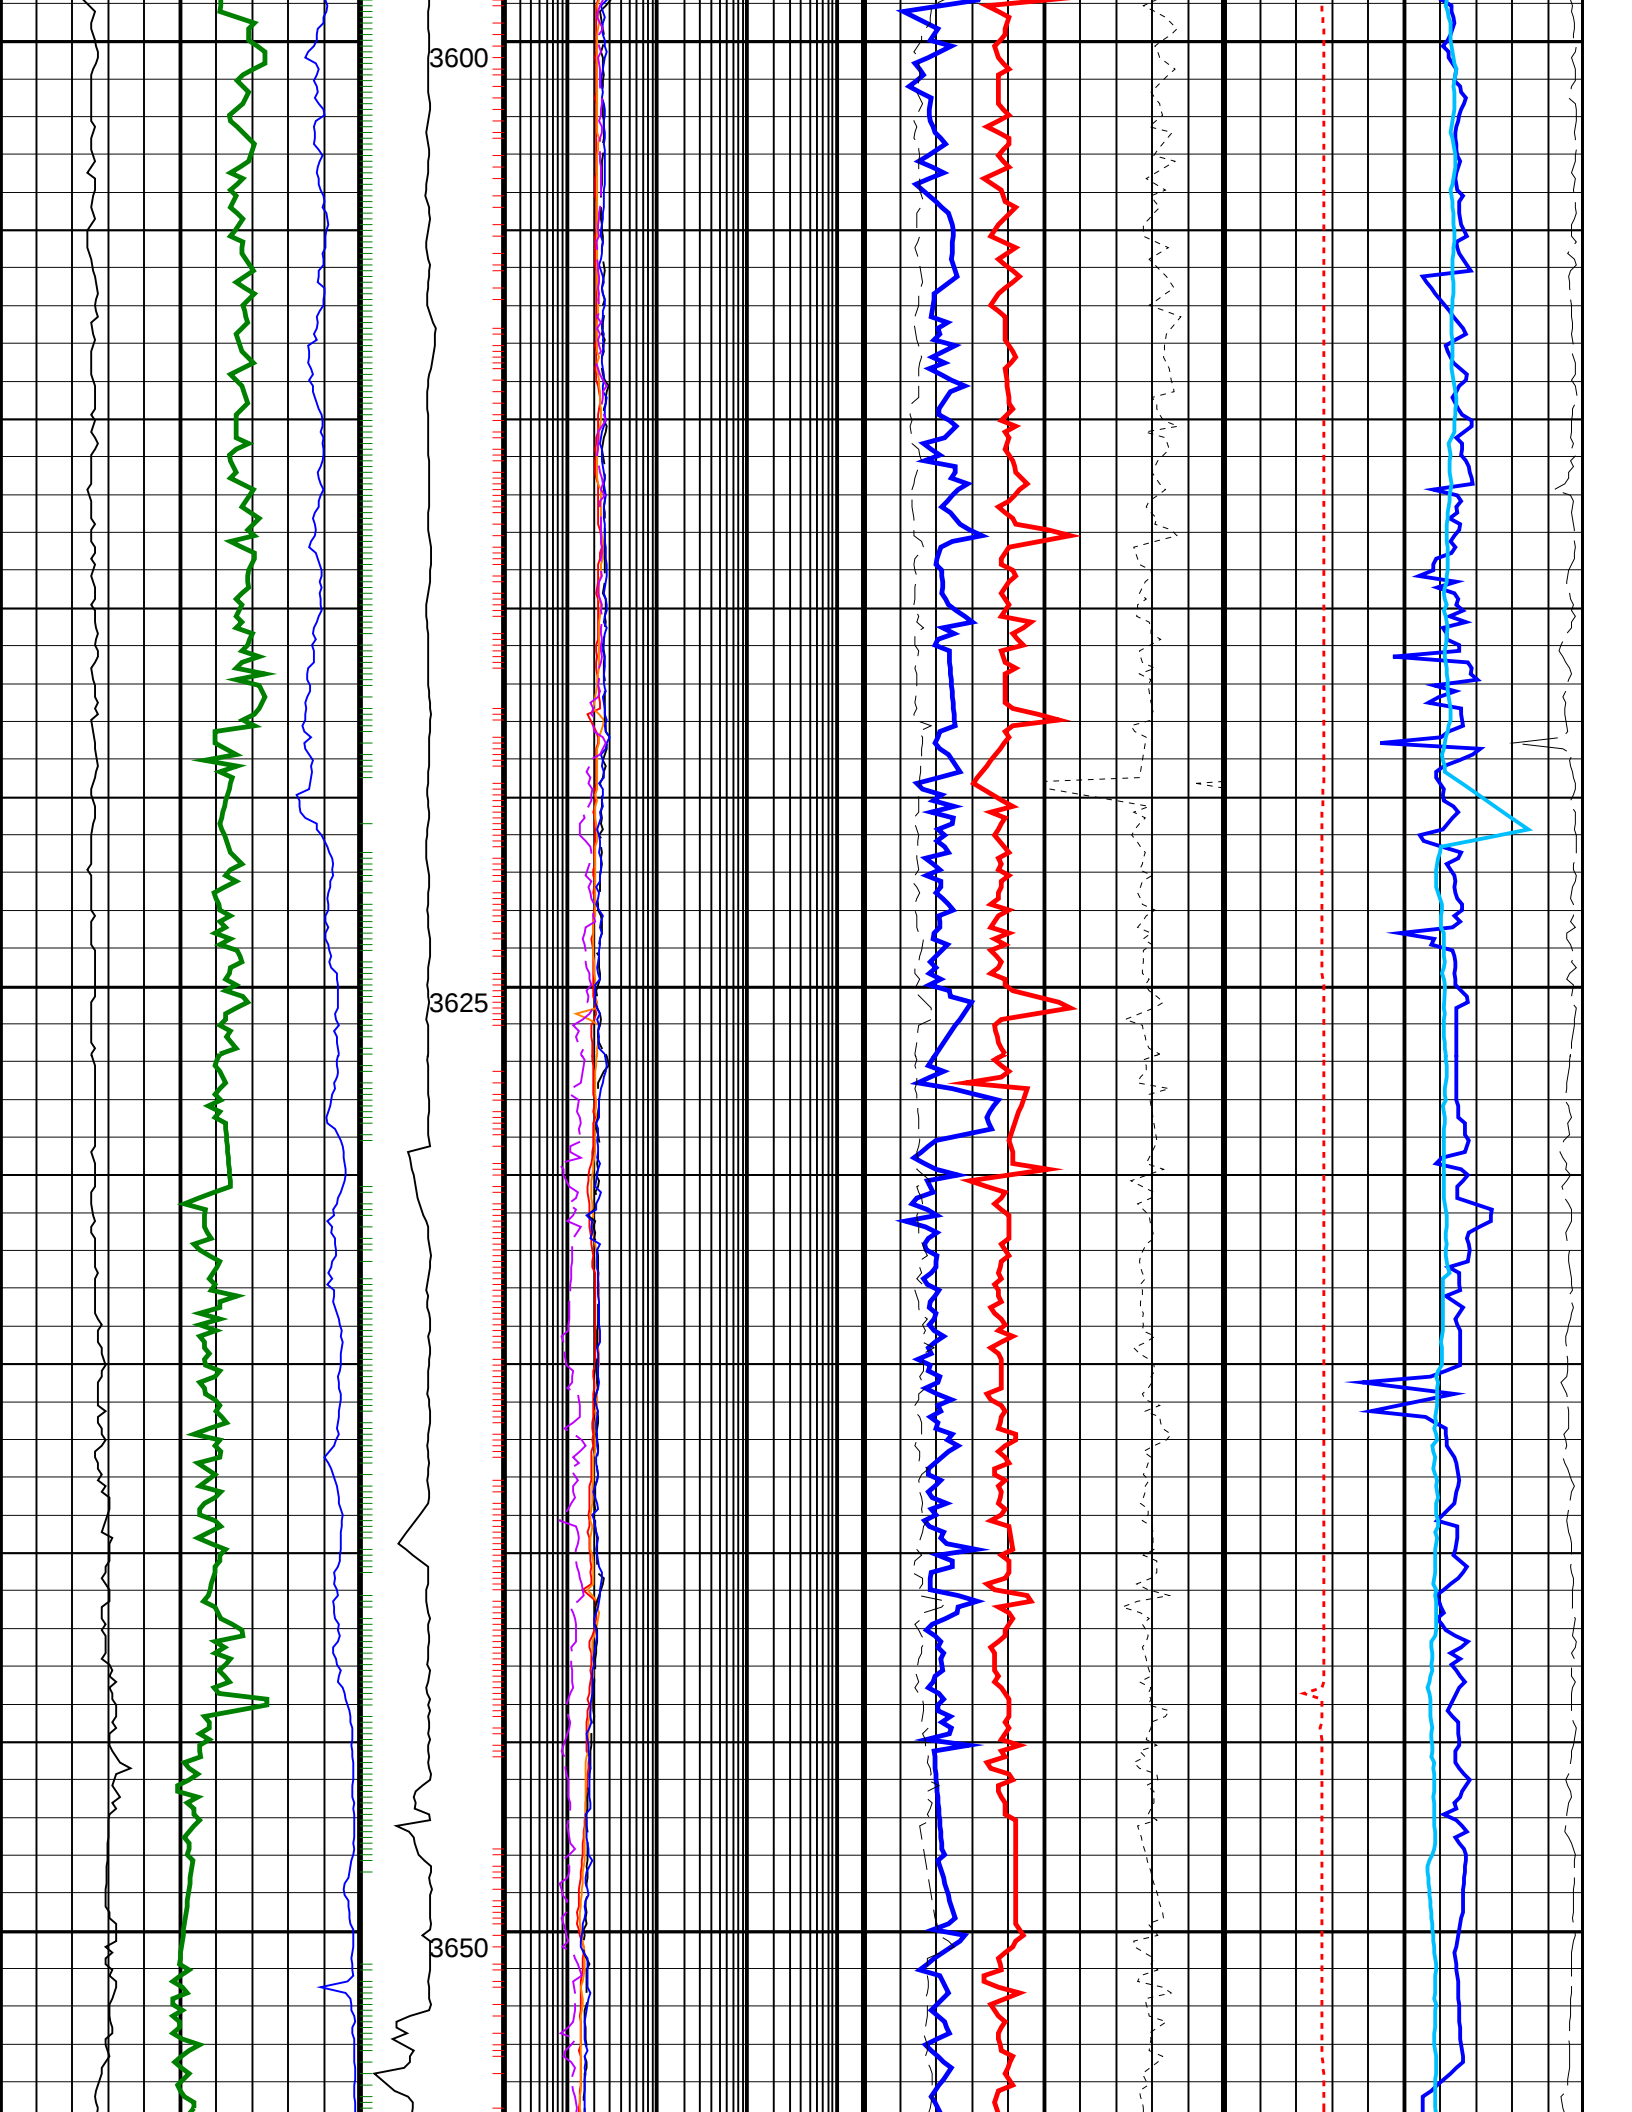



BHI depth referencing used from 3658.0m to 3718.00mMD


3675


3700

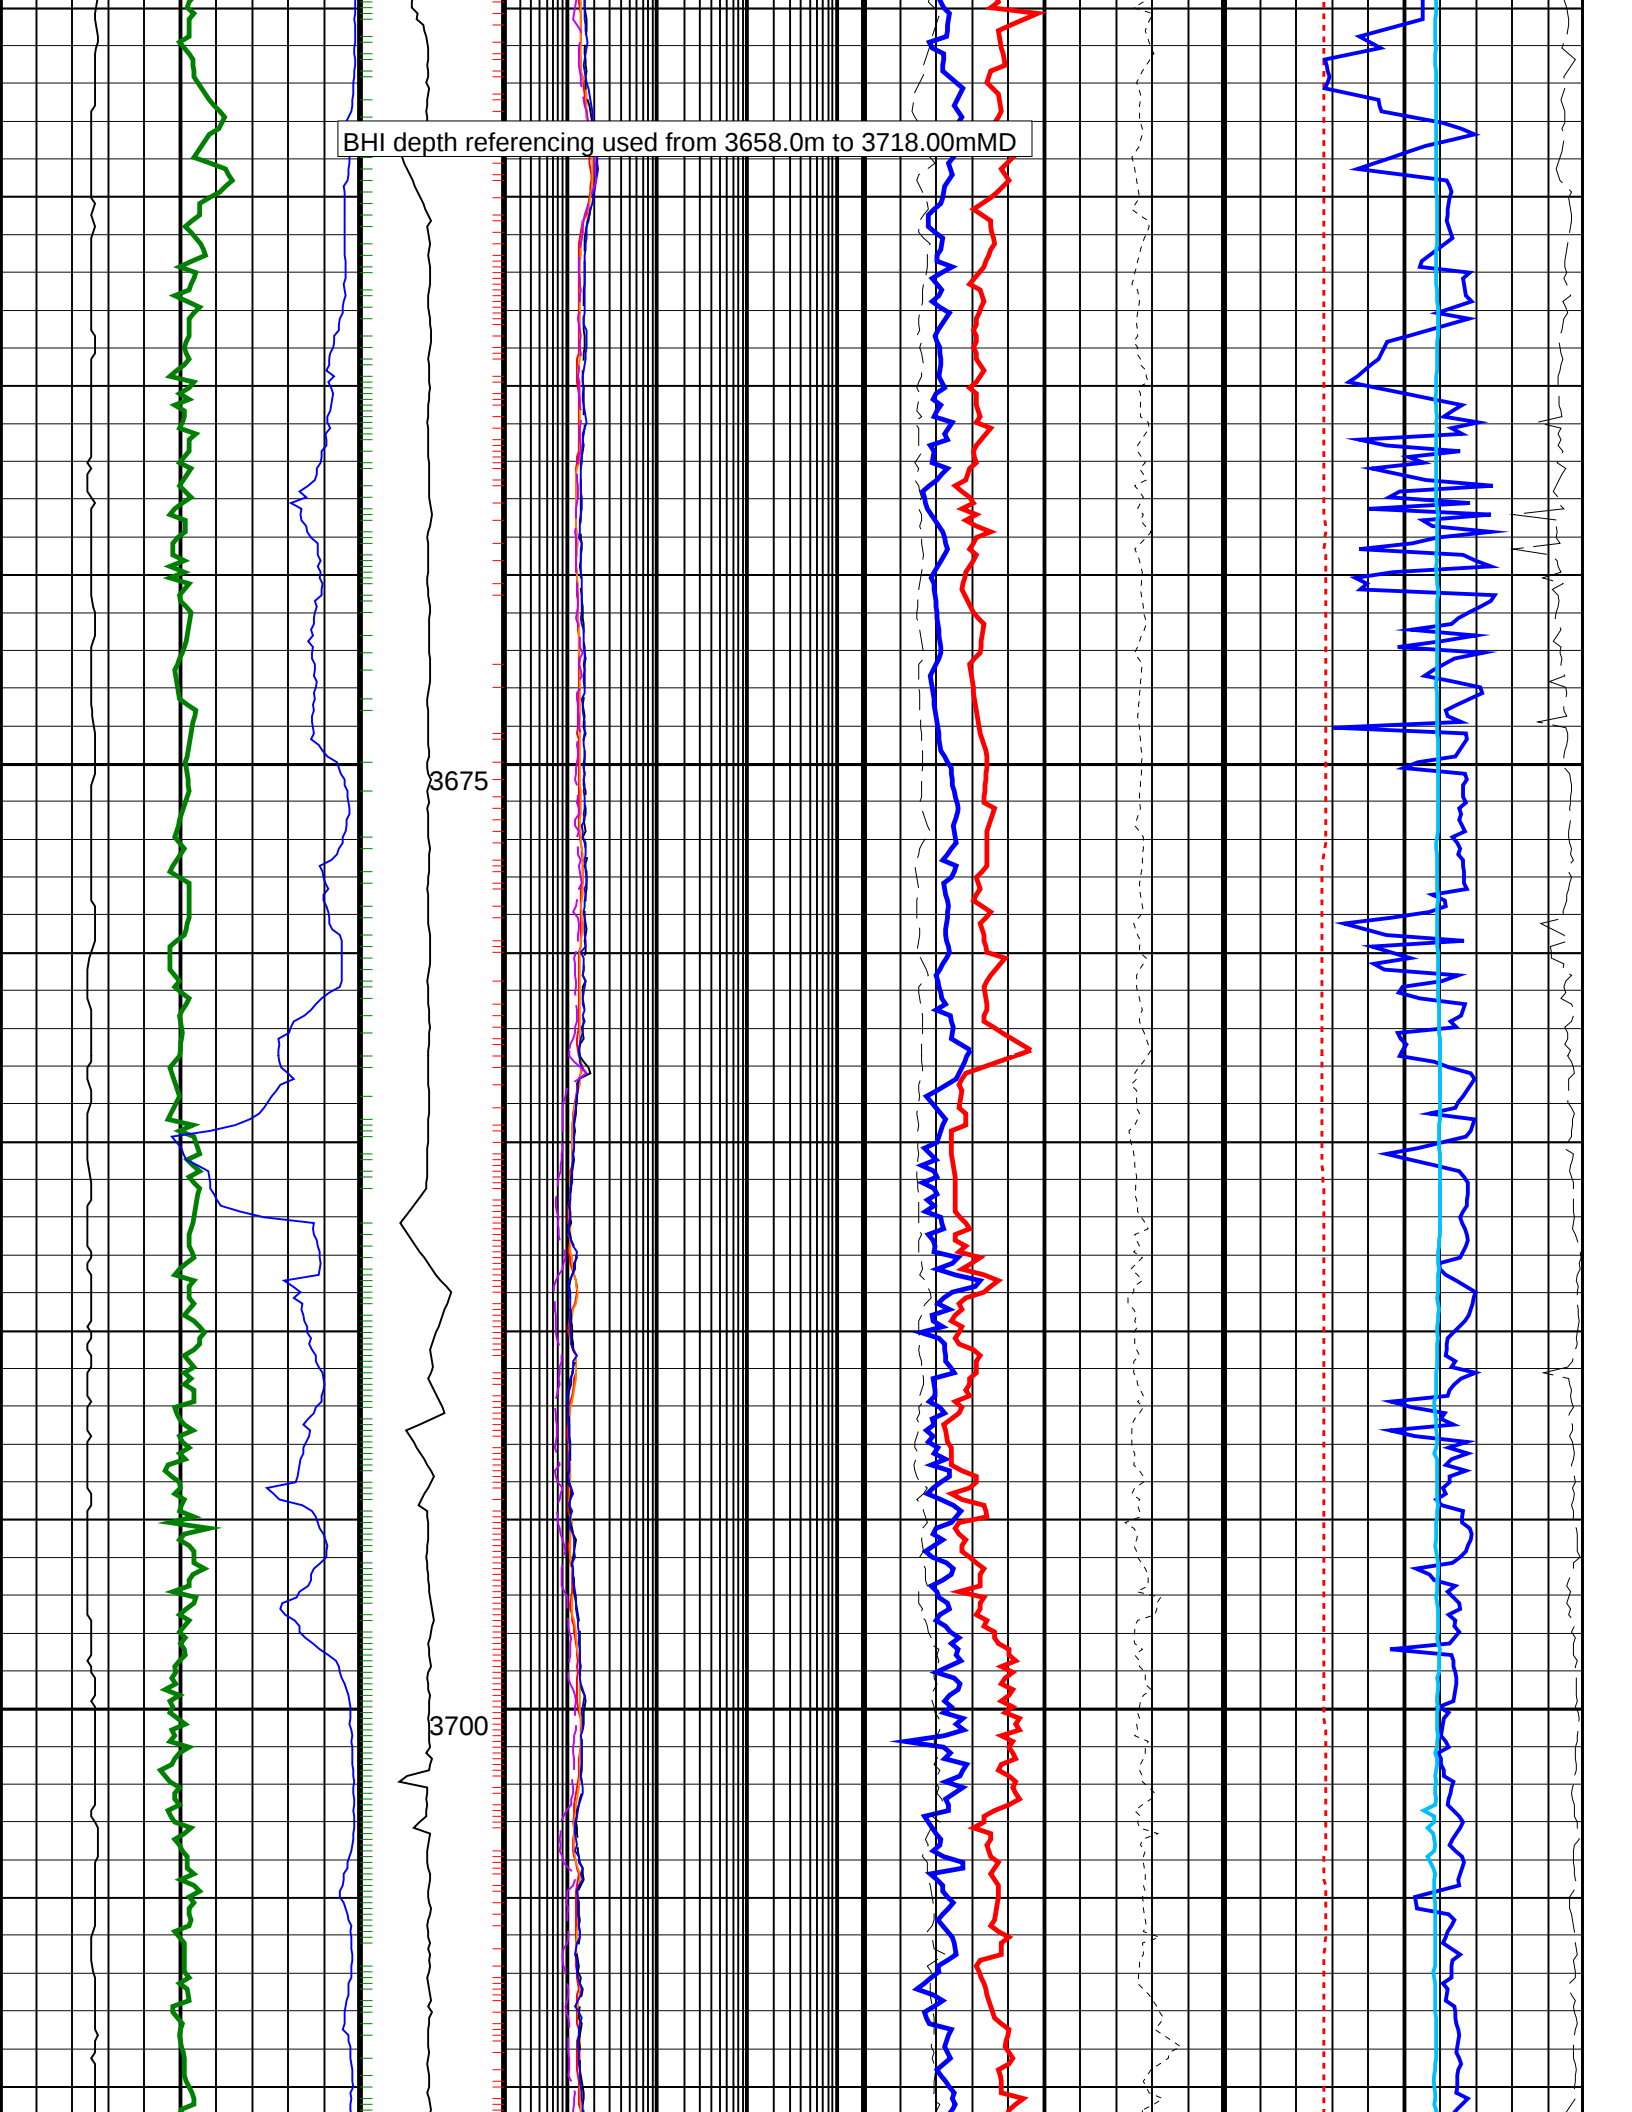


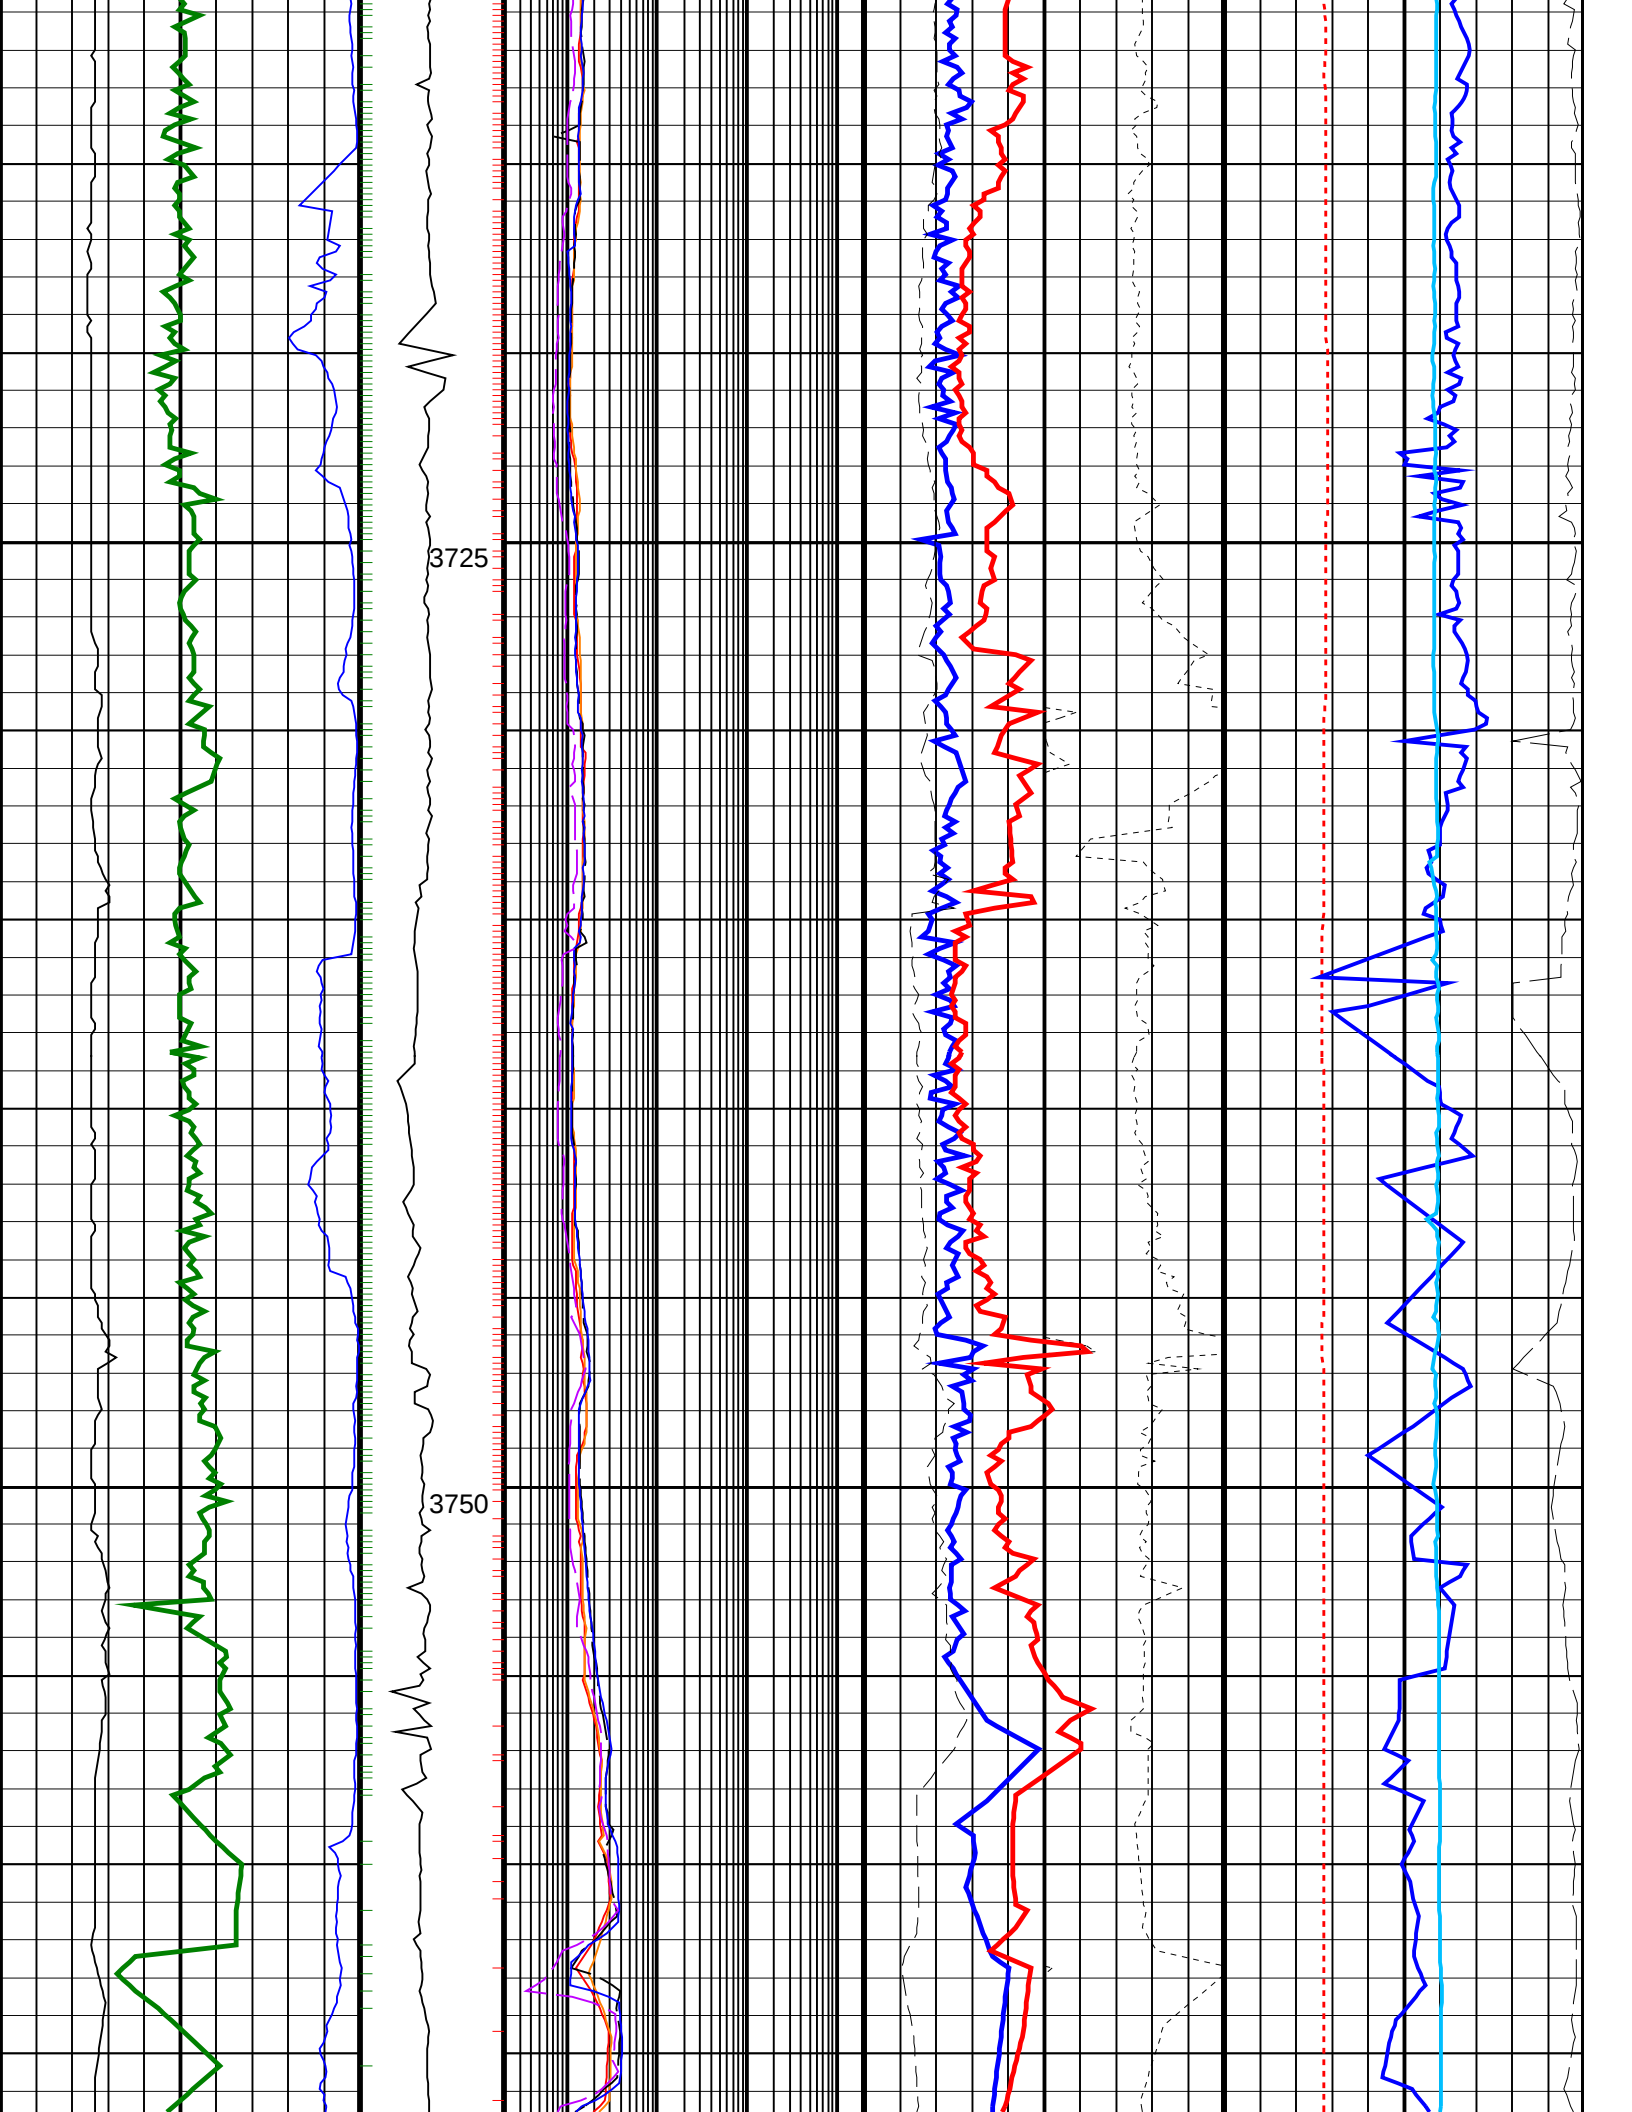


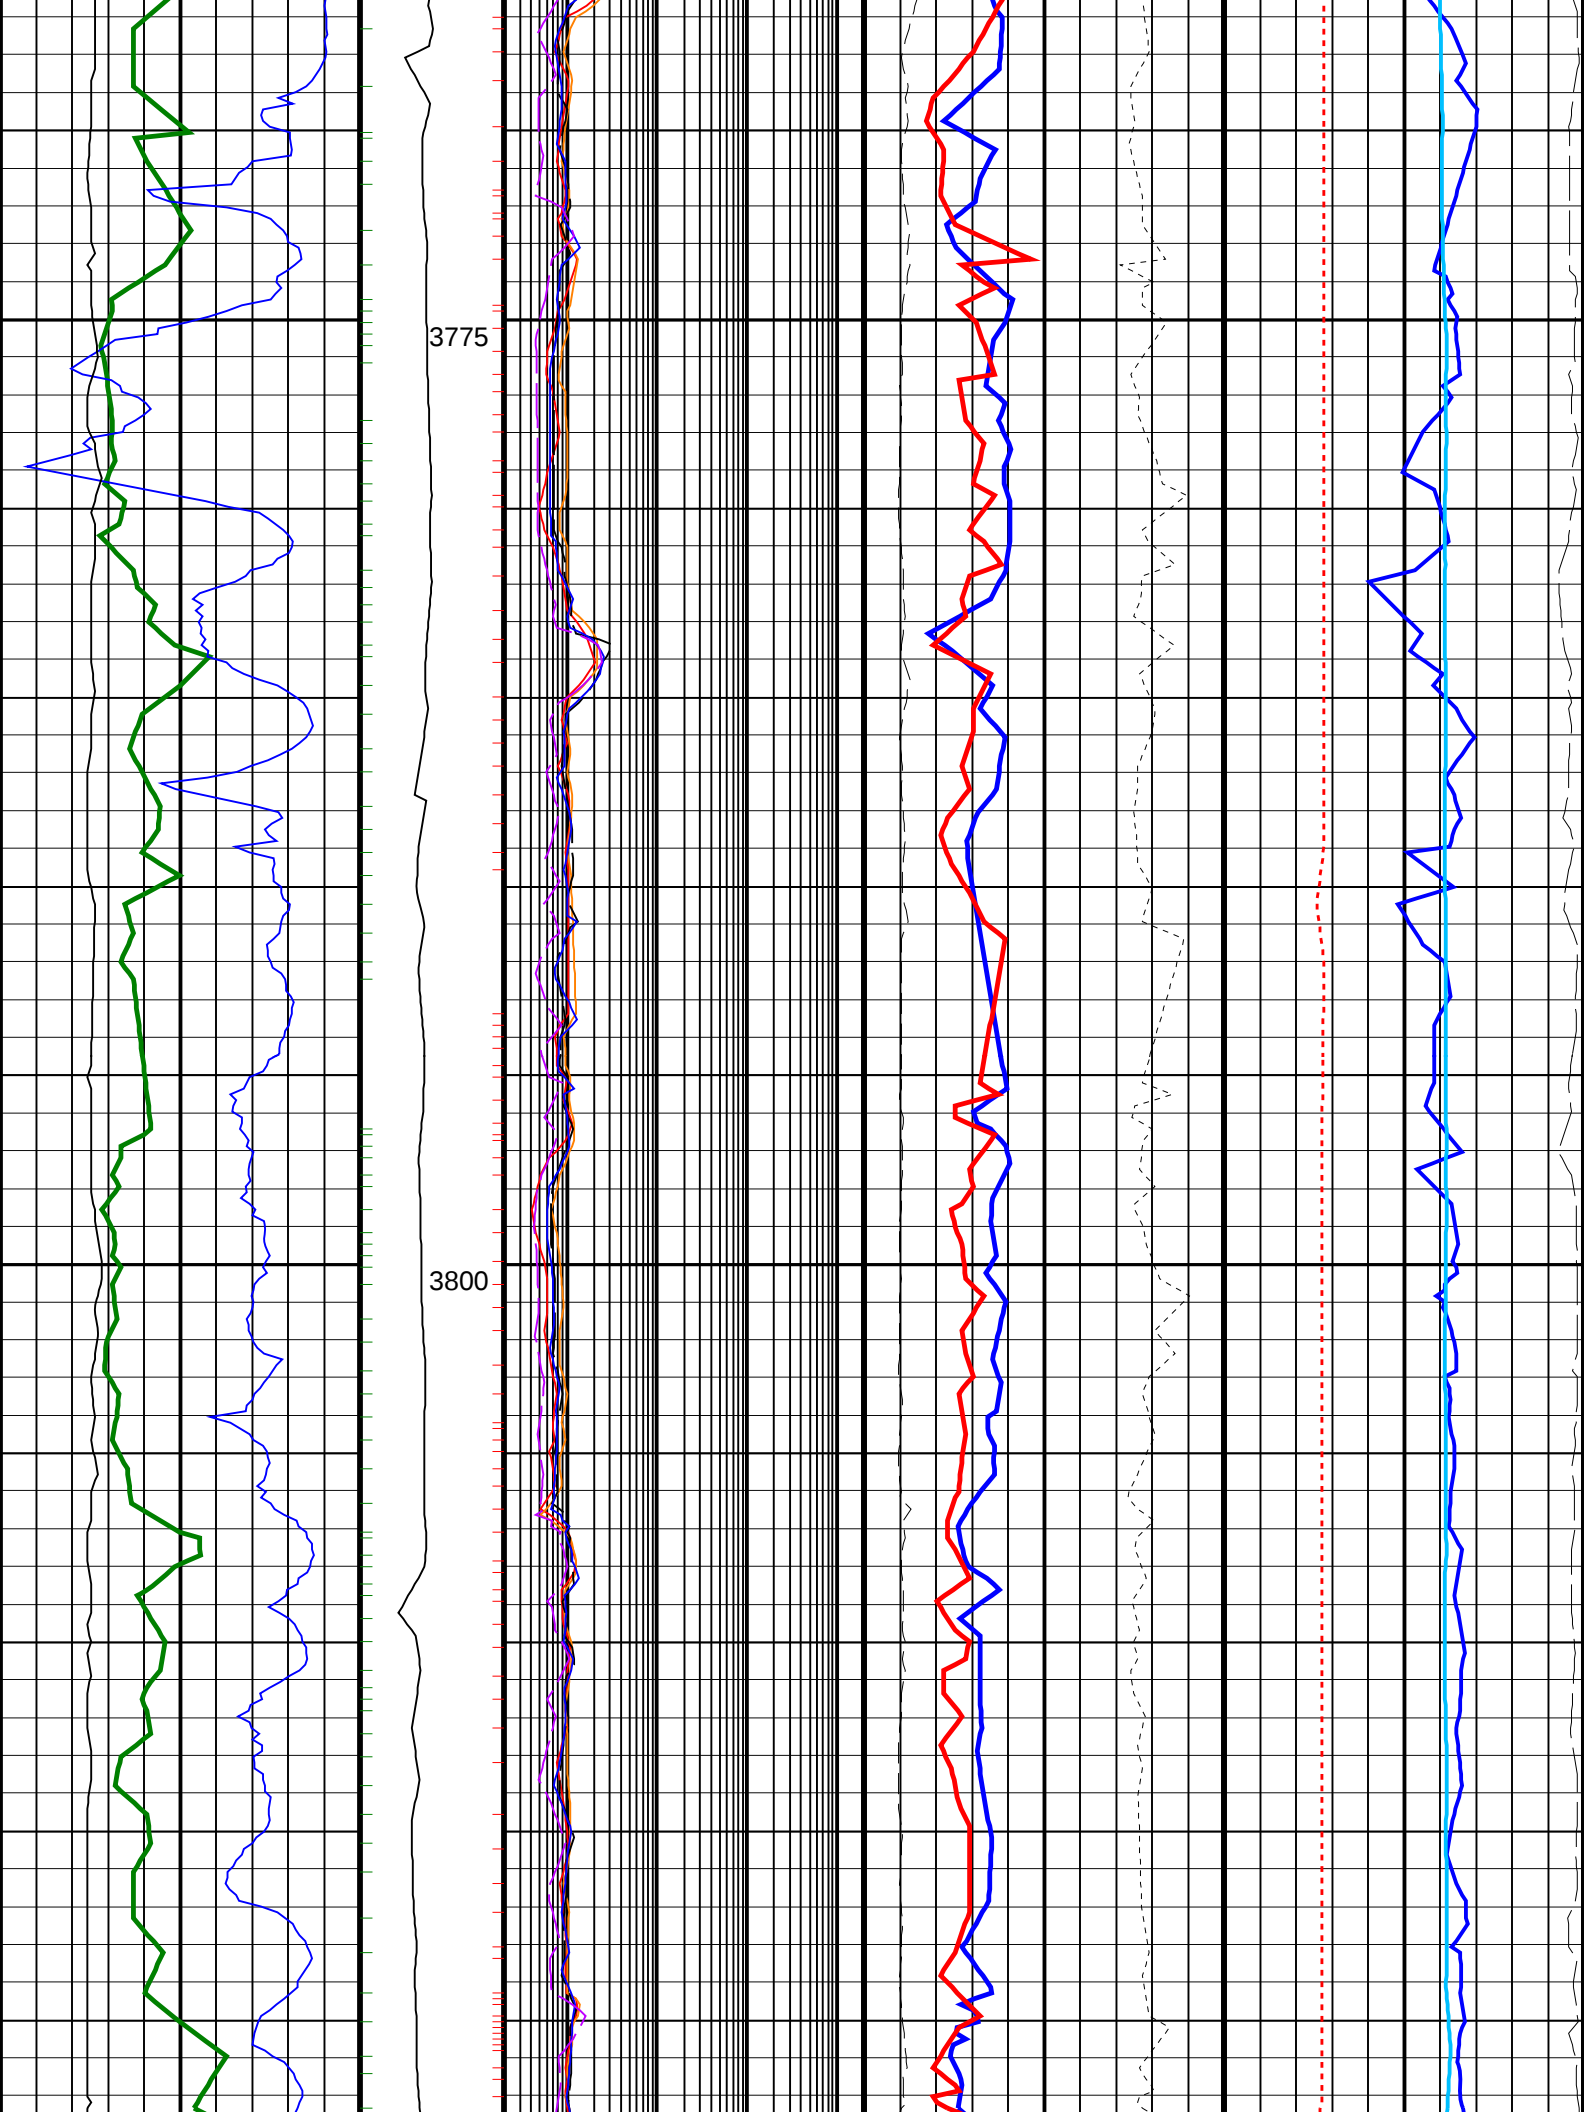


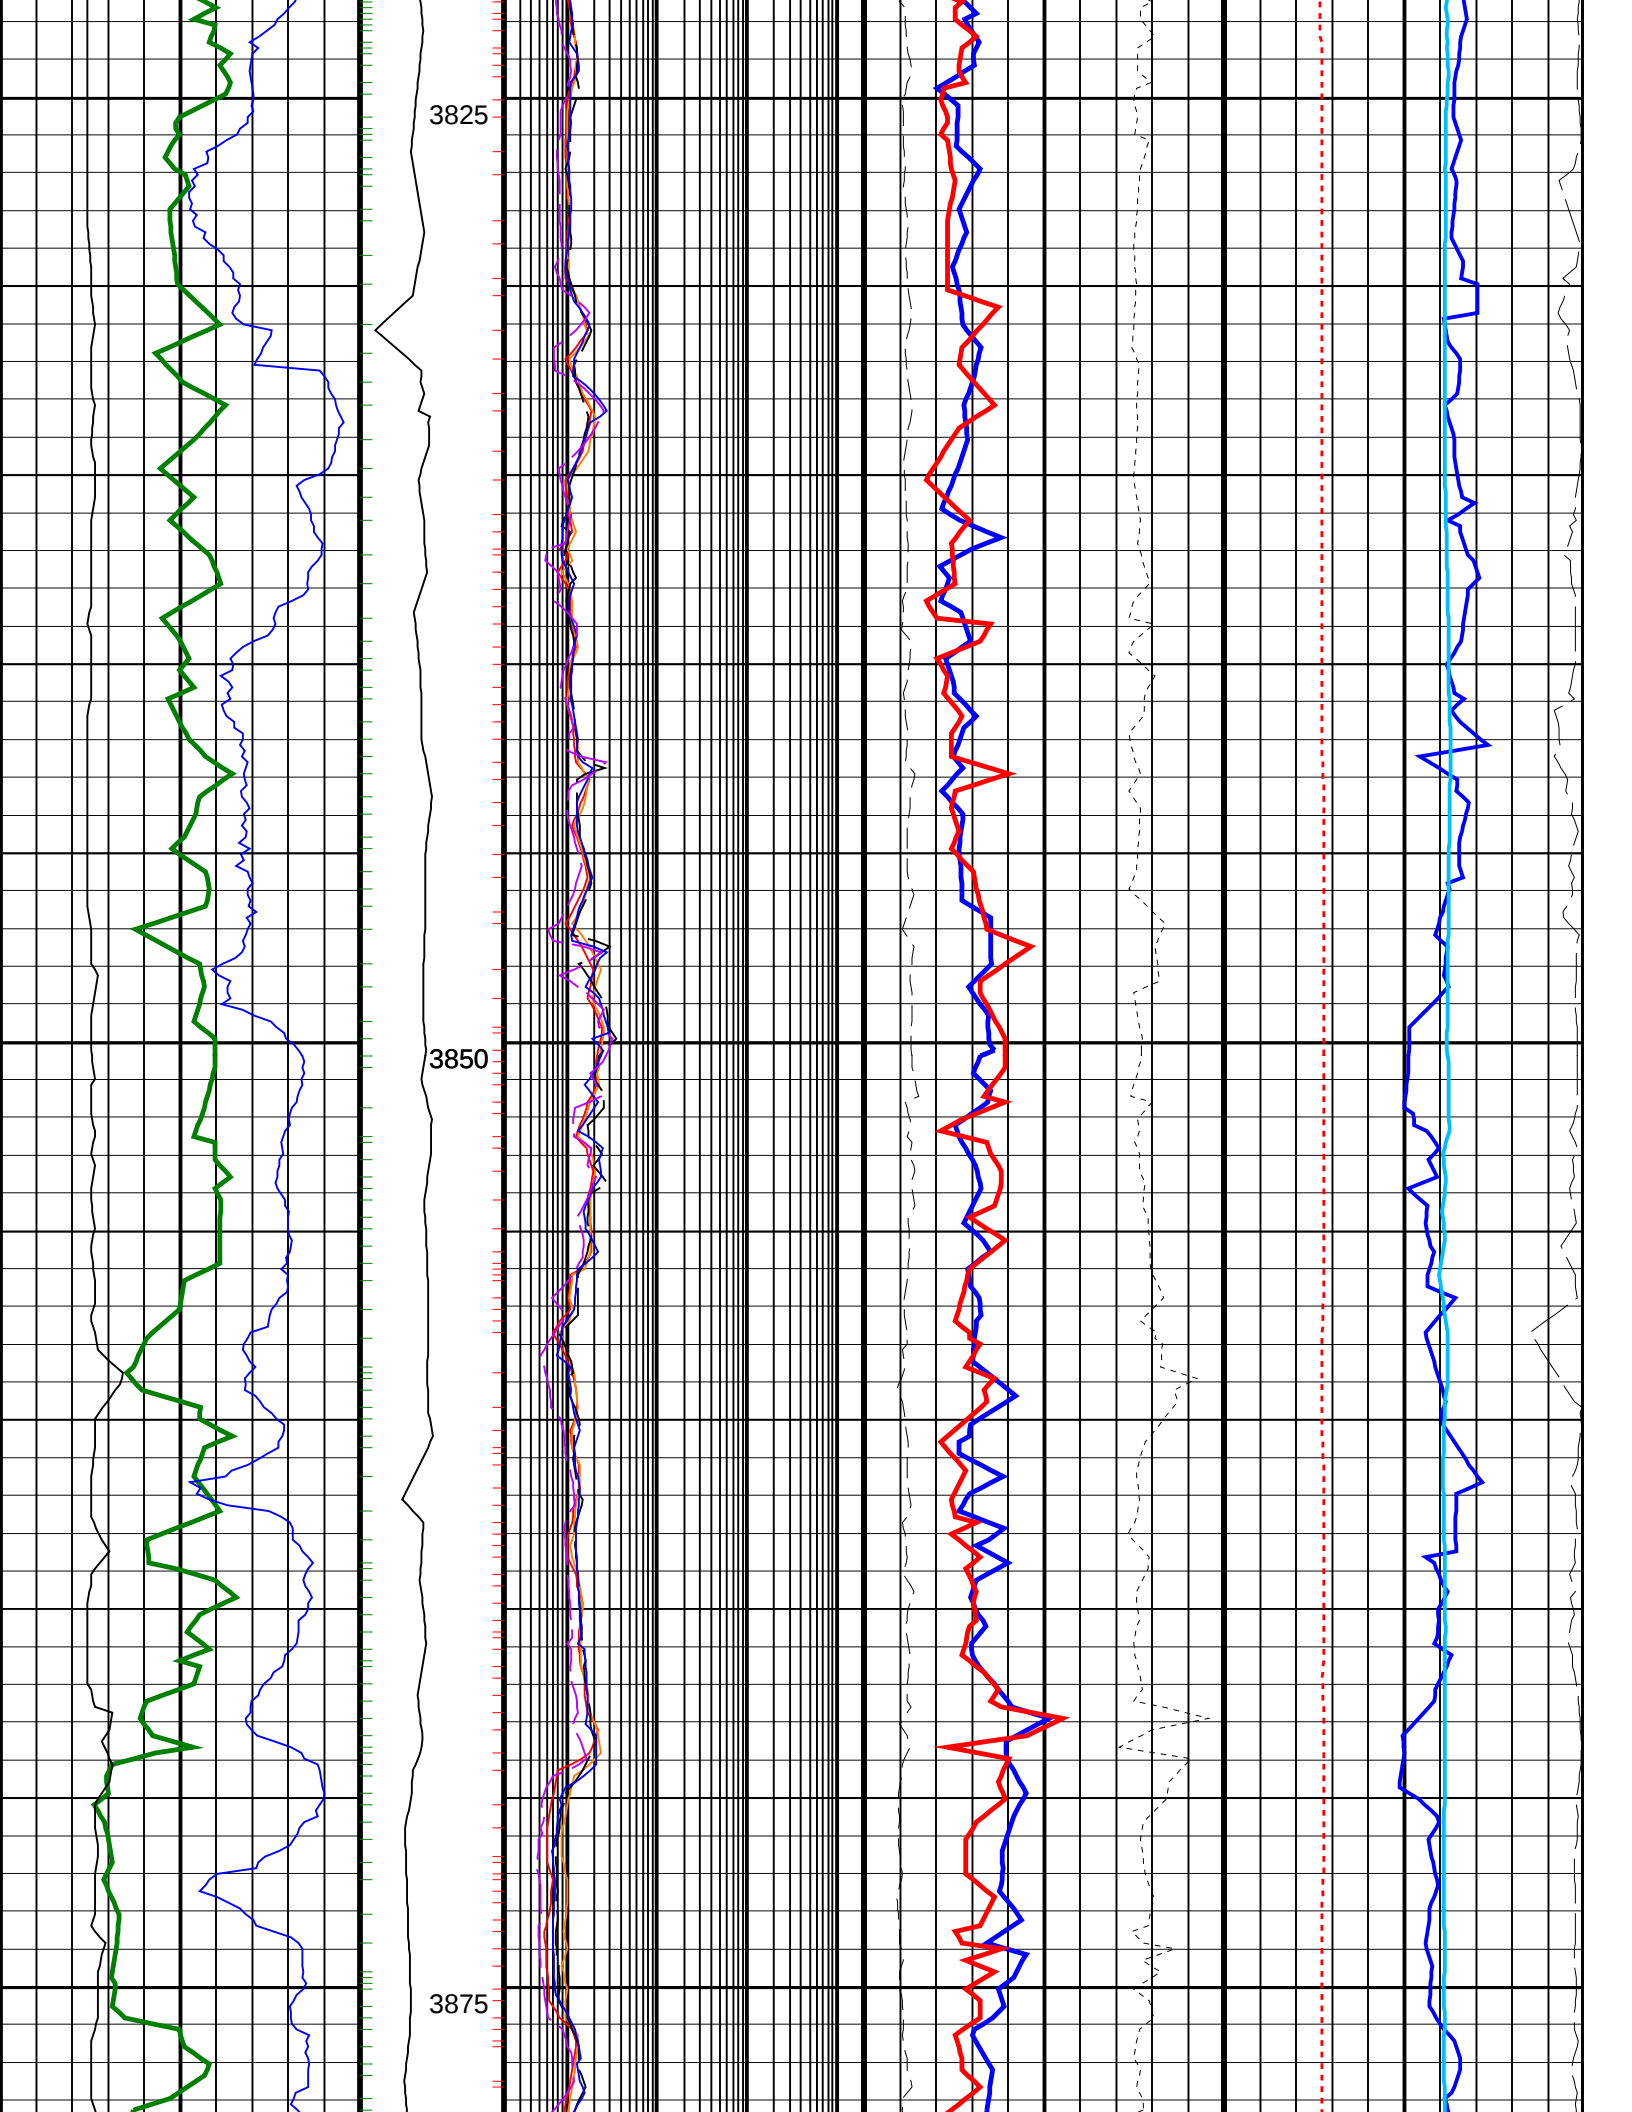


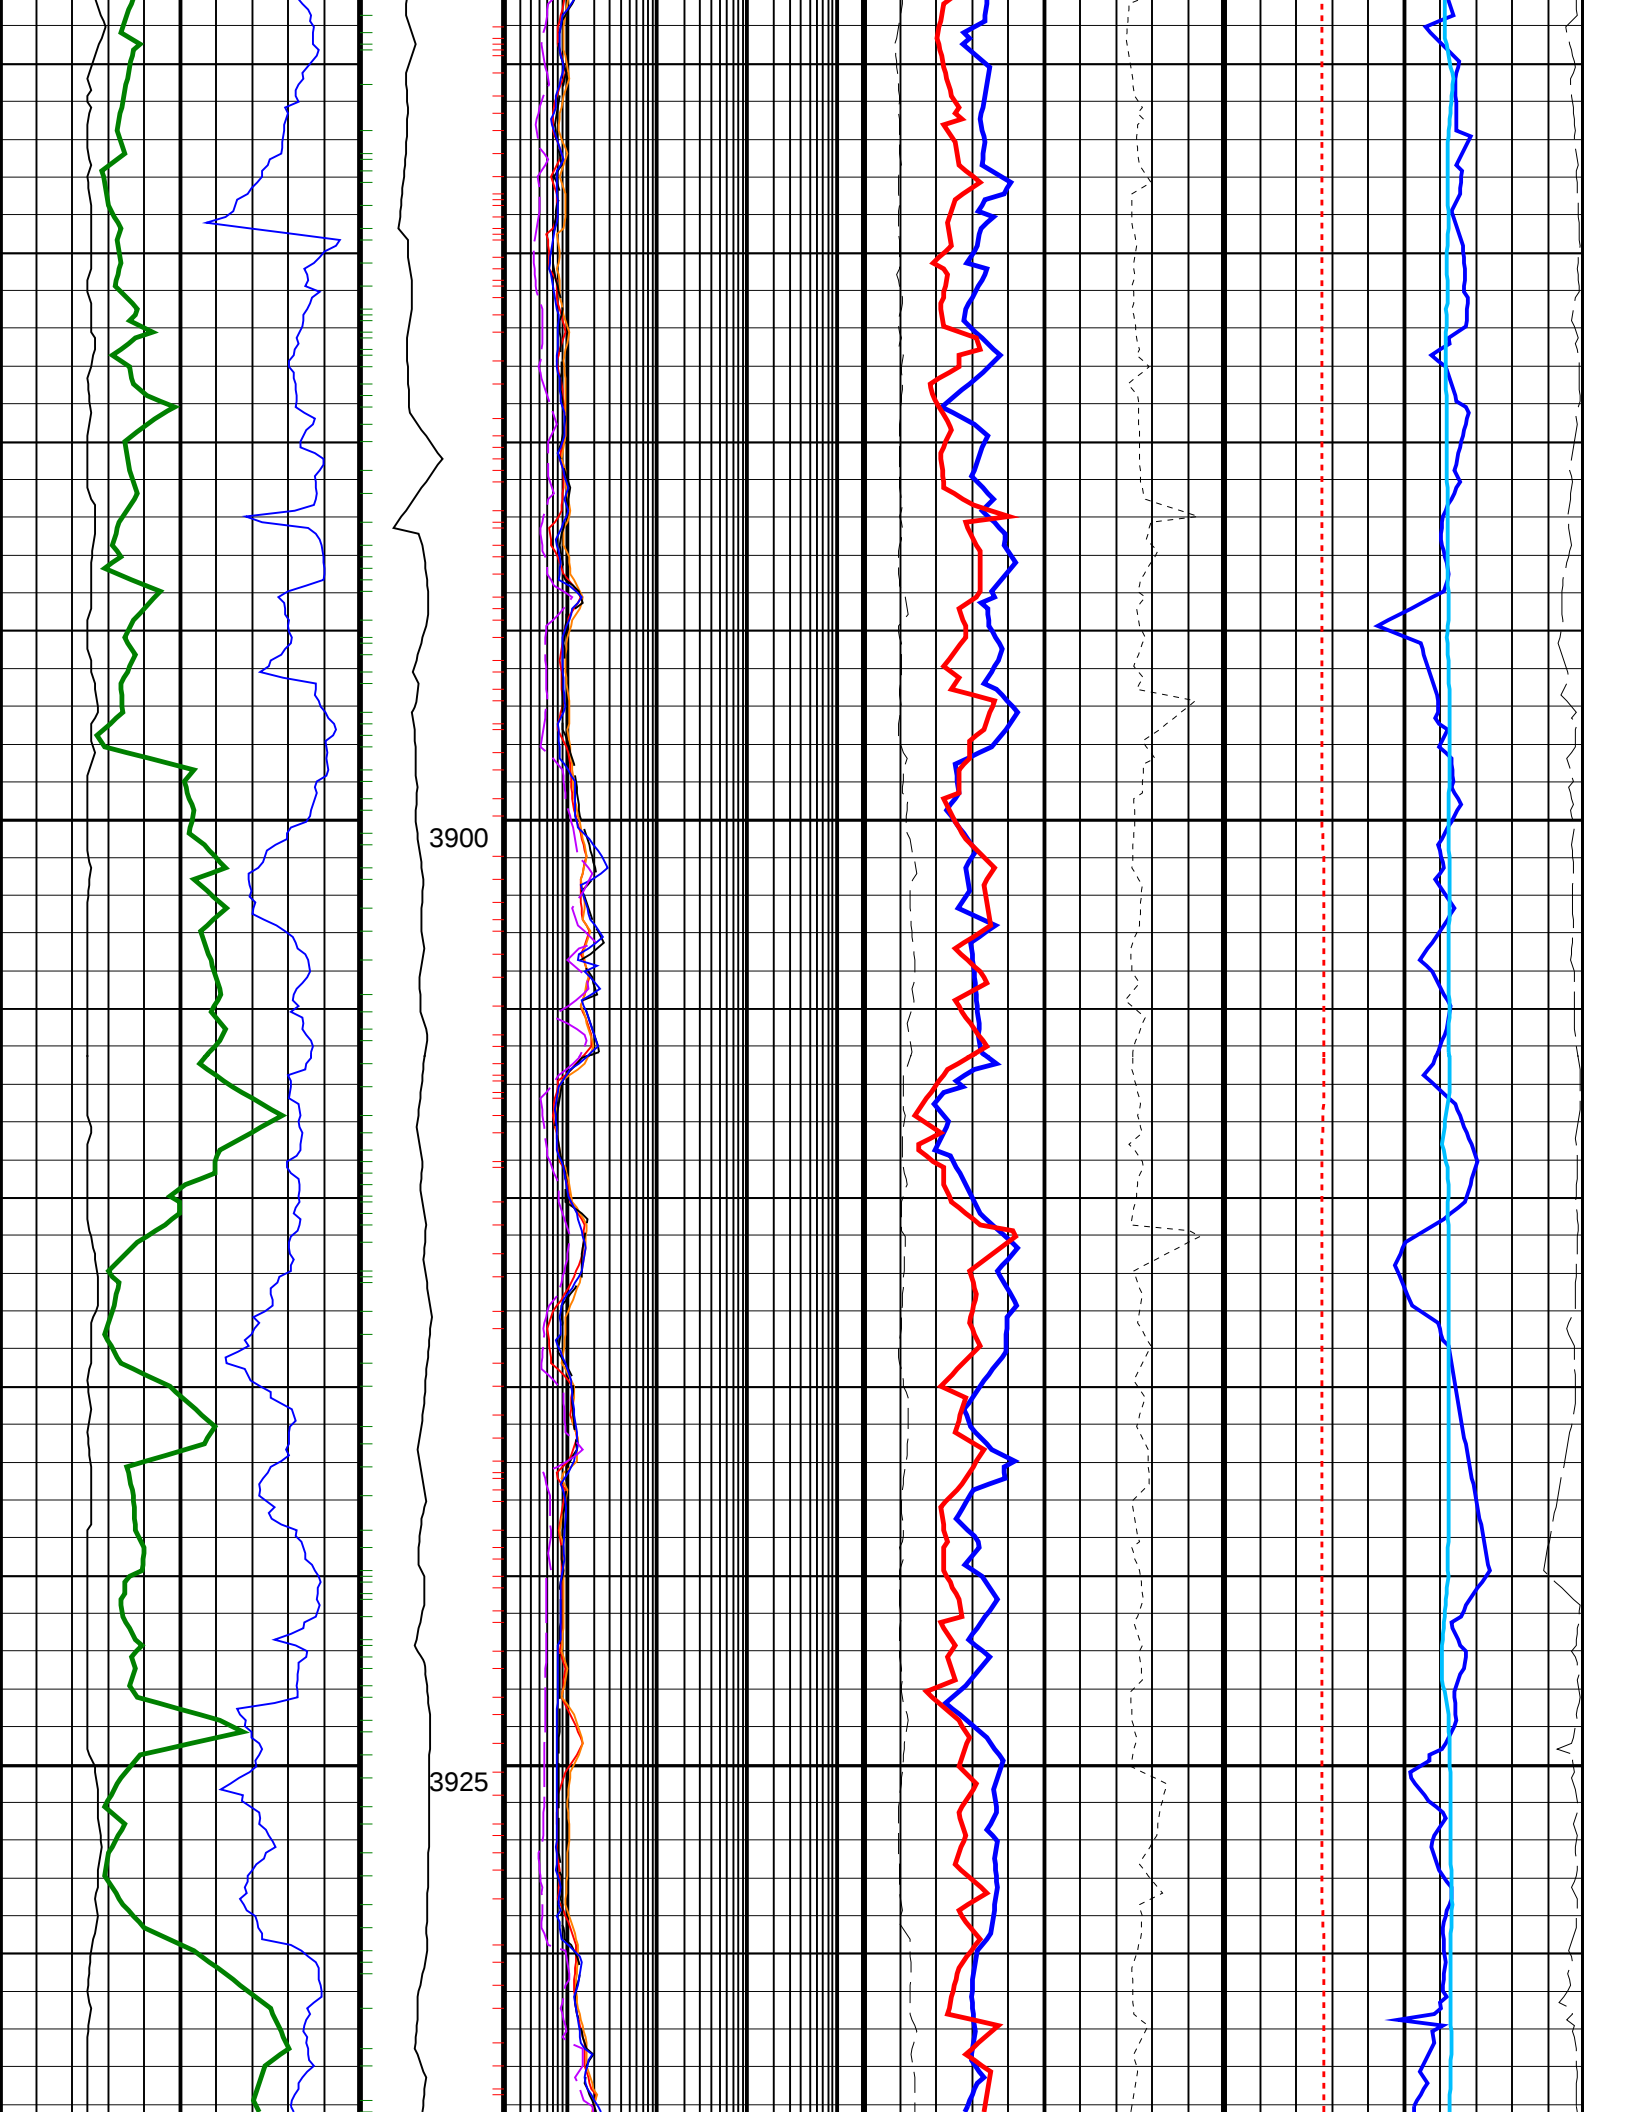


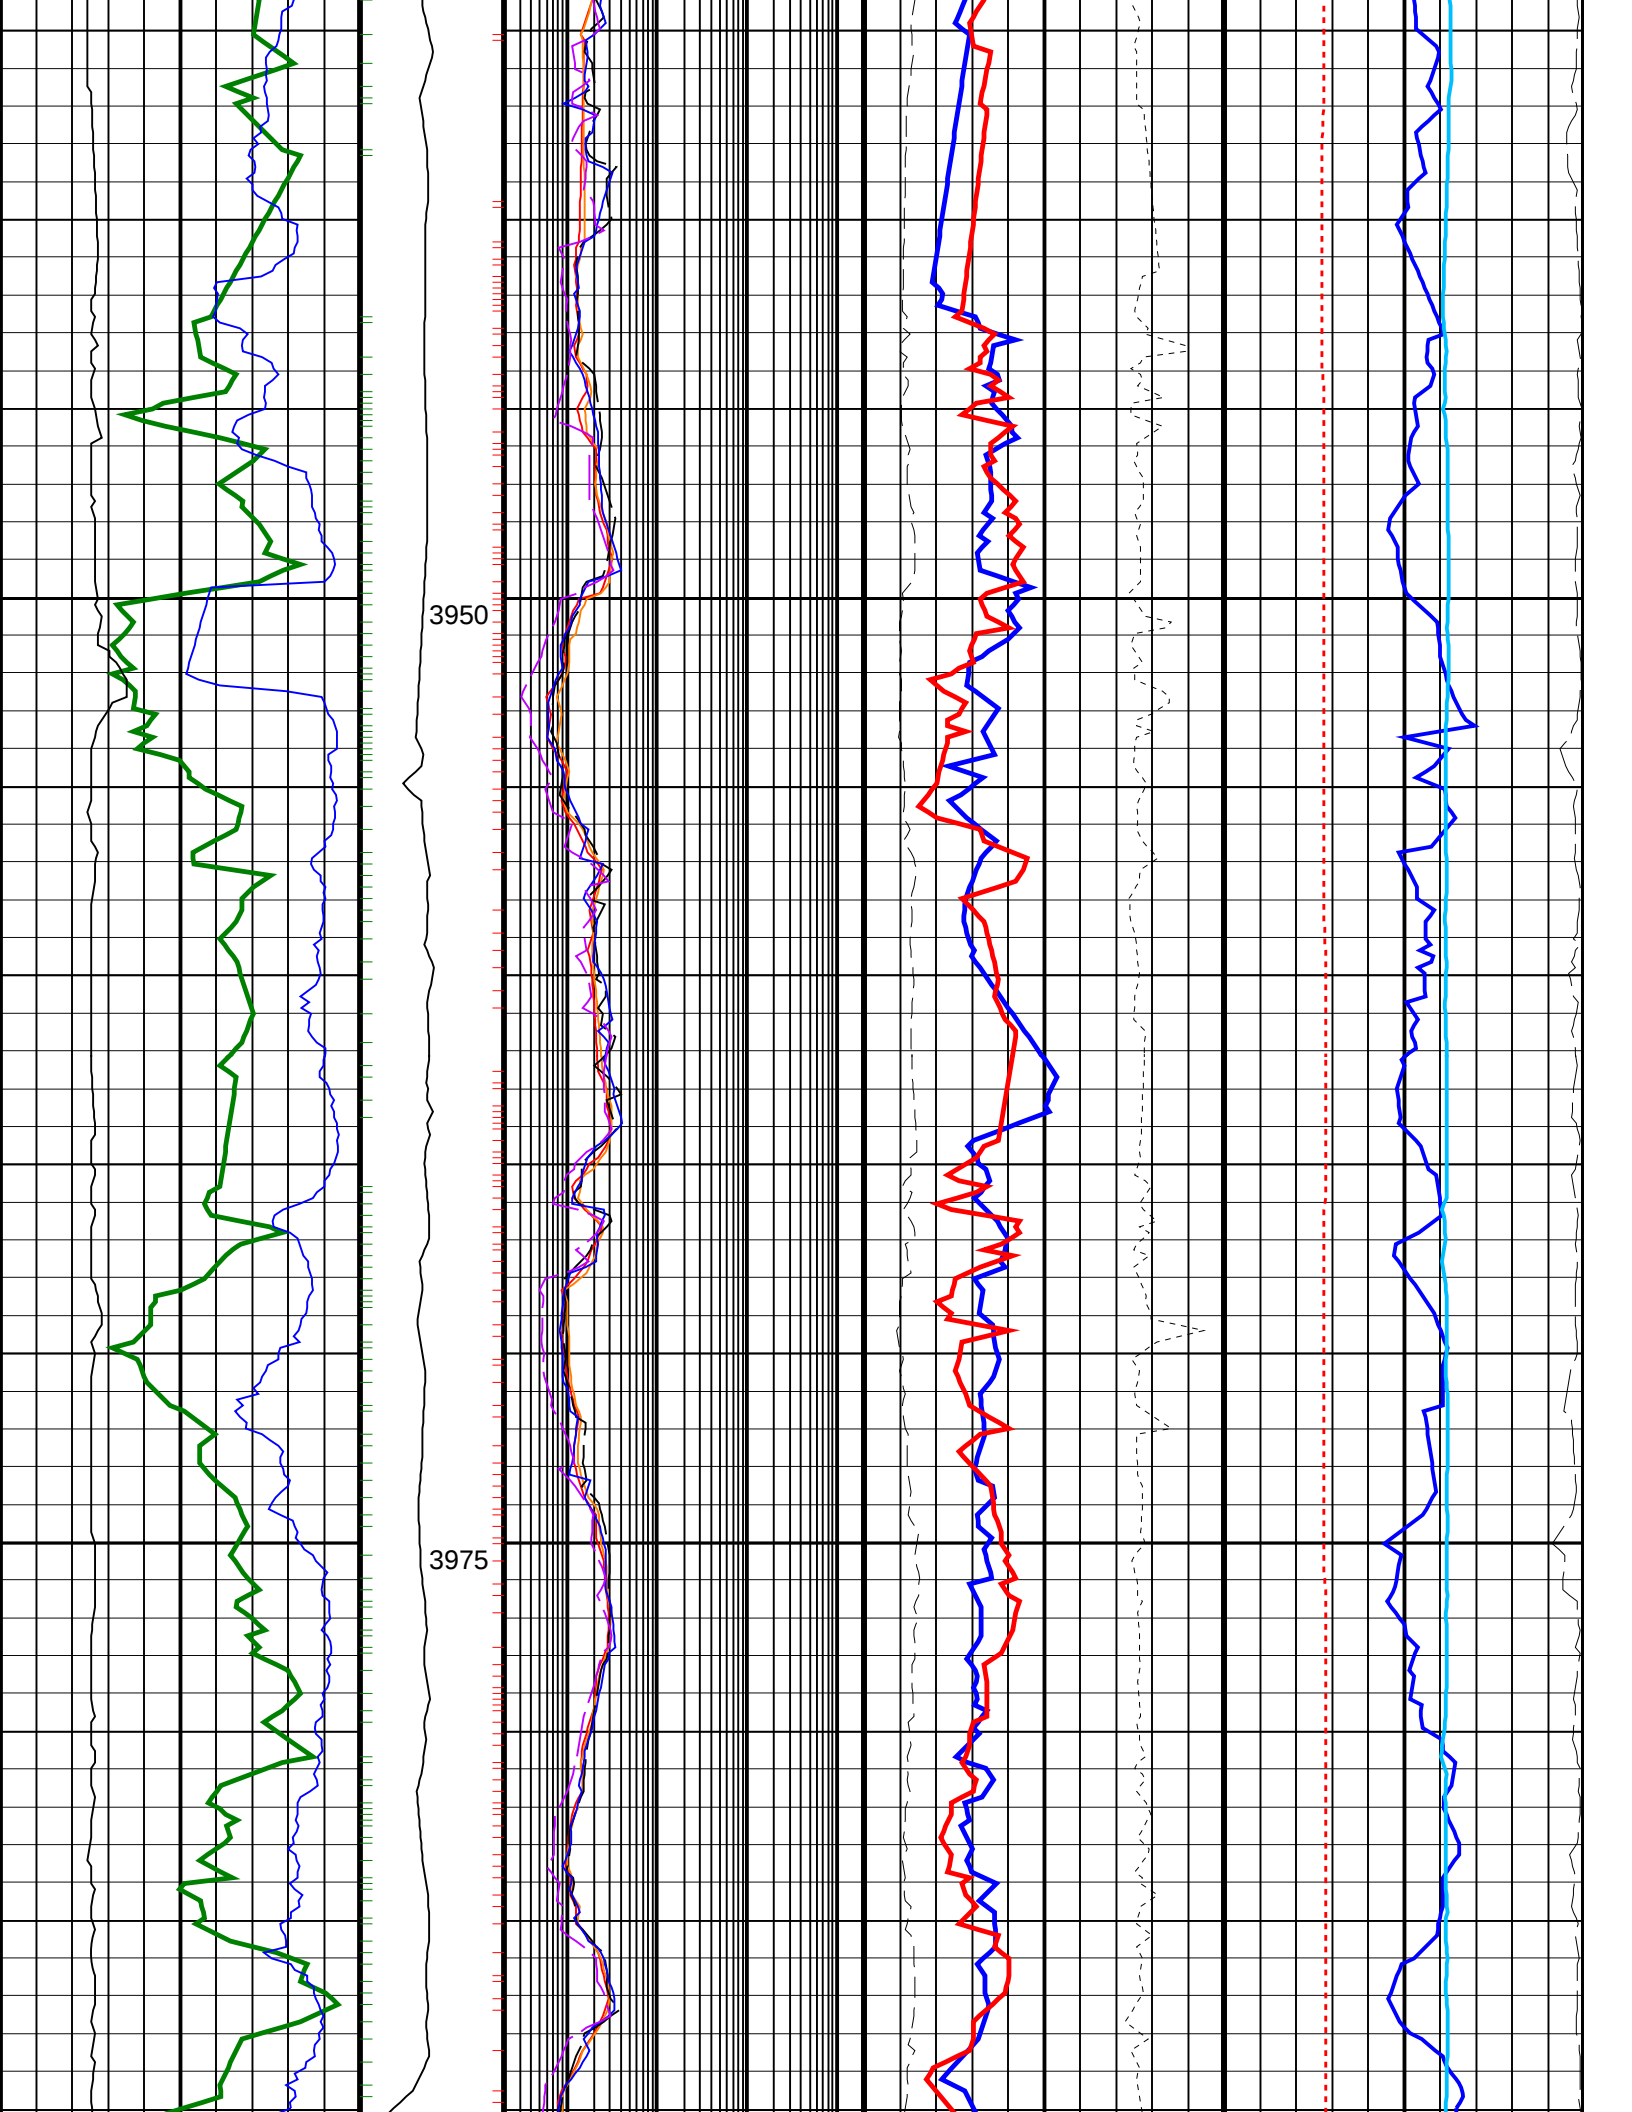


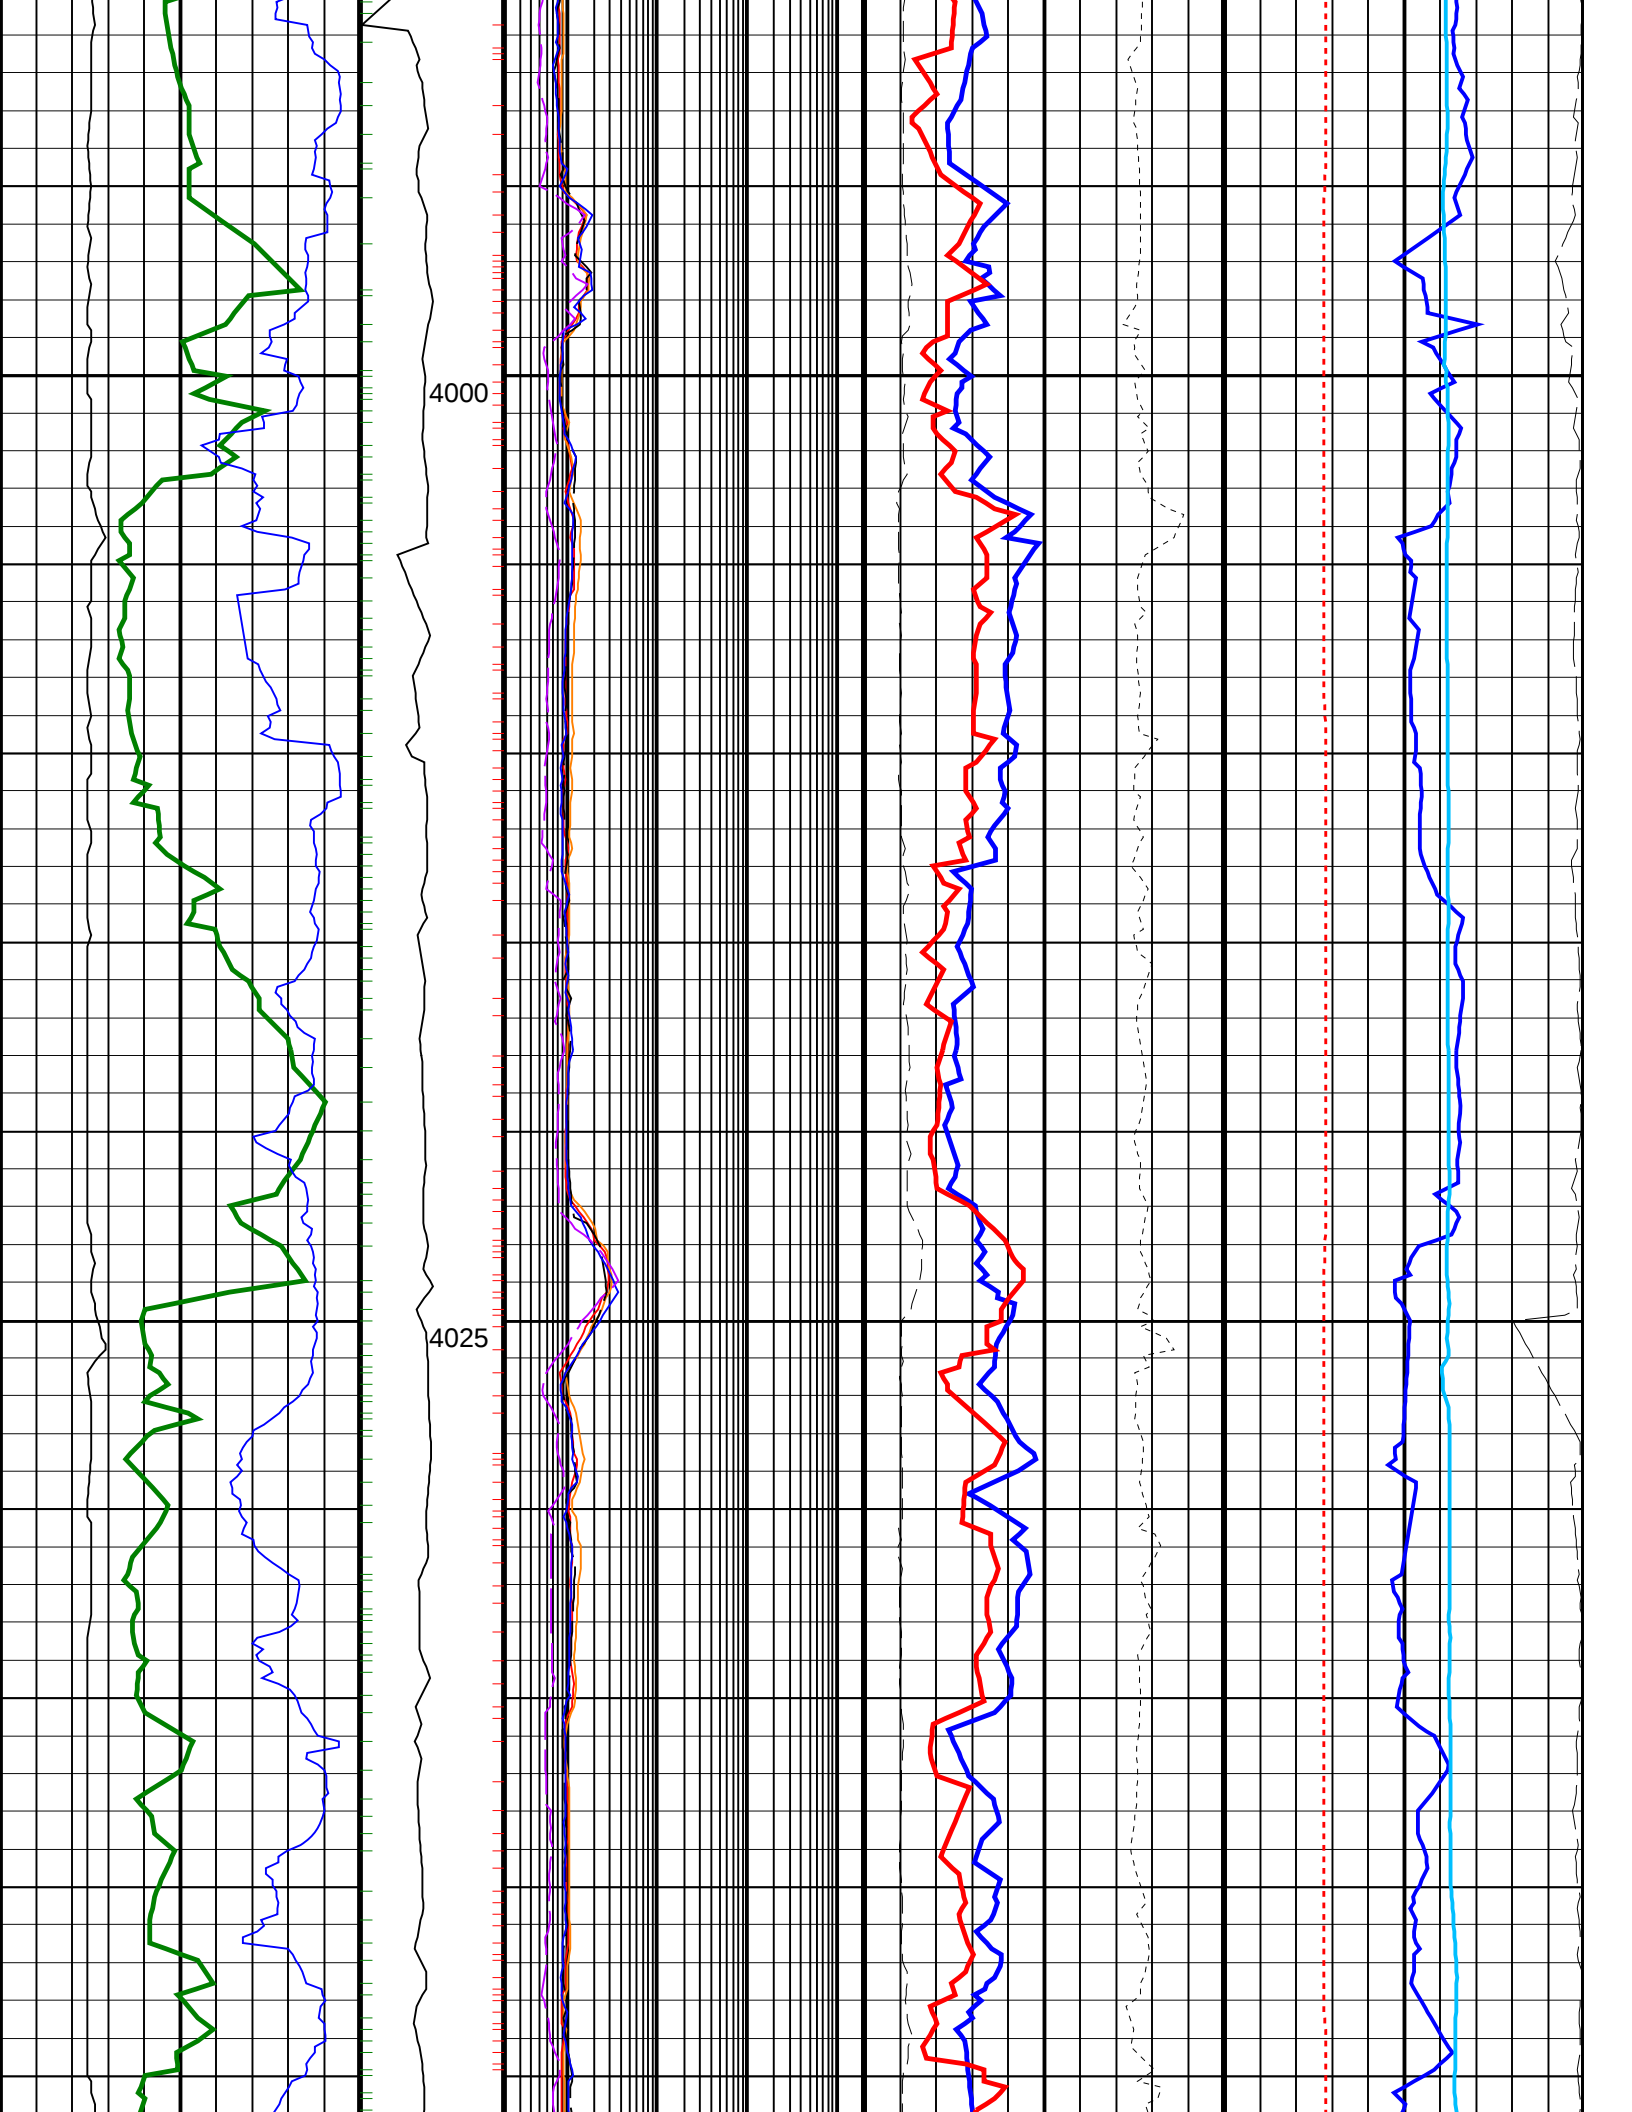


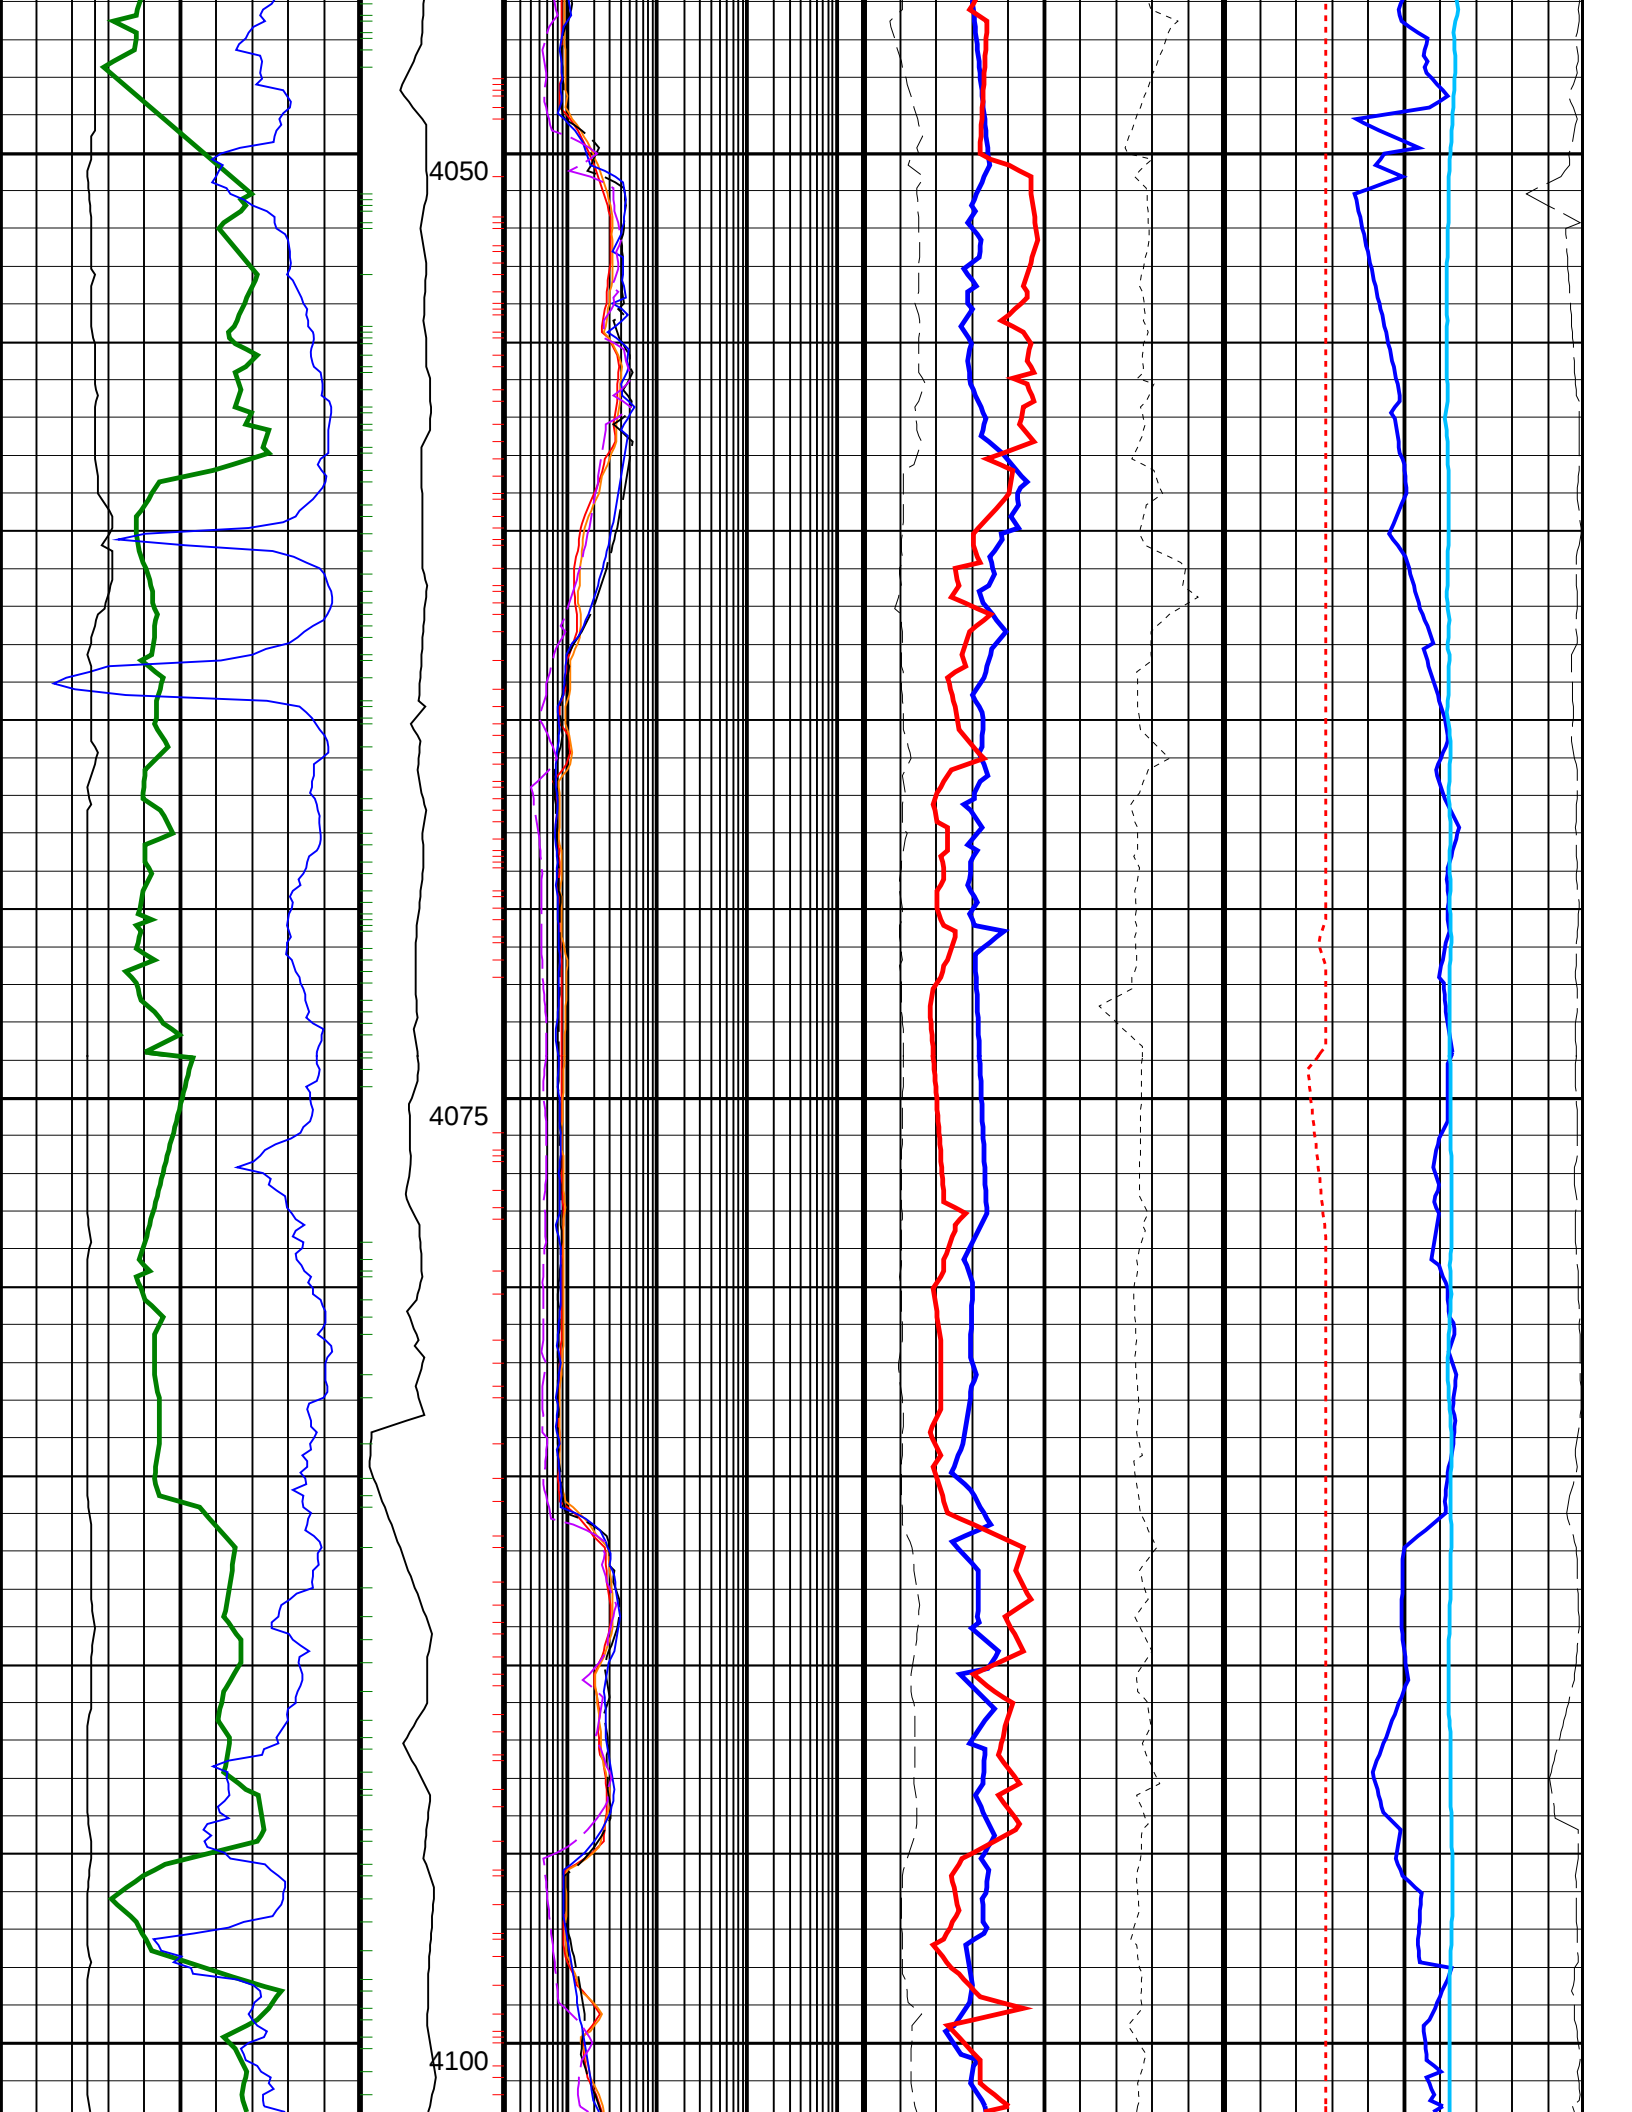


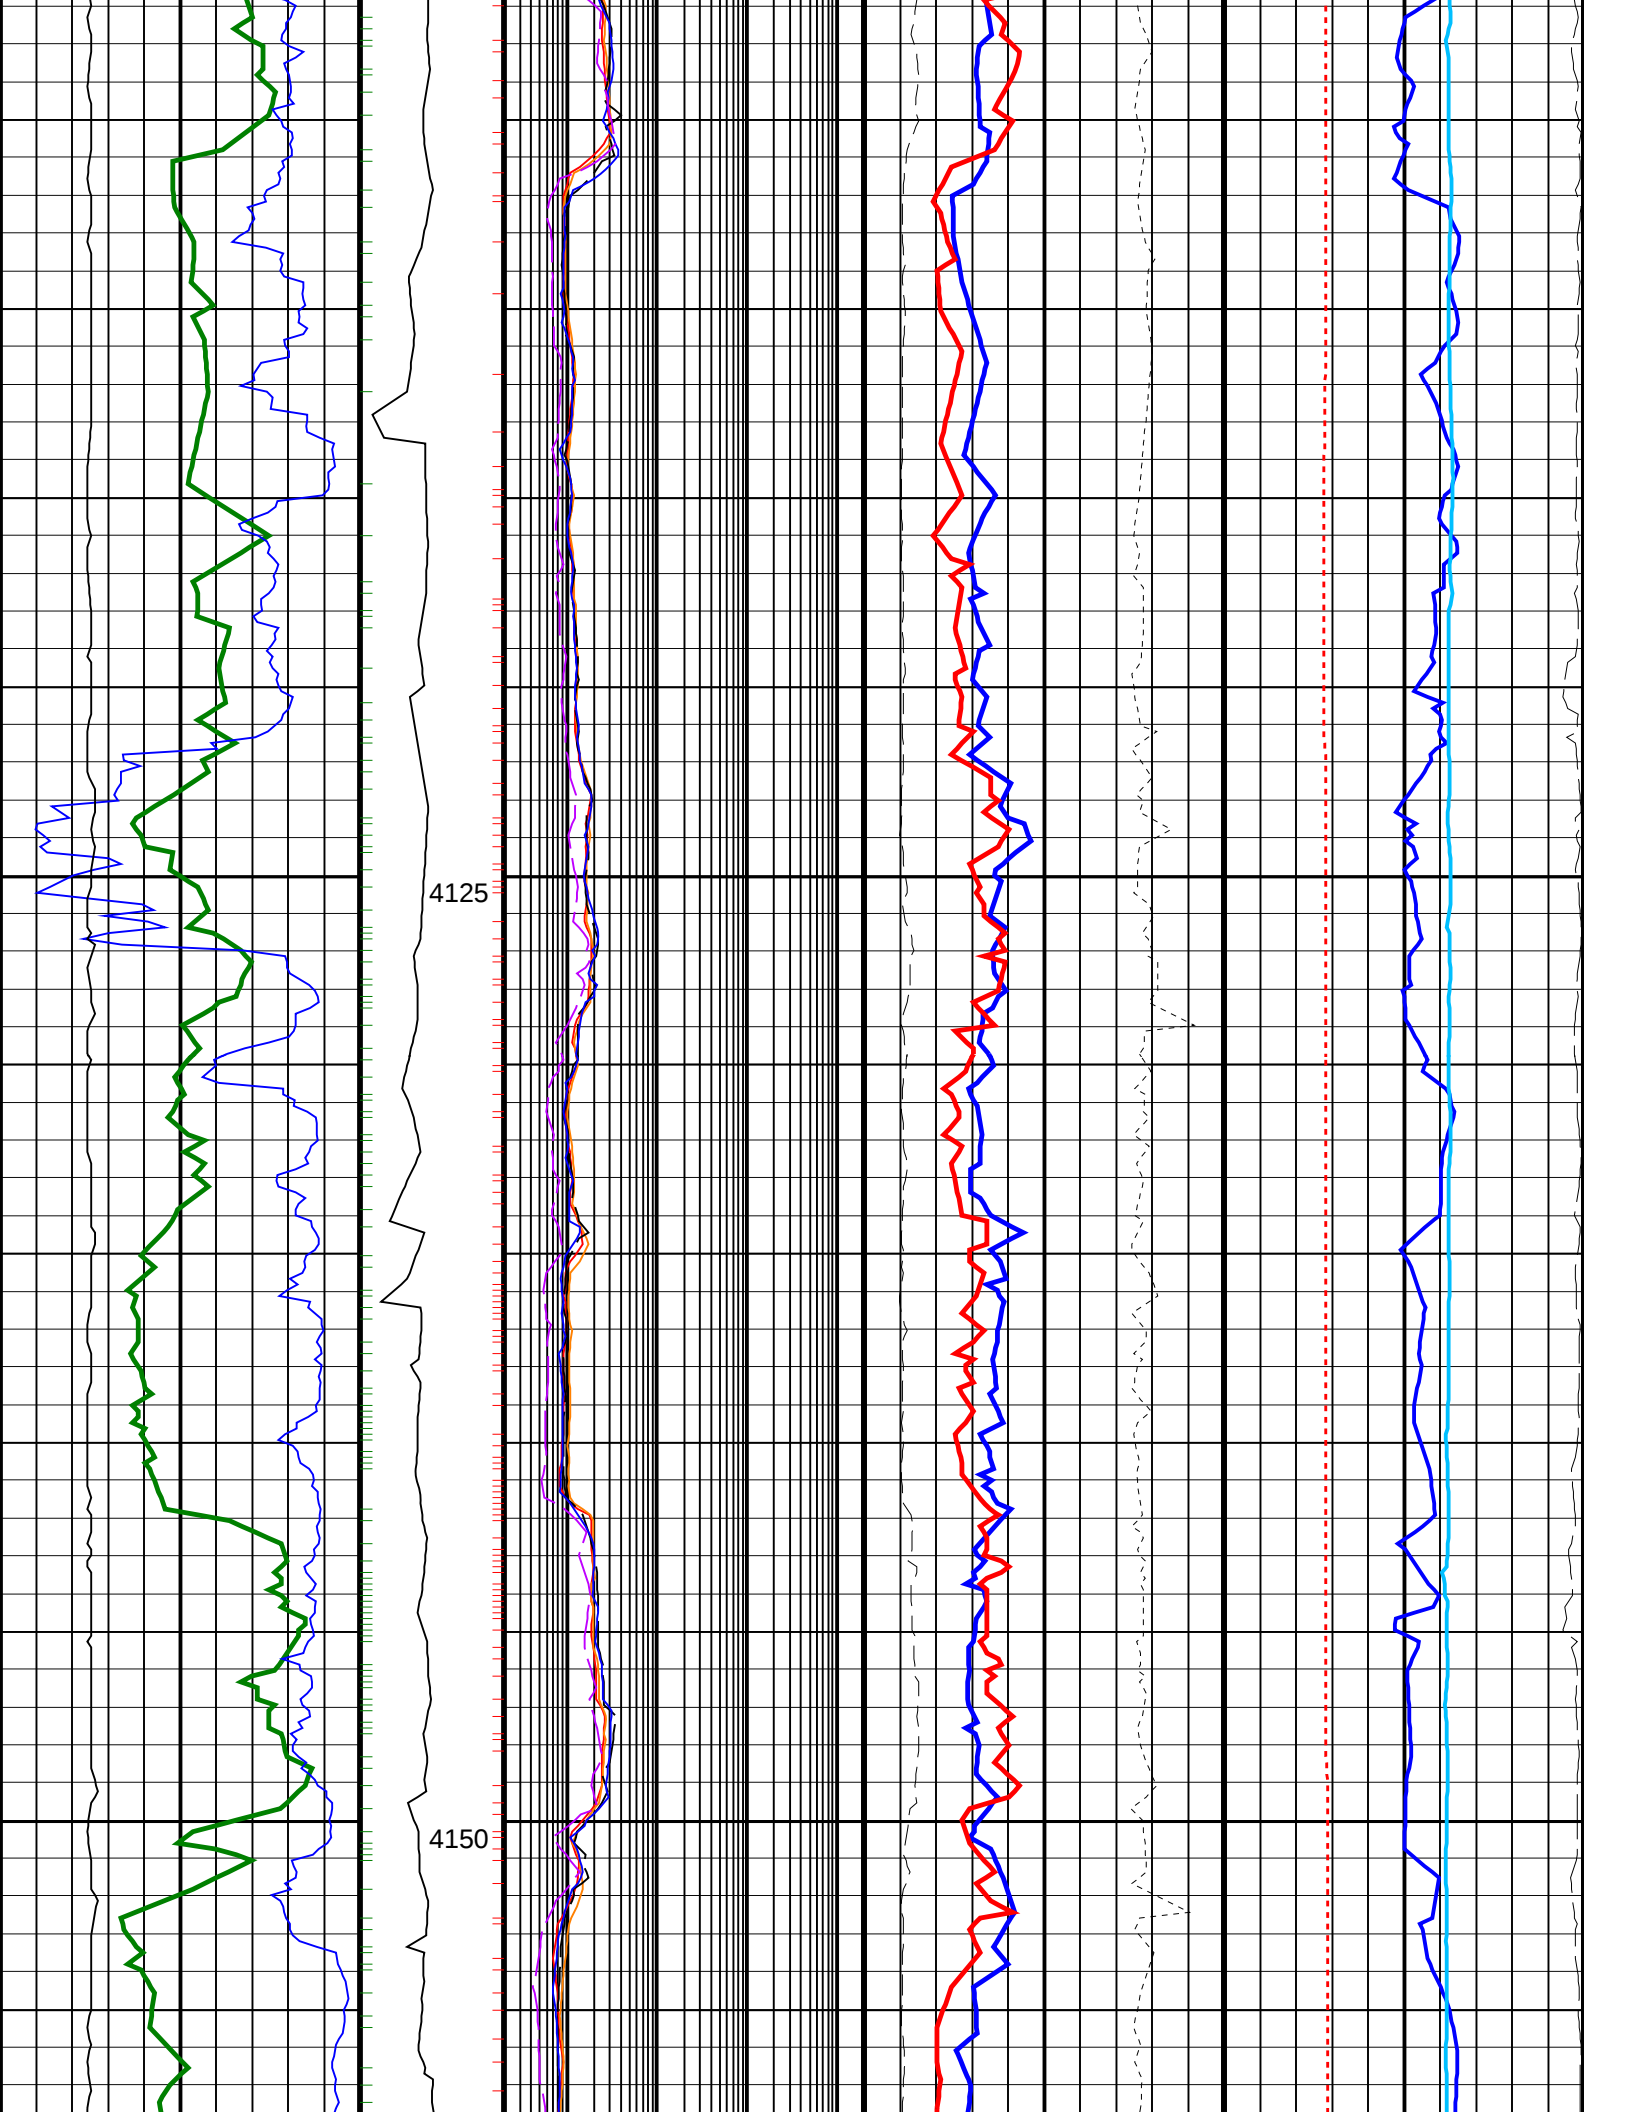


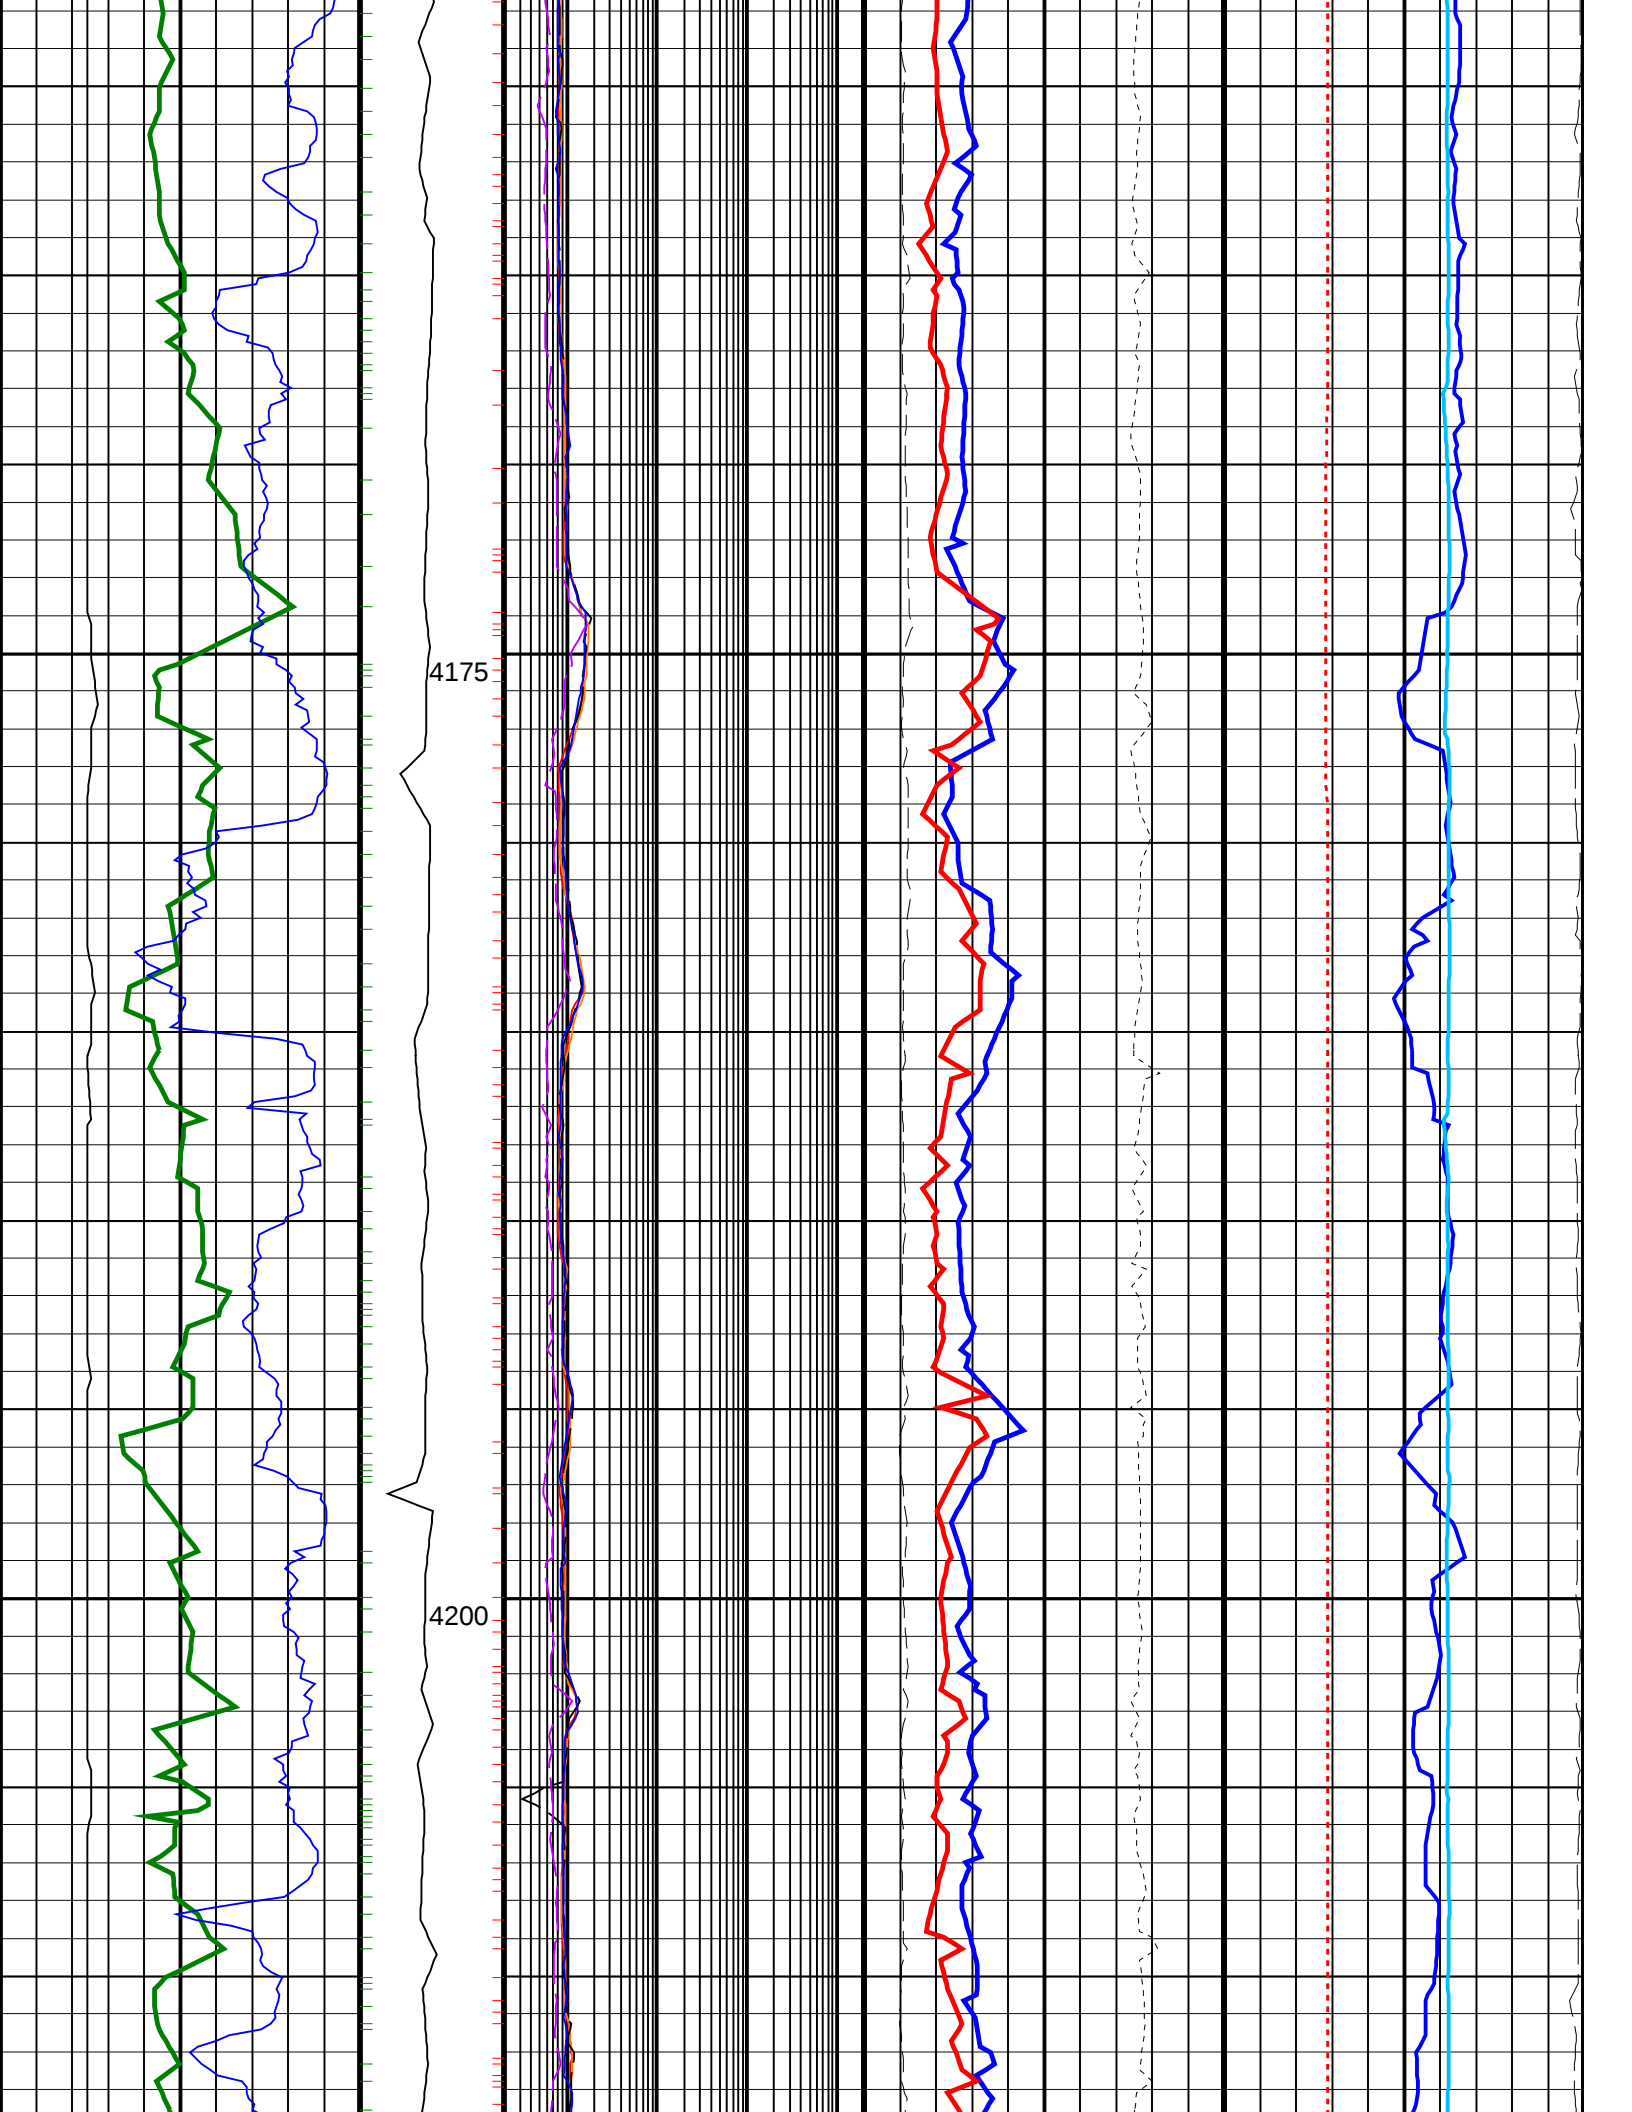


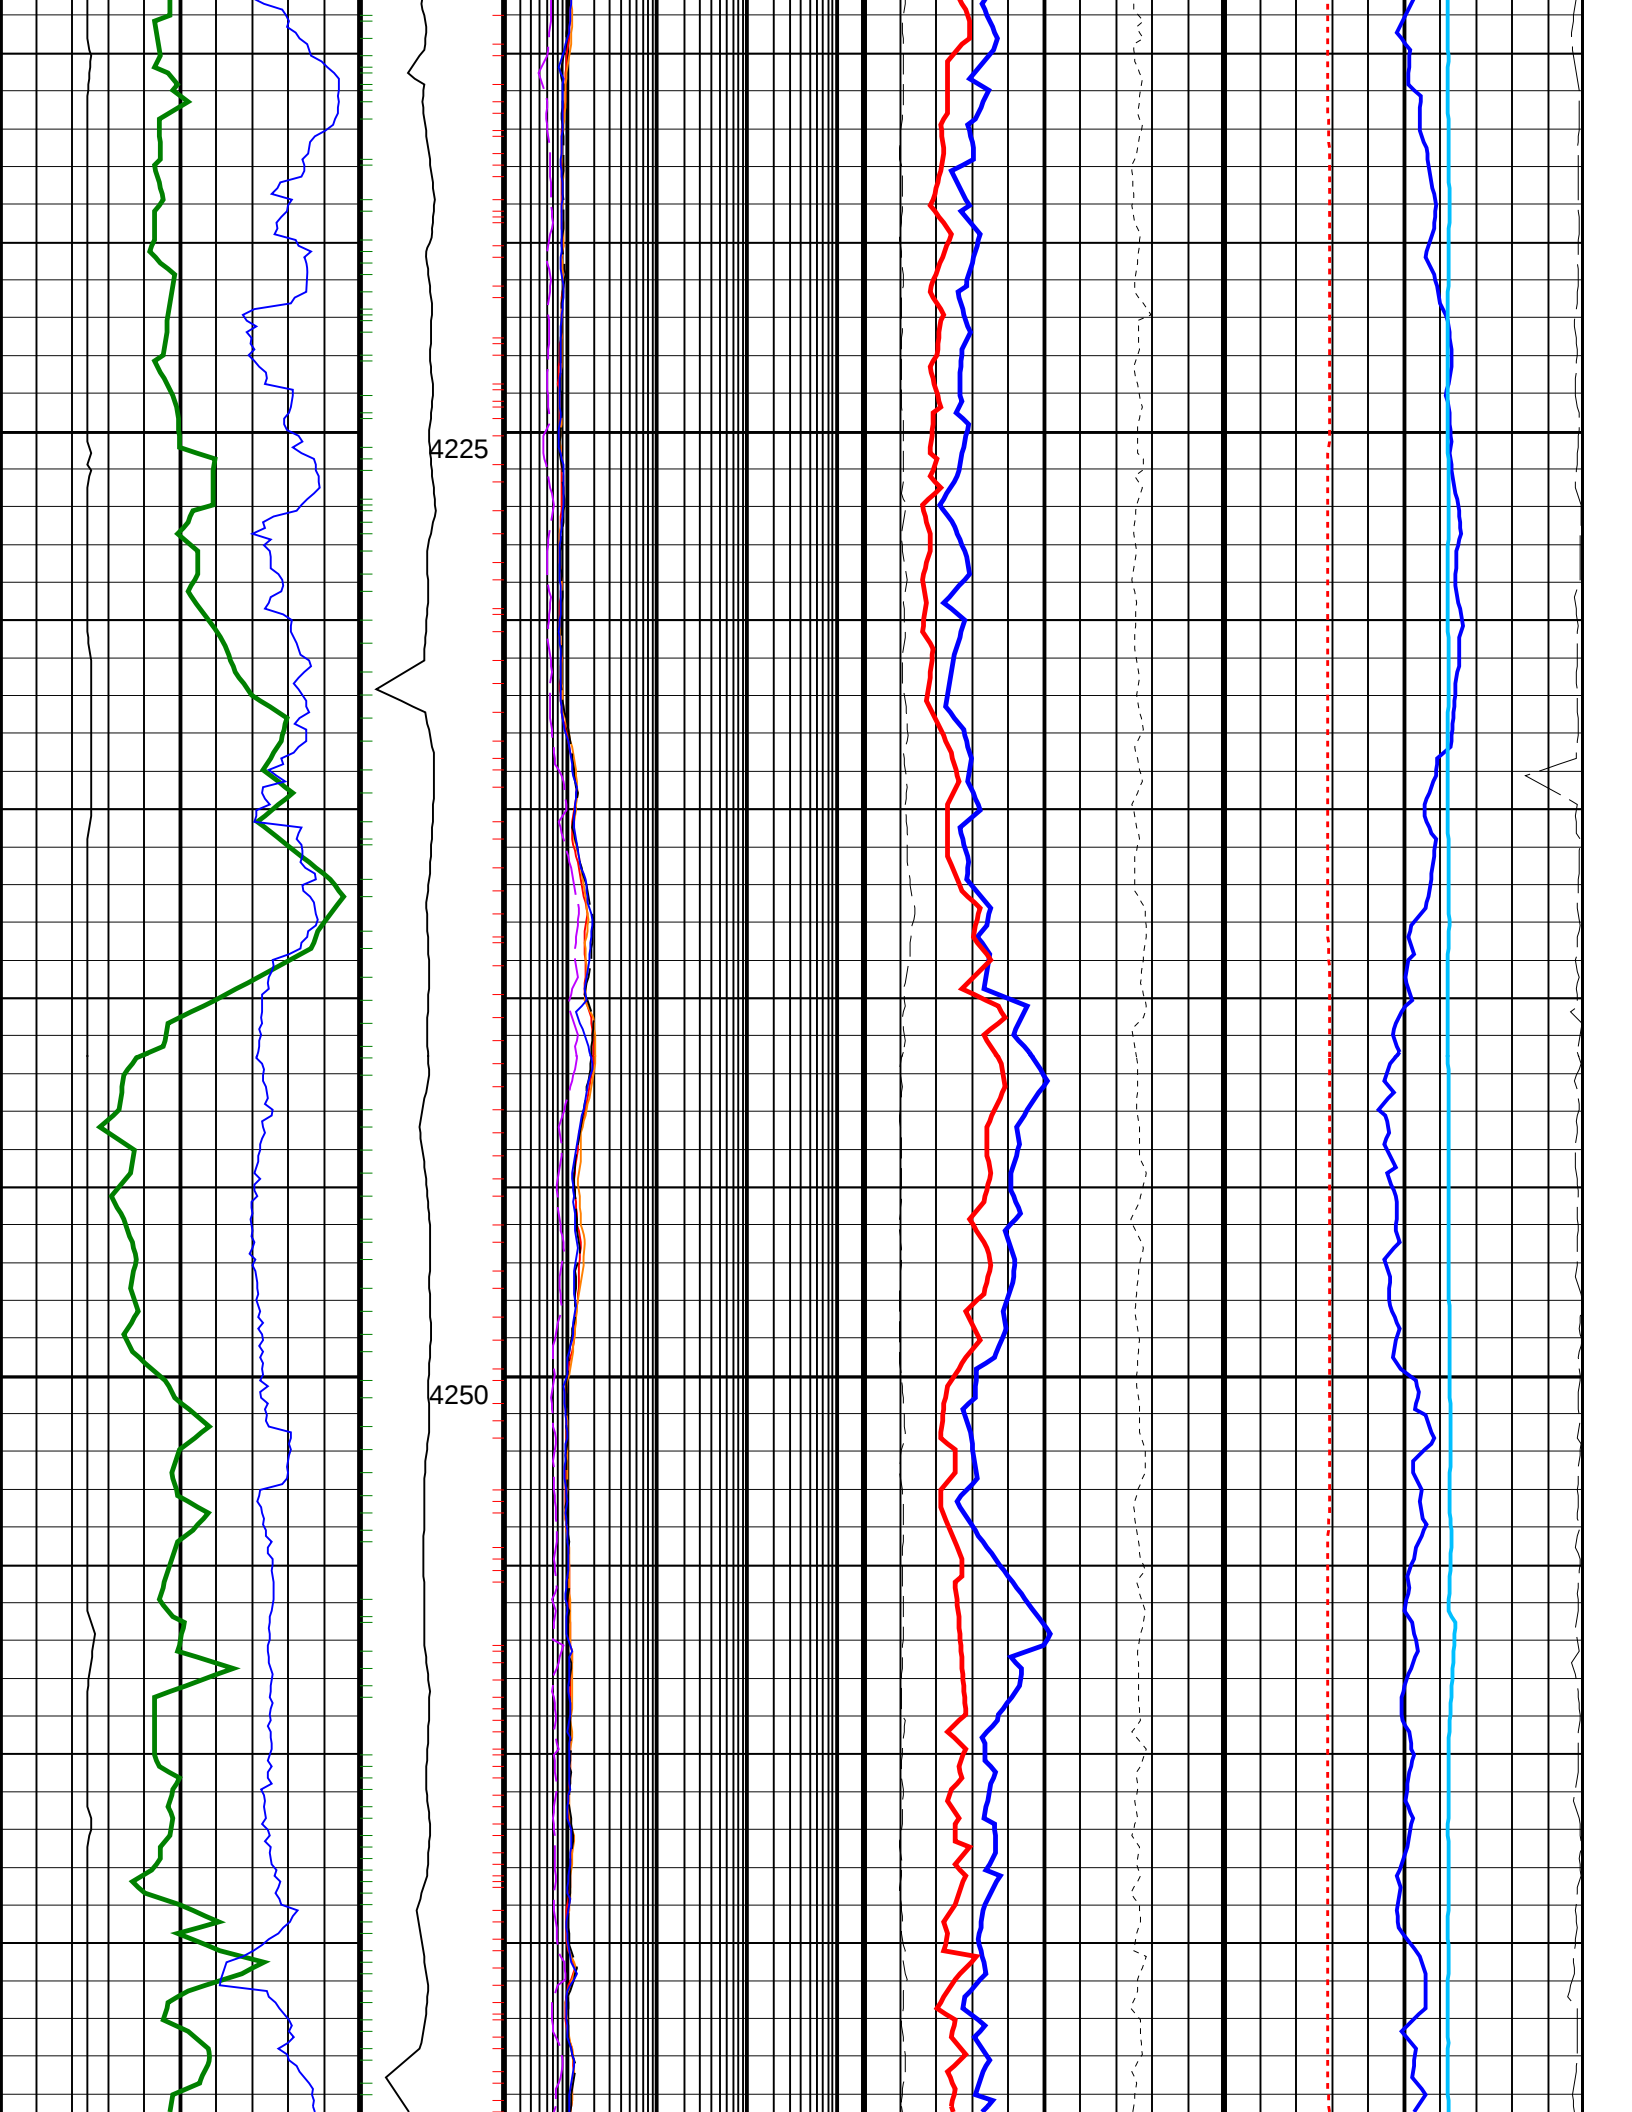


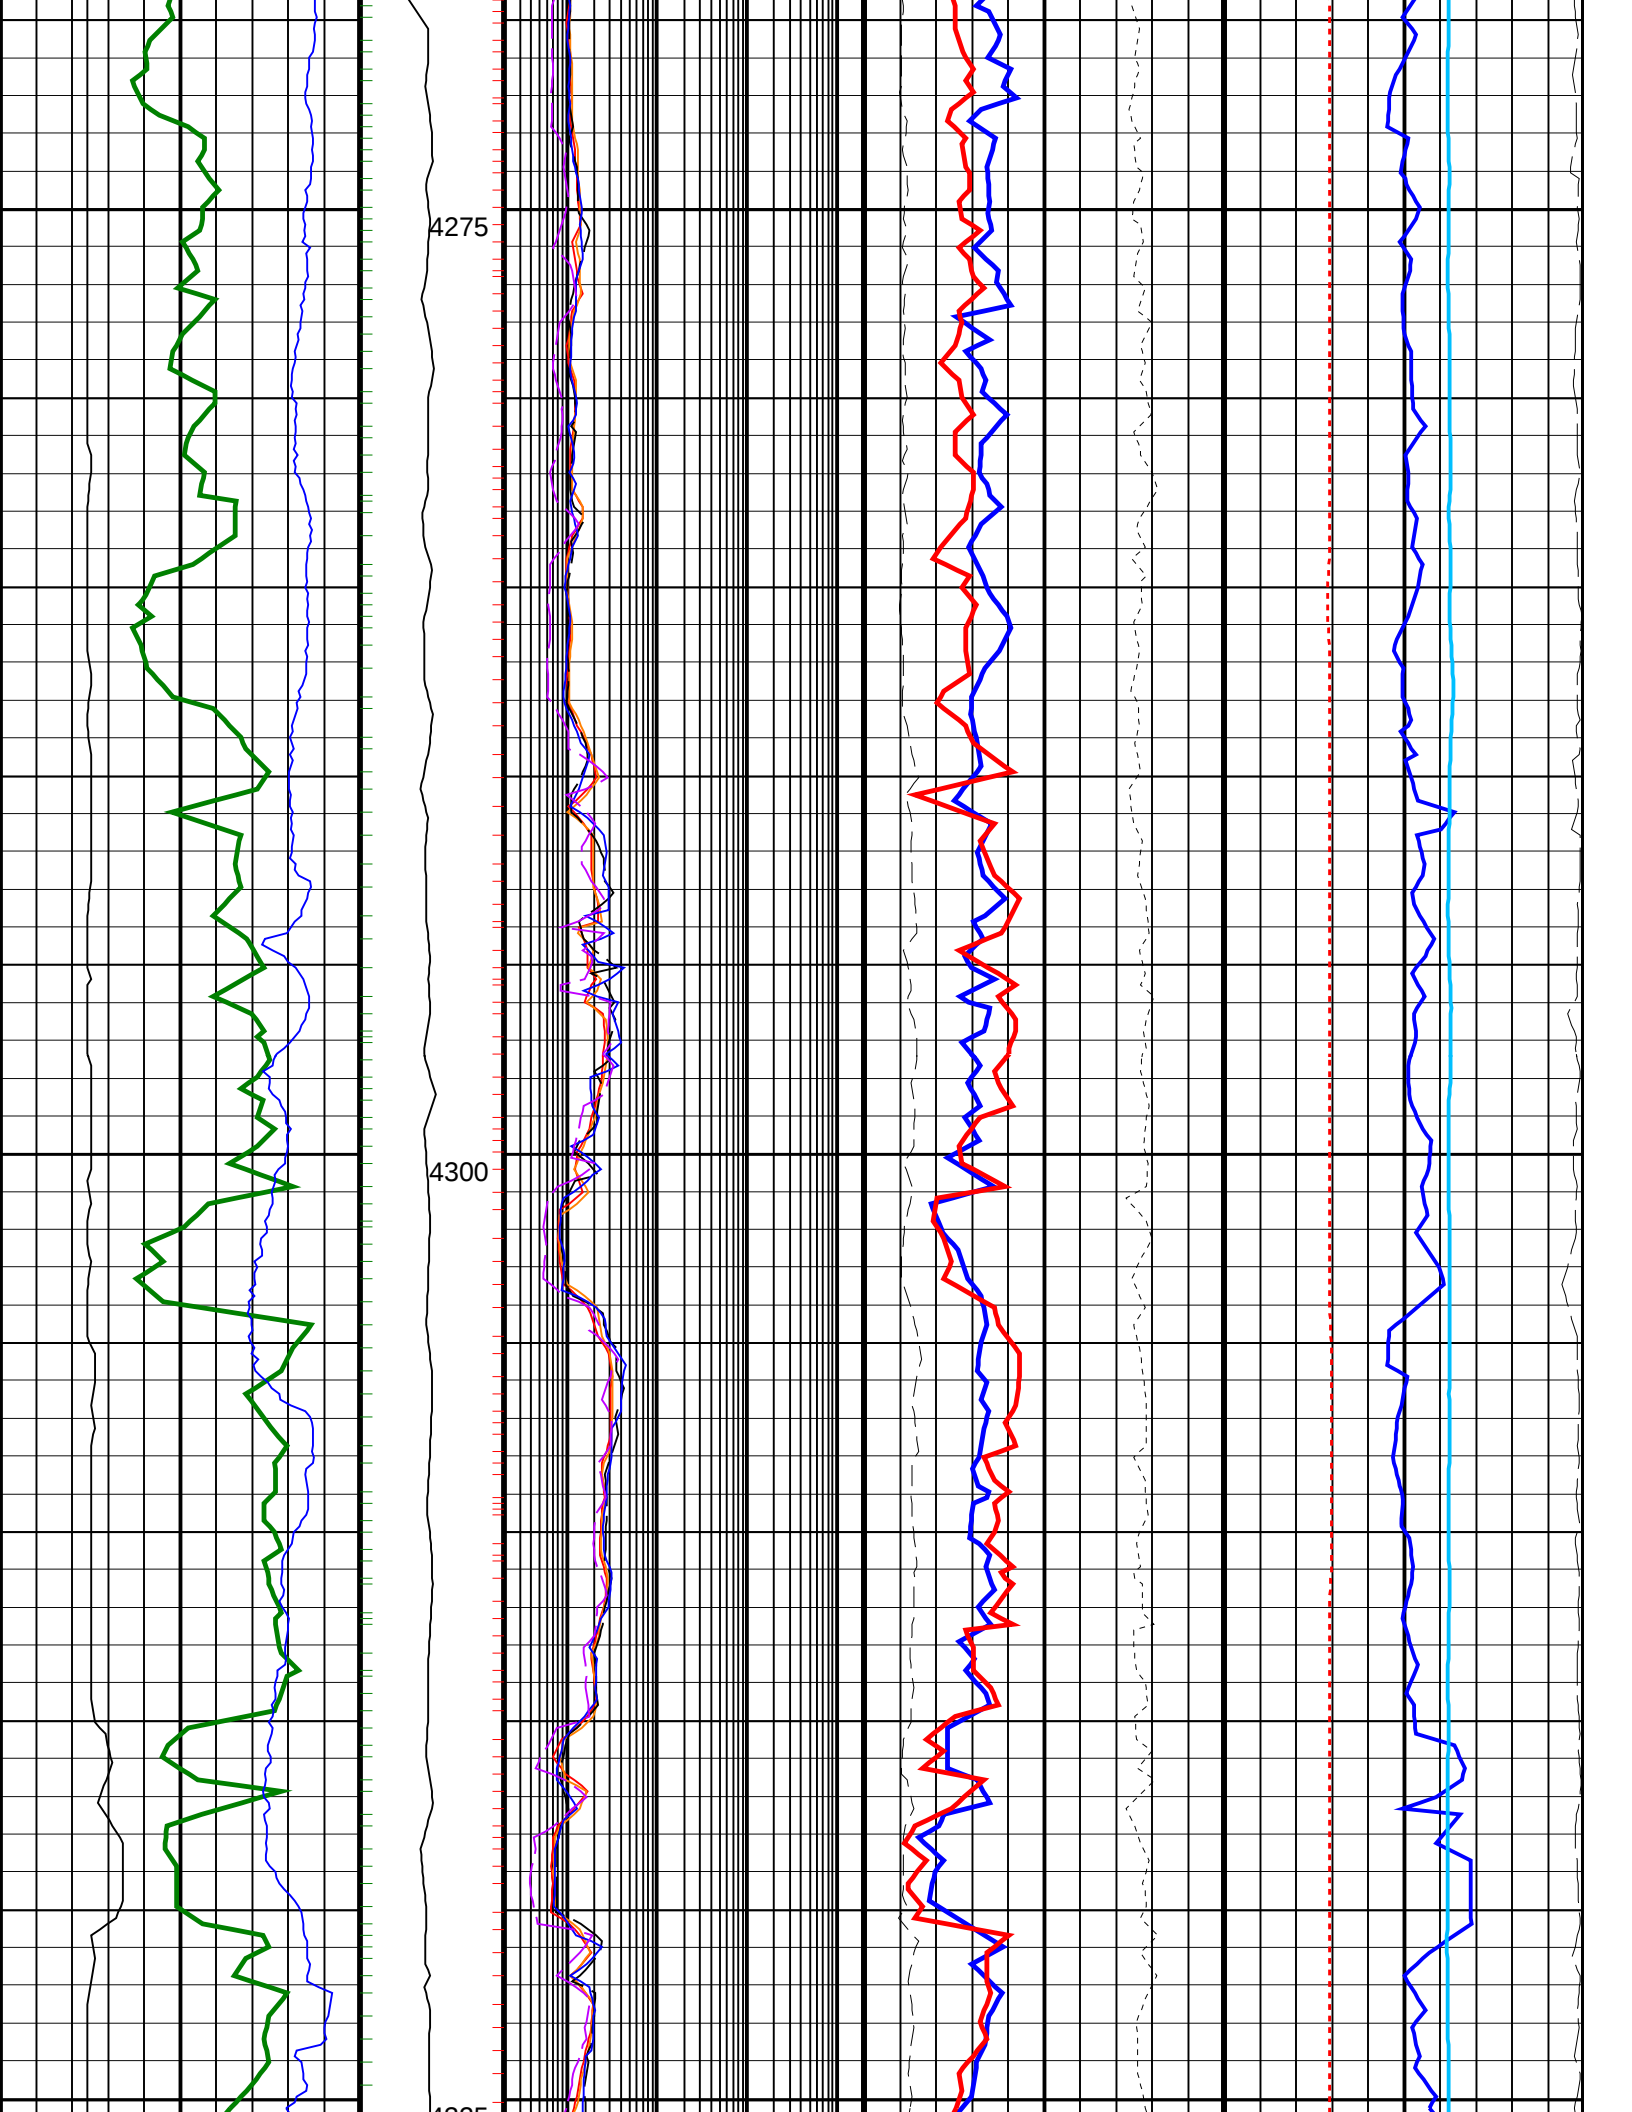


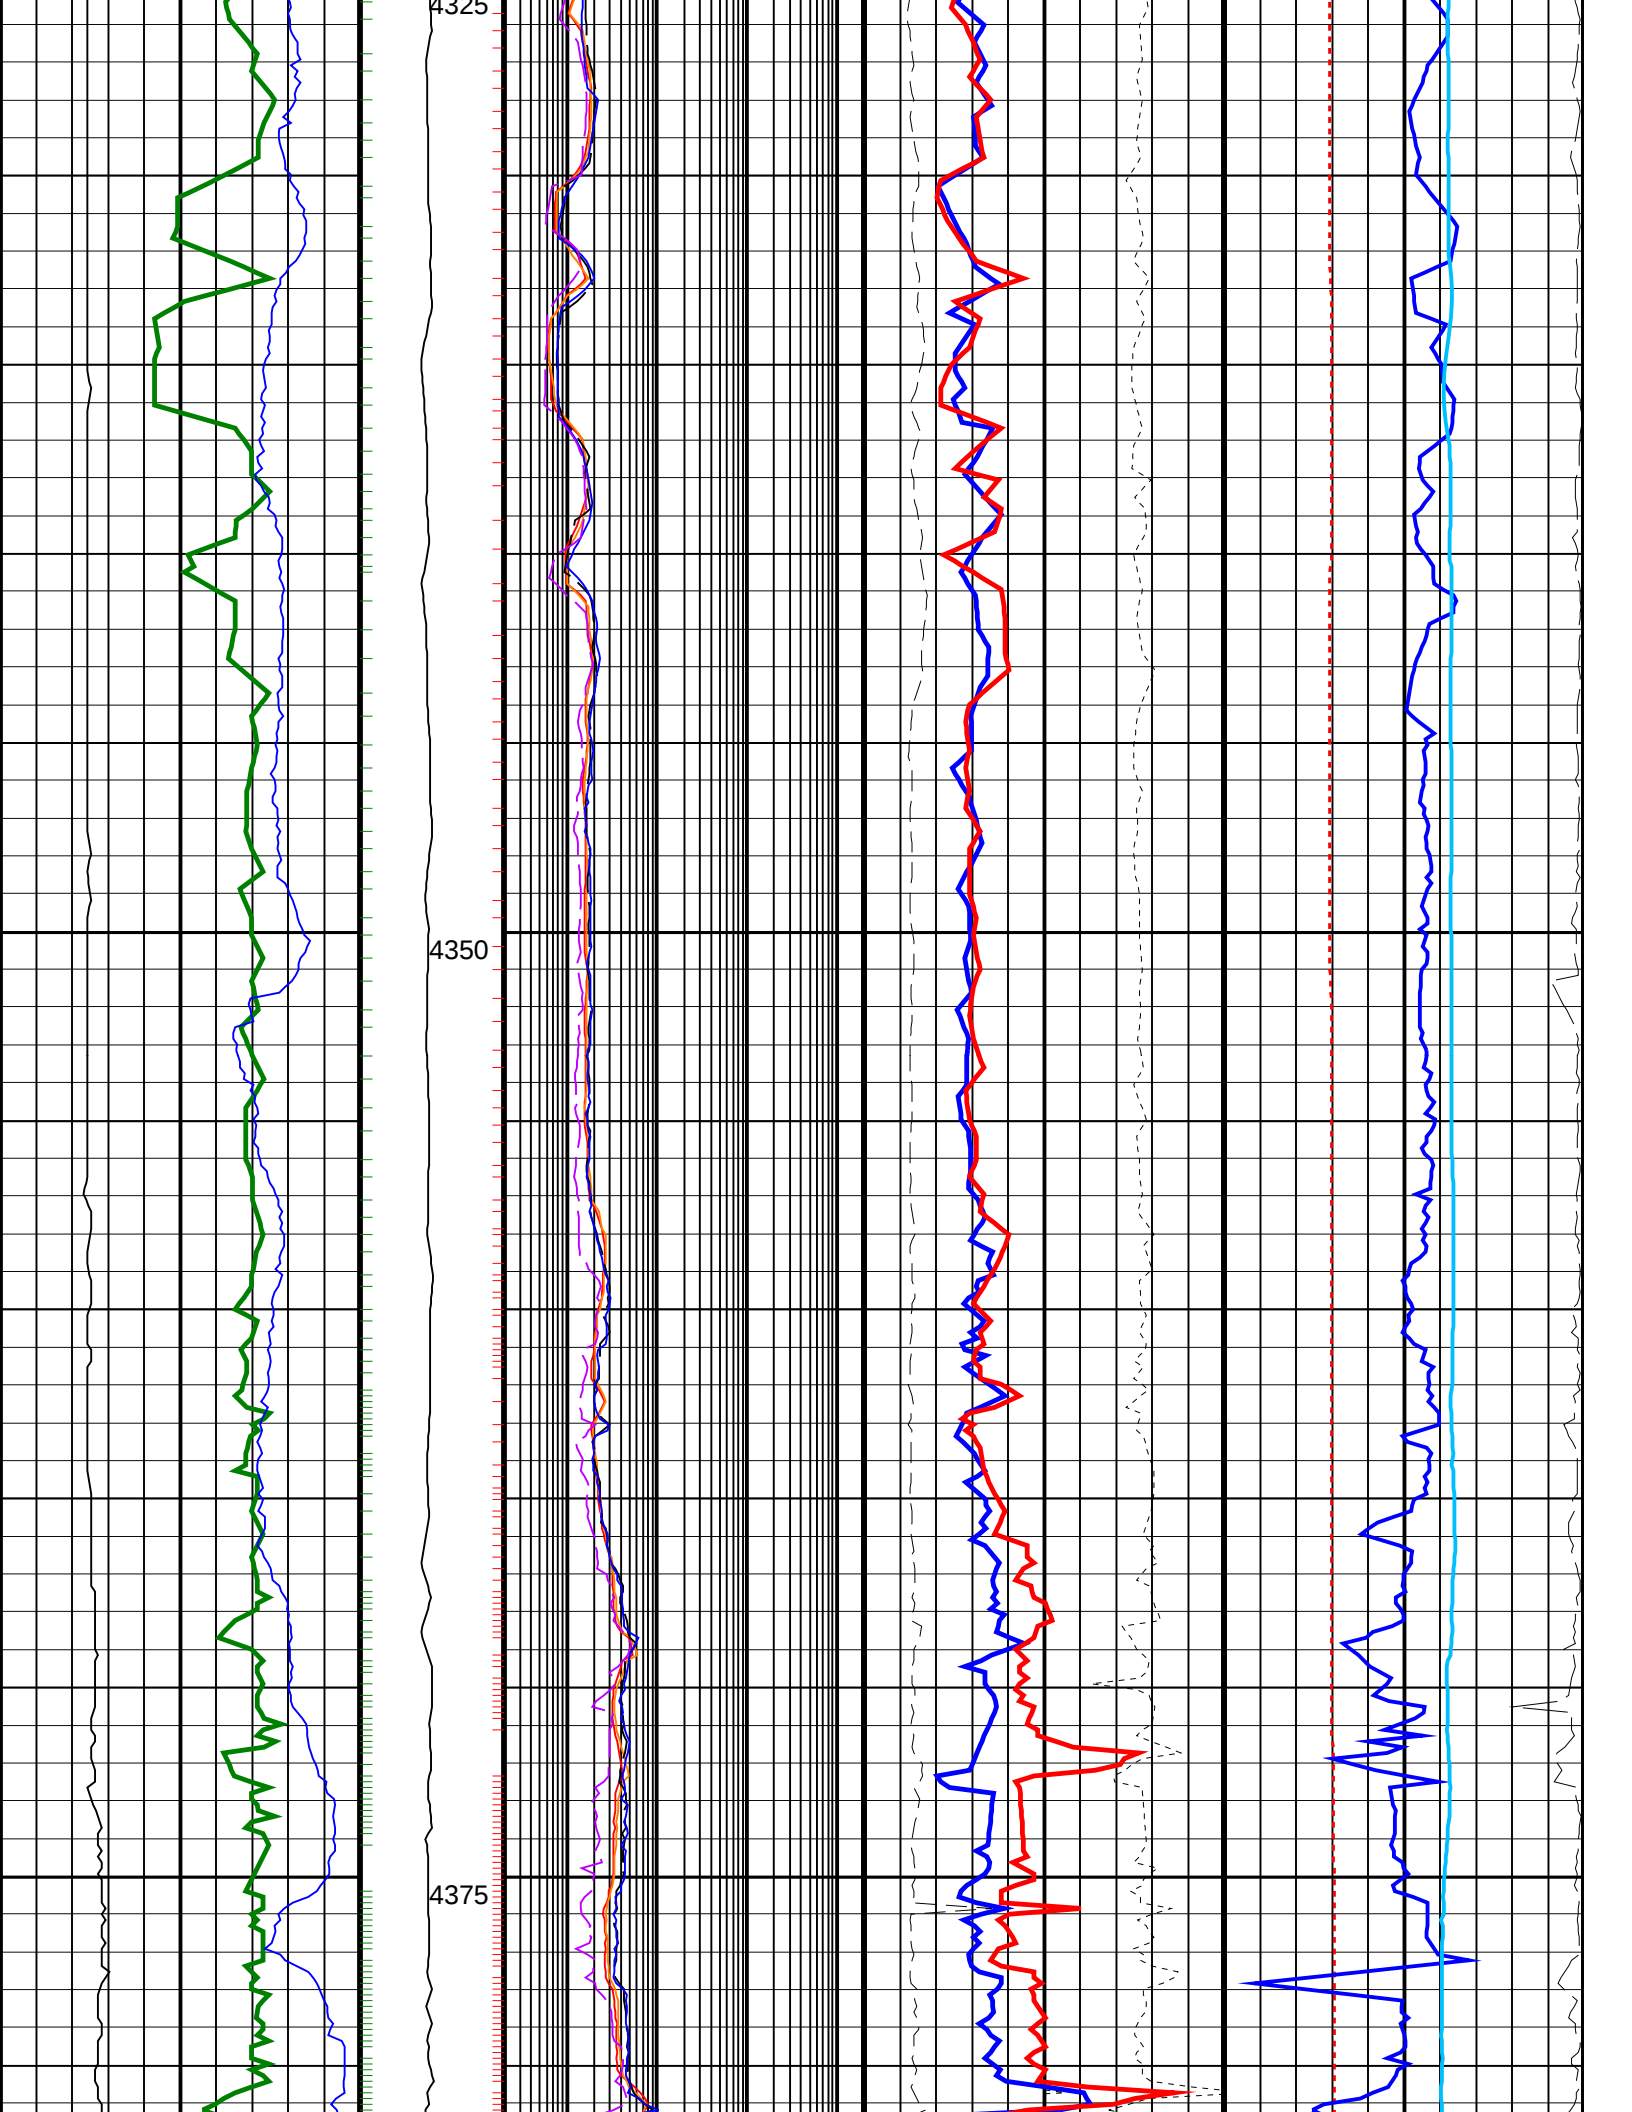


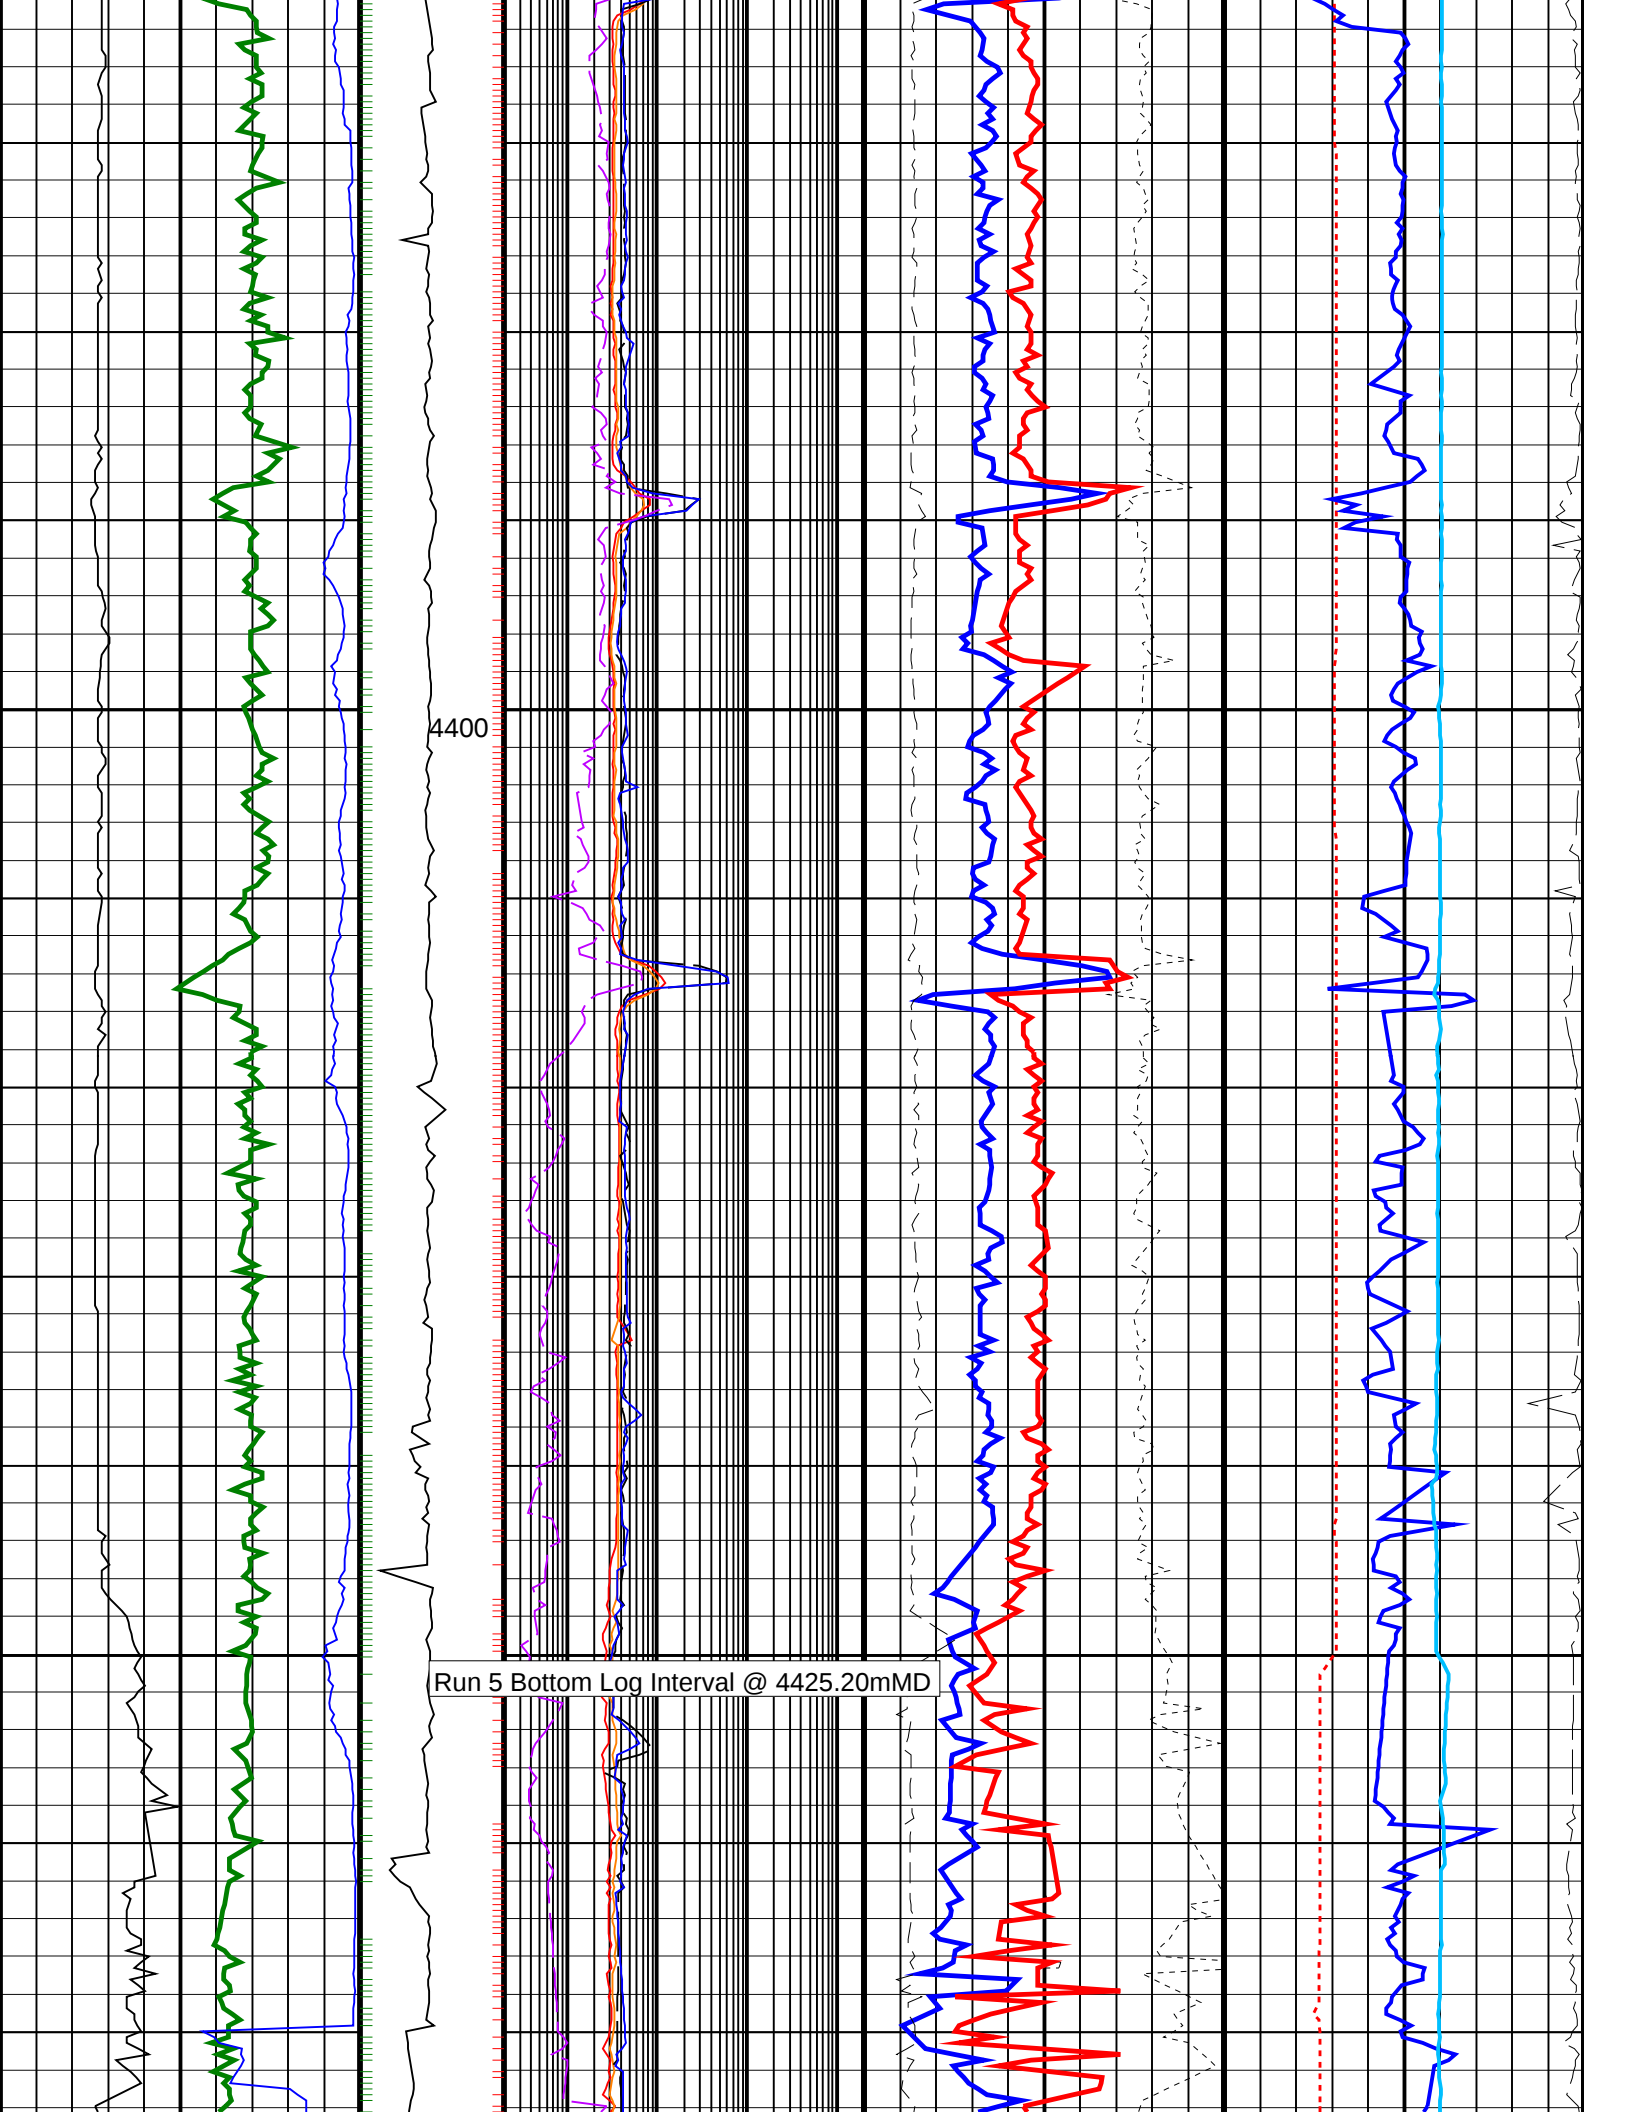


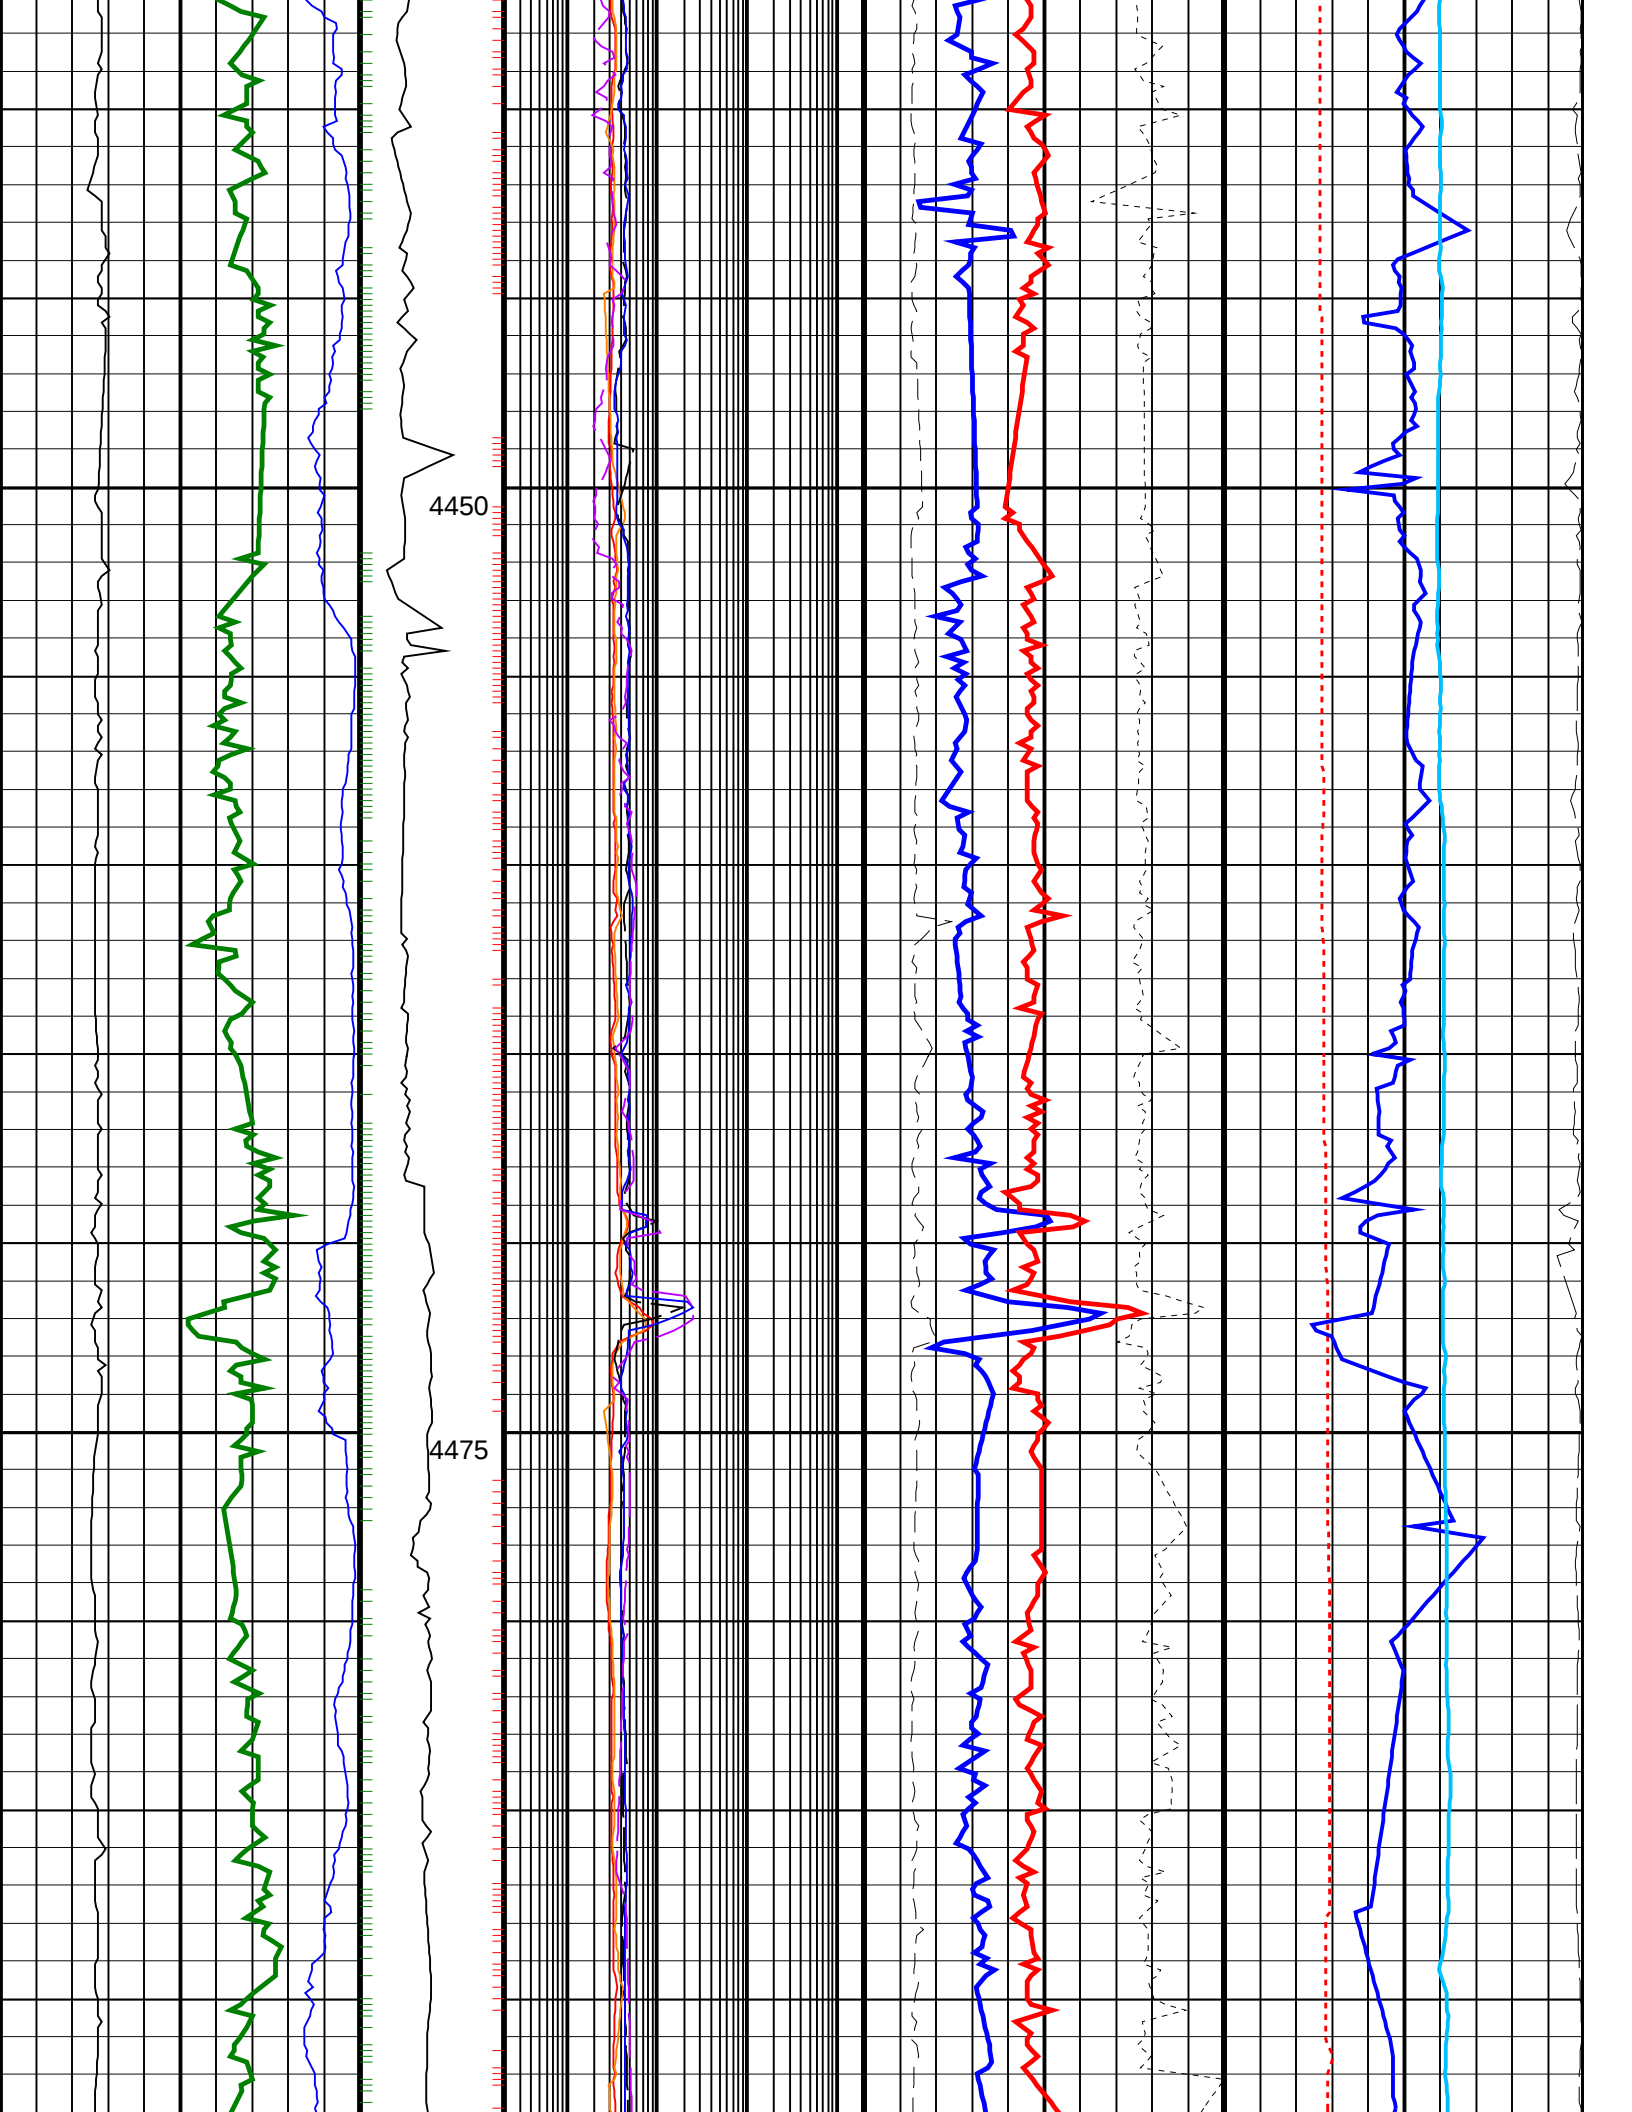


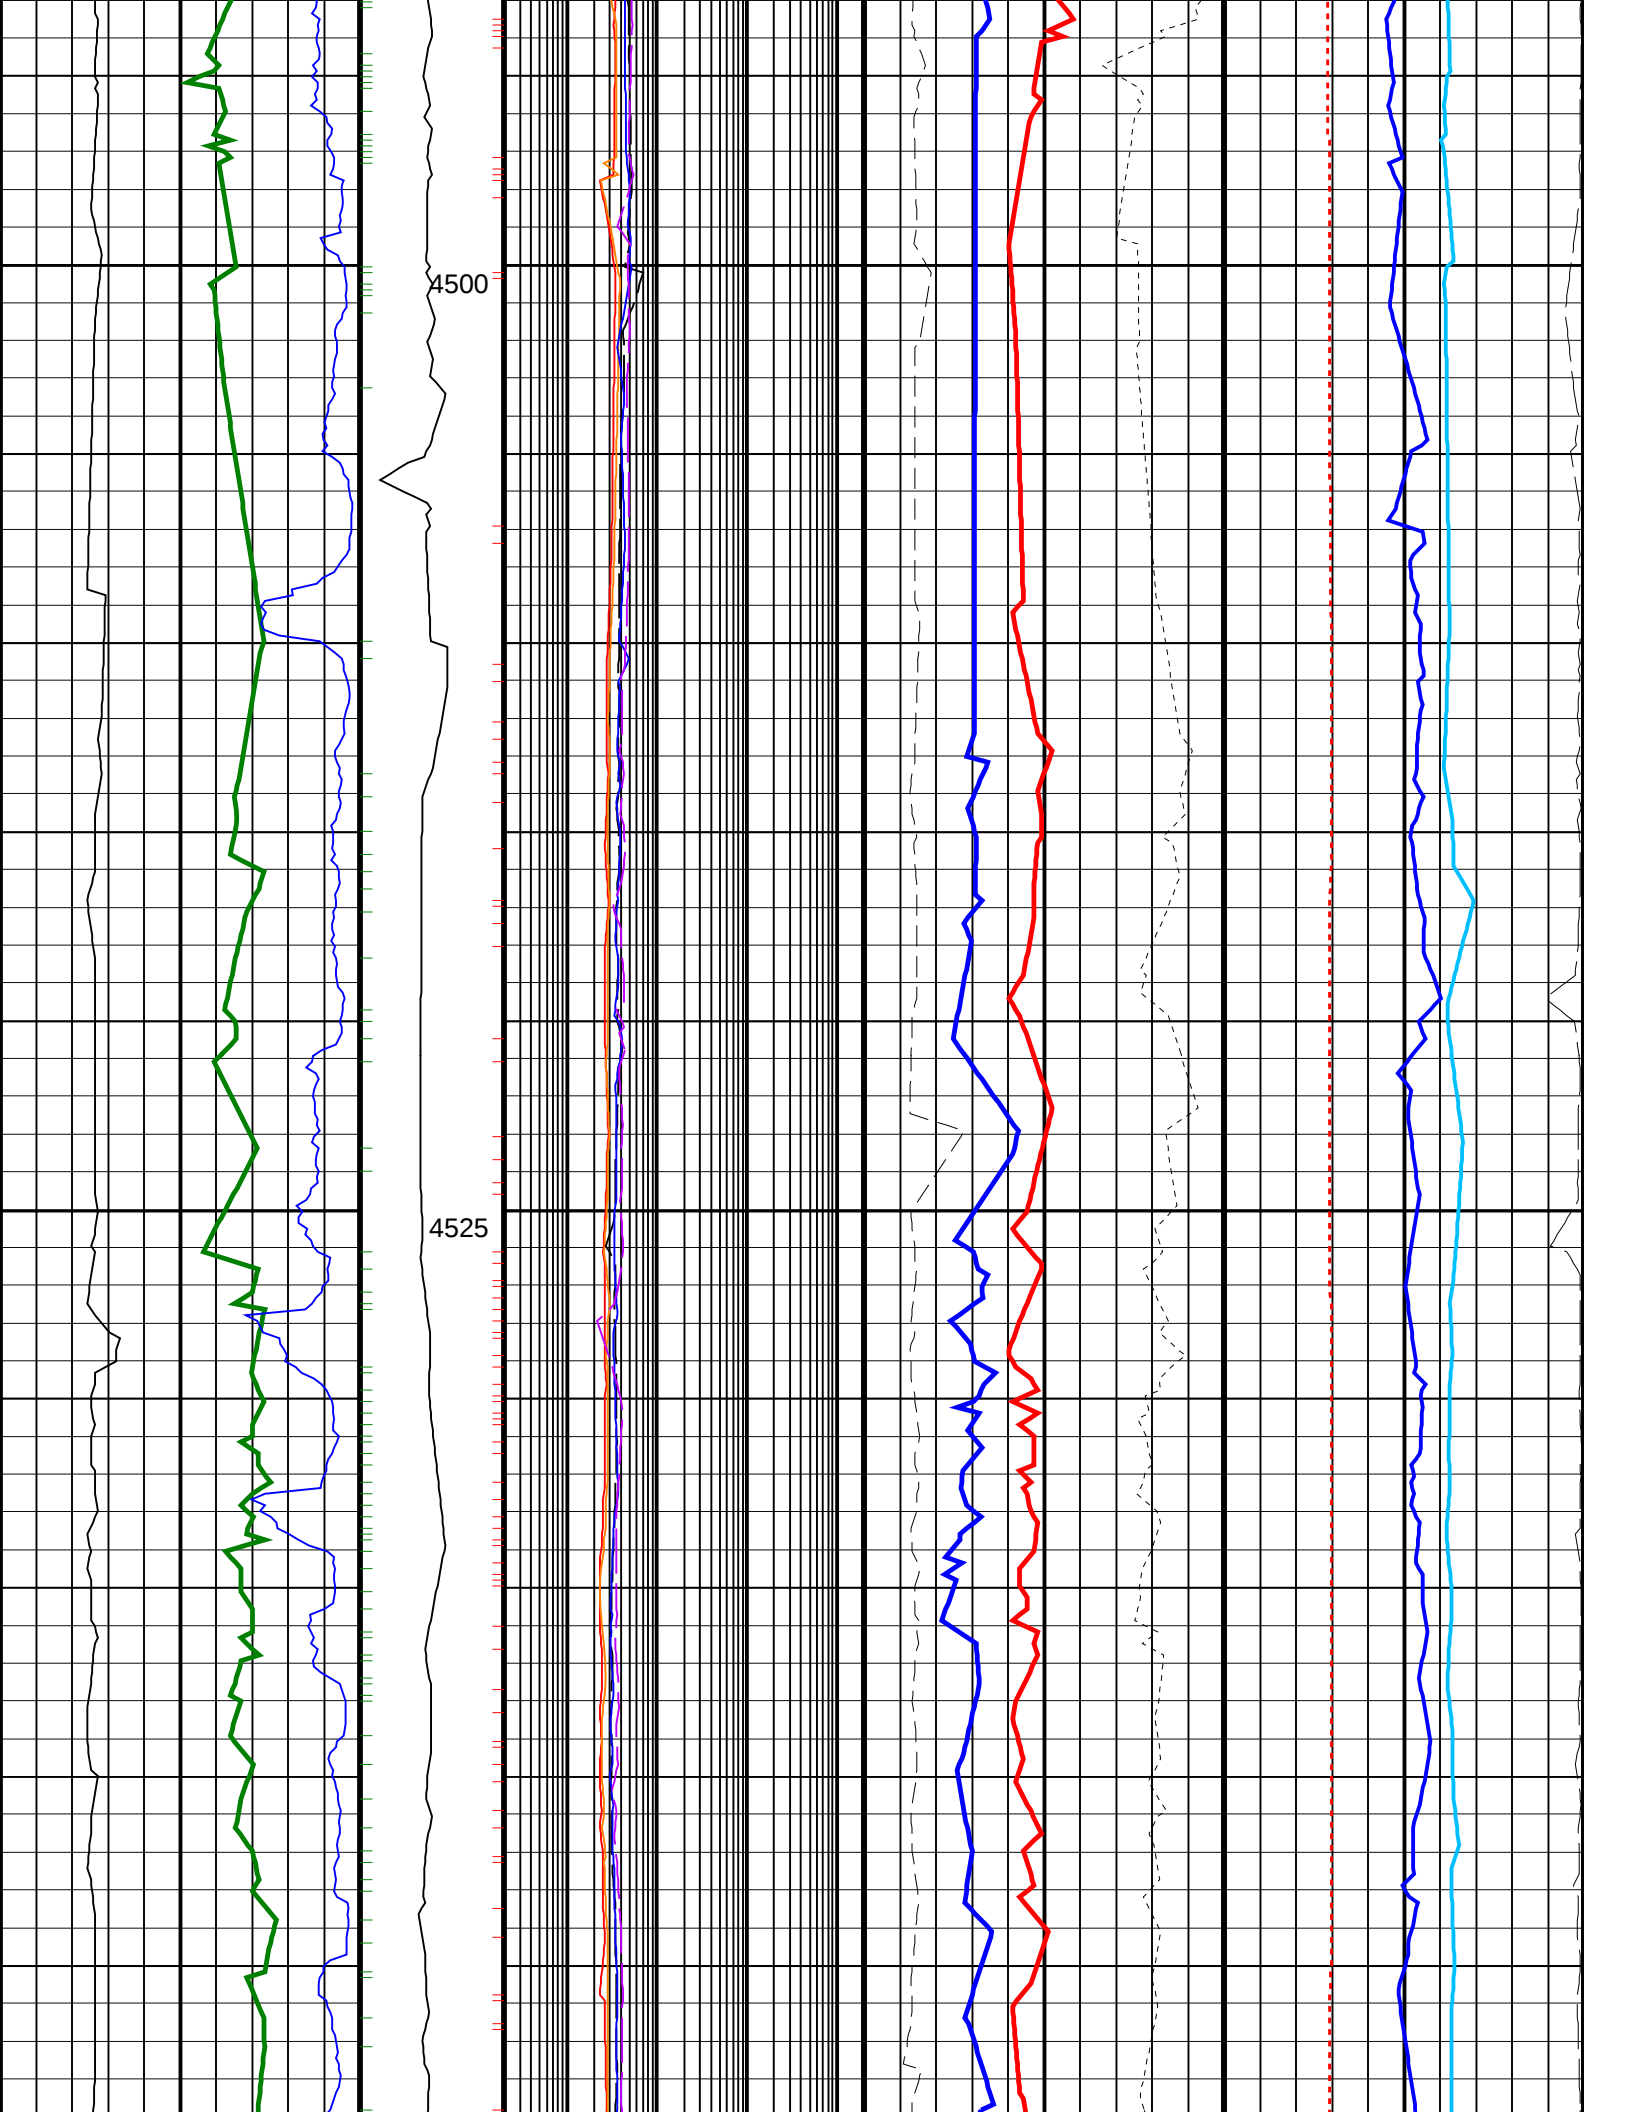


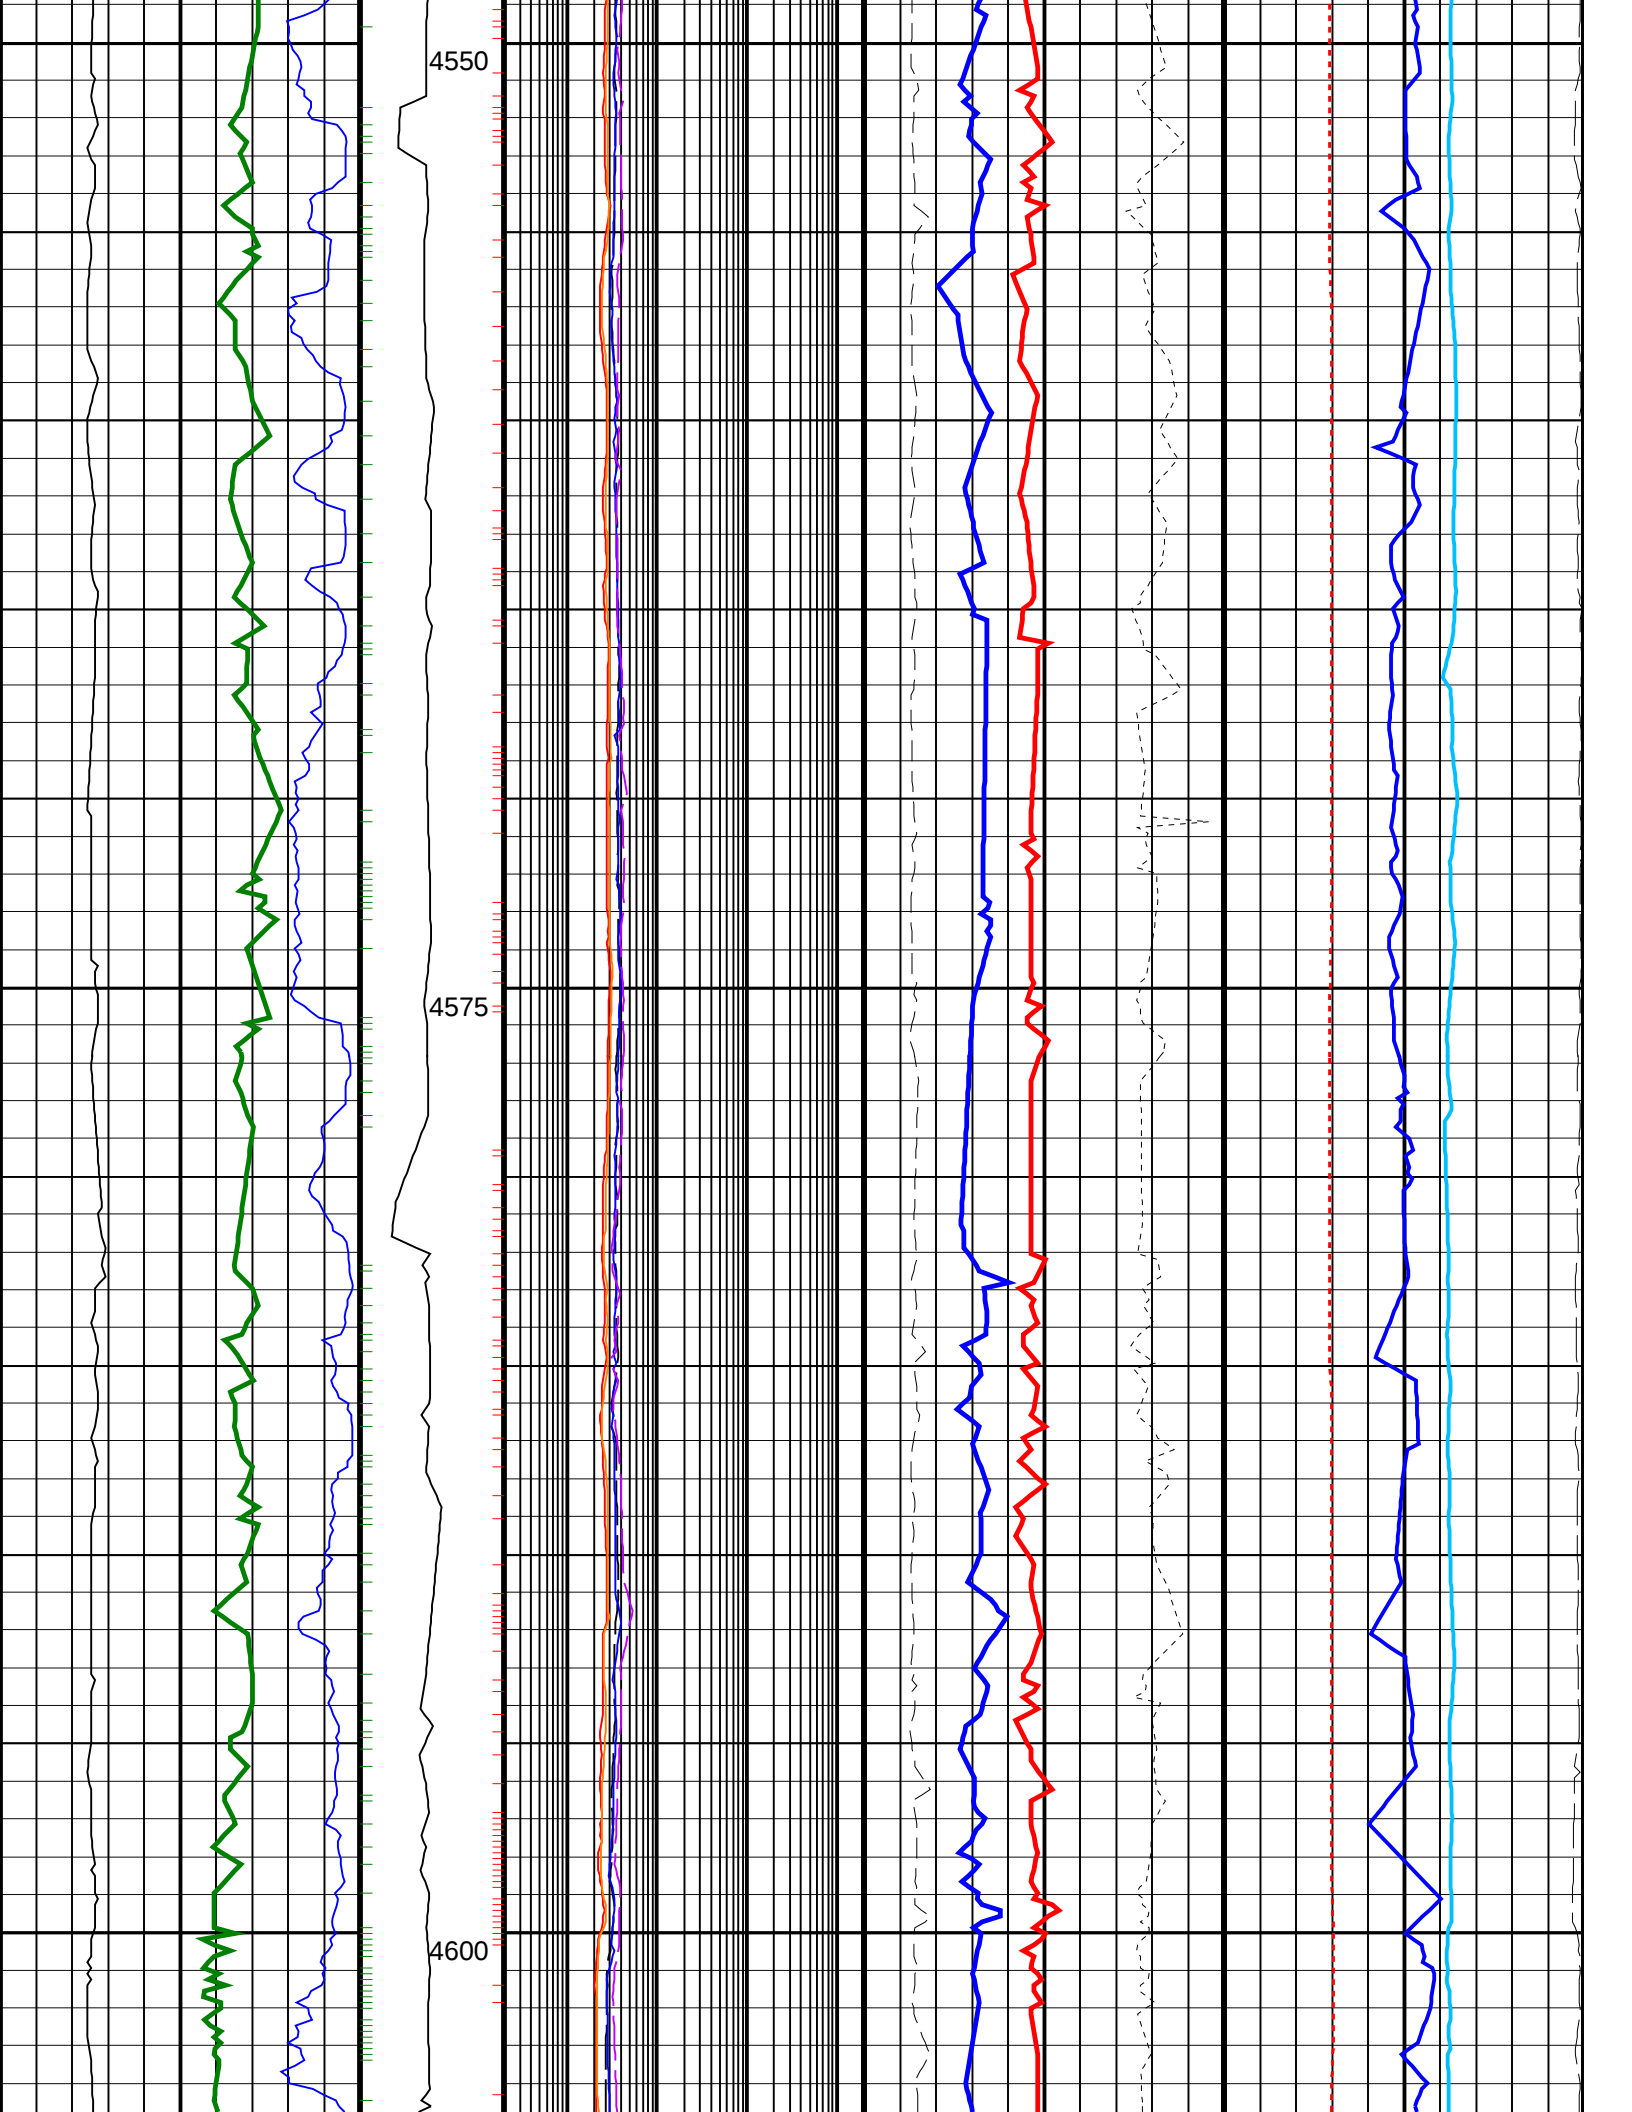


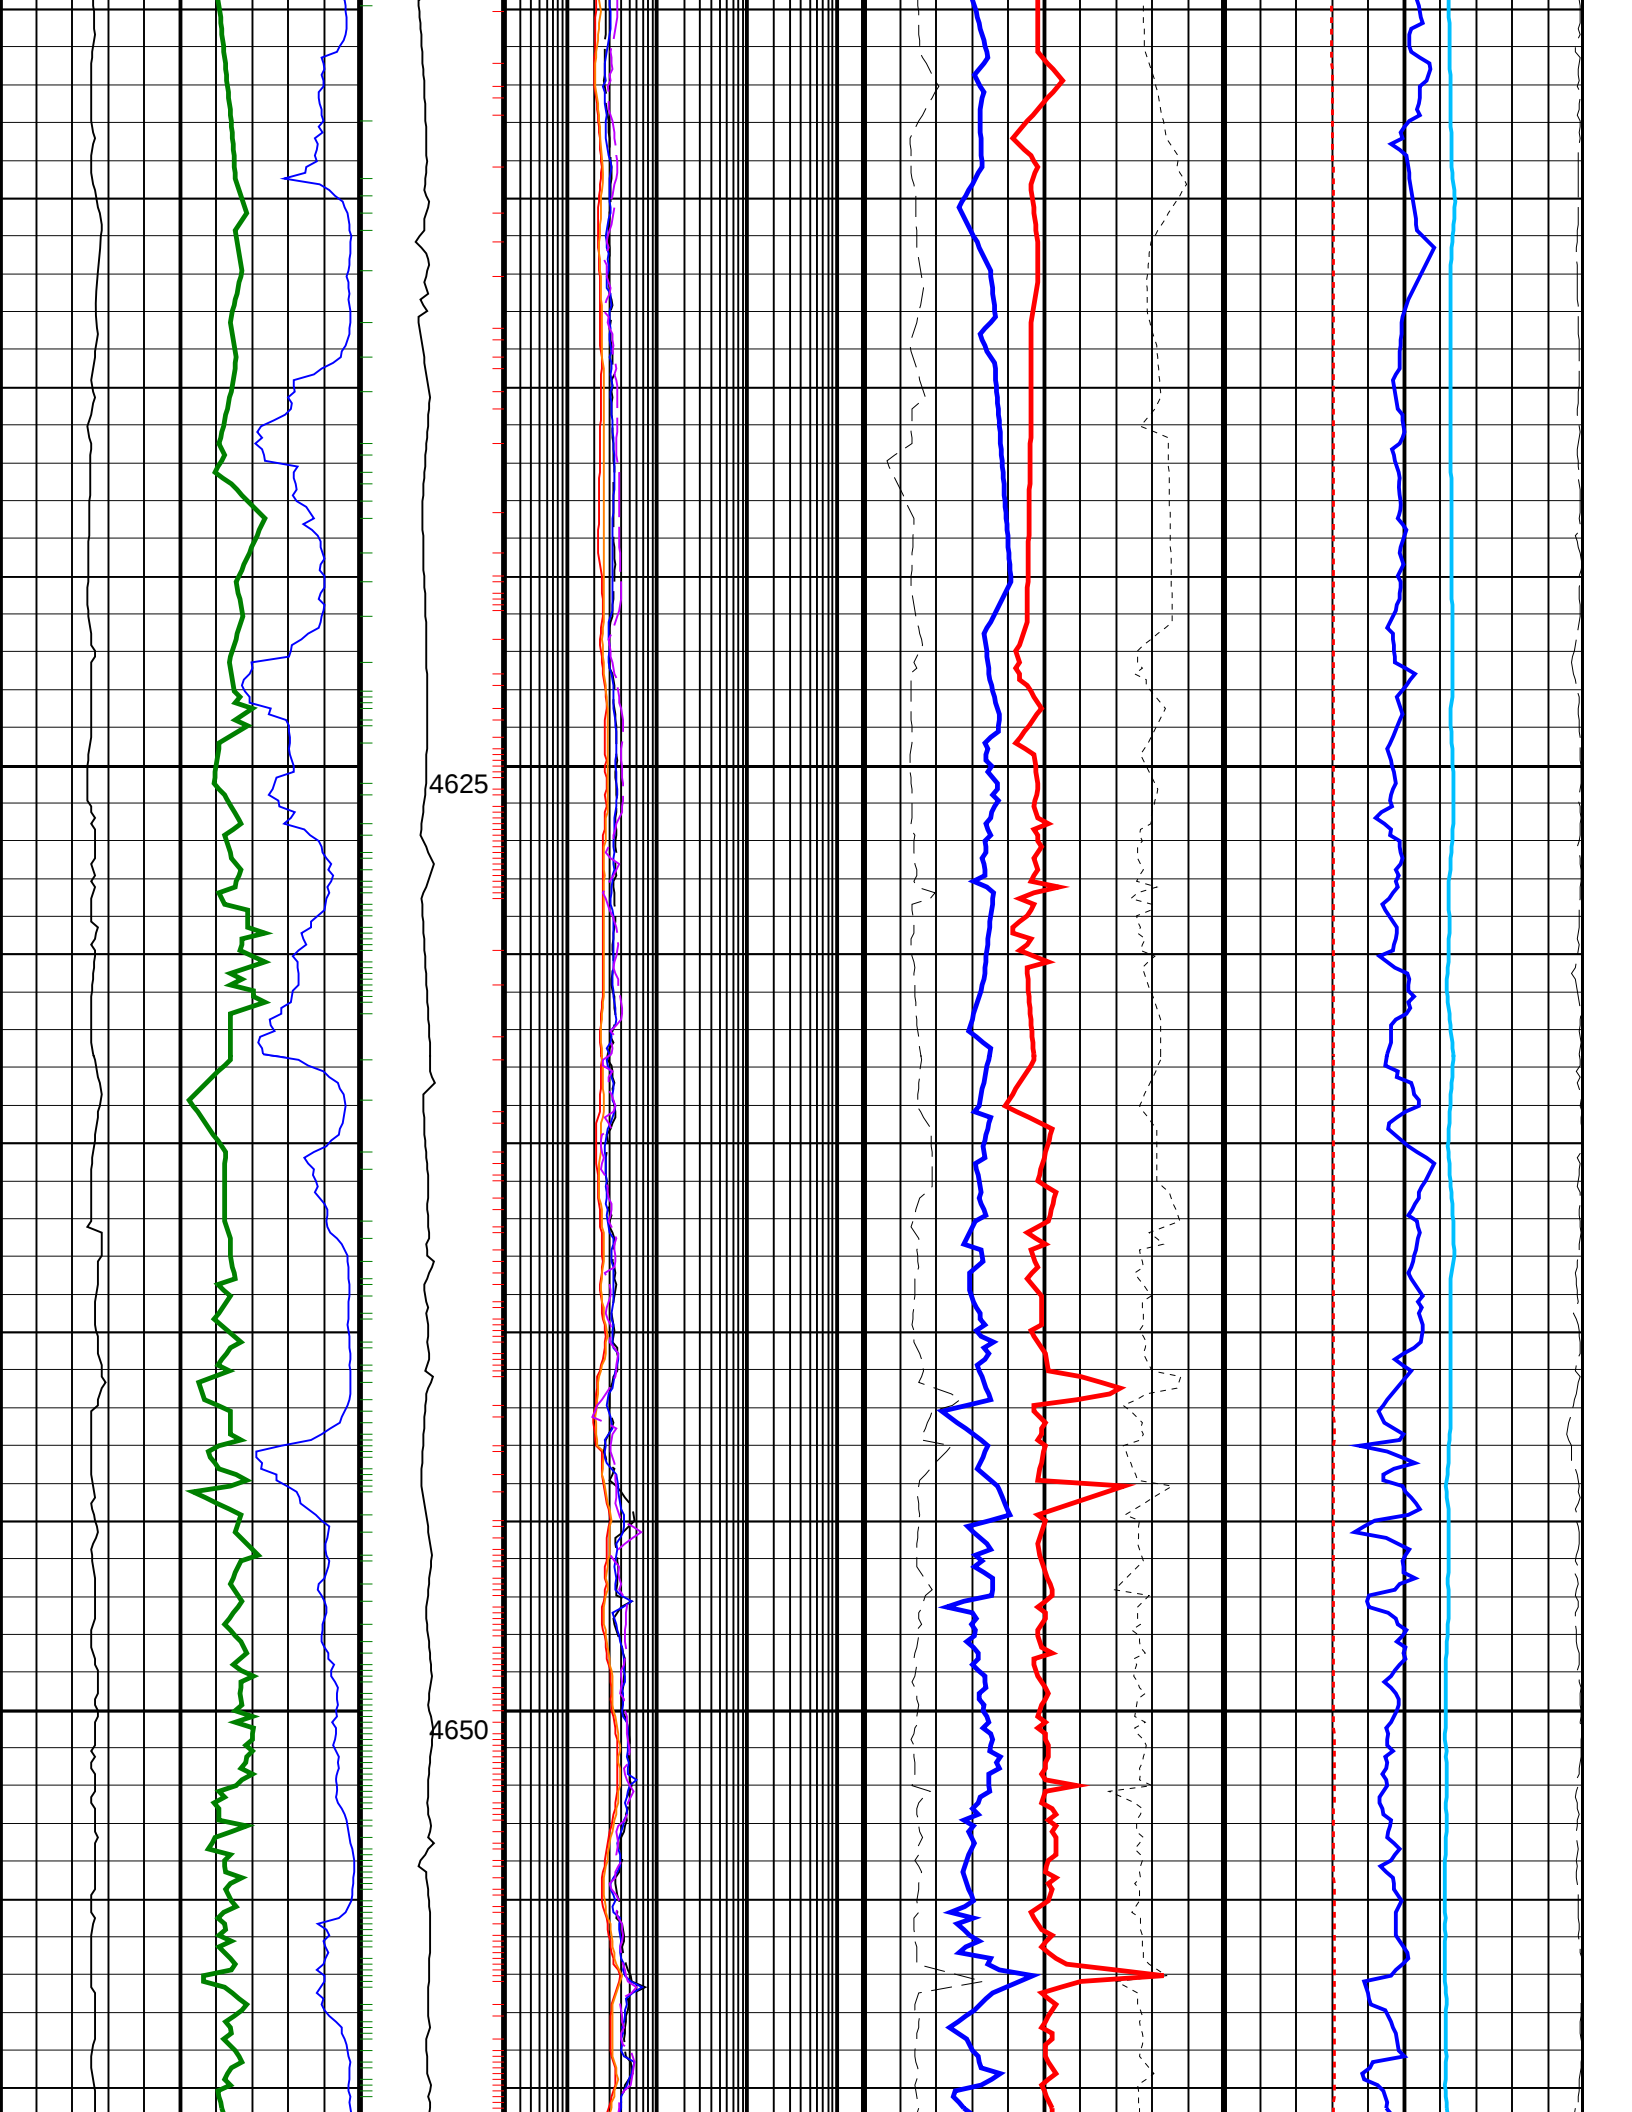

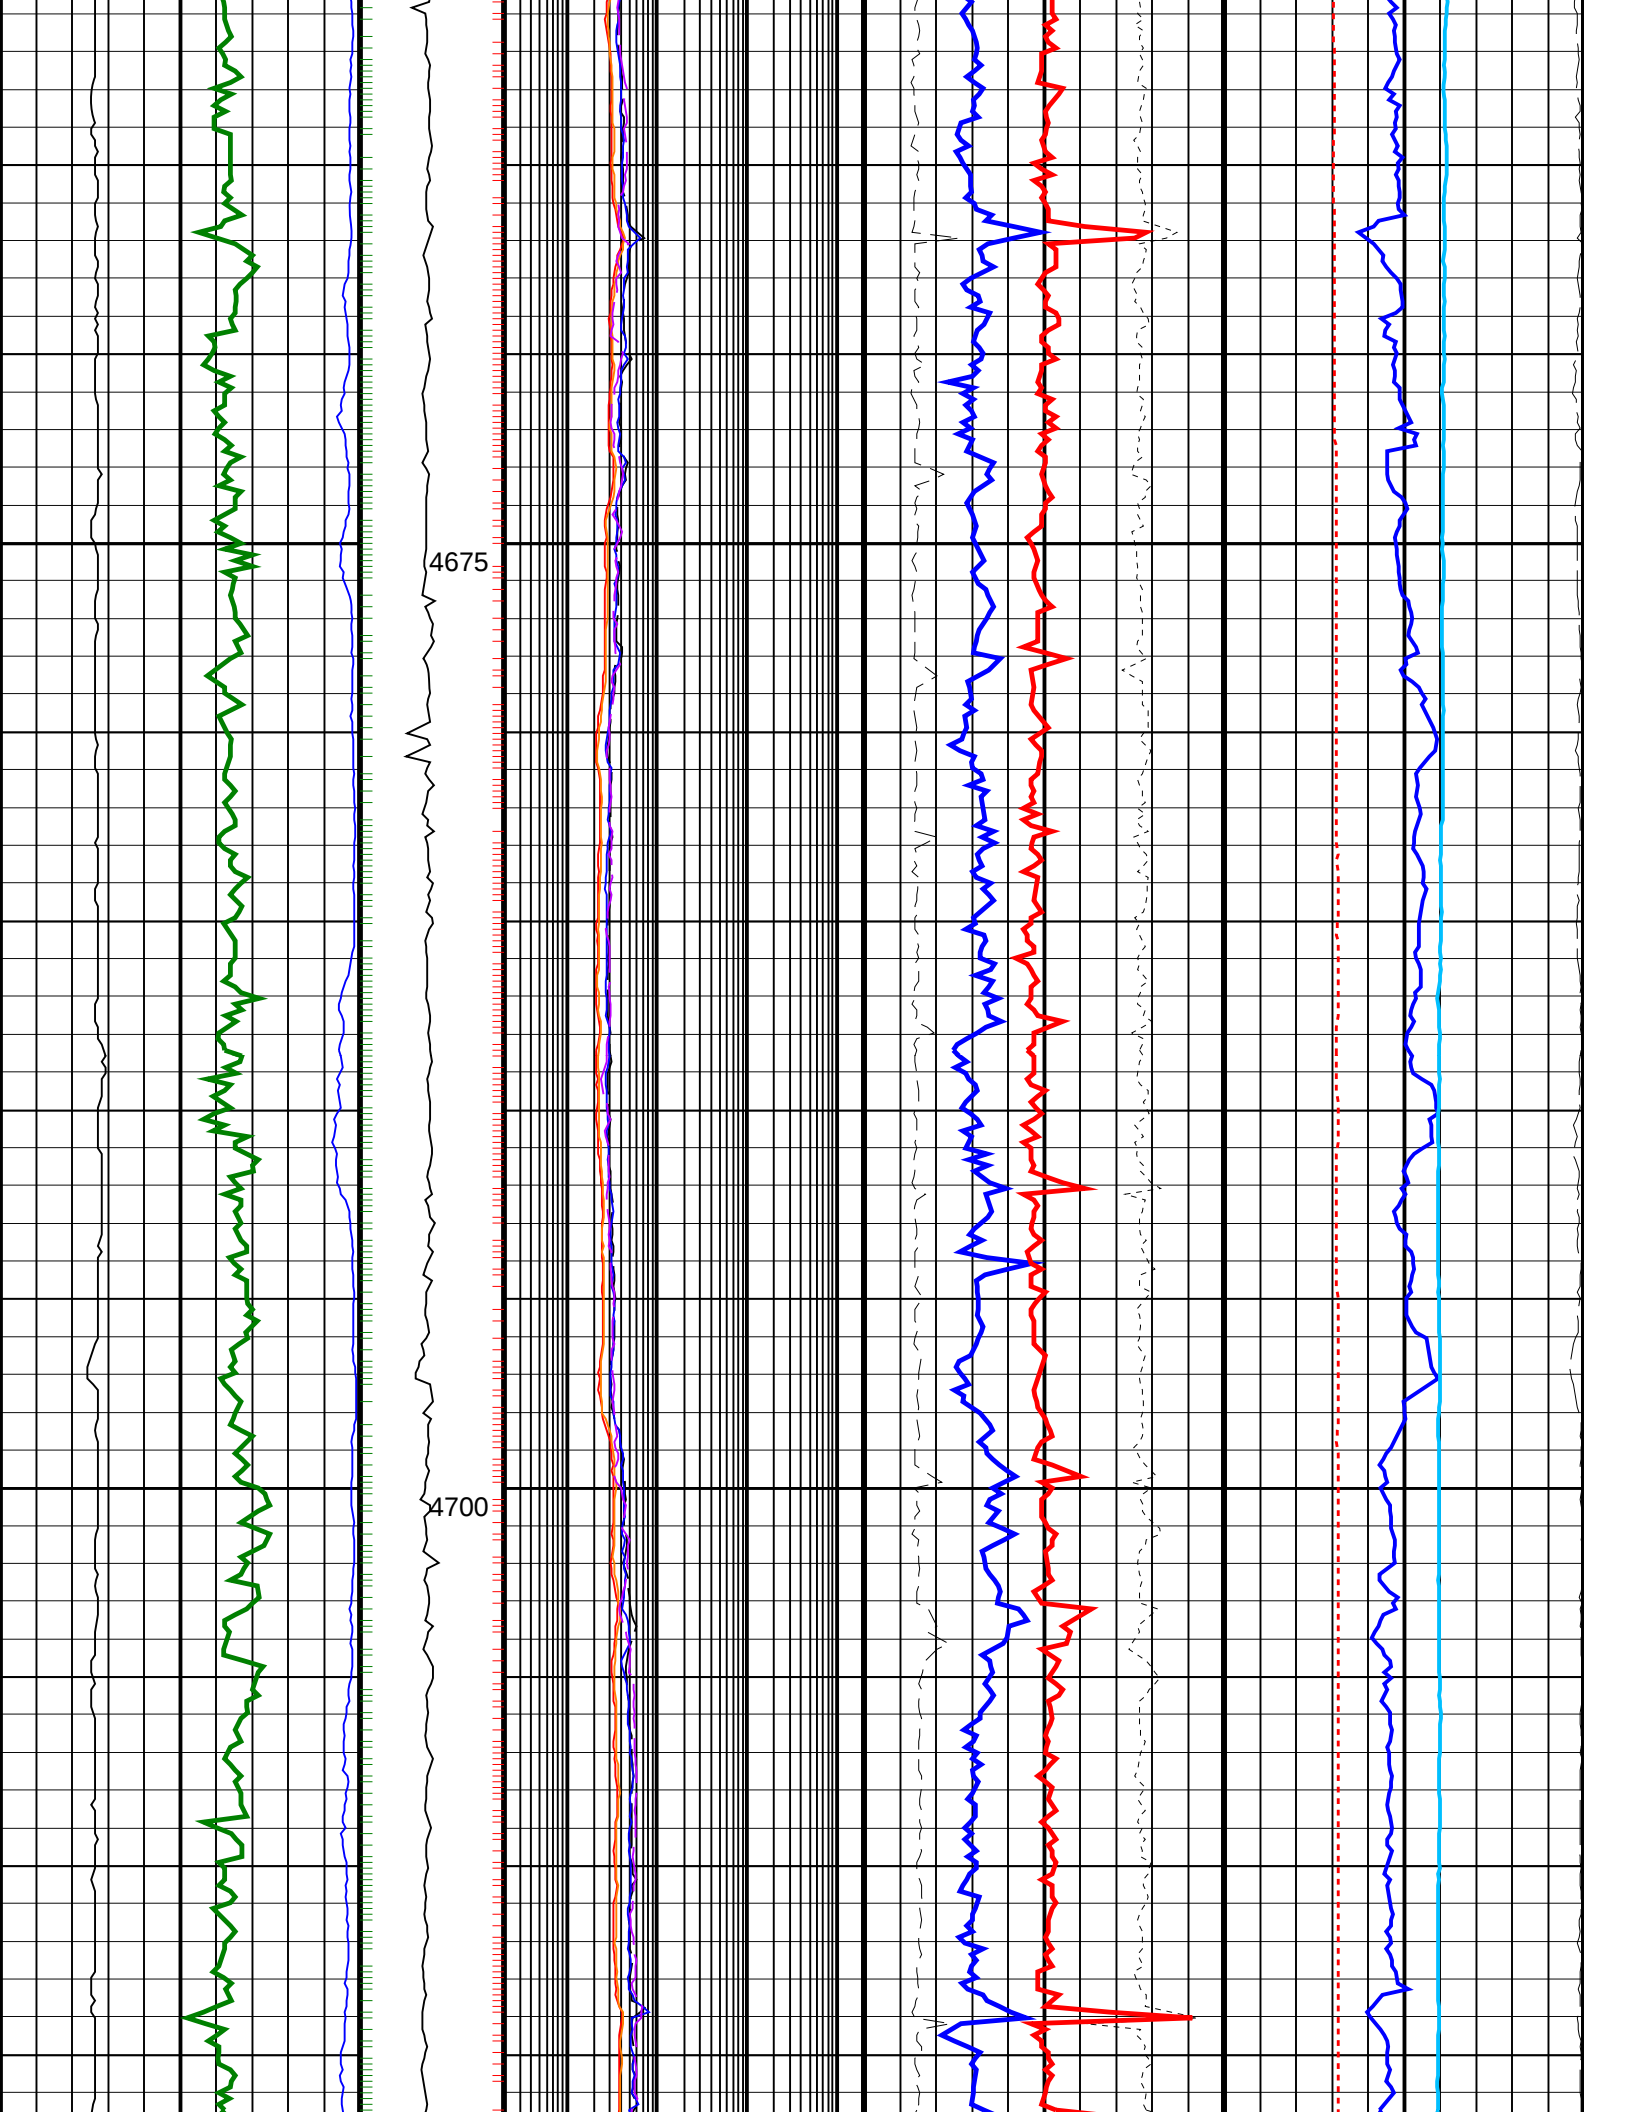

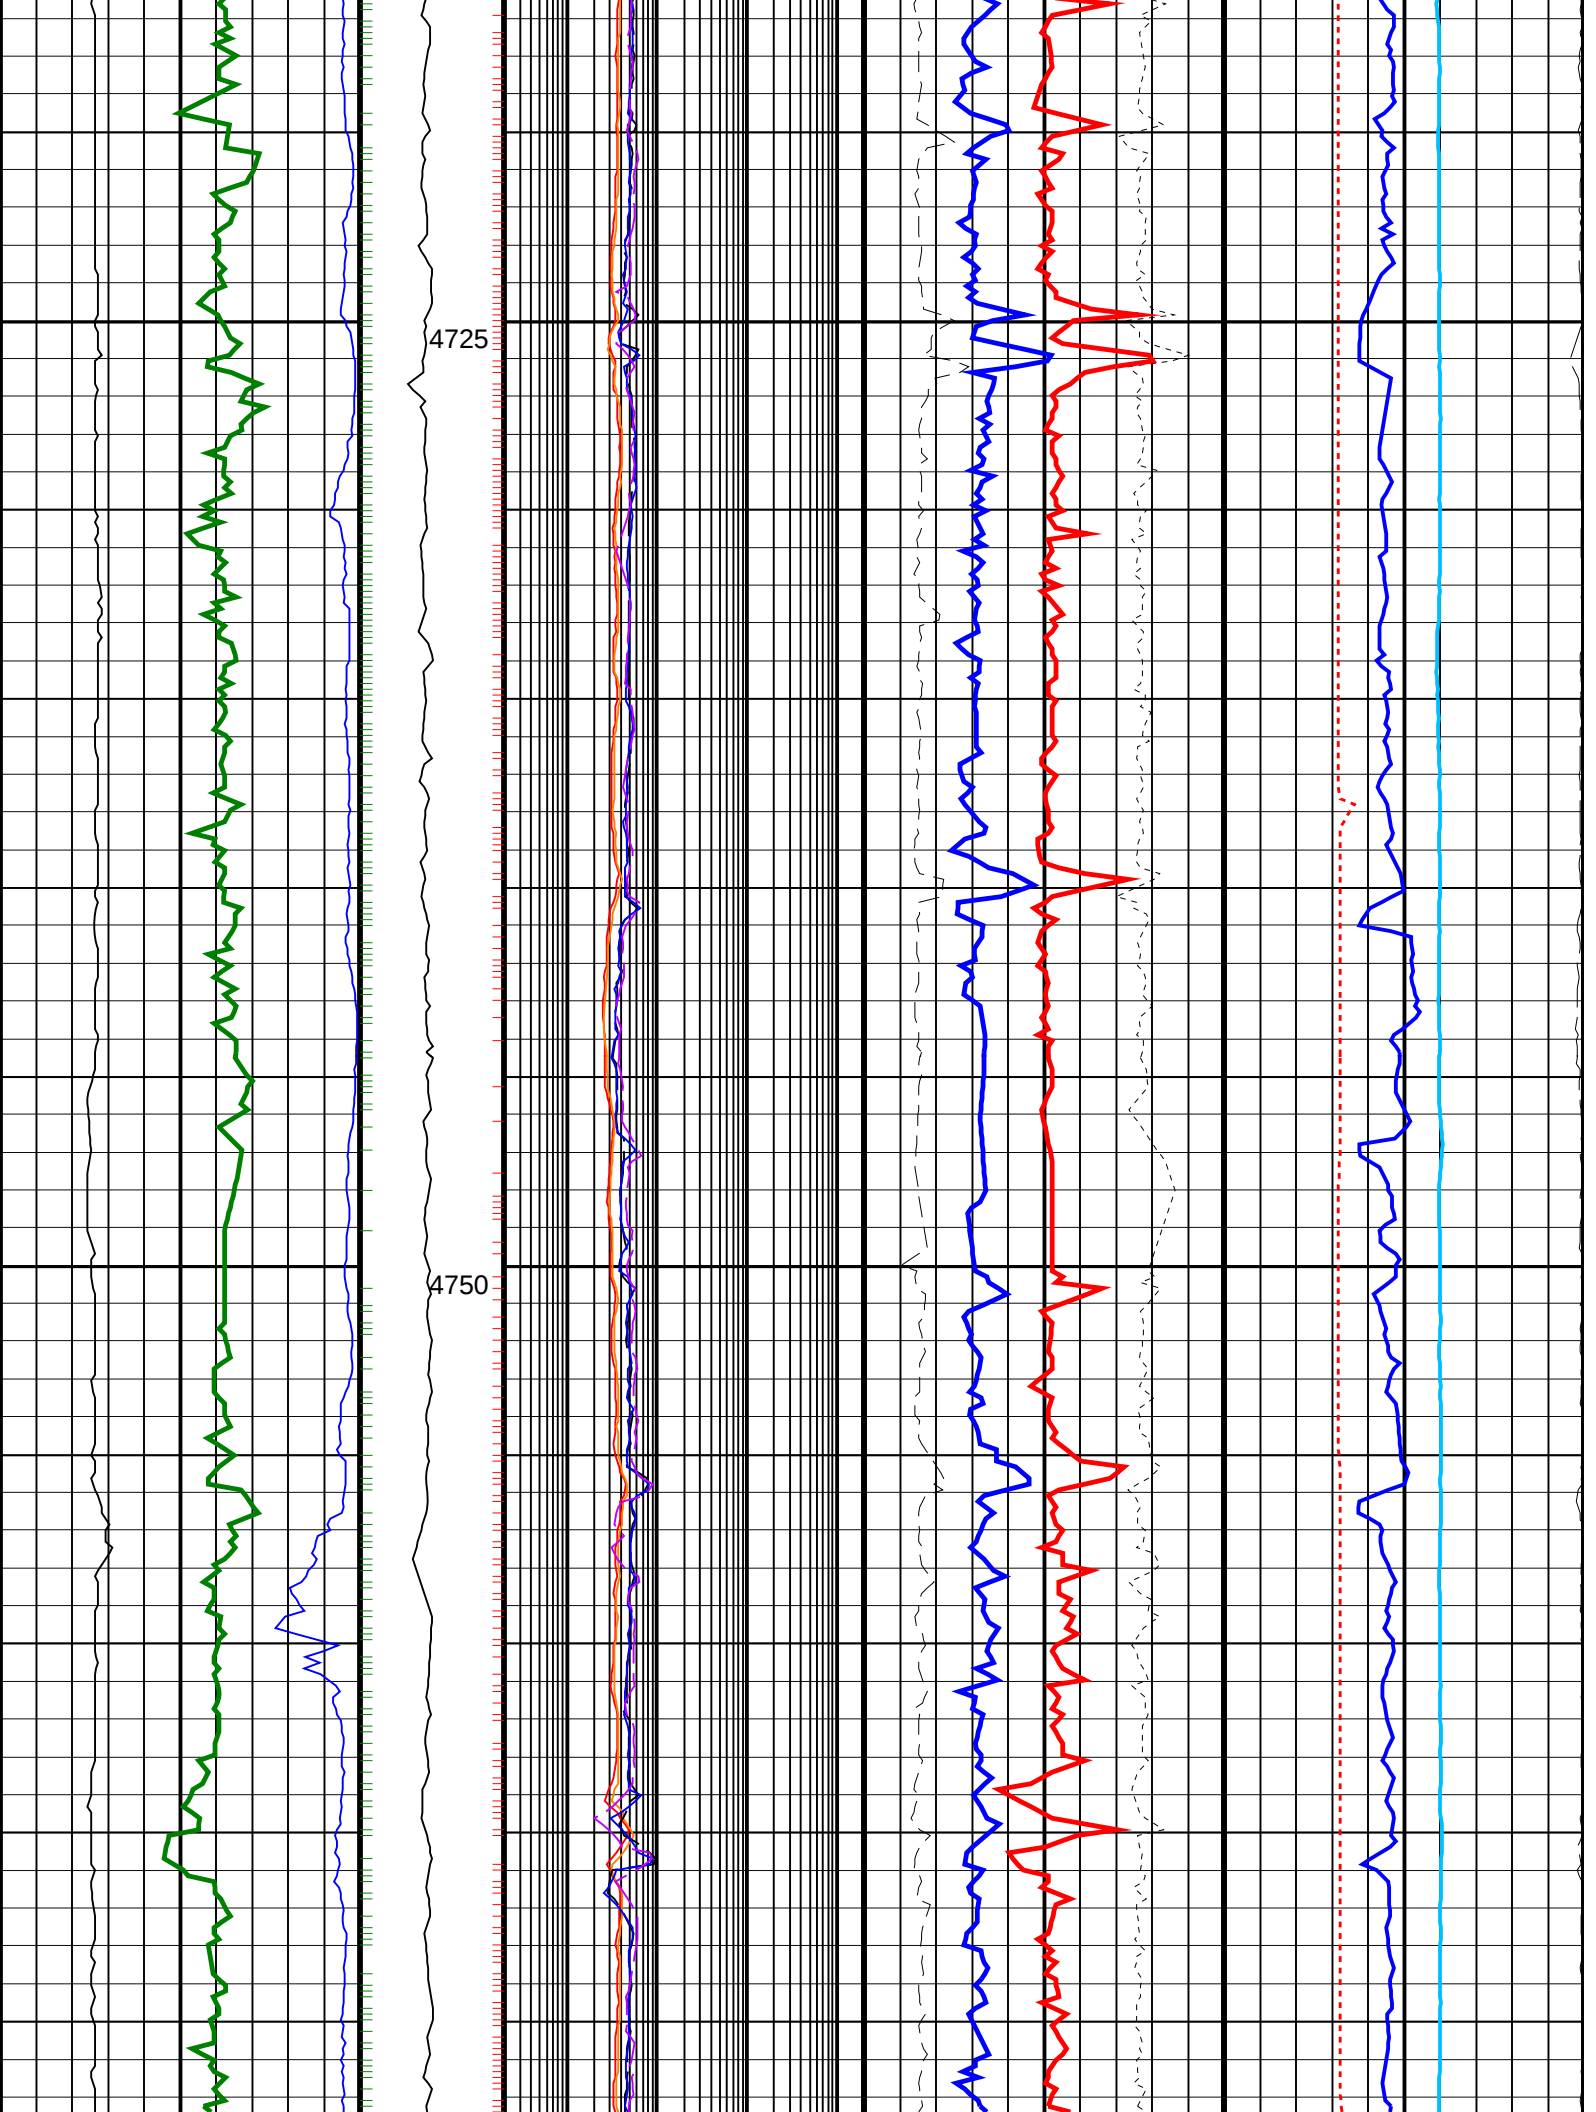

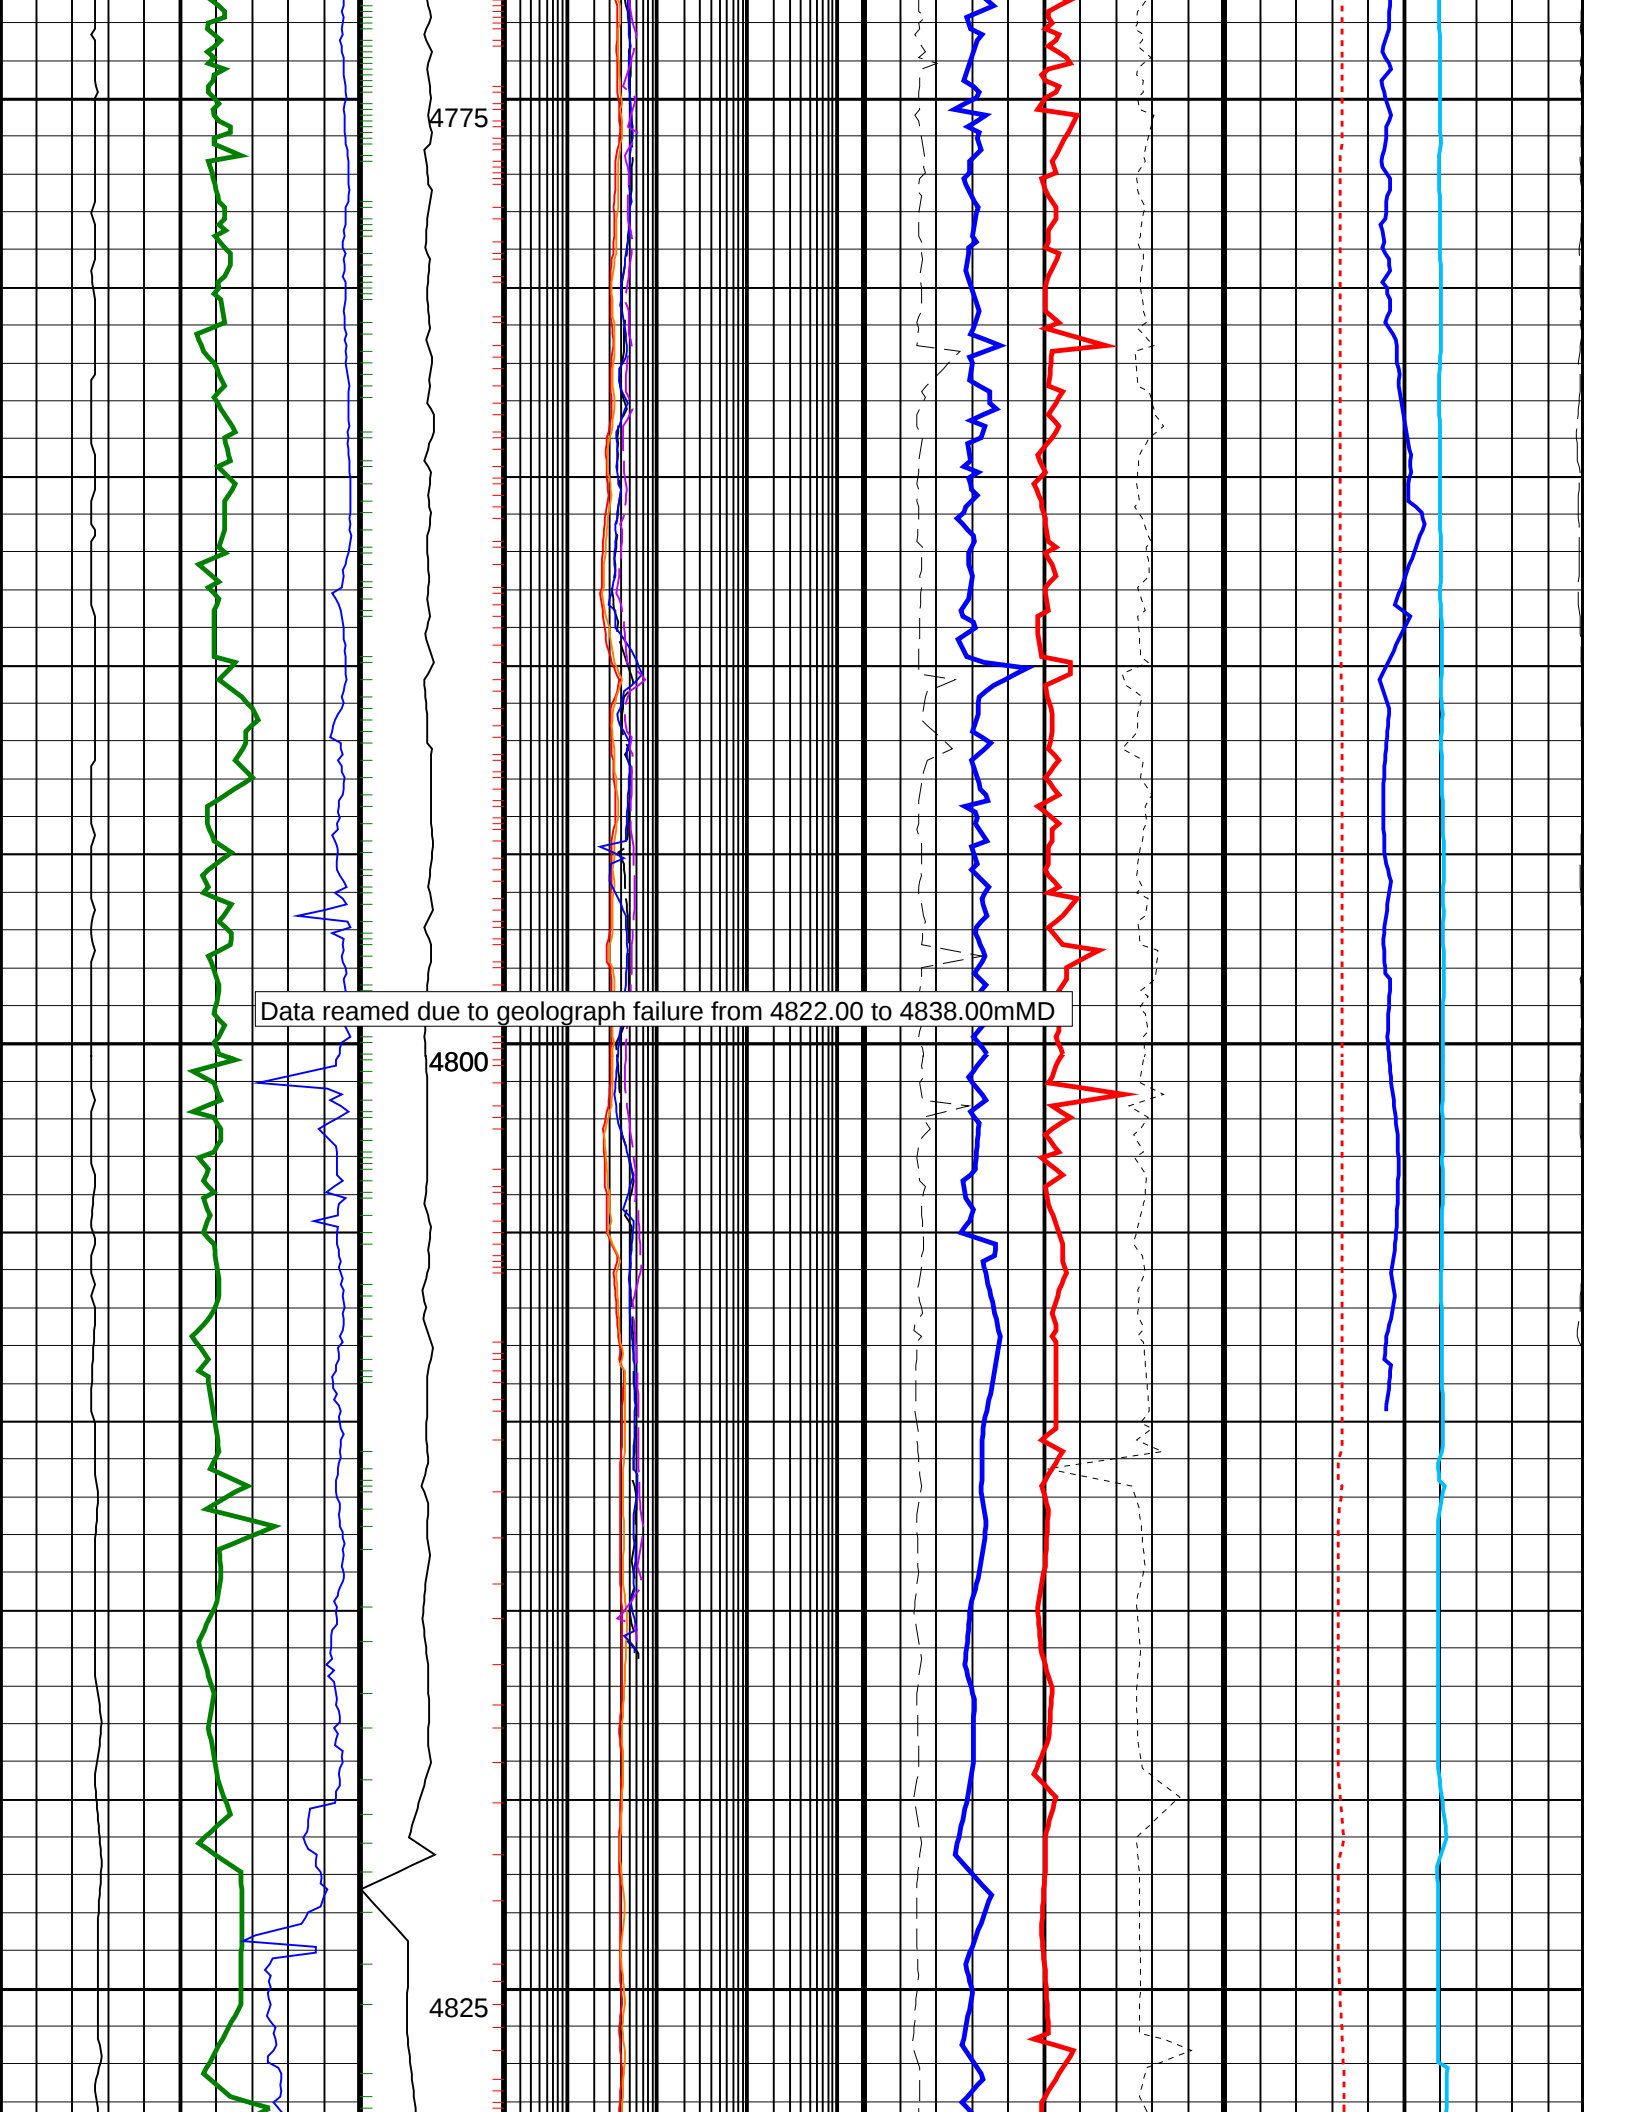

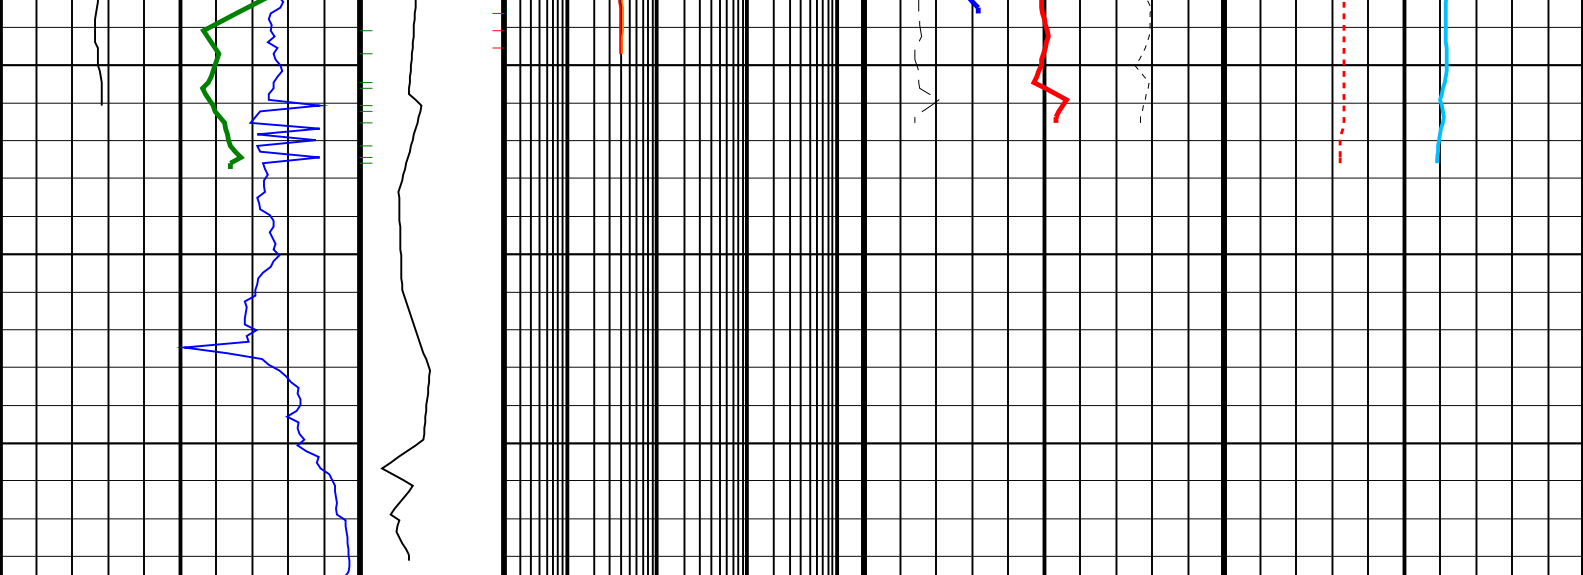

ROP*5 (ROP5) 200 (M/HR) 0	MWD Collar RPM (CRPM_RT) (RPM) 0 400	ARC Phase Shift Resistivity 16 inch at 2 MHz, Real-Time (P16H_ECO_RT) 0.2 (OHMM) 2000	Best Thermal Neutron Porosity, Average, Real-Time (BPHI_ECO_RT) 0.45 (V/V) -0.15	Downhole Annulus Temperature, Real Time, Computed Downhole (DHAT_DH_ECO_RT) 0 (DEGC) 200
Gamma Ray, Average, Real-Time (GRMA_ECO_RT) (GAPI) 0 200		ARC Phase Shift Resistivity 40 inch at 2 MHz, Real-Time (P40H_ECO_RT) 0.2 (OHMM) 2000	Bulk Density, Bottom, Real-Time, Computed Downhole (ROBB_DH_ECO_RT) 1.95 (G/C3) 2.95	Coherence at Compressional Peak, Real-Time (CHCO_RT) -4 (----) 1
Ultrasonic Caliper, Average Diameter, Real-Time, Recomputed at Surface (UCAV_ECO_RT) (IN) 6 16		Ring Resistivity, Real-Time (RES_RING_RT) 0.2 (OHMM) 2000	Photoelectric Factor, Bottom, Real-Time, Computed Downhole (PEB_DH_ECO_RT) (G/C3) 0 (----) 10 -0.25 0.25	Delta-T Compressional, Real-Time (DTCO_RT) (US/F) 40 140
		Deep Button Resistivity, Real-Time (RES_BD_RT) 0.2 (OHMM) 2000		Equivalent Circulating Density, Real-Time (ECD_ECO_RT) (G/C3) 0.8 1.6
		Shallow Button Resistivity, Real-Time (RES_BS_RT) 0.2 (OHMM) 2000		

PIP SUMMARY

└ Gamma Ray Samples
└ Resisitivity Samples

IDEAL Version: ID13_0C_08
IDF